

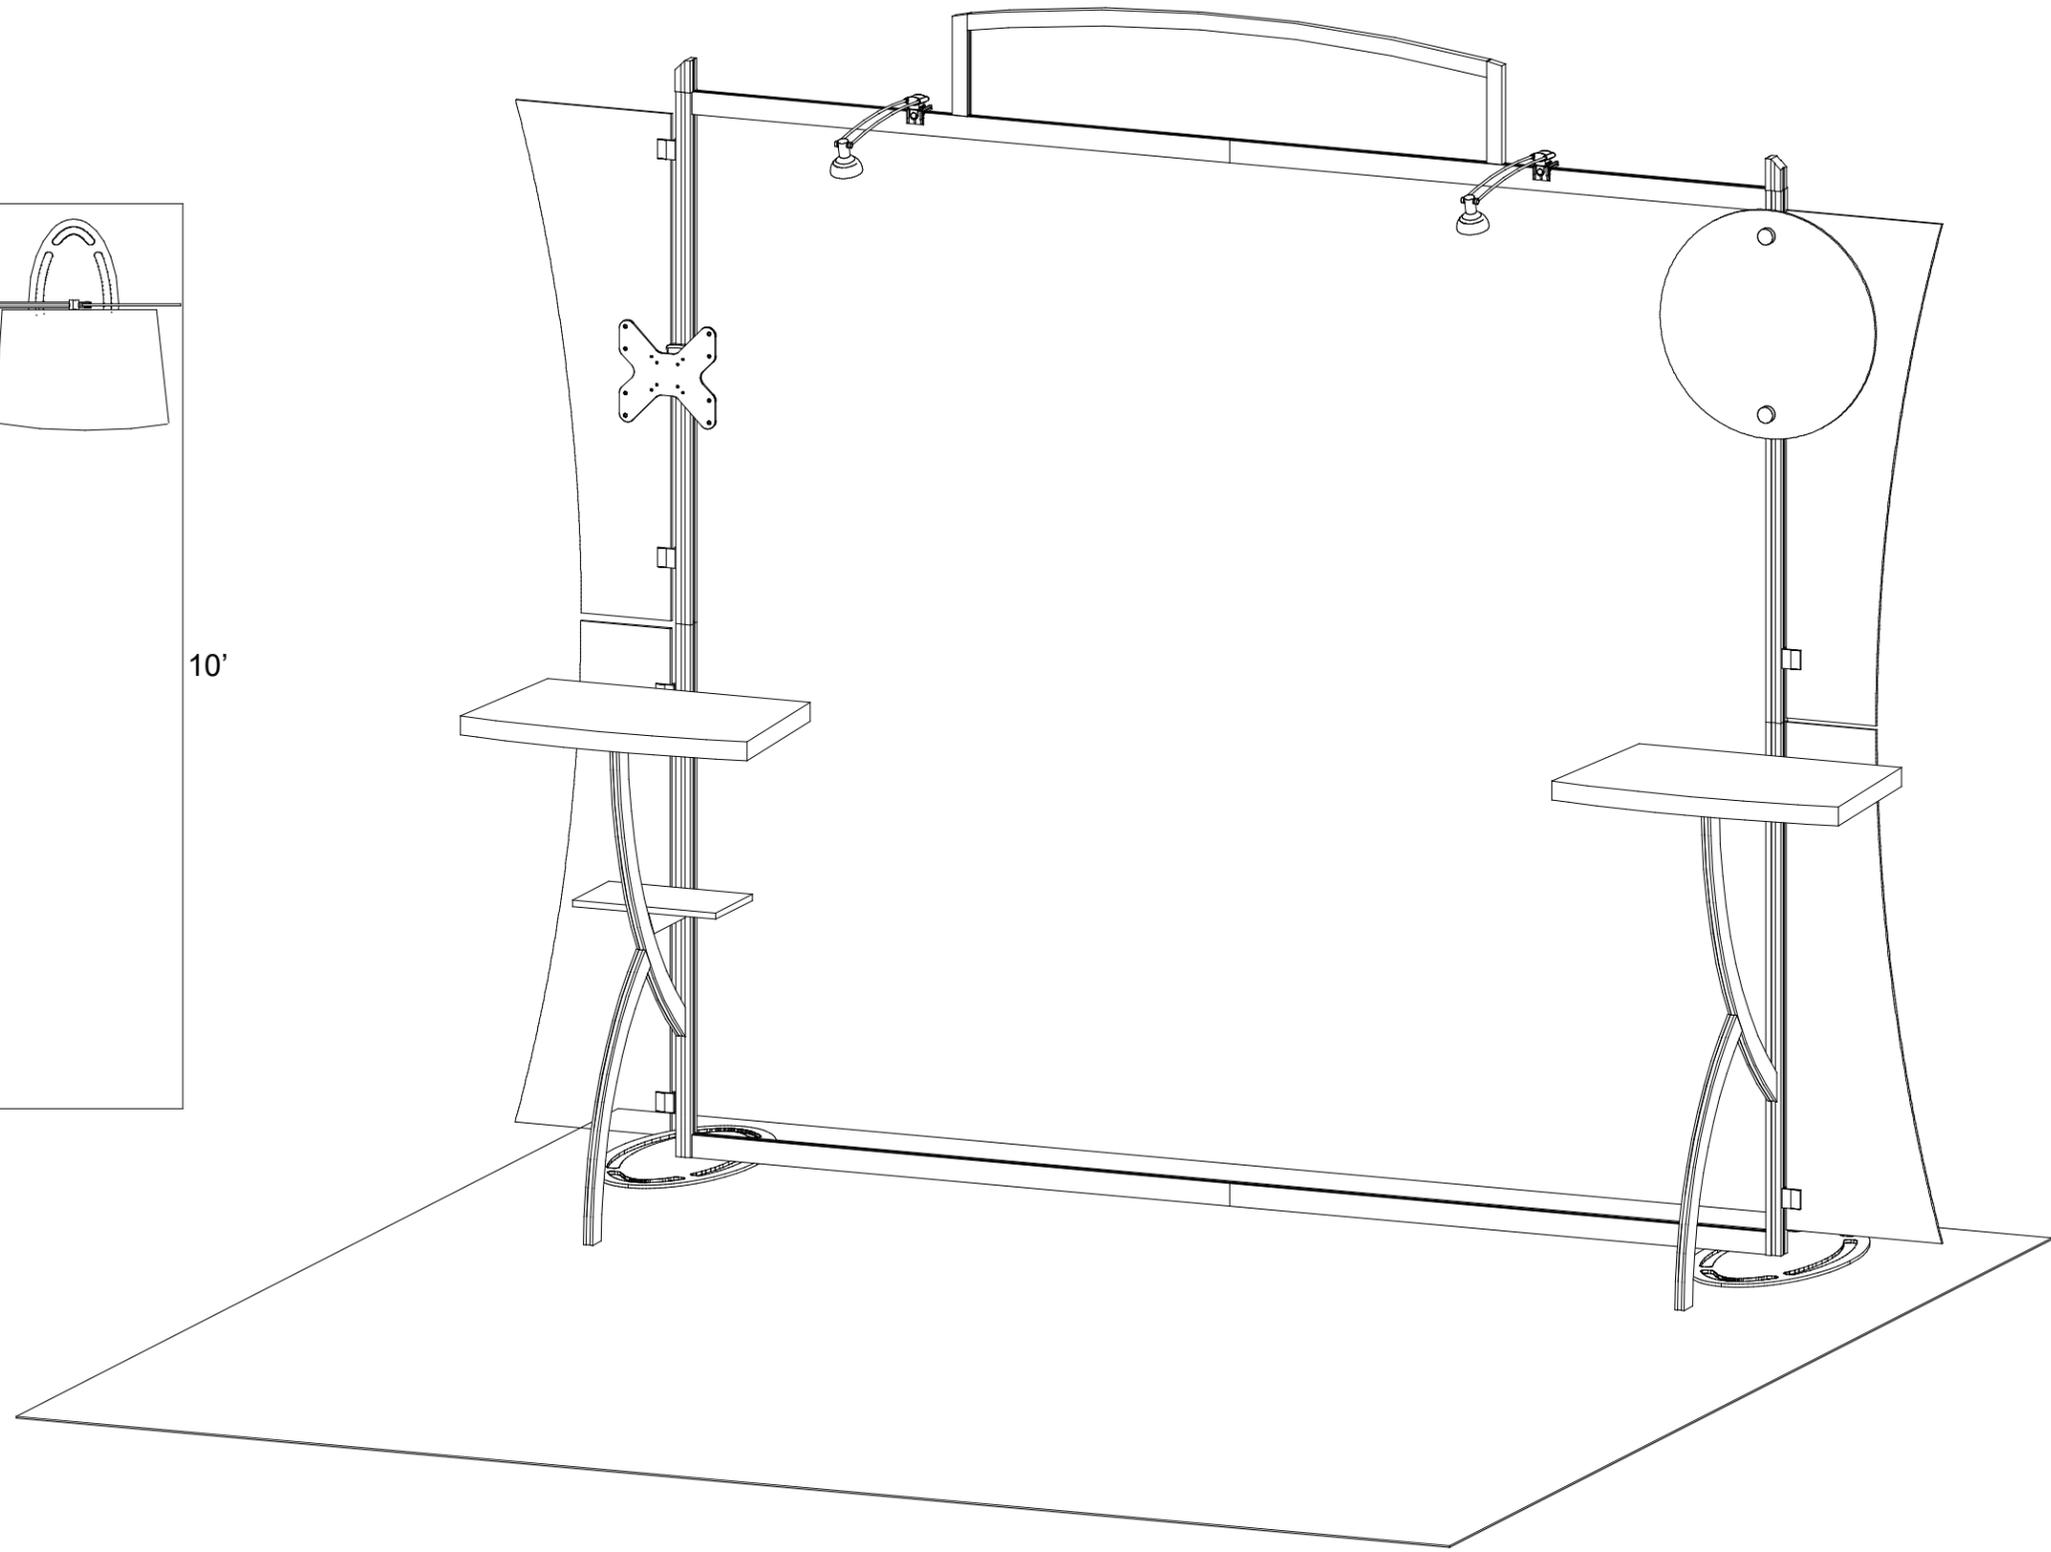


Plan View

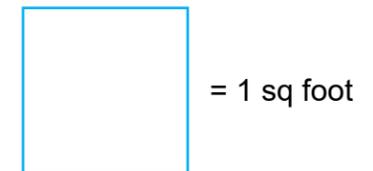

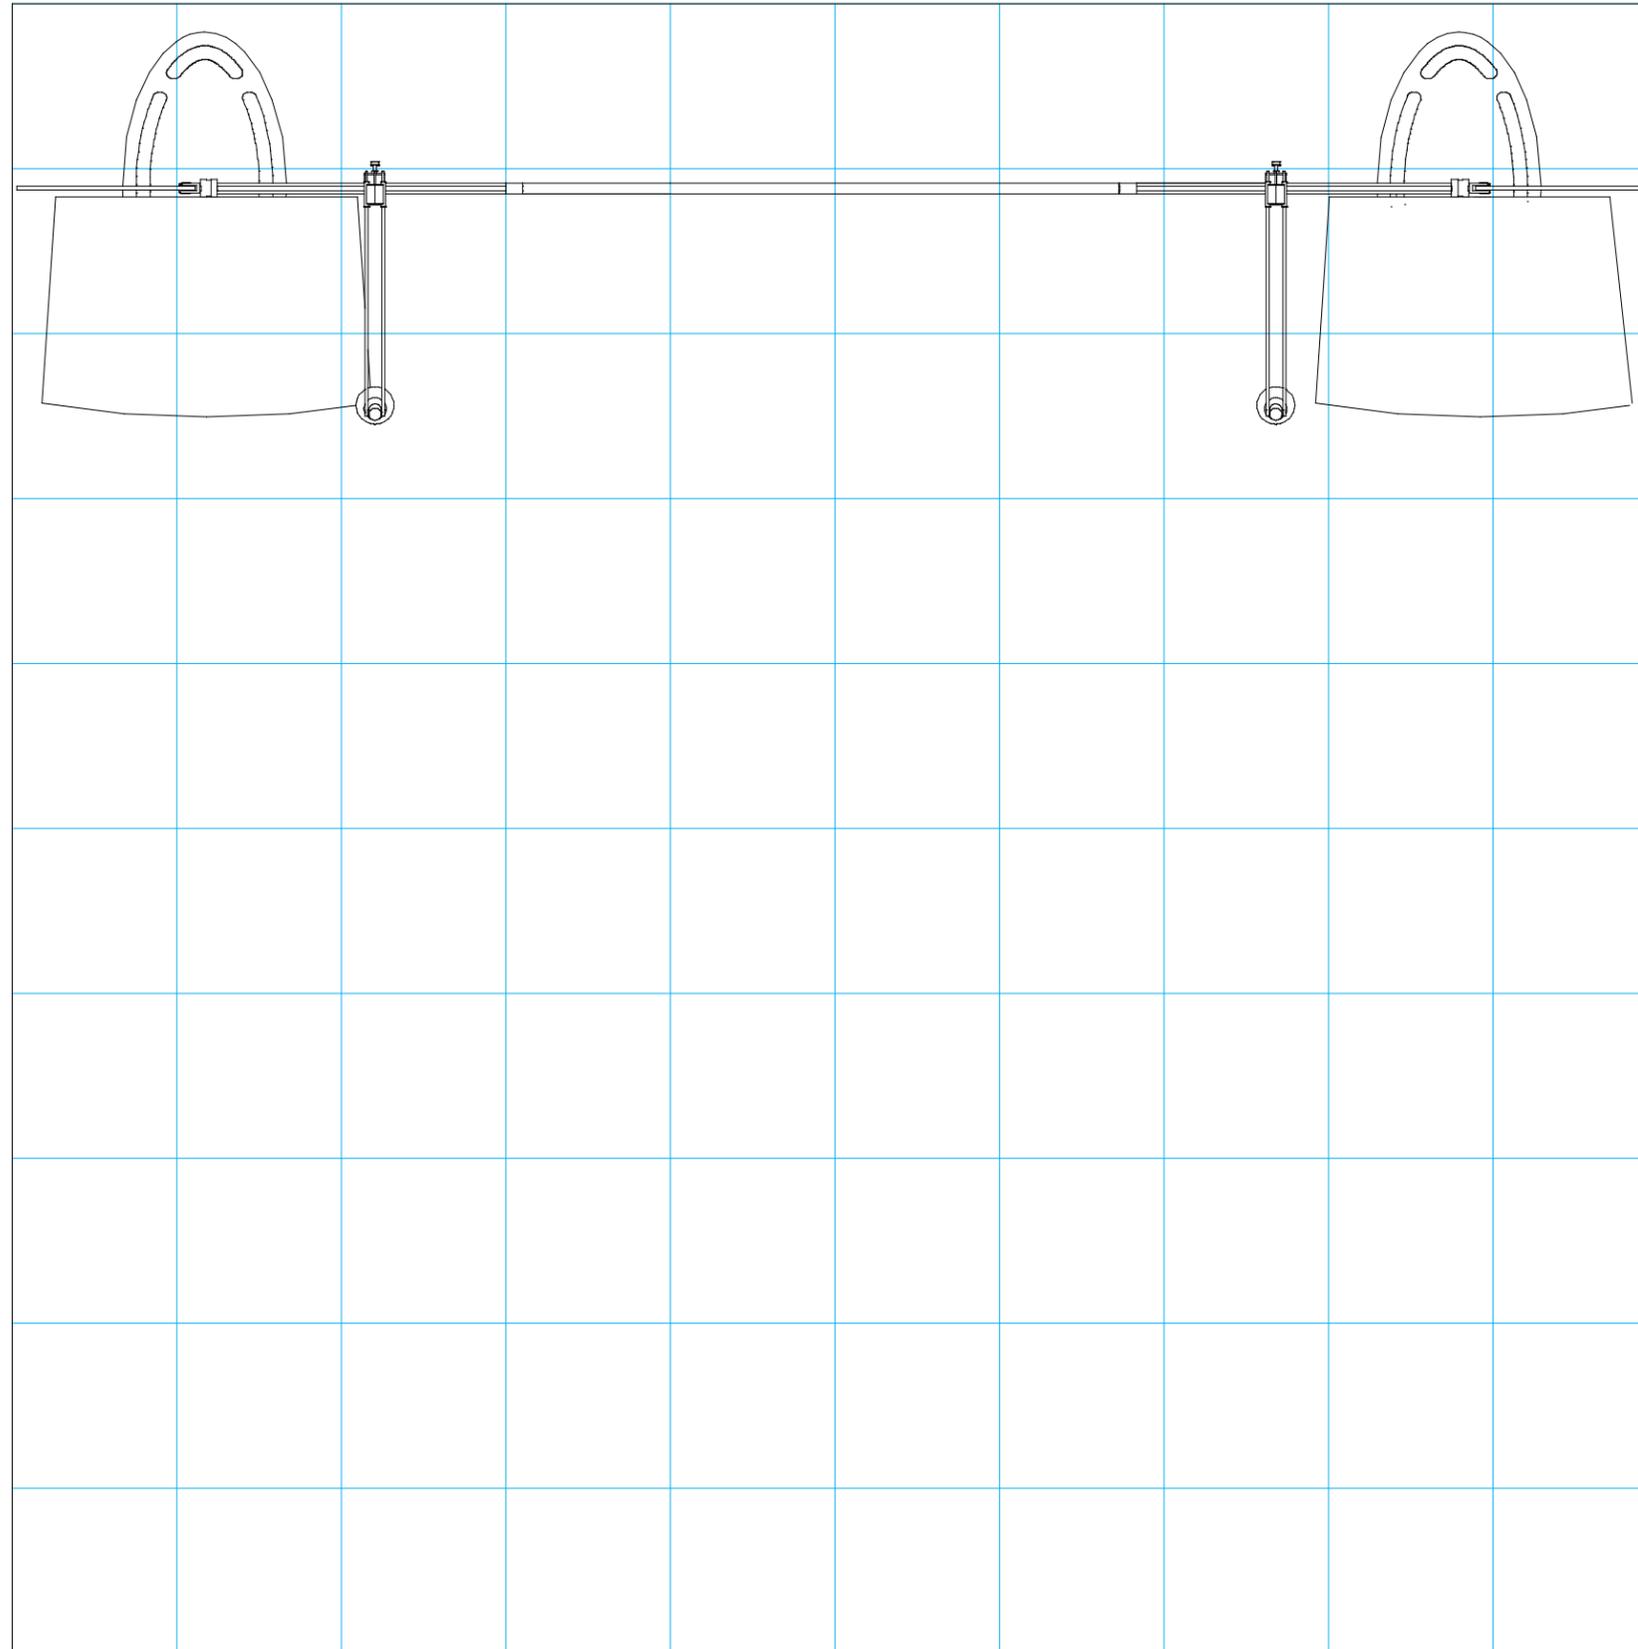

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

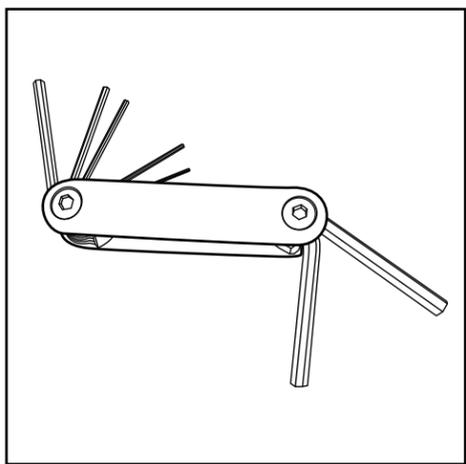


Hex Tool - Essential for Assembly

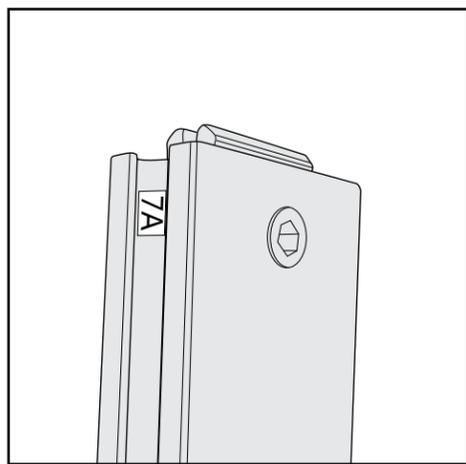


Part Identification - Numbering

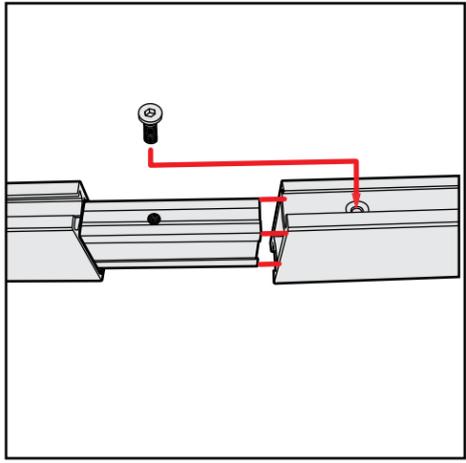


Spline Connection

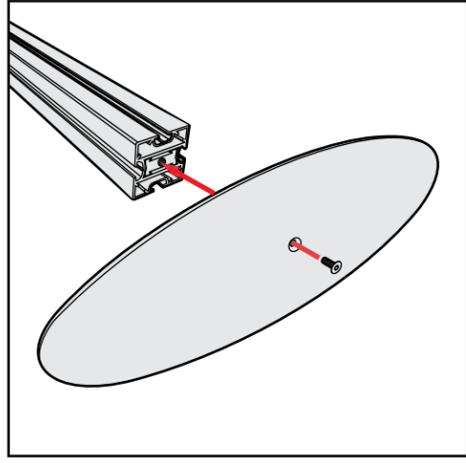

Base Plate & Extrusion Connection

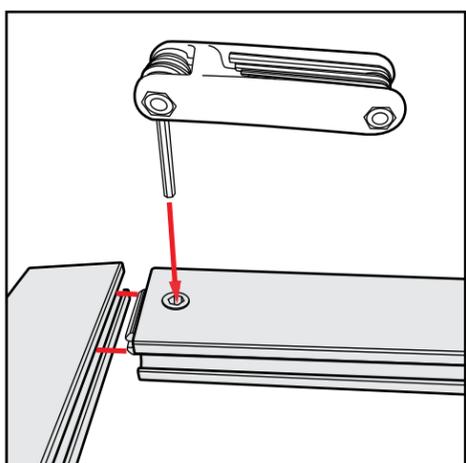

Extrusion & Lock Connection

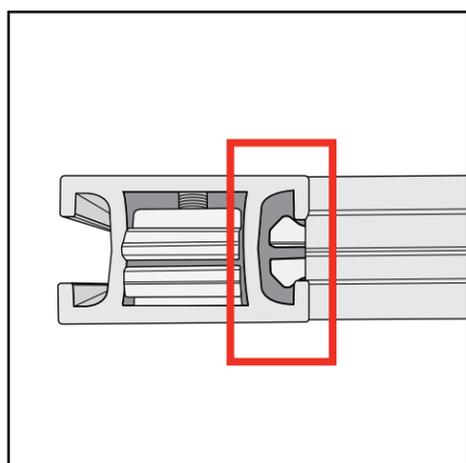

Engaged Lock



# WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS  
MAY BE REQUIRED




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


### Top View of Each Level

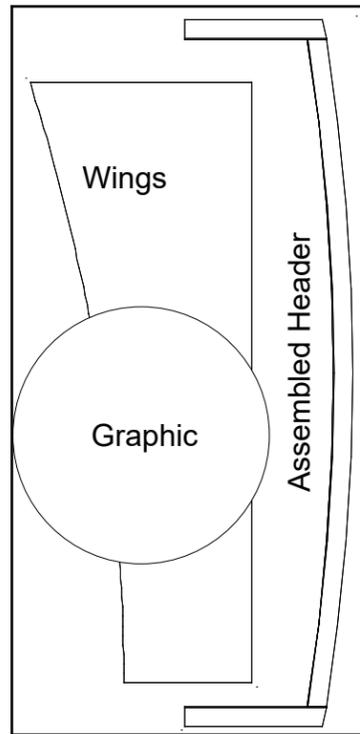


Level 1

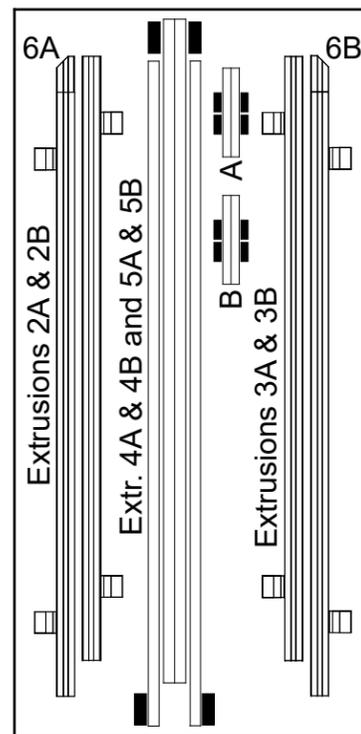



Level 2

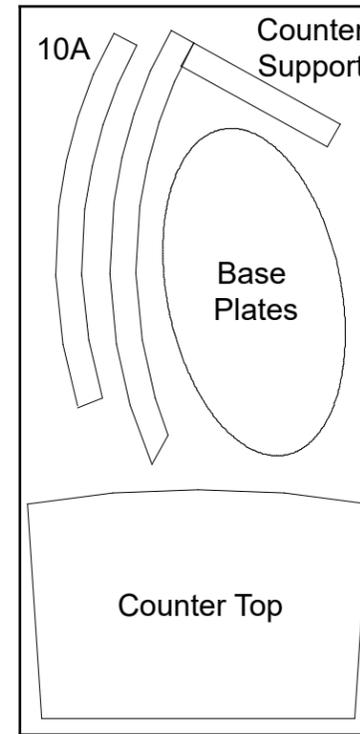

Level 3

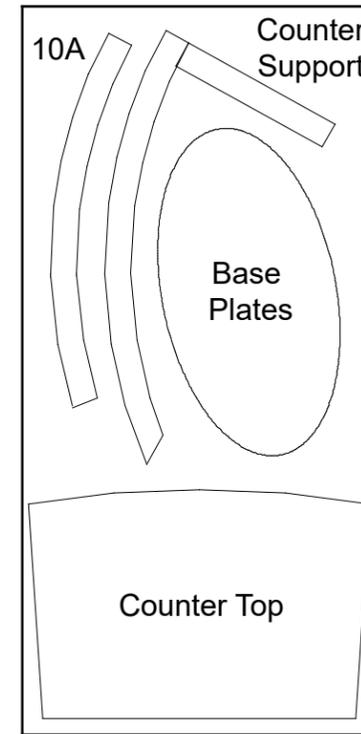


Level 4

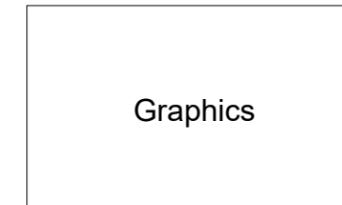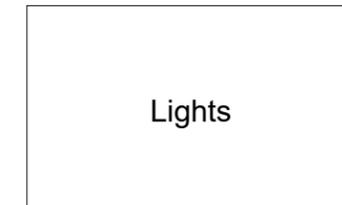

Item	Qty.	Description
1	2	Base Plate
2A,2B	1,1	42" S40 Vertical Extrusion w/ A10 Clamps
3A,3B	1,1	42" S40 Vertical Extrusion w/ A10 Clamps
4A,4B	1,1	45" Z45 Horizontal Extrusion
5A,5B	1,1	45" Z45 Horizontal Extrusion
6A,6B	1,1	2.5" S40 Angle-Cut Vertical

- Steps:
- 1) Attach base plates [1] lower verticals [2A] and [3A], using bolts.
  - 2) Connect verticals [2A to 2B] and [3A to 3B], using connection bars [B].  
See [Straight Connection with Knobs](#) detail.
  - 3) Connect horizontals [4A to 4B] and [5A to 5B], using connection bars [A].  
See [Straight Connection with Knobs](#) detail.
  - 4) Connect assemblies [2A/2B] and [3A/3B] with assemblies [4A/4B] and [5A/5B].  
See [Corner Connection with Knob](#) detail.
  - 5) Connect extrusions [6A to 2B] and [6B to 3B].  
See [2.5" h Angle-Cut Vertical Attachment](#) detail.
  - 6) Attach graphic to Velcro on back of assembled Backwall.

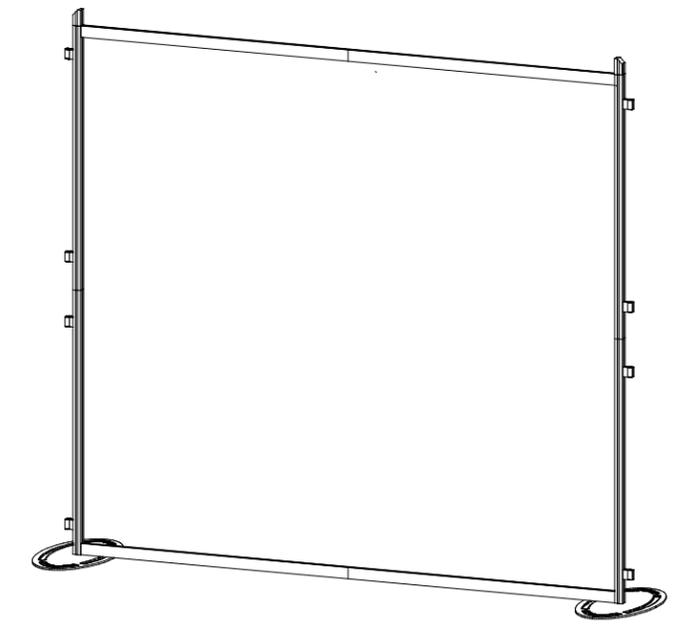

When Assembled

Keep extrusions [6A] and [6B] attached to [2B] and [3B].

Keep A10 clamps attached to [2A] [2B] [3A] and [3B].

Keep connection bars [A] attached to [4A] [5A], and [B] to [2A] [3A].

**★ Corner Connection with Knob**



Turn knob clockwise to tighten lock.

**Do not over tighten Knobs**

**◆ Straight Connection with Knobs**

Slide connection bar between extrusions, then turn knobs clockwise to tighten lock.

**Do not over tighten Knobs**

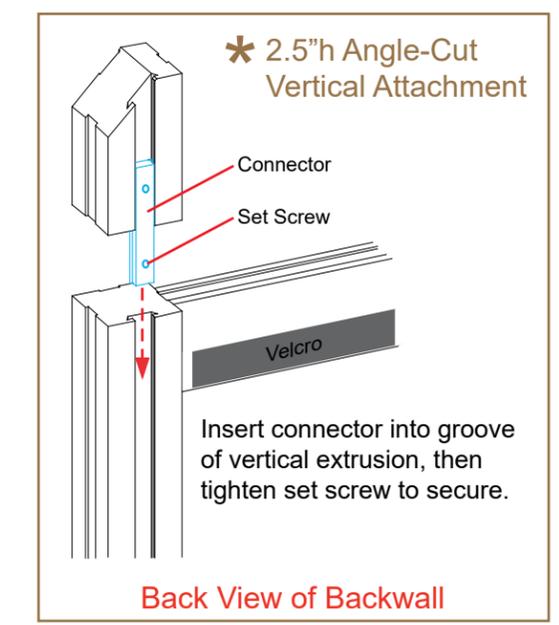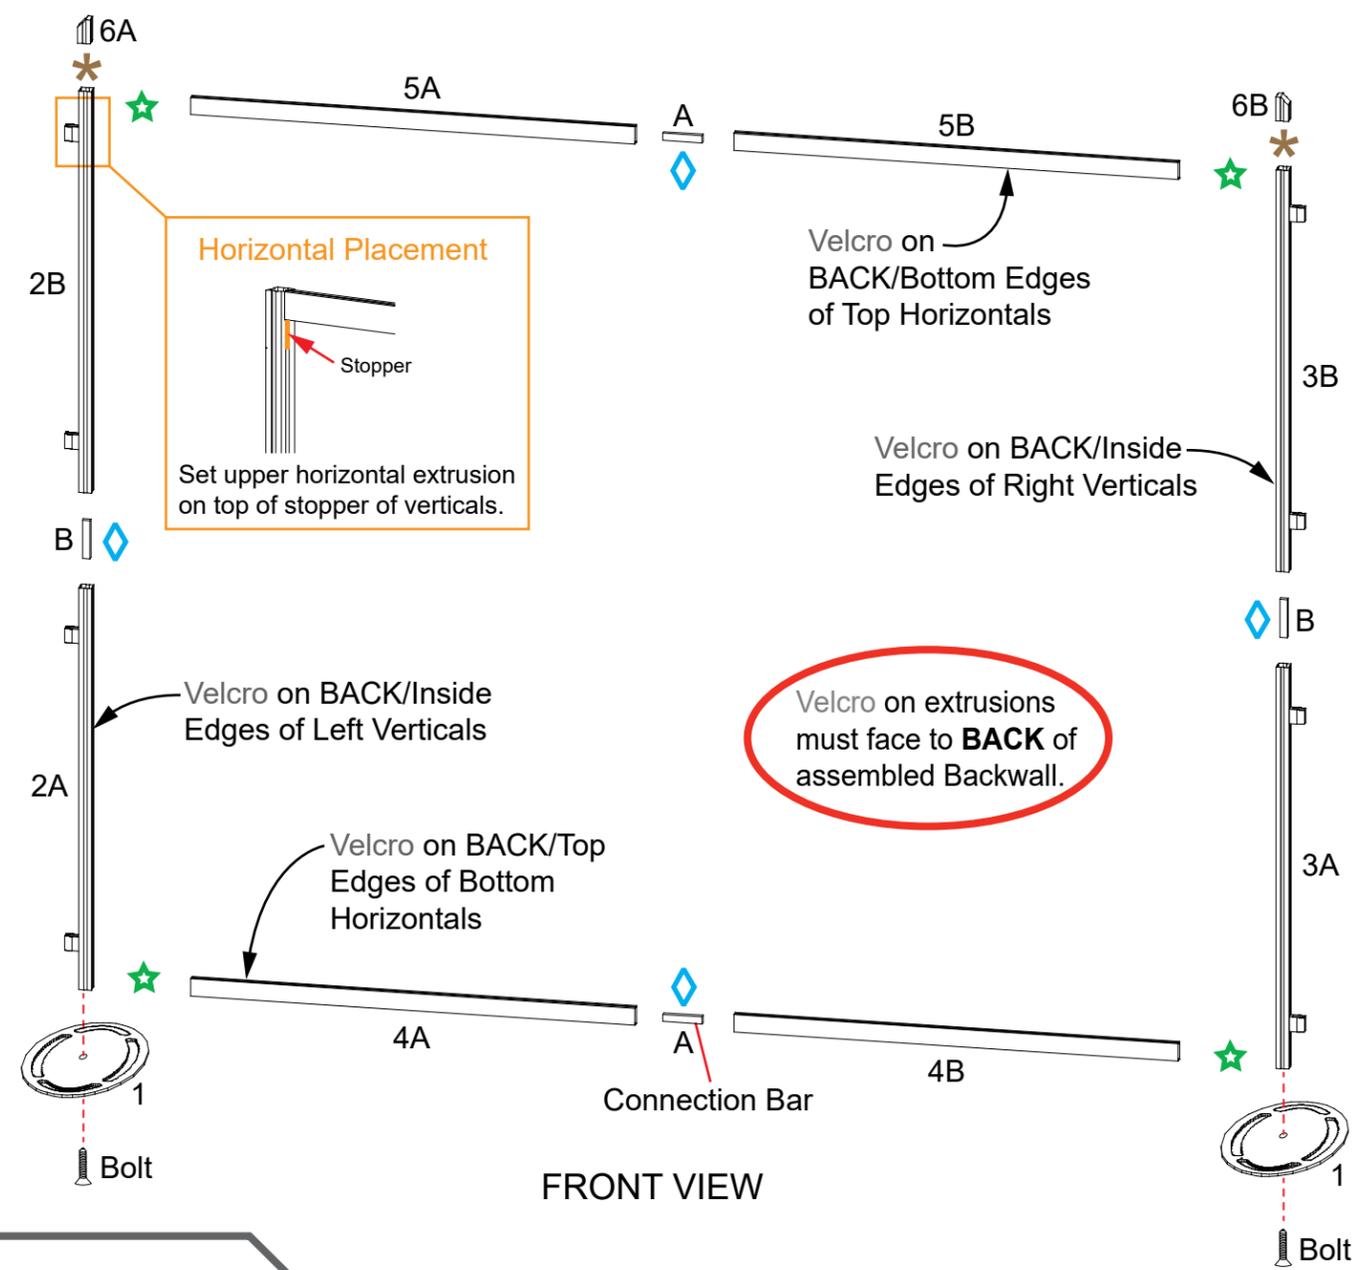

Steps:

- 1) Connect lights to top horizontal extrusions [5A/5B]. See **Light Connection** detail.
- 2) Attach assembled Header Frame and connect graphic.
- 3) Attach extrusions [10/11] to verticals [2A] & [3A]. Attach Shelf between [10] & [2A].
- 4) Attach support legs [10A] to curved extrusions [10].
- 5) Attach flange plates [11A] to top of curved extrusions [10], using bolts.
- 6) Attach counter tops to counter mounting plates [11A]. See **Counter Top Attachment** detail.
- 7) Route power cords for wireless chargers under counter top to power source.
- 8) Attach wings to A10 clamps. See **Clamp Attachment** detail.
- 9) Attach monitor mount to vertical [2B]. See **Monitor Mount Attachment** detail.
- 10) Attach graphic to vertical extrusion [3B]. See **Graphic Attachment** detail.

Item	Qty.	Description
7/8/9	1/1/1	Header Frame
10	2	30.2" Curved Extrusion
10A	2	Support Leg
11	2	12.184" Horizontal Extrusion
11A	2	Counter Mounting Plate

**\* Light Connection**

Slide light onto clip then lock clip into groove of horizontal extrusion.

**\* Graphic Attachment**

Slide connector into groove of extrusion. Tighten set screws to secure in place. Screw standoff into connector. Place graphic between standoff and cap then tighten cap to secure sign.

**\* Counter Top Attachment**

Attach Flange Plate to Curved Extrusion [10], using screw. Insert Fixed Screws, located on underside of Counter, into holes of Flange Plate. Secure with Wing Nuts.

**\* Monitor Mount Attachment**

Slide V4 Connectors into groove of Extrusion. Tighten Set Screws to secure connectors in place.

Attach Monitor Mount back piece to Extrusion, using bolts.

Then slide monitor mount into back piece.

