
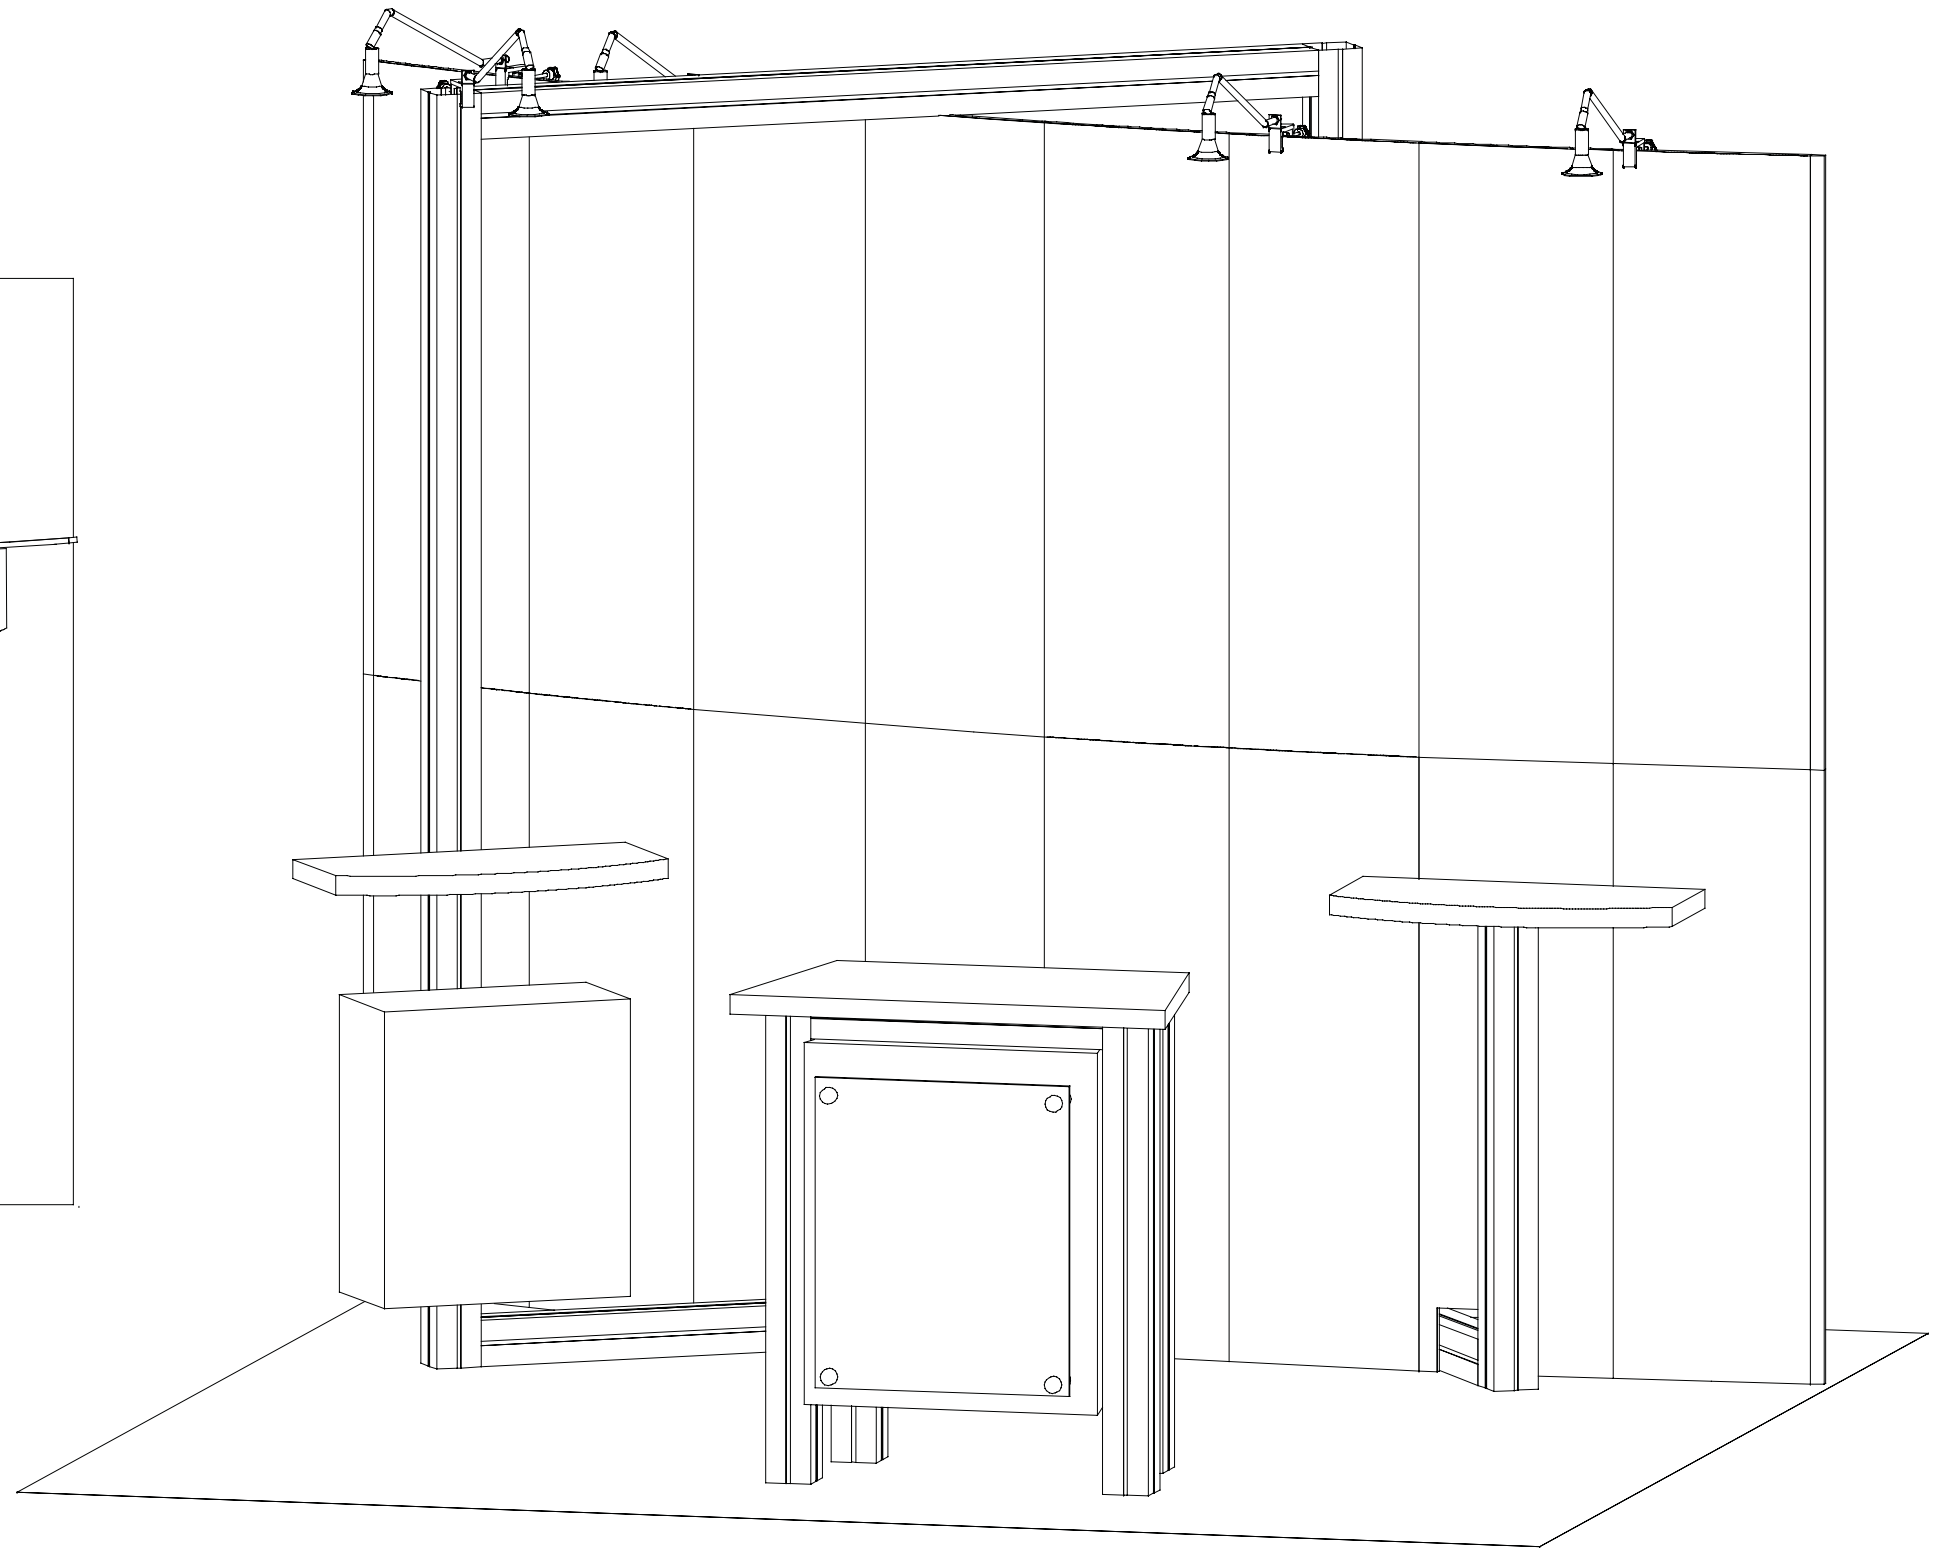


euro It | HYBRIDS

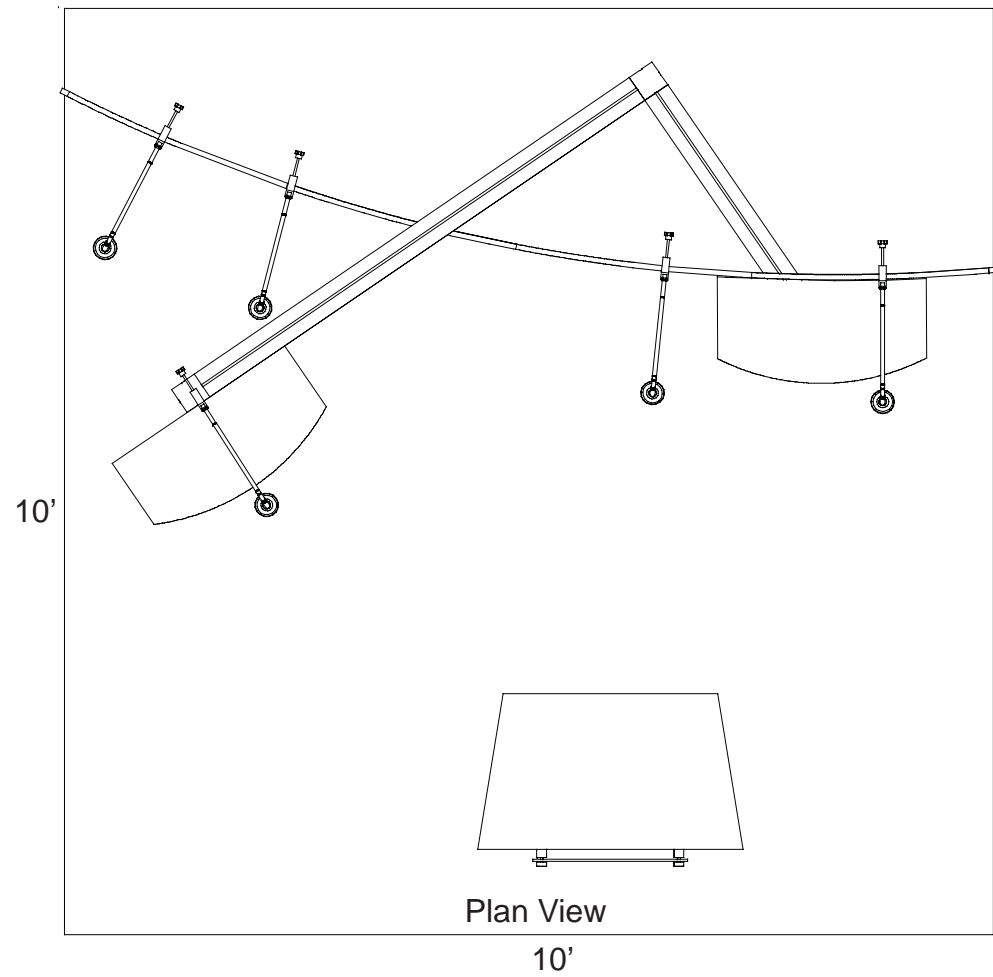

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro It | HYBRIDS

Euro LT Hybrids General Setup Instructions - Order #xxxxx

Using Your Setup Instructions


The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Panel System

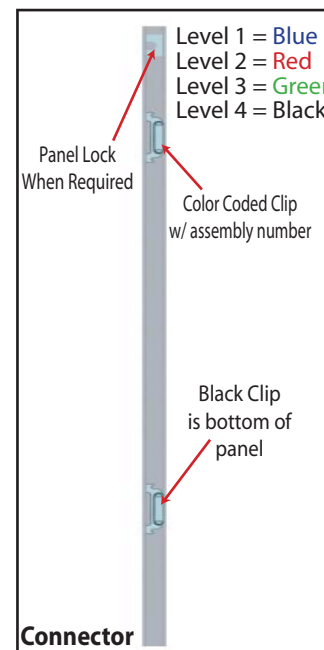


Connector
Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish the level. The color coded clip also contains the numbered label.

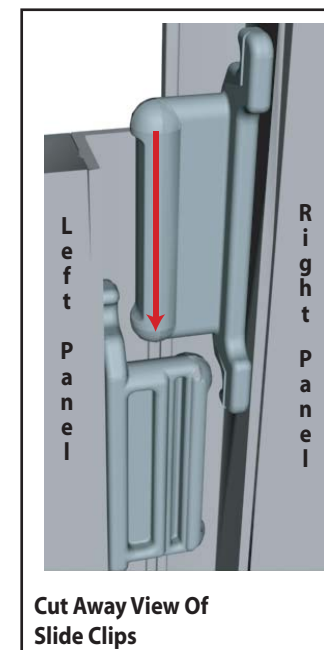

Cut Away View Of Slide Clips
Components connect together by aligning them and sliding downward connecting clips together.

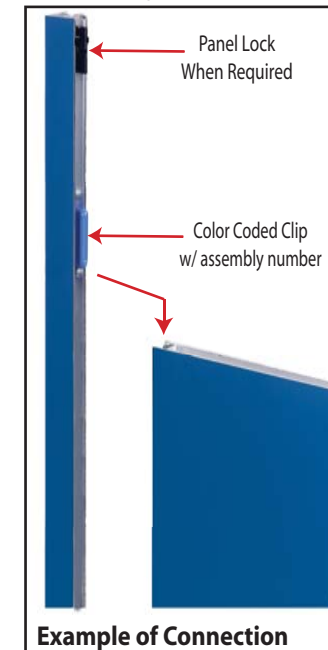

Example of Connection
Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

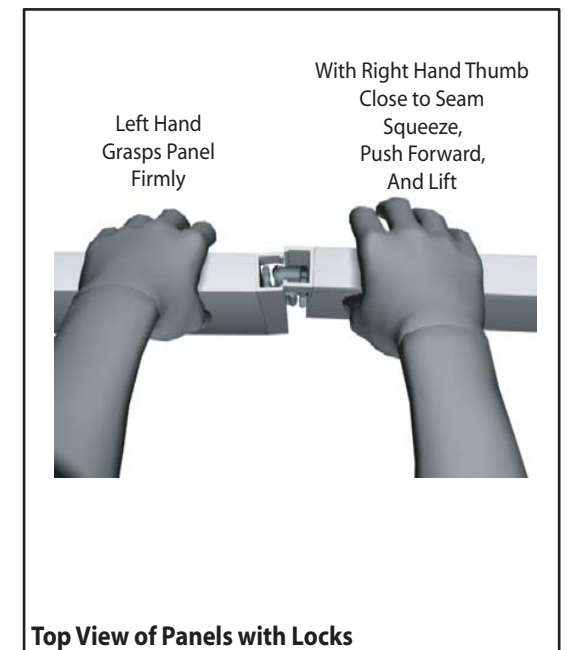

Top View of Panels with Locks
The first level of components contains panel locks that are located at the top of the panel for extra stability and a seamless connection. When disassembling panels, twist top connection slightly and lift right panel upward.

General Setup Instructions for Extrusion System




The Tool
Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.



Typical Connection
Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.




Typical Connection (cont'd)

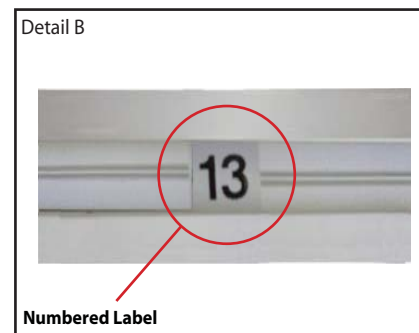


Numbered Label
Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Horizontal Inline Connection (remove only one setscrew)
Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

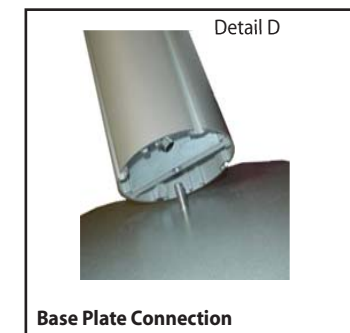

Base Plate Connection
Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

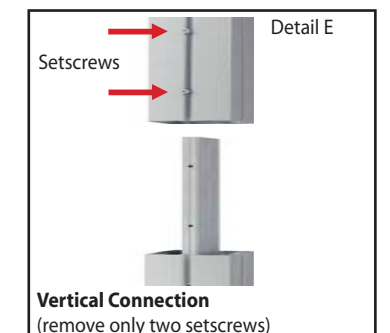

Vertical Connection (remove only two setscrews)
When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


Part Number	Qty for Step	Description
1	1	98.5286" h Vertical Extrusion
2	1	98.5286" h Vertical Extrusion
3	1	38" h Vertical Extrusion
4	2	68.061" w Horizontal Extrusion
5	1	35.531" w Horizontal Extrusion

Steps

1) Connect lower horizontal extrusion [4] between vertical extrusions [1 and 2] as shown.

NOTE: Upper Horizontal extrusion [4] can not be assembled until AFTER the Euro LT Panel Section is Assembled.

2) Connect horizontal extrusion [5] between vertical extrusions [2 and 3] as shown.

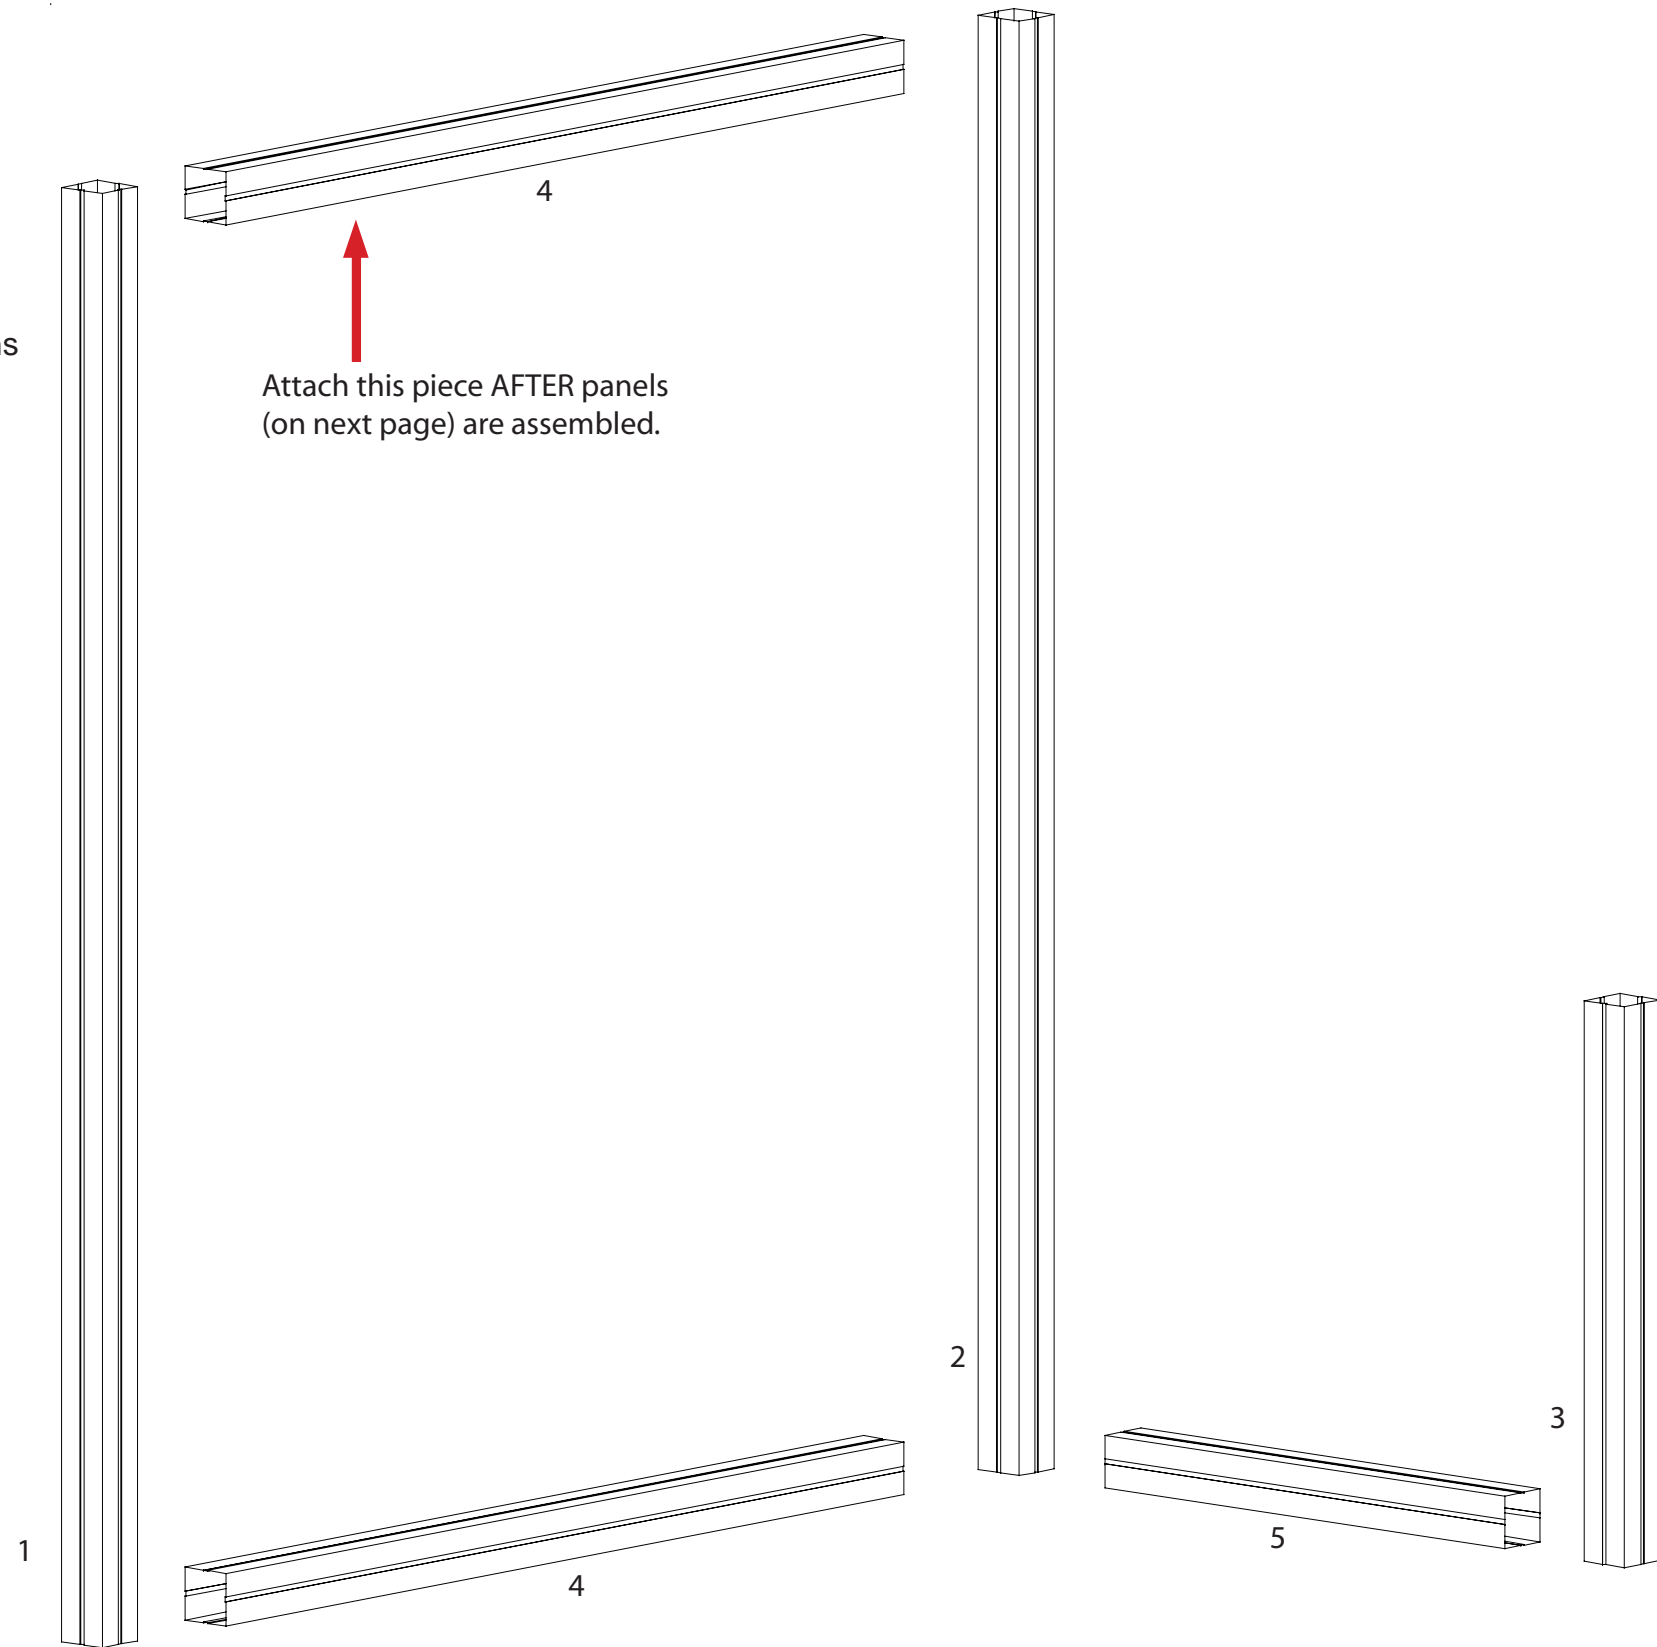



WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	47.5"h End Cap
2	47.5"h Custom Curve Panel
3	47.5"h Custom Curve Panel
4	47.5"h Custom Curve Panel
5	47.5"h Custom Curve Panel
6	47.5"h End Cap

Steps:
Connect panels together in numerical order as shown in illustrations.

Set atop assembled visions section.

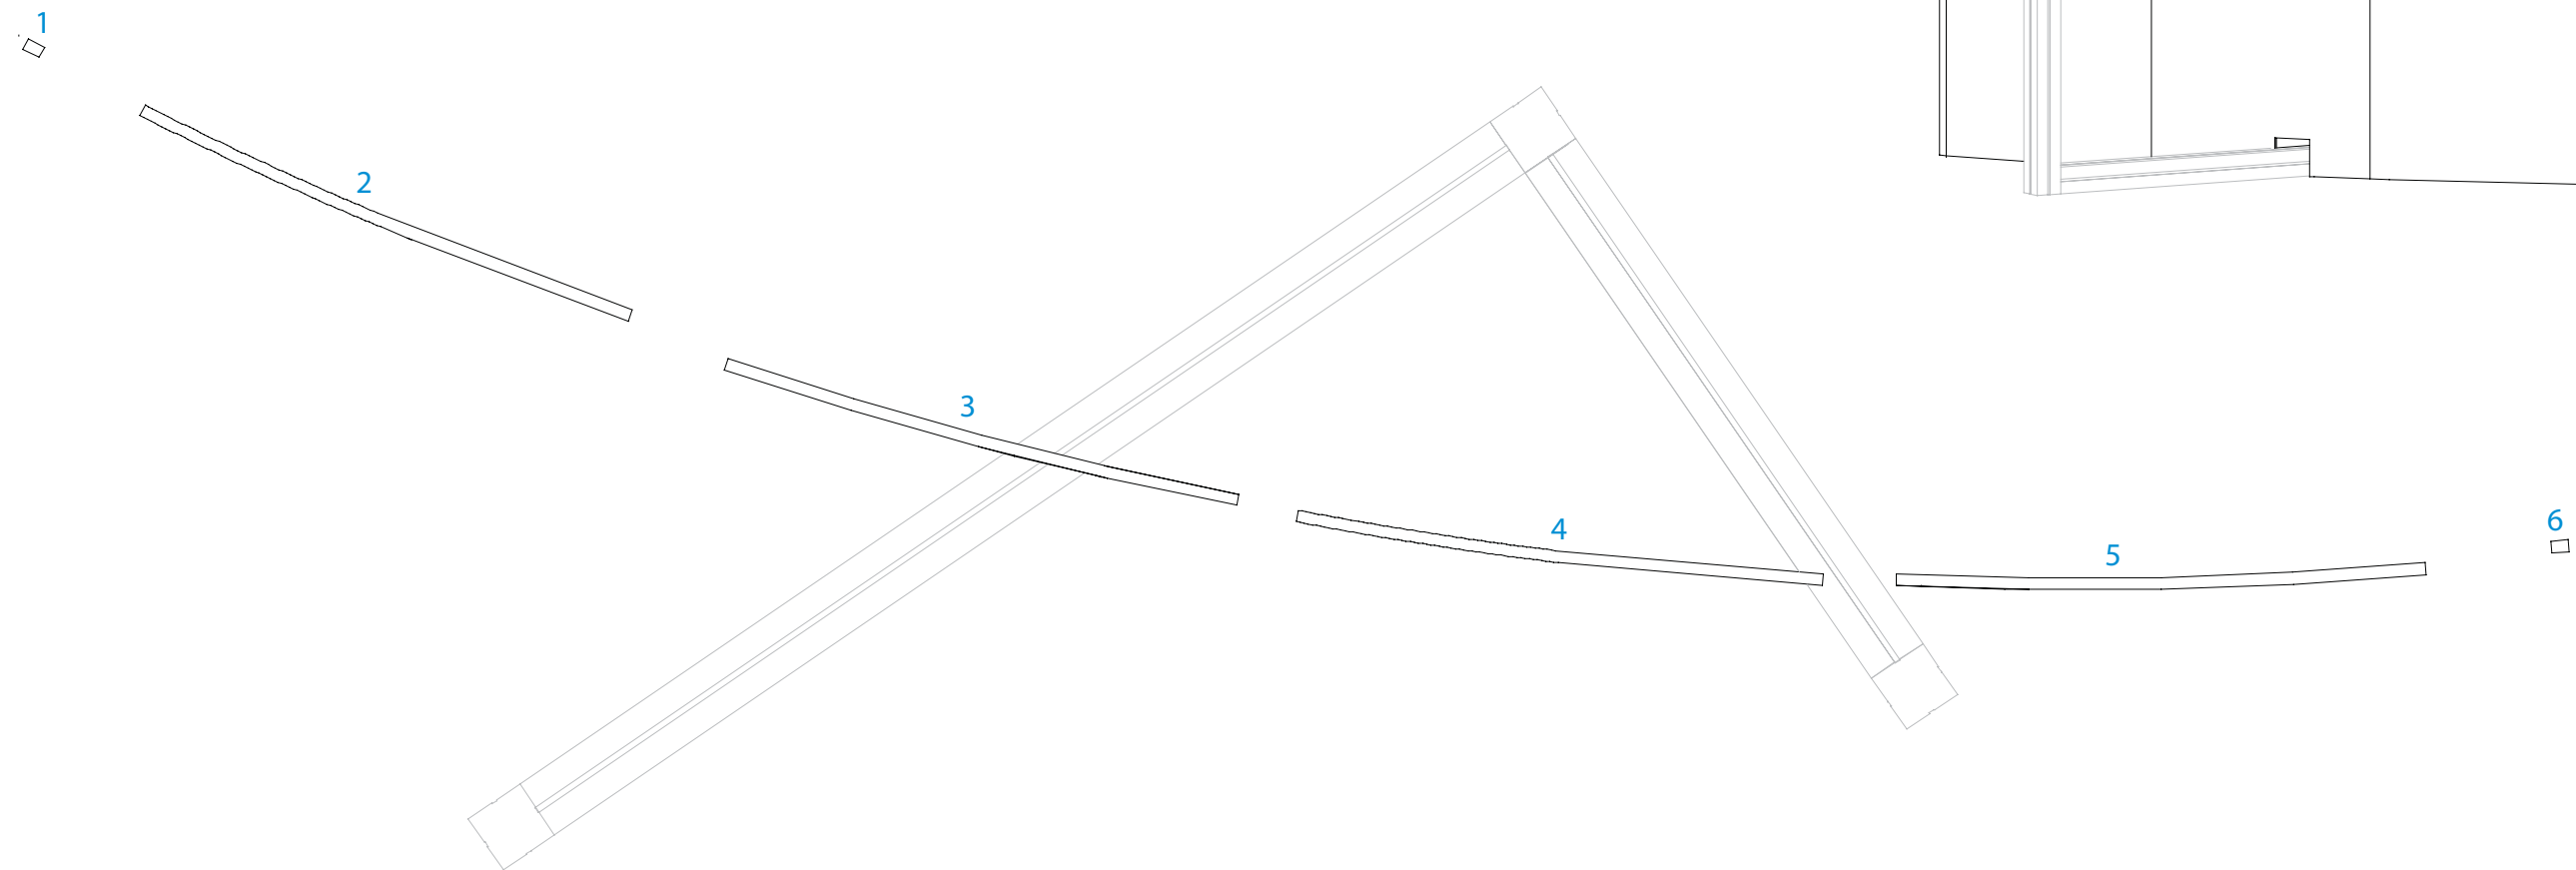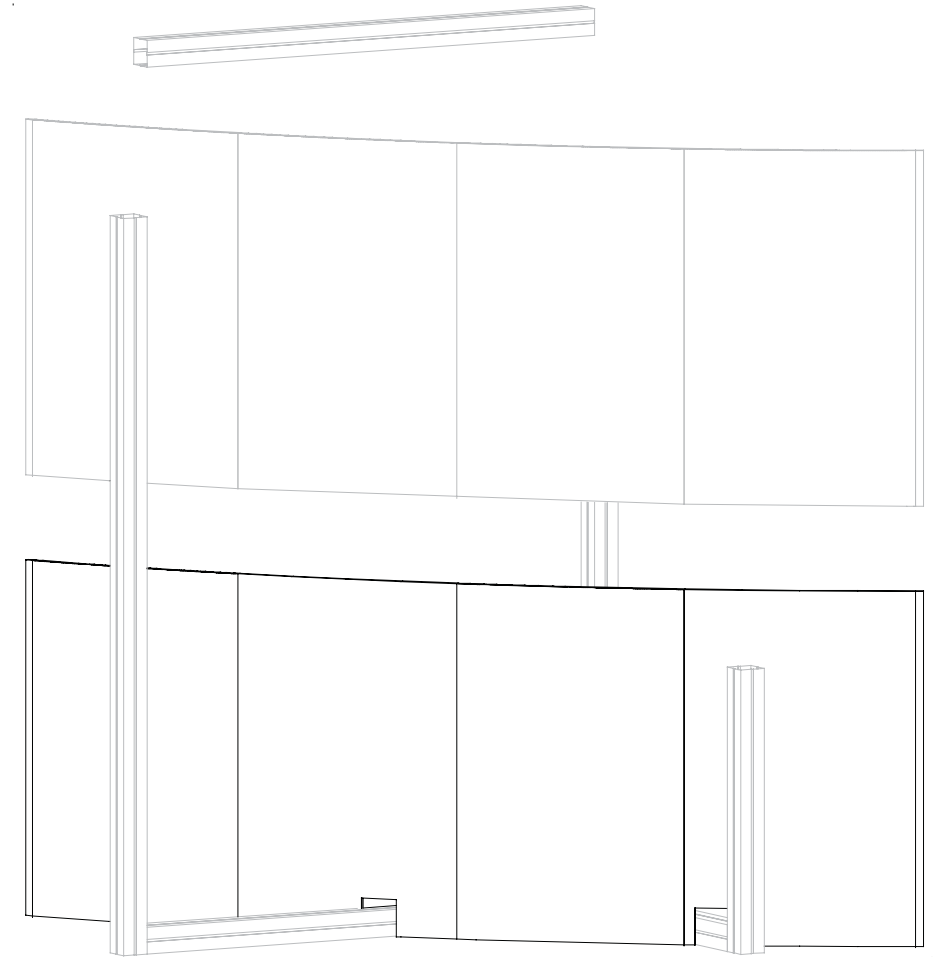




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100


Item Number	Description
1	47.5"h End Cap
2	47.5"h Custom Curve Panel
3	47.5"h Custom Curve Panel w/ pins on top
4	47.5"h Custom Curve Panel
5	47.5"h Custom Curve Panel
6	47.5"h End Cap

Steps:
Connect panels together in numerical order as shown in illustrations.

When Assembled Connect horizontal extrusion [4] between vertical extrusions [1 and 2].

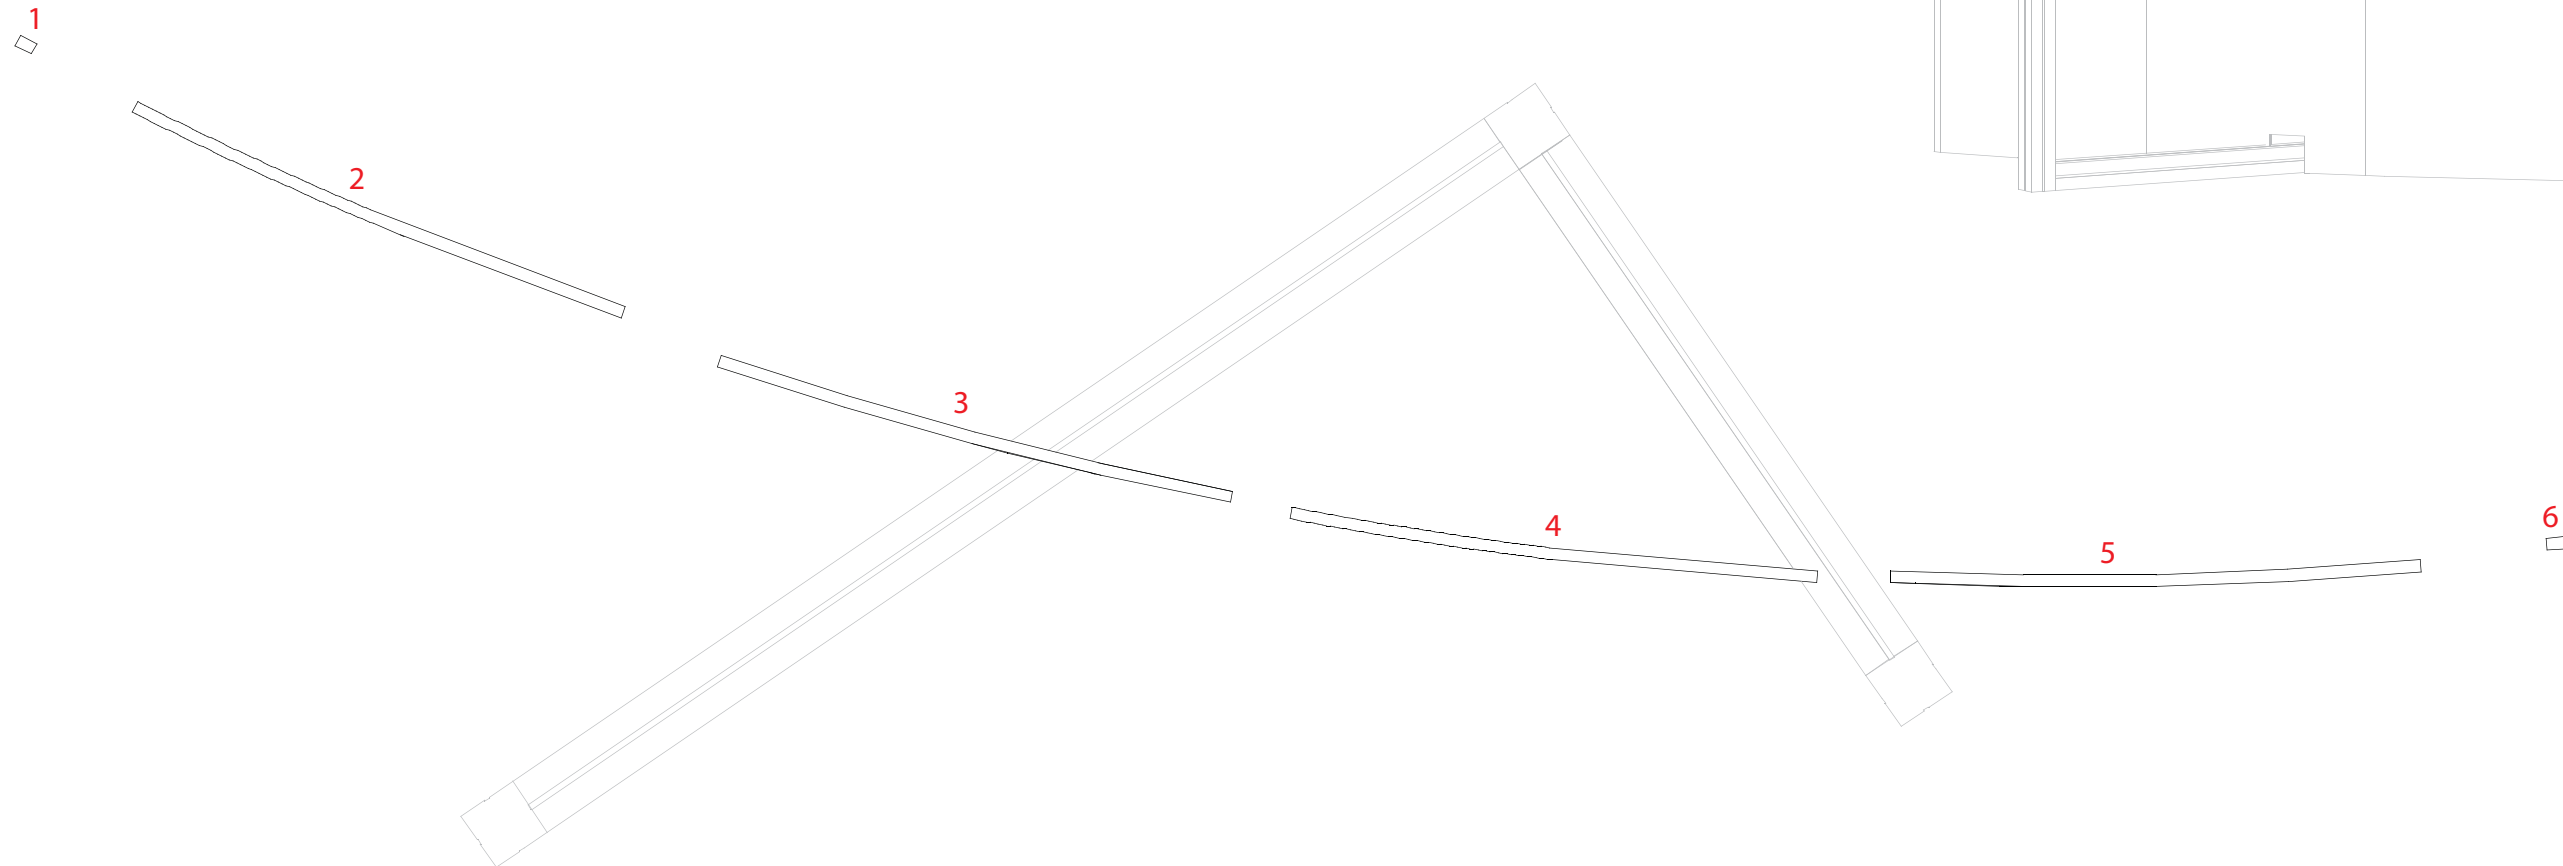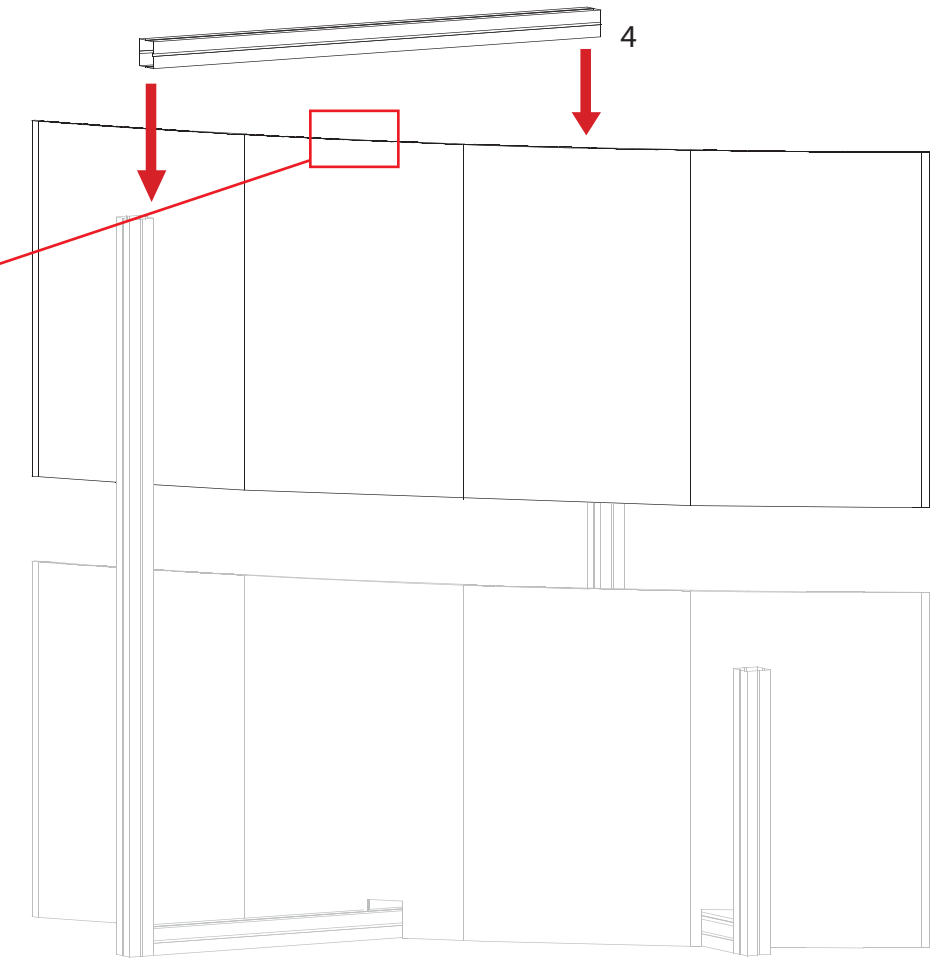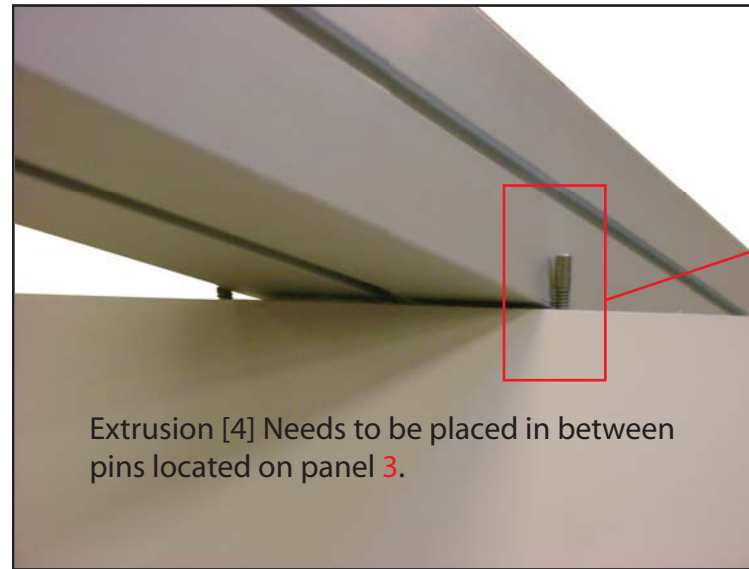

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

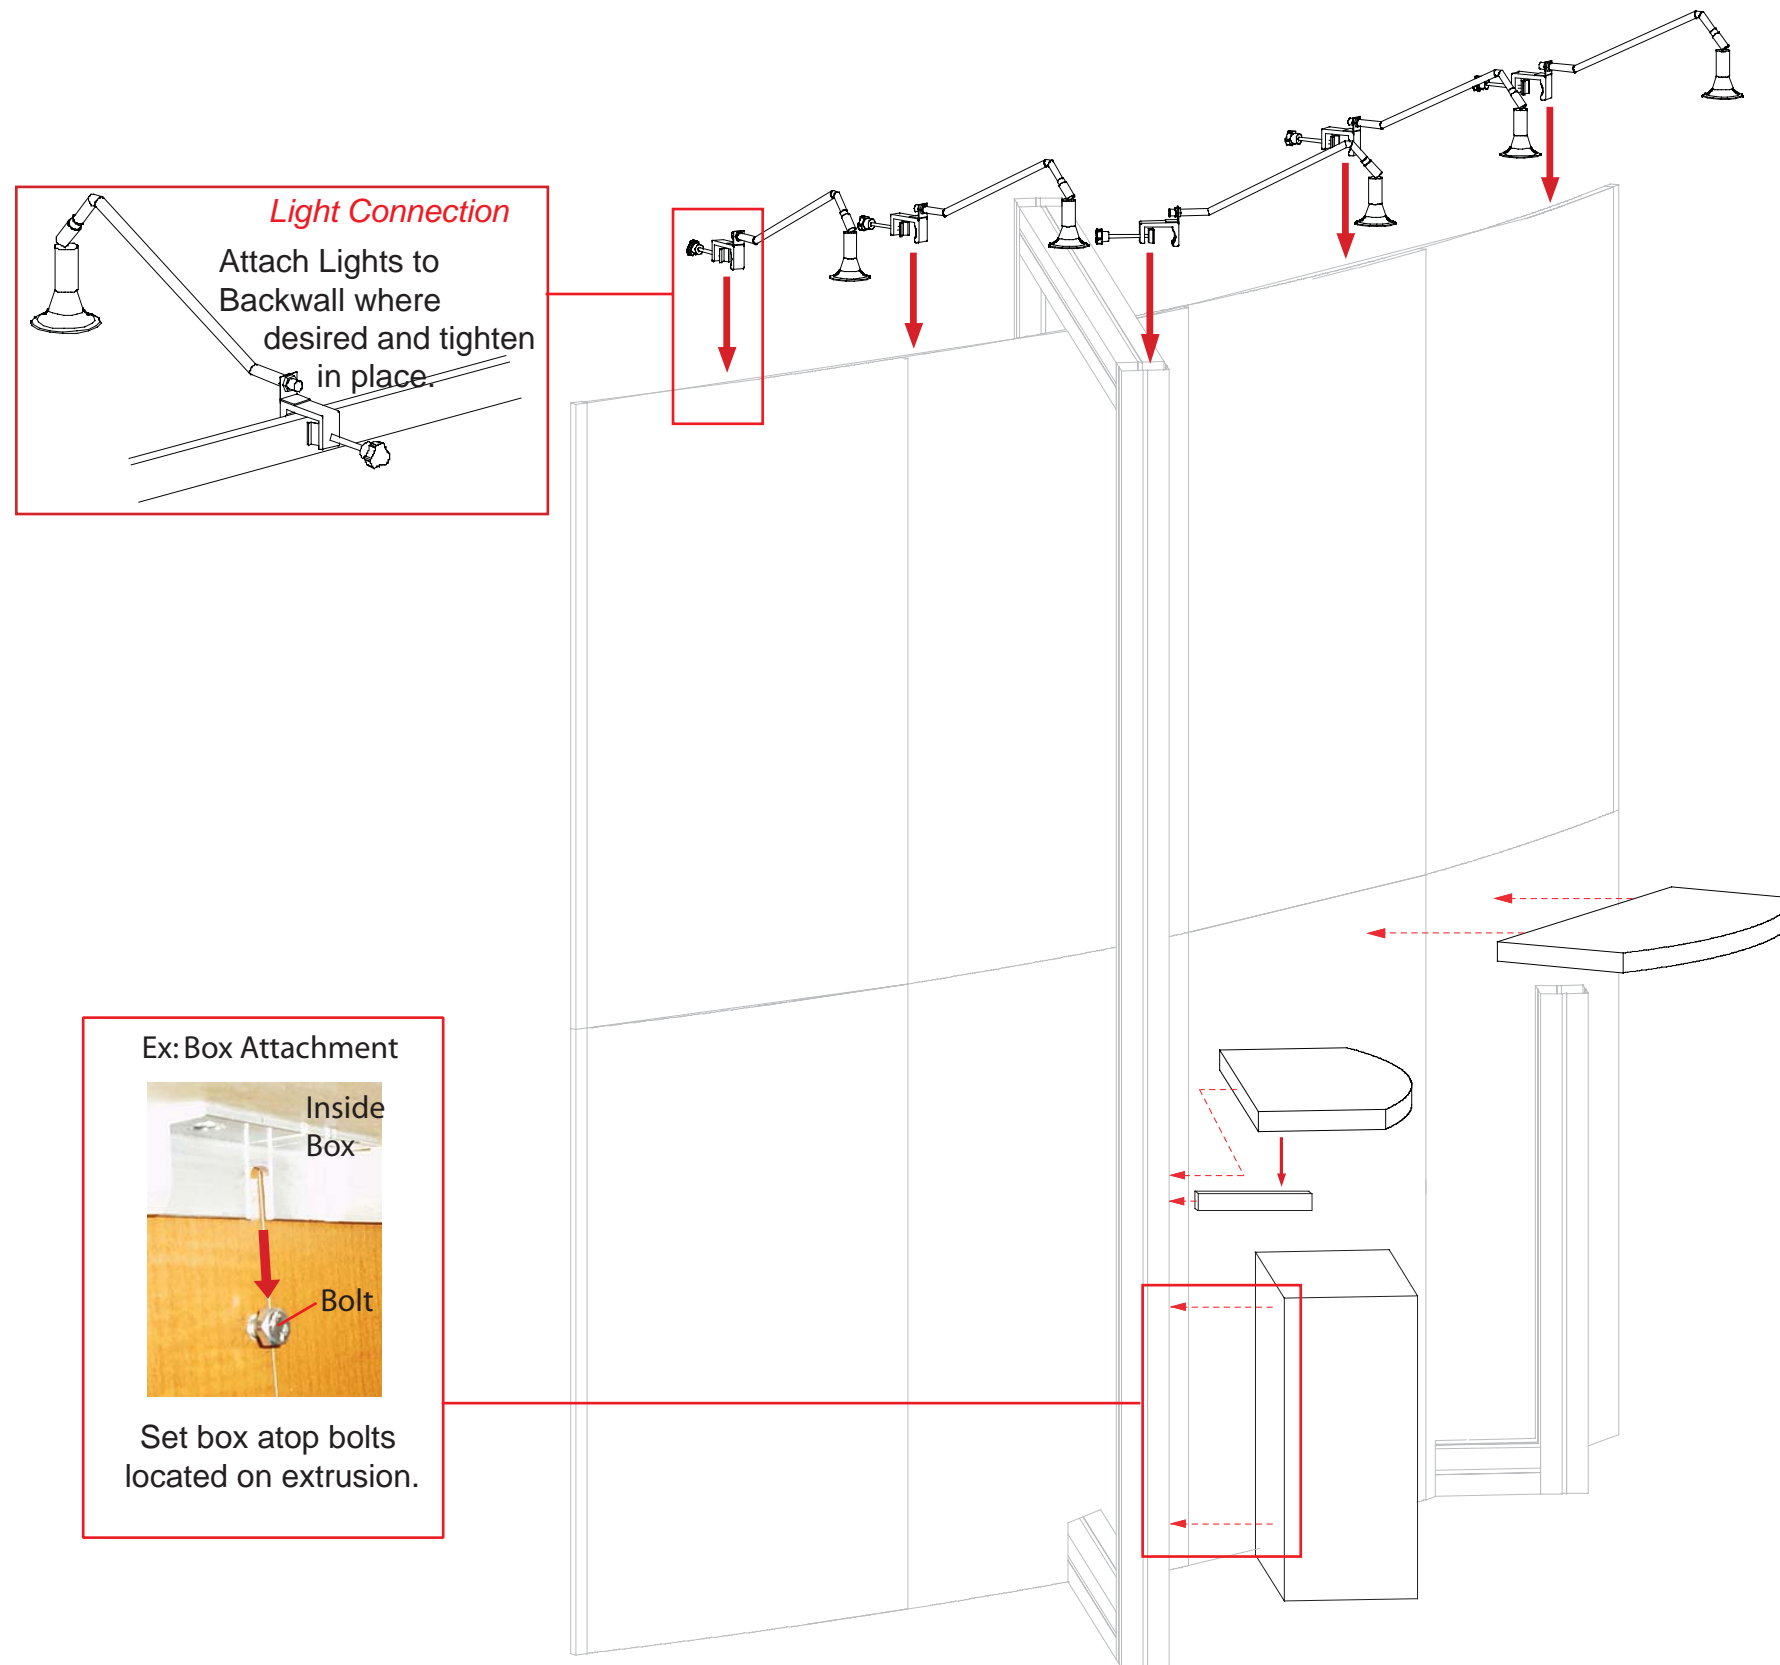

Light Connection
Attach Lights to Backwall where desired and tighten in place.

Ex: Box Attachment
Inside Box
Bolt
Set box atop bolts located on extrusion.




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Part Number	Qty for Step	Description
6	4	38" h Vertical Extrusion
7	1	23" w Horizontal Extrusion
8	1	19" w Horizontal Extrusion

Steps

- 1) Connect horizontal extrusions [7 and 8] between vertical extrusions [6] as shown.
- 2) Attach box to assembled extrusion pieces using thumbscrews provided.
- 3) Attach plex piece to box using standoff barrels and caps as shown.
- 4) Set counter atop assembled pedestal.

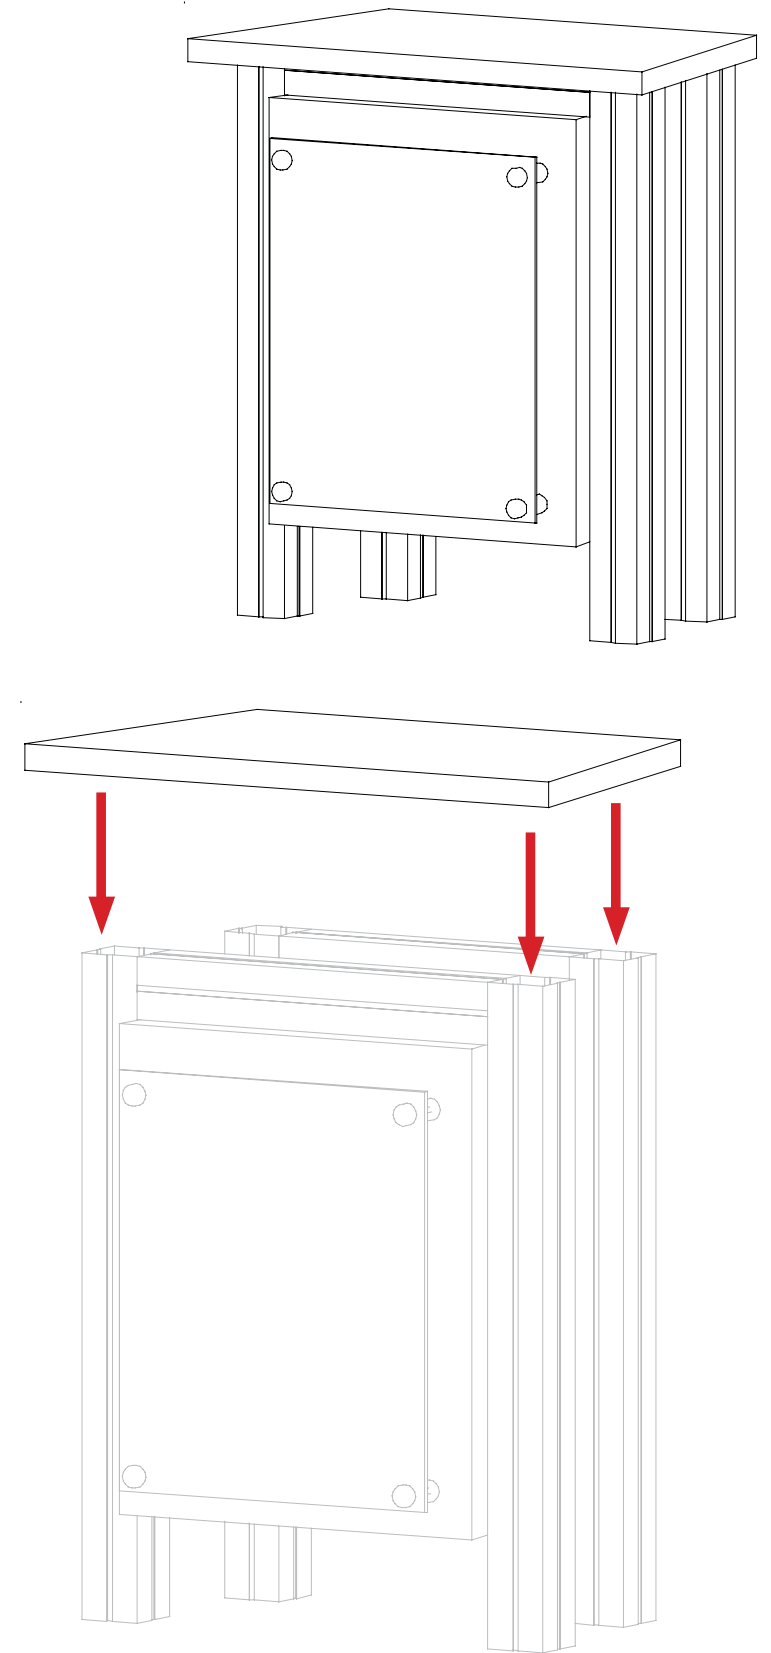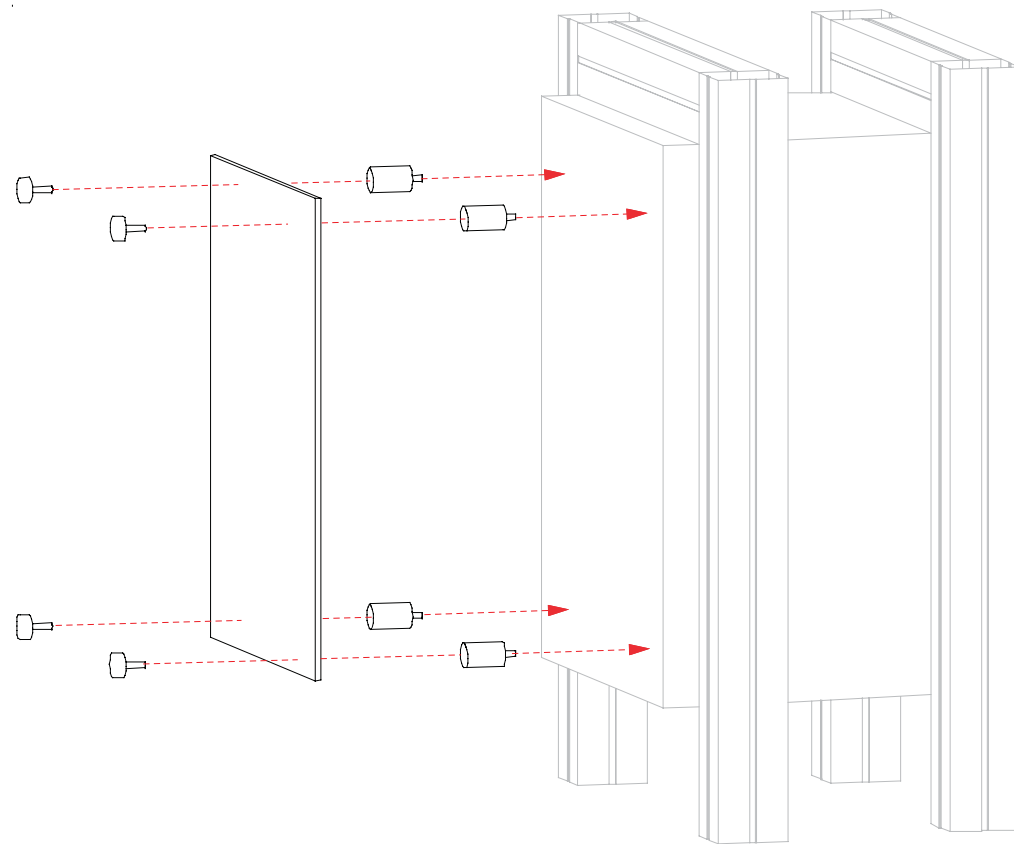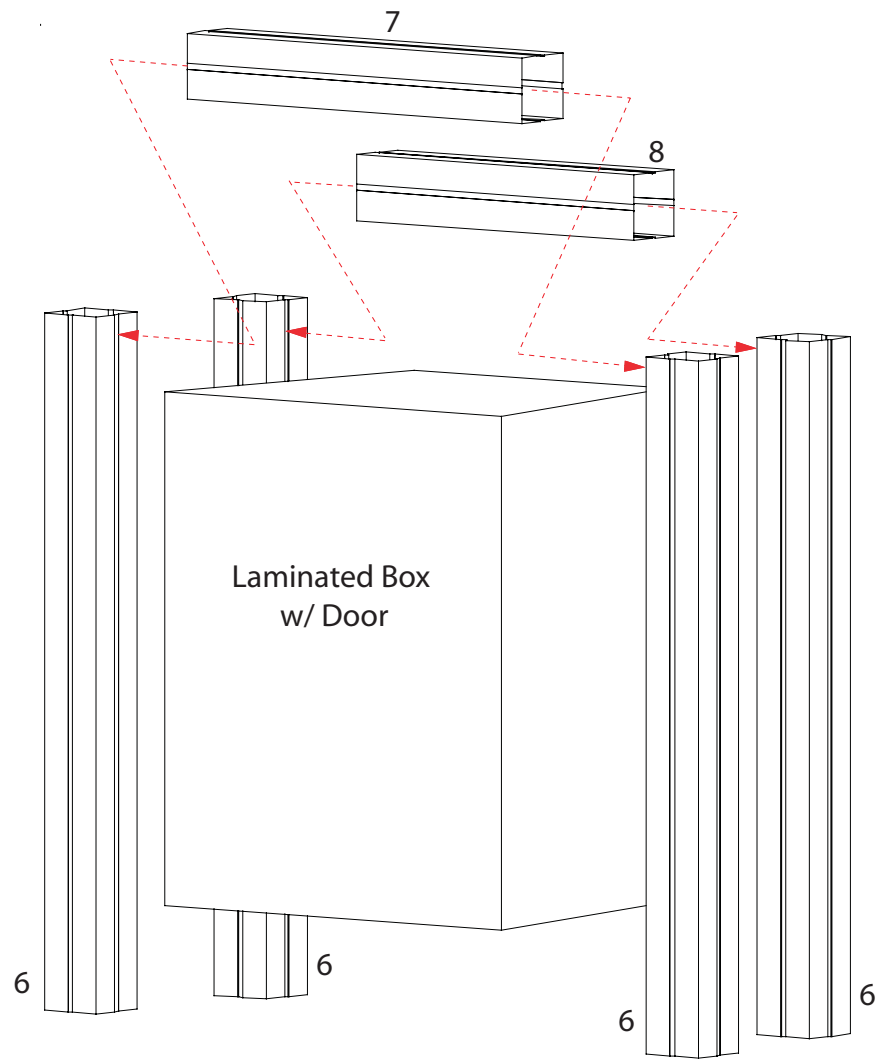

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

NOTE :

PDF copies of your Setup Instructions are available @ classicexhibits.com
See the search tool on the lower left hand corner of the Home page.

Enter the 5 digit Order #.

Search for Setup Instructions

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL
SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING