
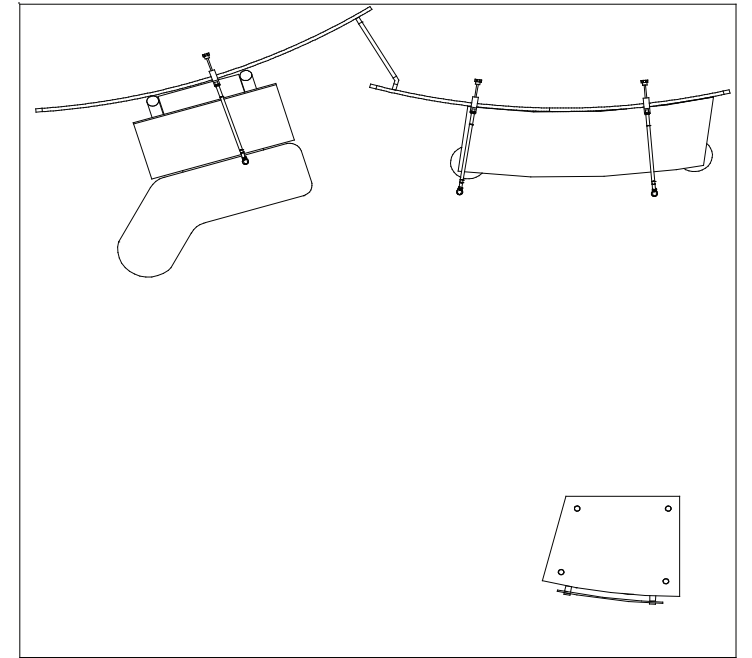


euro It | HYBRIDS

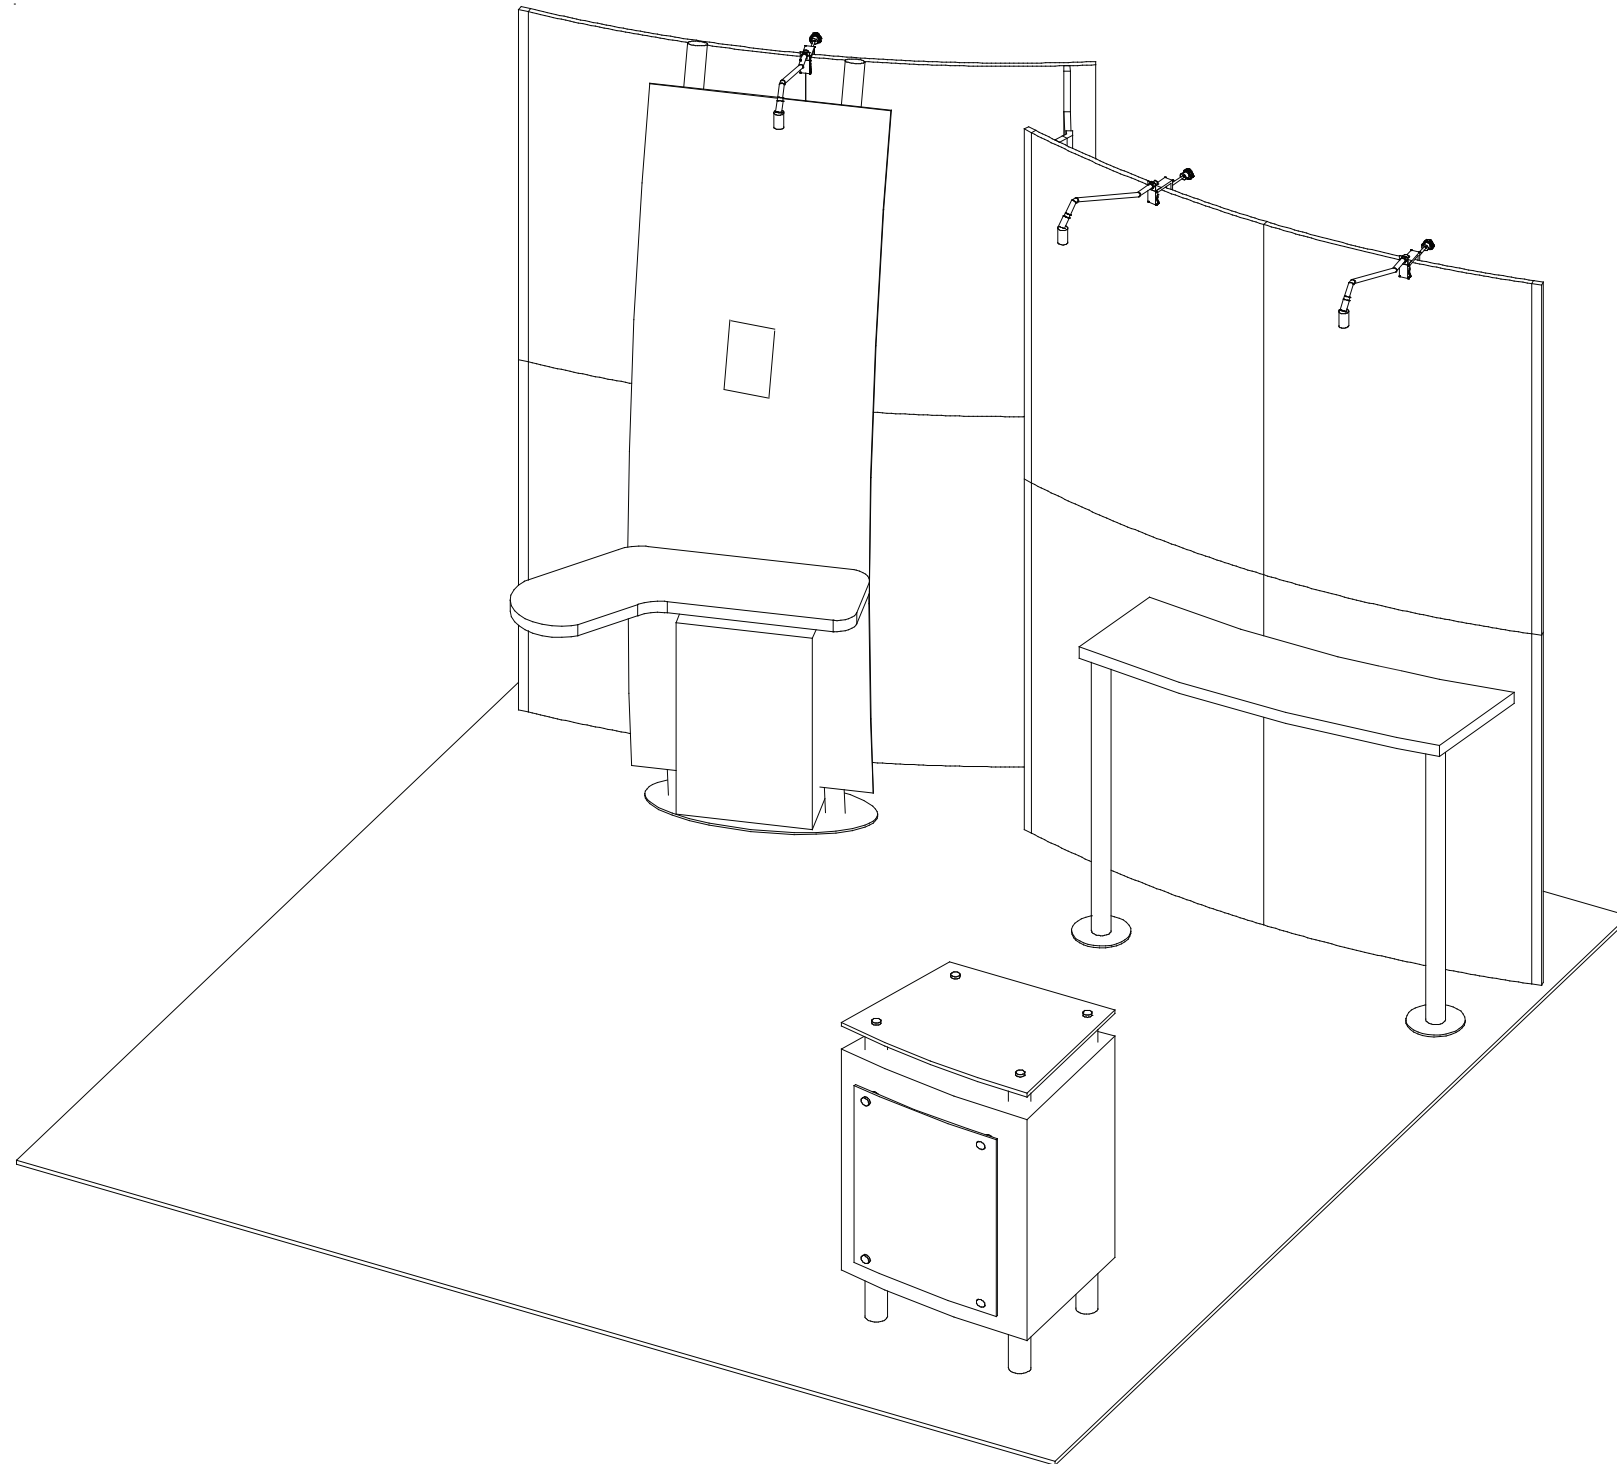

Plan View

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

General Setup Instructions for Extrusion System




The Tool

Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.

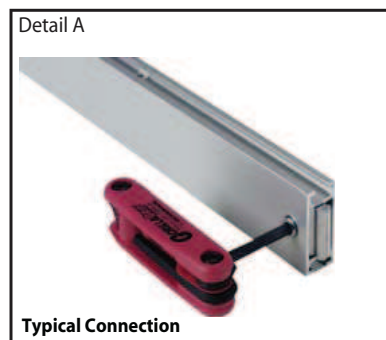


Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

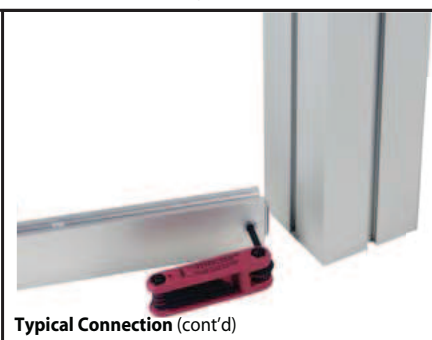


Typical Connection (cont'd)

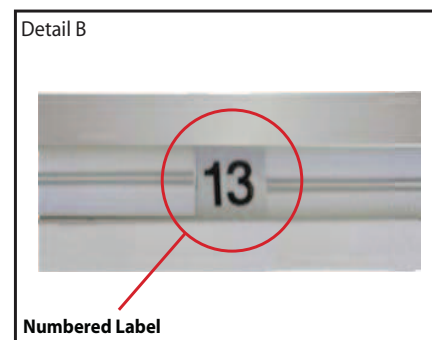


Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

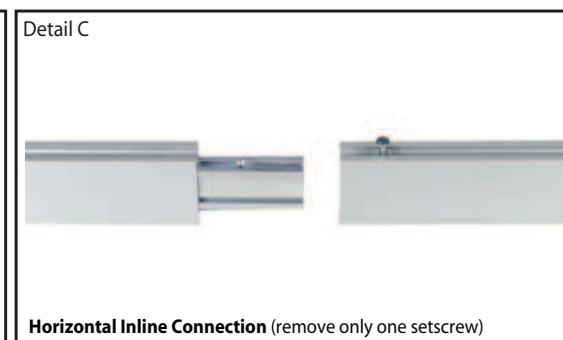


Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.



Base Plate Connection


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.



Vertical Connection (remove only two setscrews)


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

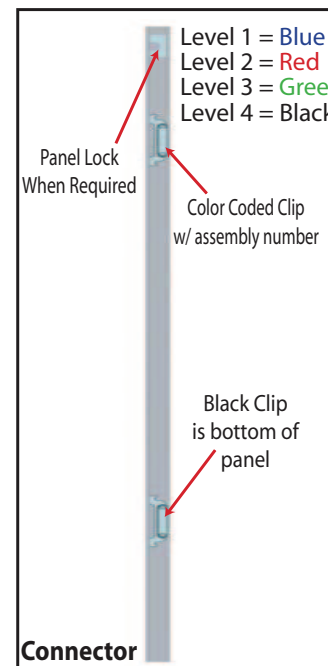


Connector

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

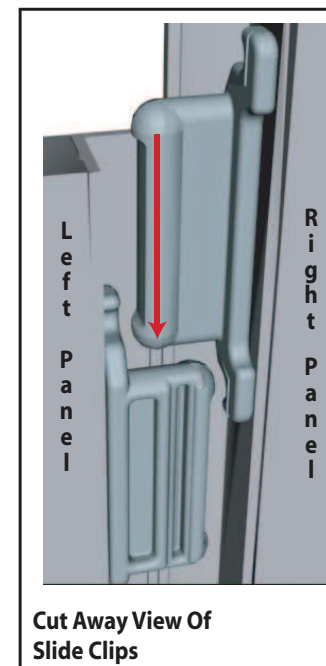


Cut Away View Of Slide Clips

Components connect together by aligning them and sliding downward connecting clips together.

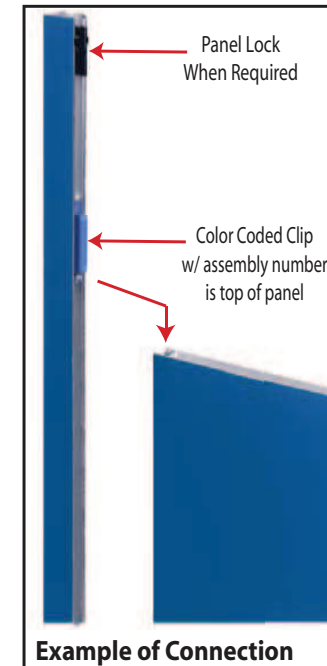

Example of Connection

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

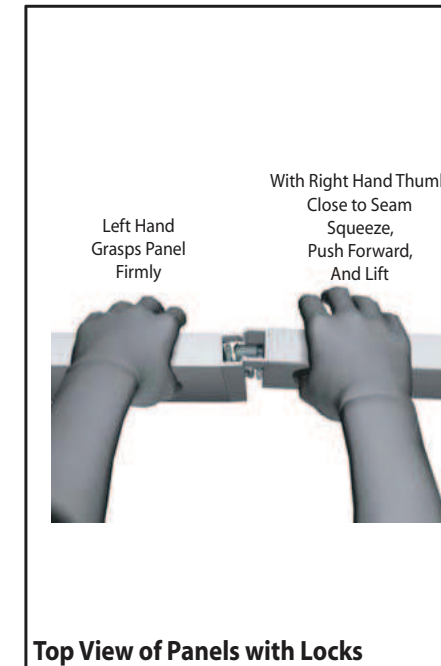


Top View of Panels with Locks

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item Number	Description
1	47.5" h End Cap
2	10" r x 47.5" h Curve Panel
3	10" r x 47.5" h Curve Panel
4	47.5" h End Cap
5	47.5" h Connector
6	11.5" w x 47.5" h Flat Panel
7	47.5" h 135° Connector
8	47.5" h Connector
9	47.5" h End Cap
10	10" r x 47.5" h Curve Panel
11	10" r x 47.5" h Curve Panel
12	47.5" h End Cap

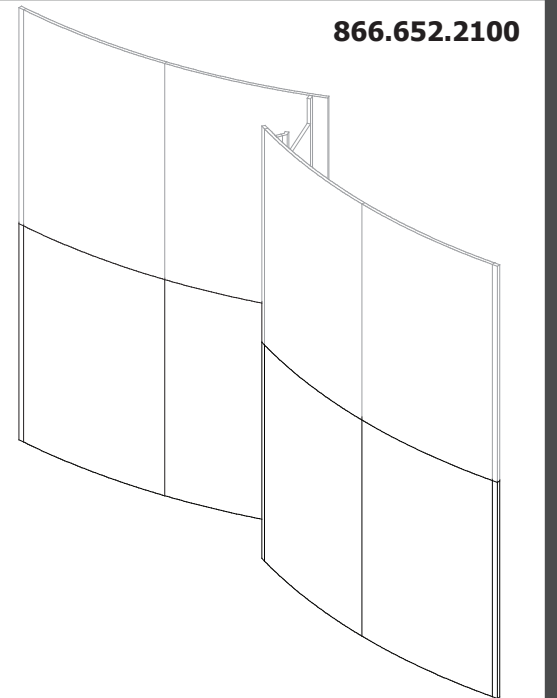

Steps:

- 1) Connect end cap [1] to curve panel [2] together, and continue in numerical order.

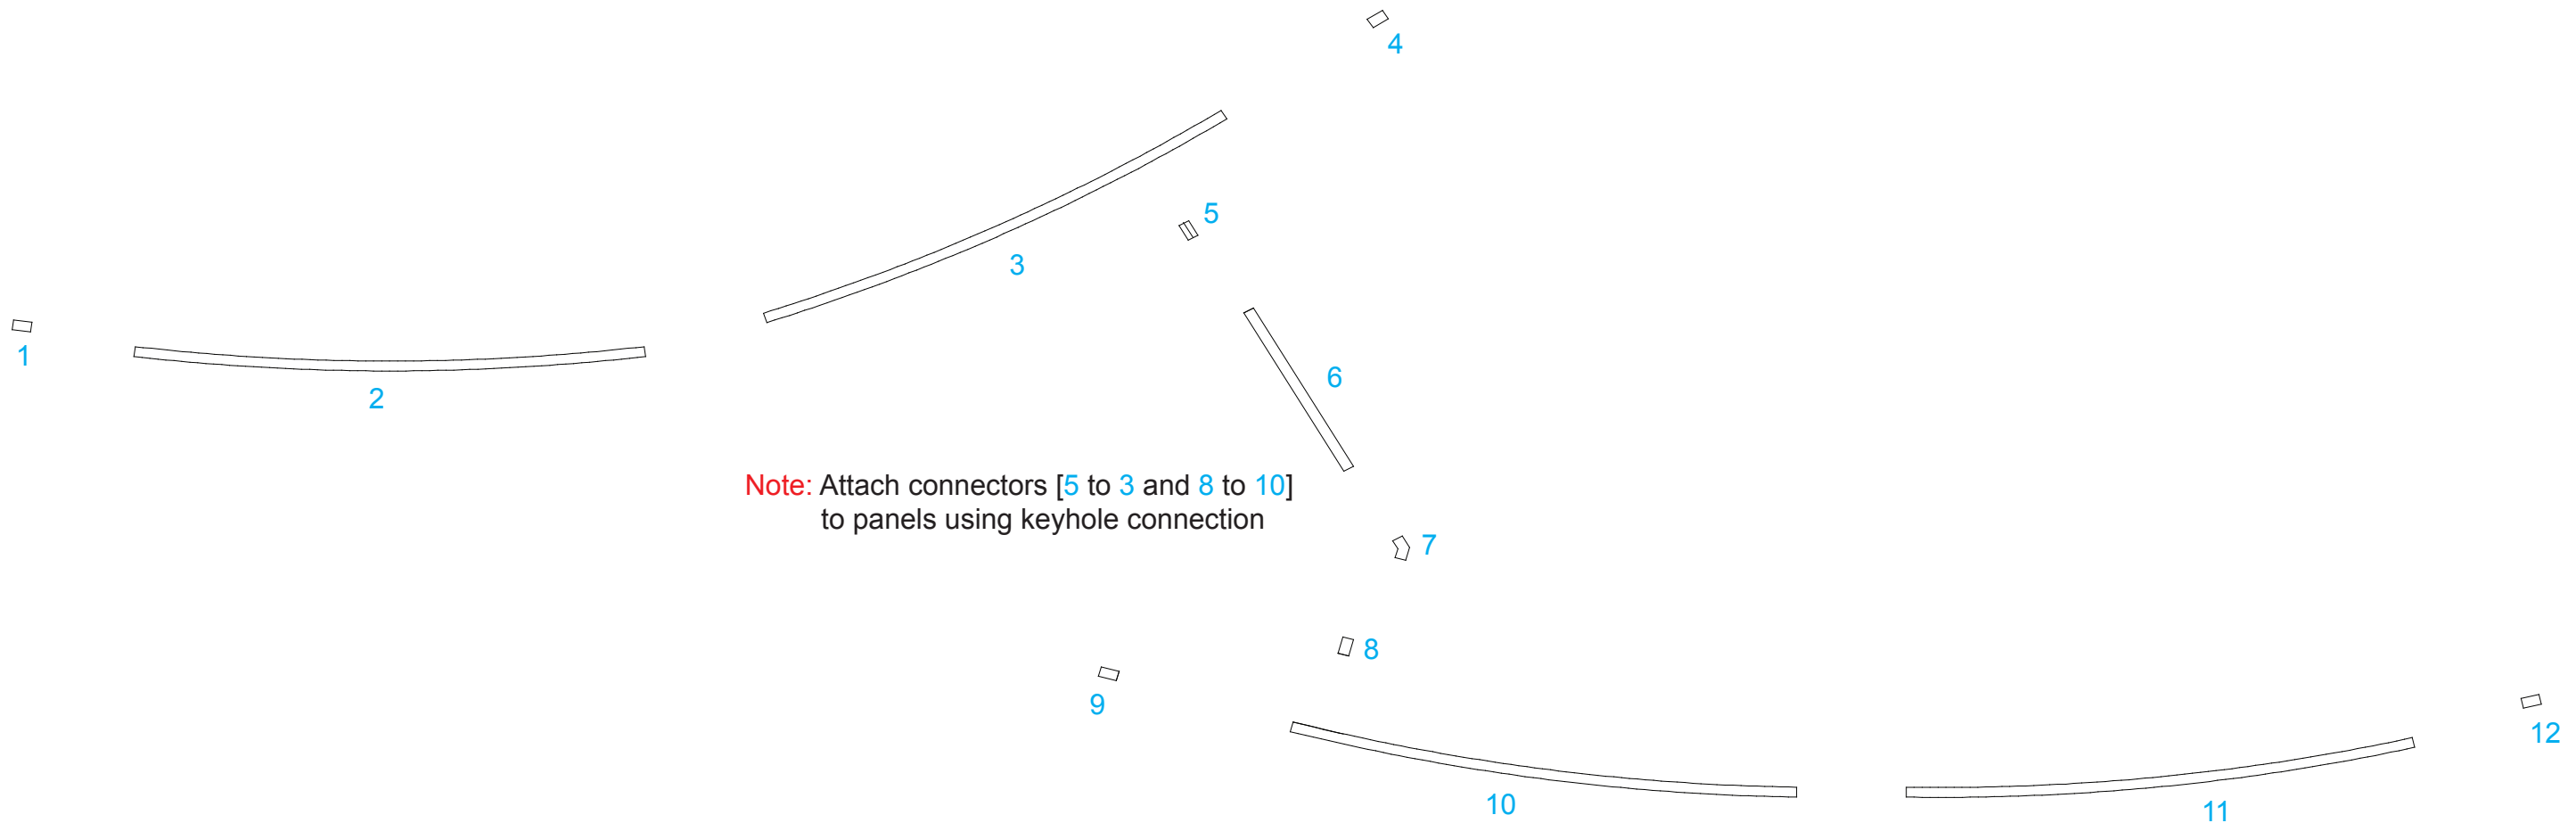



WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	47.5" h End Cap
2	10" r x 47.5" h Curve Panel
3	10" r x 47.5" h Curve Panel
4	47.5" h End Cap
5	47.5" h Connector
6	11.5" w x 42" h Flat Panel
7	42" h 135° Connector
8	47.5" h Connector
9	47.5" h End Cap
10	10" r x 47.5" h Curve Panel
11	10" r x 47.5" h Curve Panel
12	47.5" h End Cap

Steps:

- 1) Connect end cap [1] to curve panel [2] together, and continue in numerical order.
- 2) Attach lights to to of backwall panels as shown.

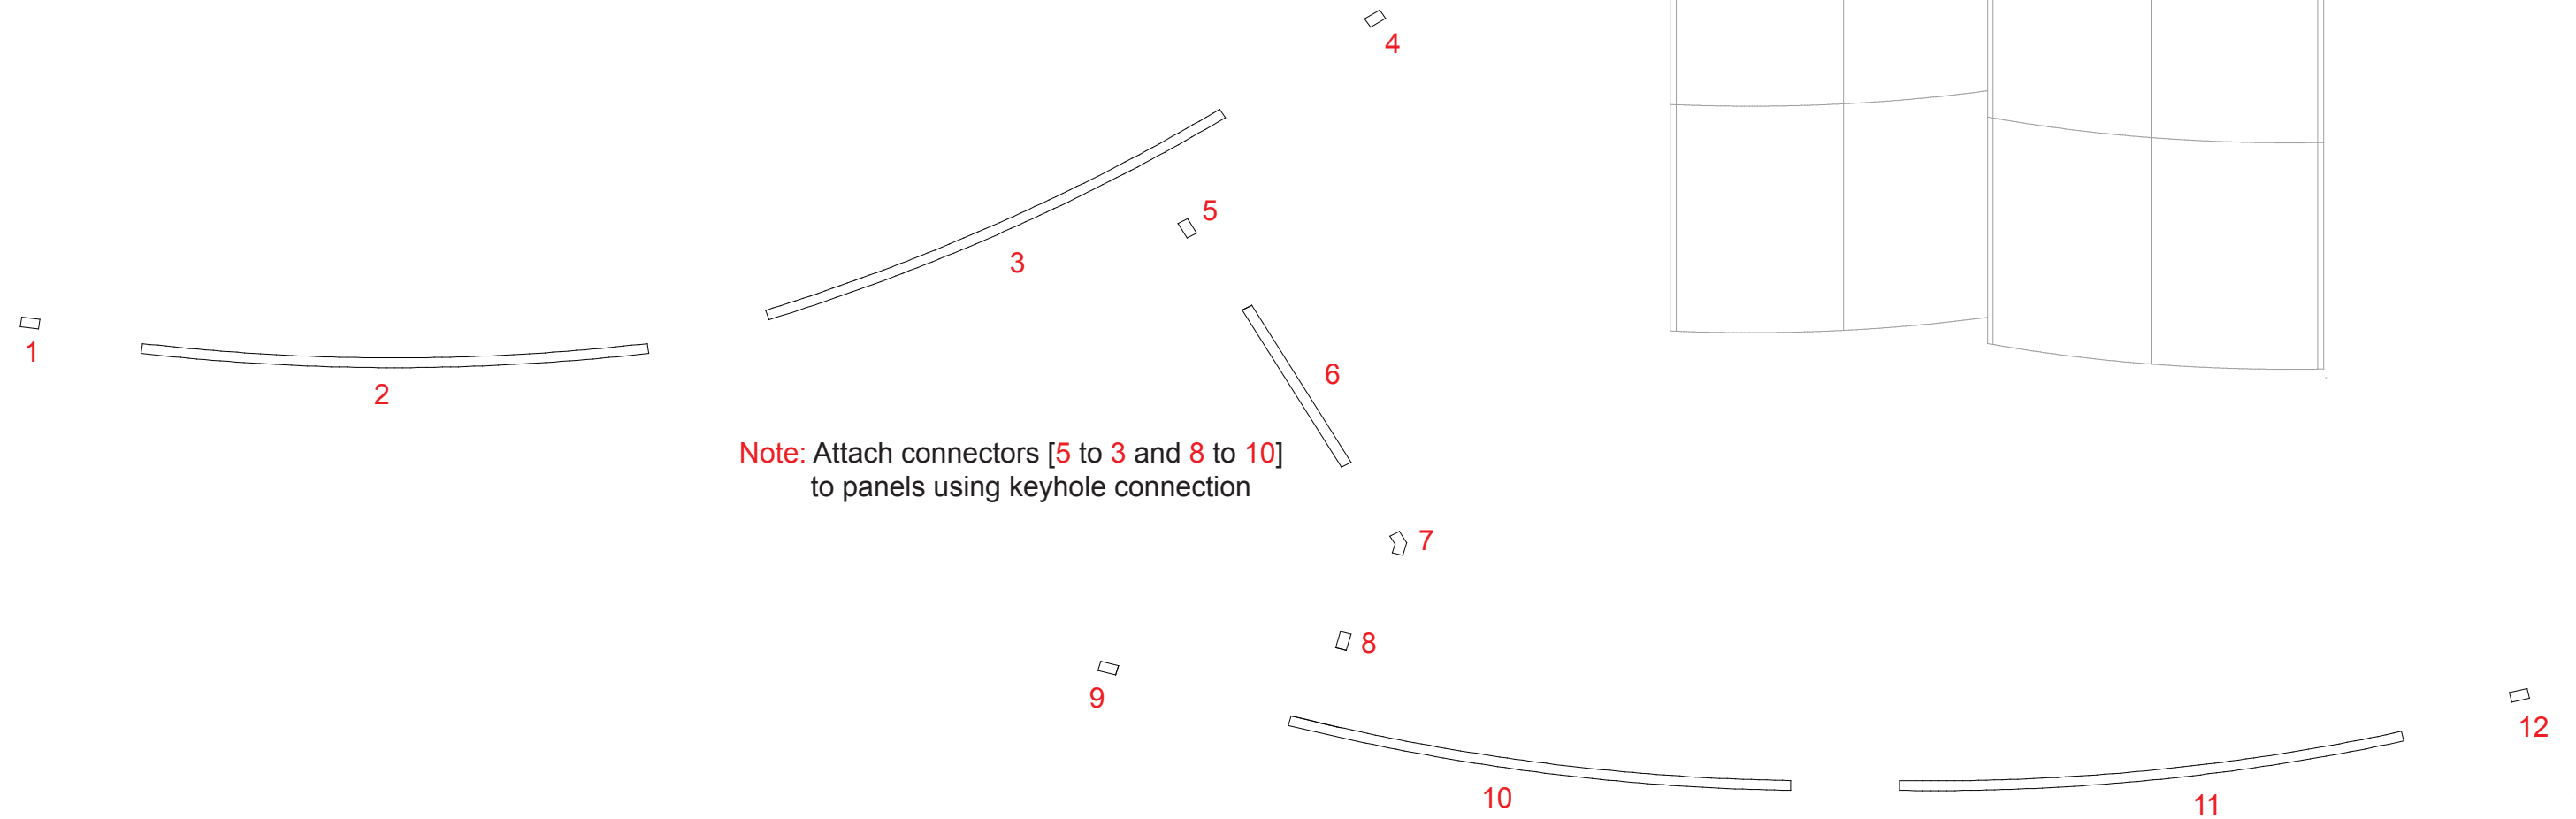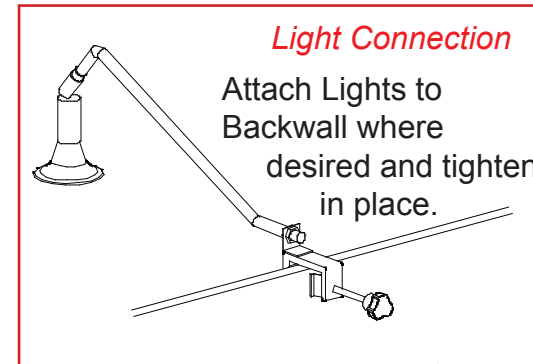



Note: Attach connectors [5 to 3 and 8 to 10] to panels using keyhole connection

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
20	2	Base Plate
21	2	37.5" h Round Extrusion
22	2	Round Flange

Steps:

- 1) Connect round extrusions [21] to base plates [20] and flanges [22] as shown.
- 2) Place counter atop assembled legs and secure to backwall panel [10 and 11] by using thumbscrews.

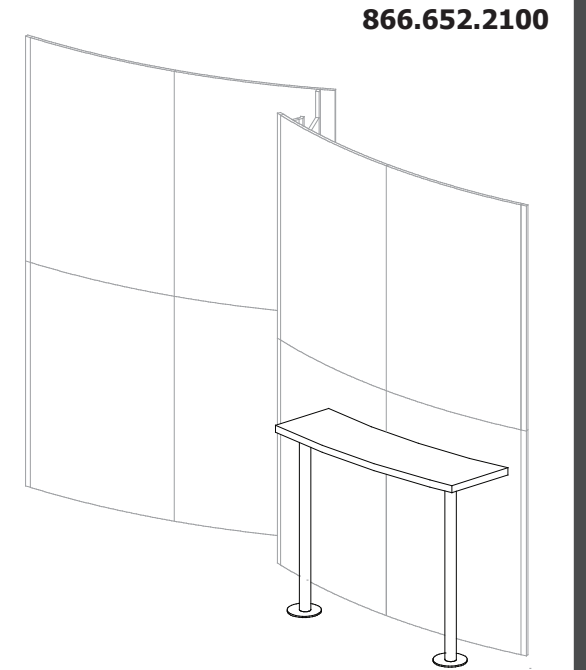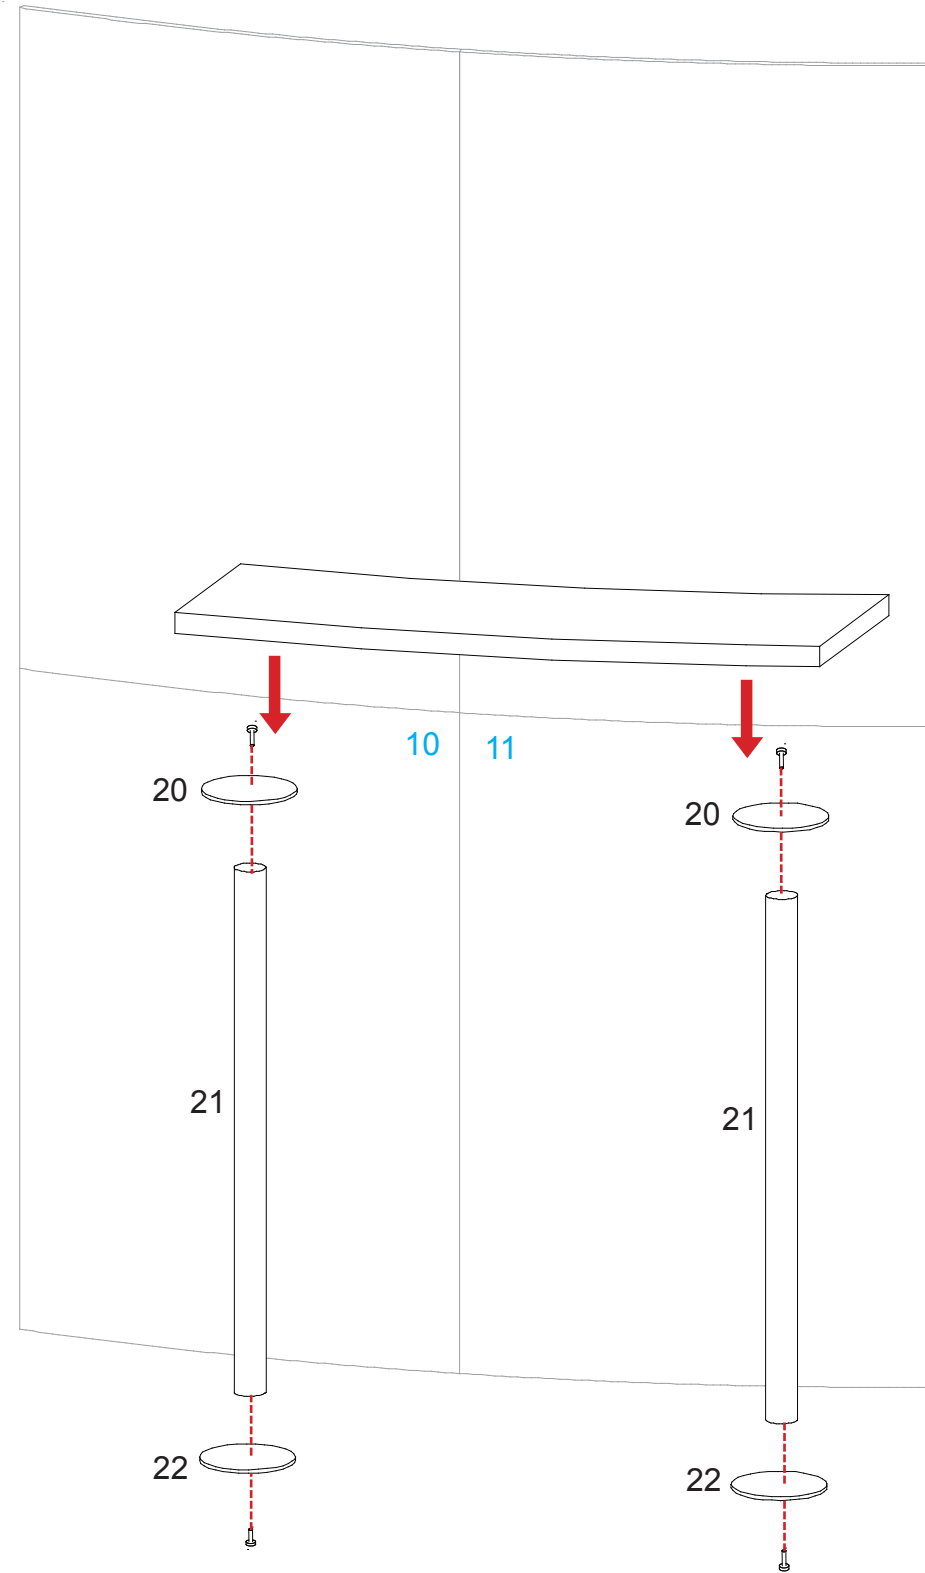


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100



Item	Qty.	Description
1	1	Base Plate
2	1	Custom Curved Vertical Extrusion
3	1	Custom Curved Vertical Extrusion
4	1	Monitor Bracket Support
5	2	9" w Horizontal Shelf Supports

Steps

- 1) Attach curved vertical extrusions [2 and 3] to base plate [1]
- 2) Connect horizontal extrusion [4] between curved vertical extrusions [2 and 3].
- 4) Hook assembled extrusions to assembled backwall as shown.
- 5) Place box to assembled workstation frames.
- 6) Attach curved plex to workstation frames with stand-offs.
- 7) Attach shelf supports [5], and place shelf atop supports.

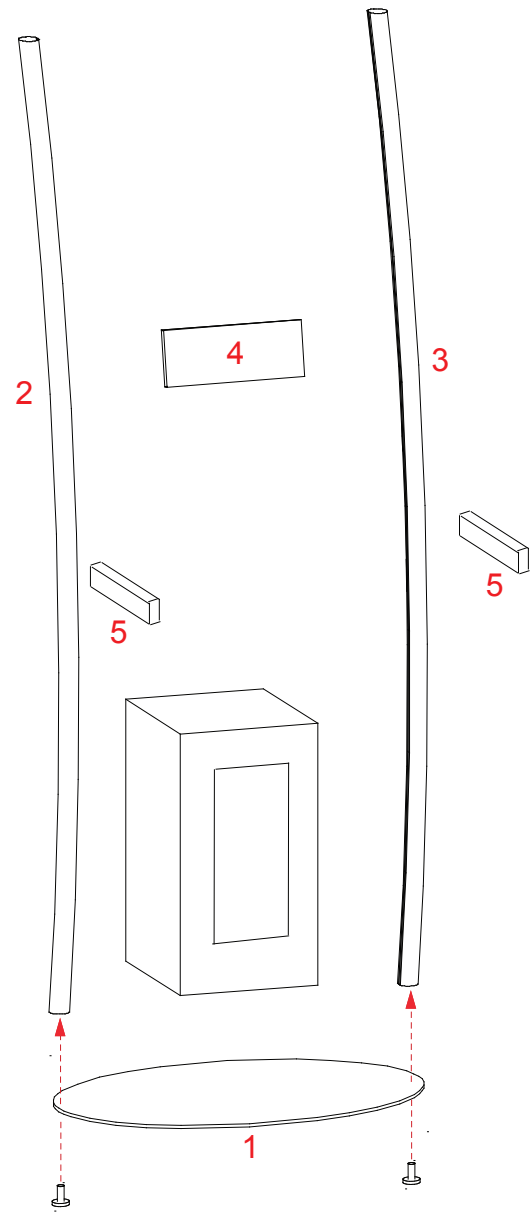

Assembled Backwall



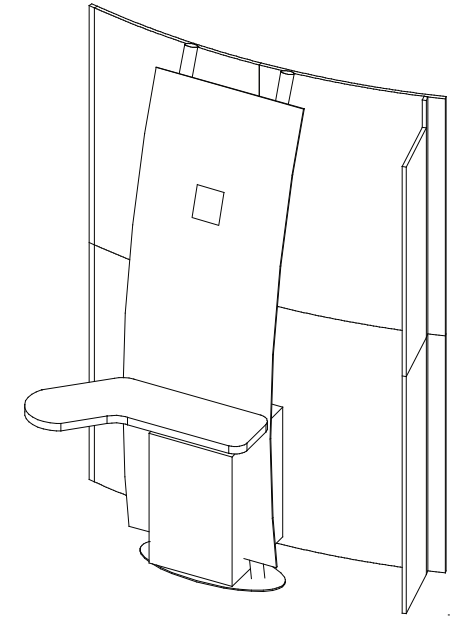
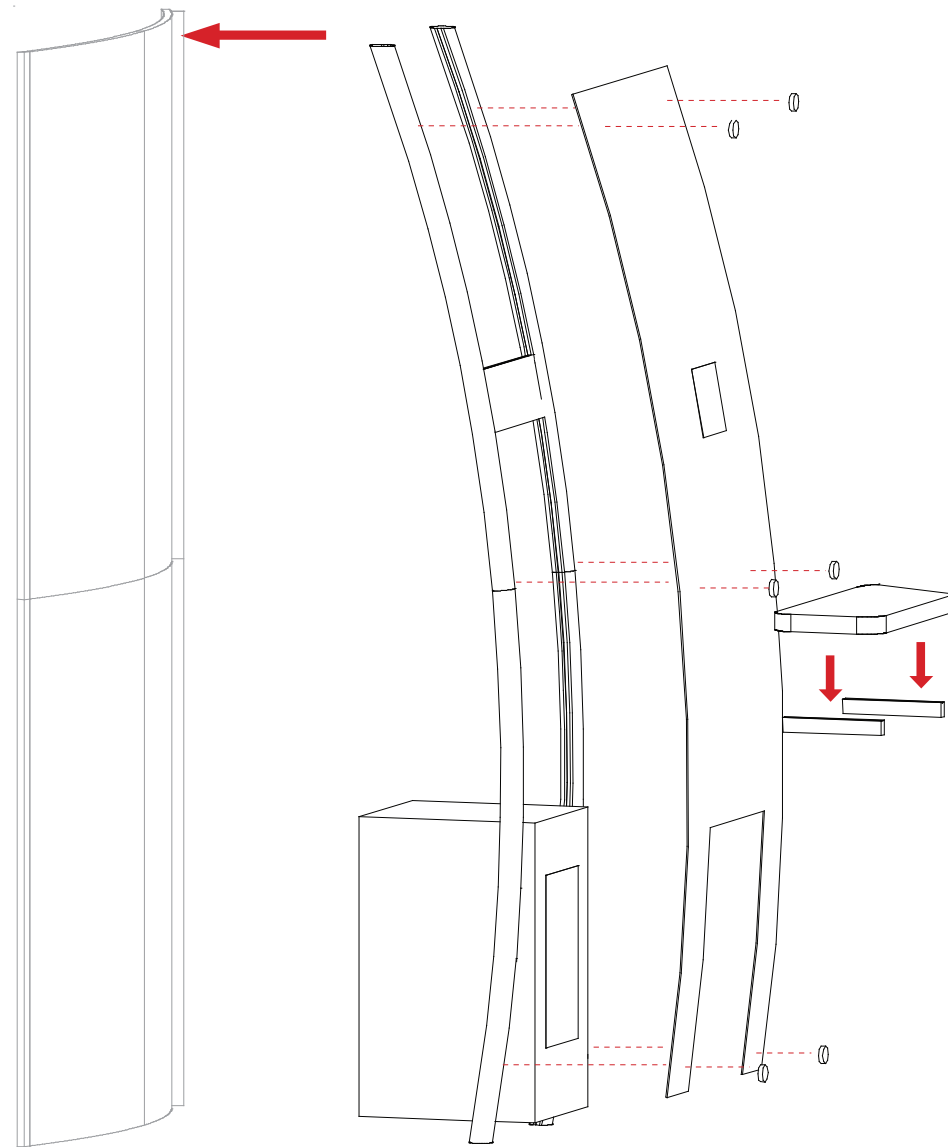


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Qty.	Description
4	Extrusion Leg
4	Stand-off Extrusion

- Steps**
- 1) Attach extrusion legs to bottom of box using set screws.
 - 2) Attach stand-off extrusions to top of box using set screws.
 - 3) Place Plex atop stand-off extrusions and secure with stand-off caps.

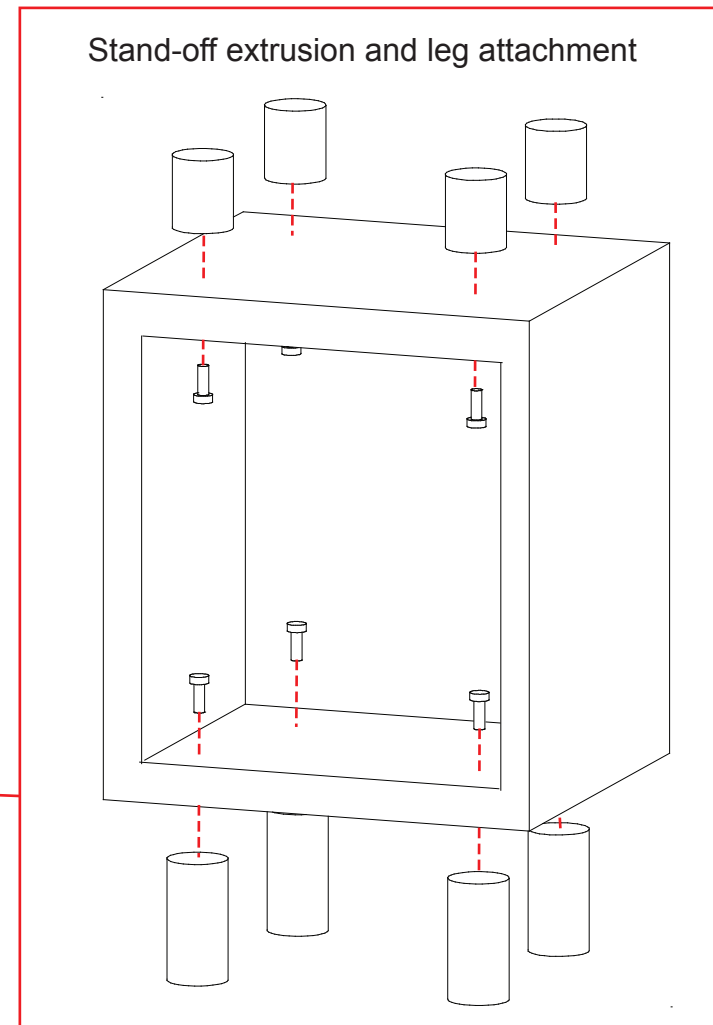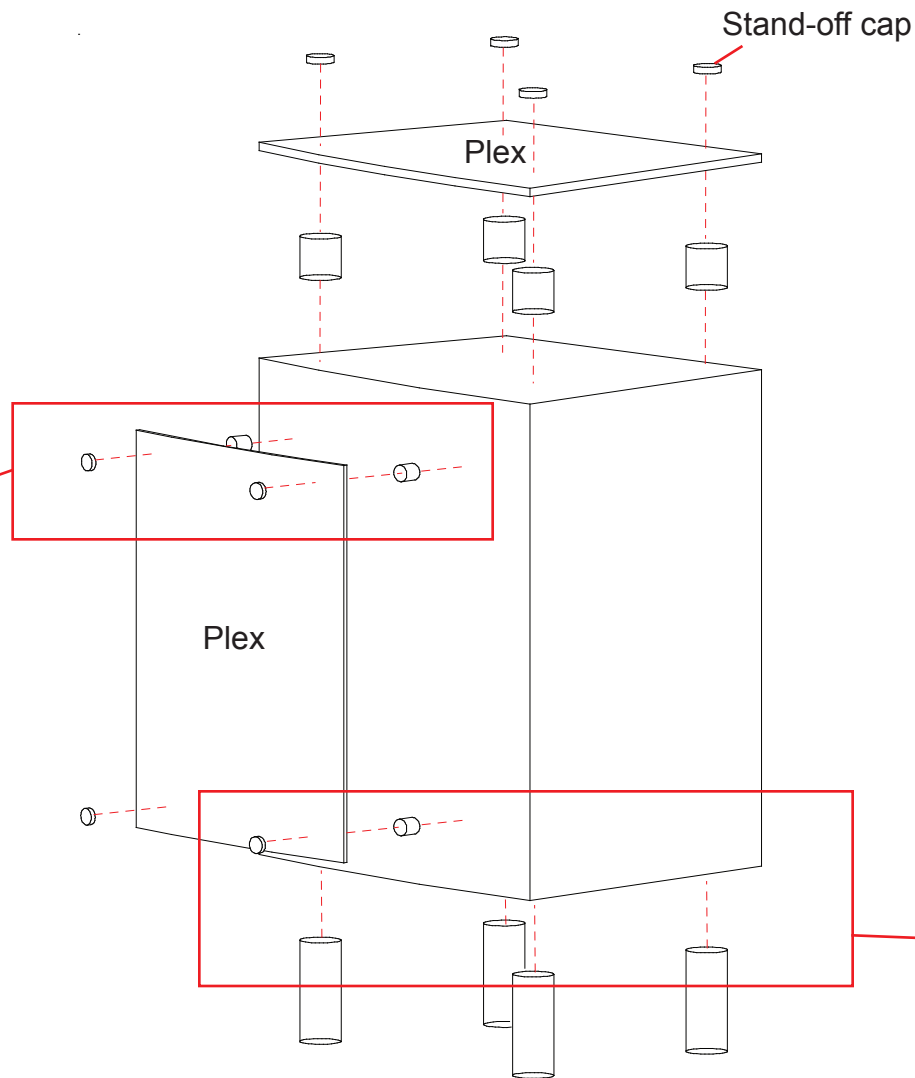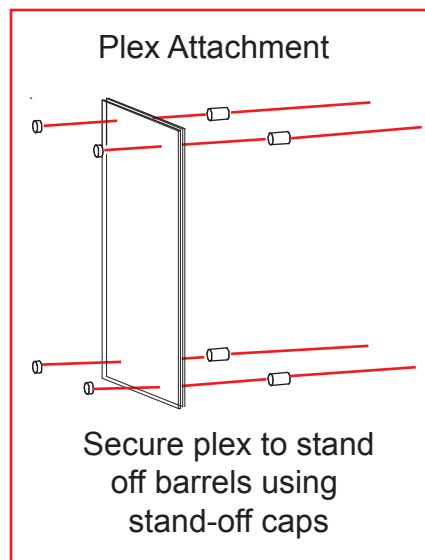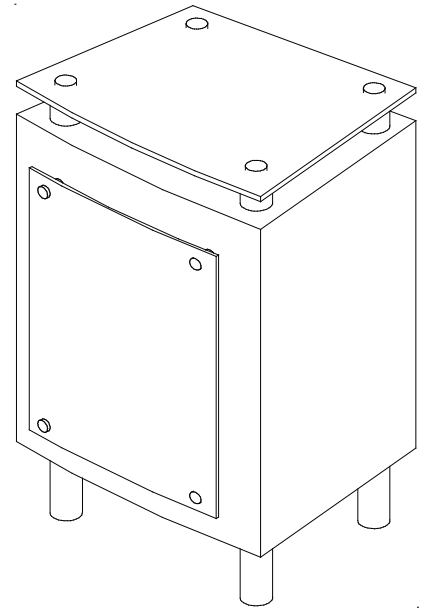

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING