
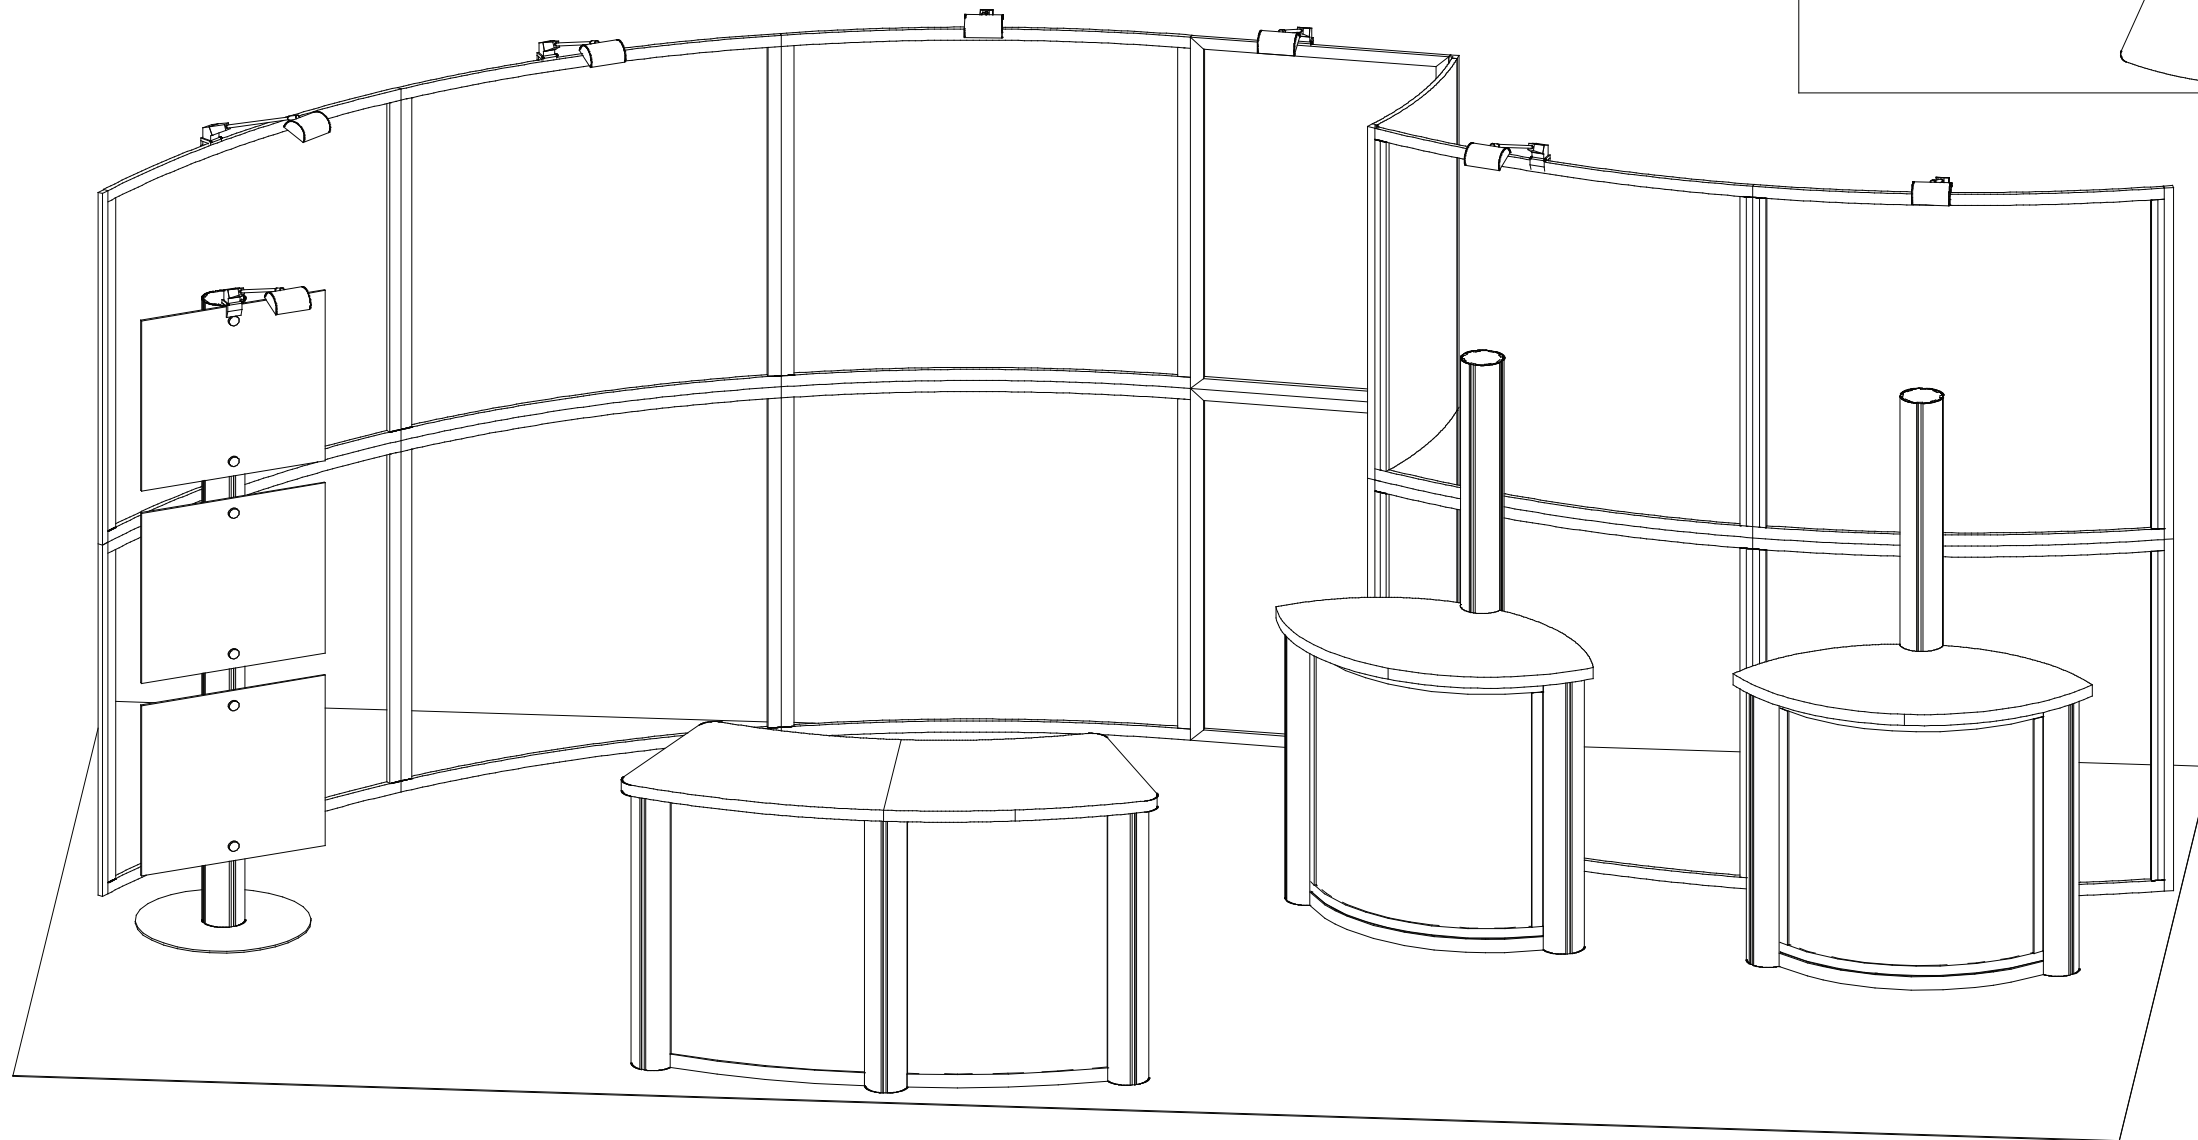


euro It | *HYBRIDS*

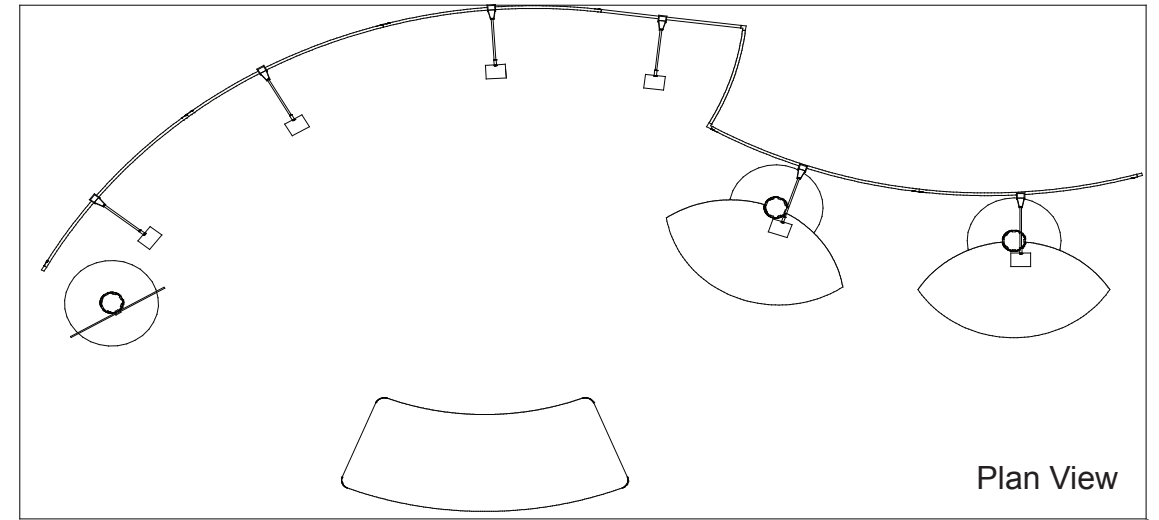

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.

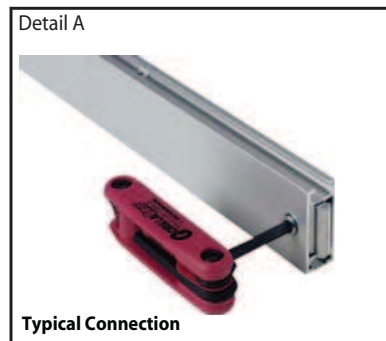


Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

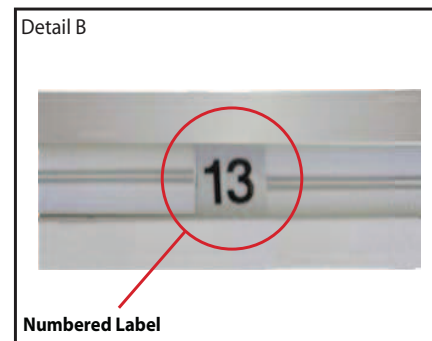


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

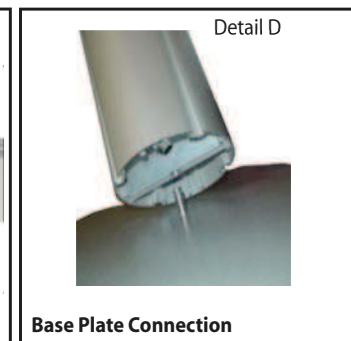


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

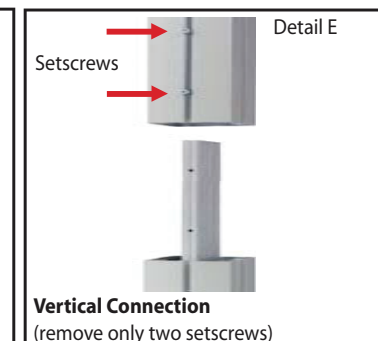


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

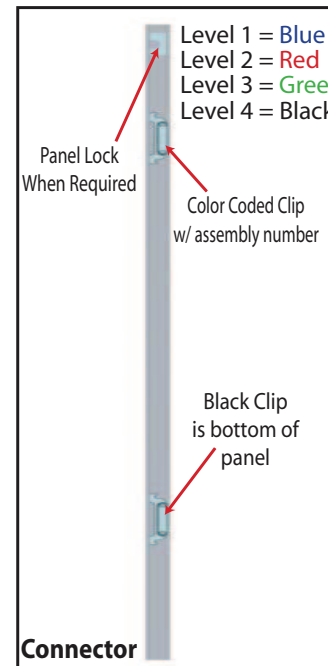


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

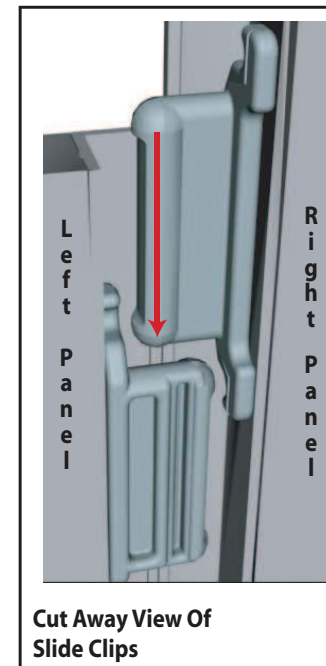

Components connect together by aligning them and sliding downward connecting clips together.

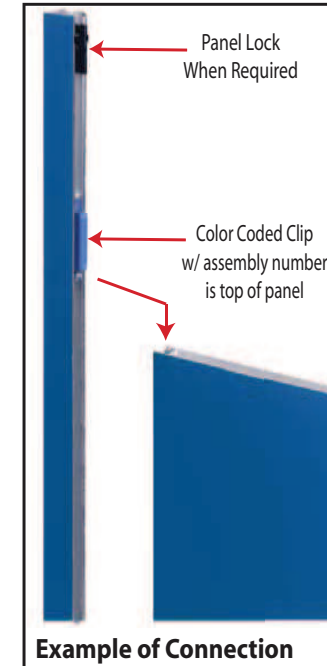

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

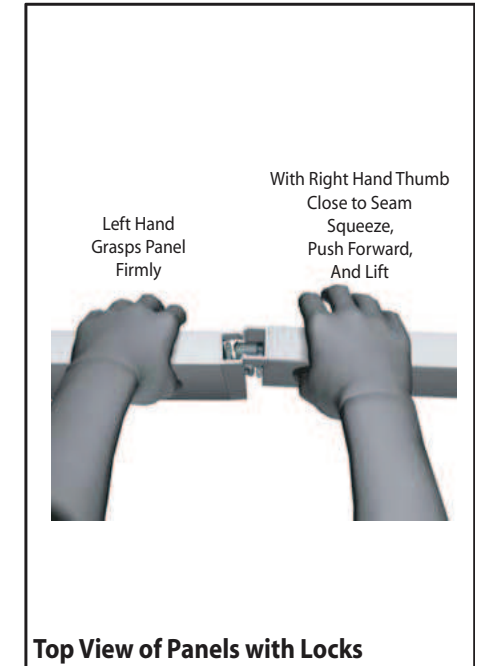


The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

Item Number	Description
1	47.5" End Cap
2	10'r x 47.5"h Curve Window
3	10'r x 47.5"h Curve Window
4	10'r x 47.5"h Curve Window
5	30"w x 47.5"h Flat Window Panel
6	47.5"h 90° Connector
7	57.5"r x 47.5"h Curve Panel
8	47.5"h 90° Connector
9	10'r x 47.5"h Curve Window
10	10'r x 47.5"h Curve Window
11	47.5"h End Cap

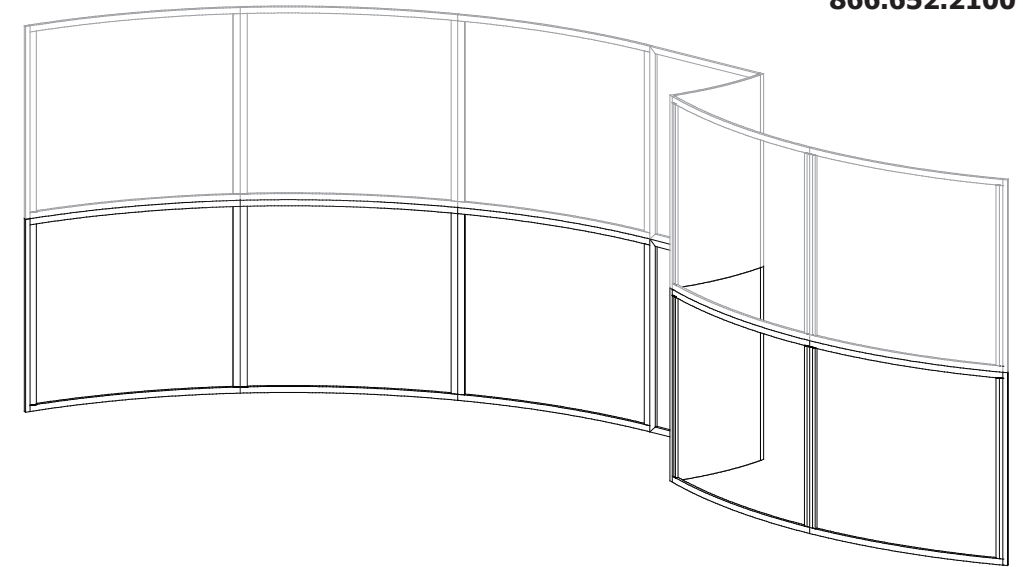

Steps:

- 1) Connect end cap [1] to curve window [4] and continue in numerical order.
- 2) Attach lights to top of assembled backwall as desired.




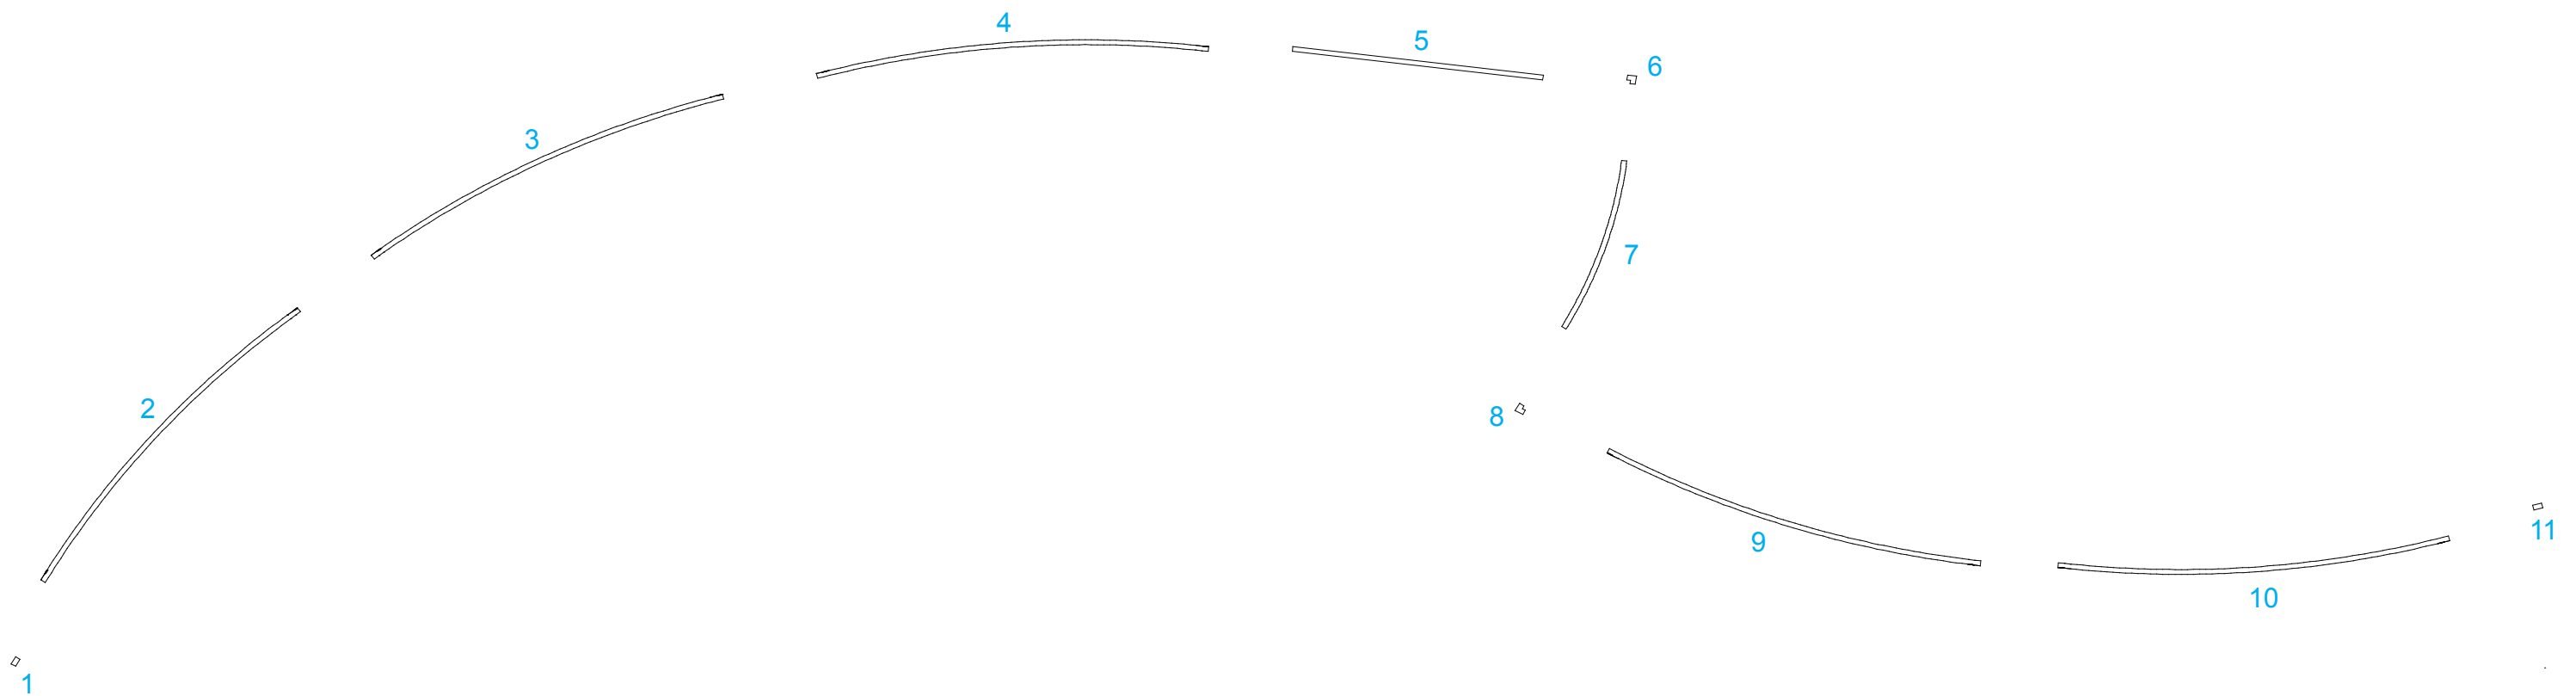


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	47.5" End Cap
2	10'r x 47.5"h Curve Window
3	10'r x 47.5"h Curve Window
4	10'r x 47.5"h Curve Window
5	30"w x 47.5"h Flat Window Panel
6	47.5"h 90° Connector
7	57.5"r x 47.5"h Curve Panel
8	47.5"h 90° Connector
9	10'r x 47.5"h Curve Window
10	10'r x 47.5"h Curve Window
11	47.5"h End Cap

- Steps:
- 1) Connect end cap [1] to curve window [4] and continue in numerical order.
 - 2) Attach lights to top of assembled backwall as desired.

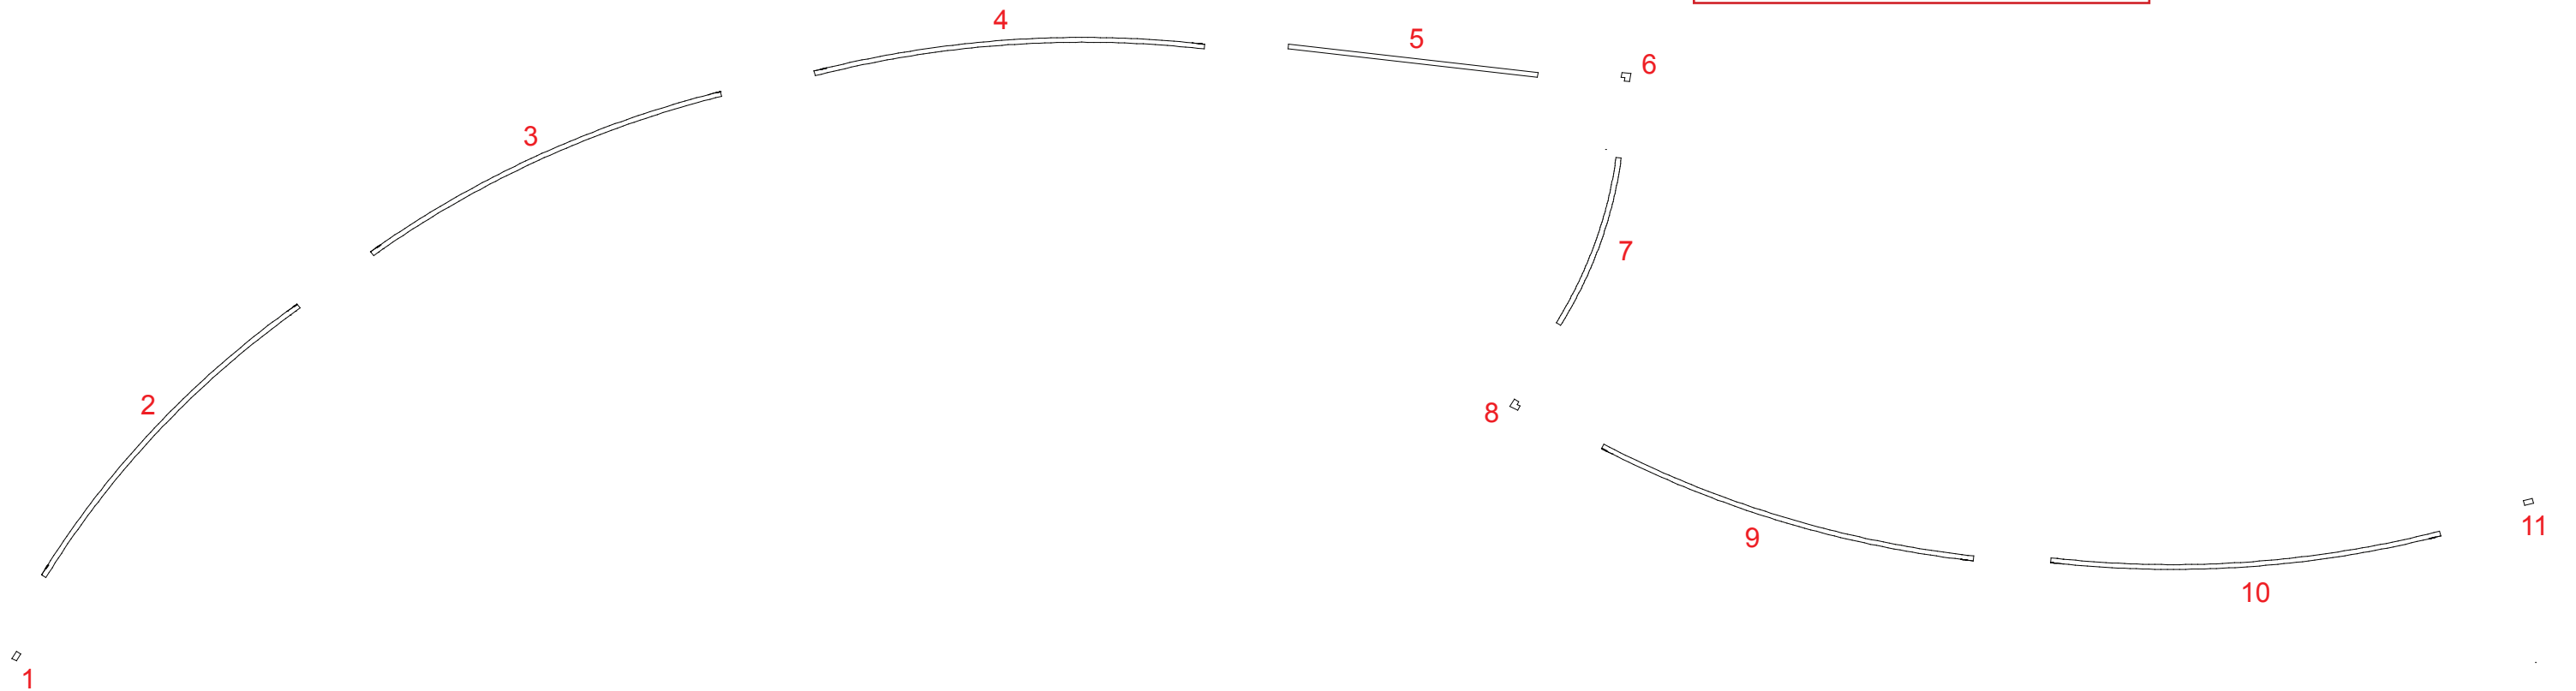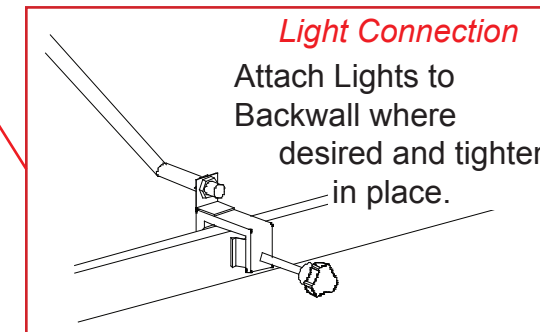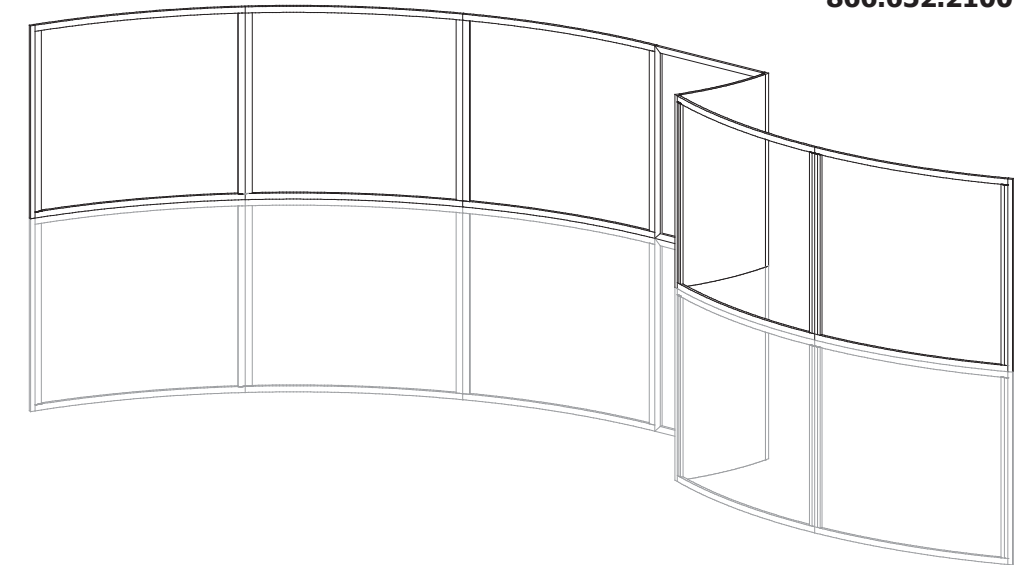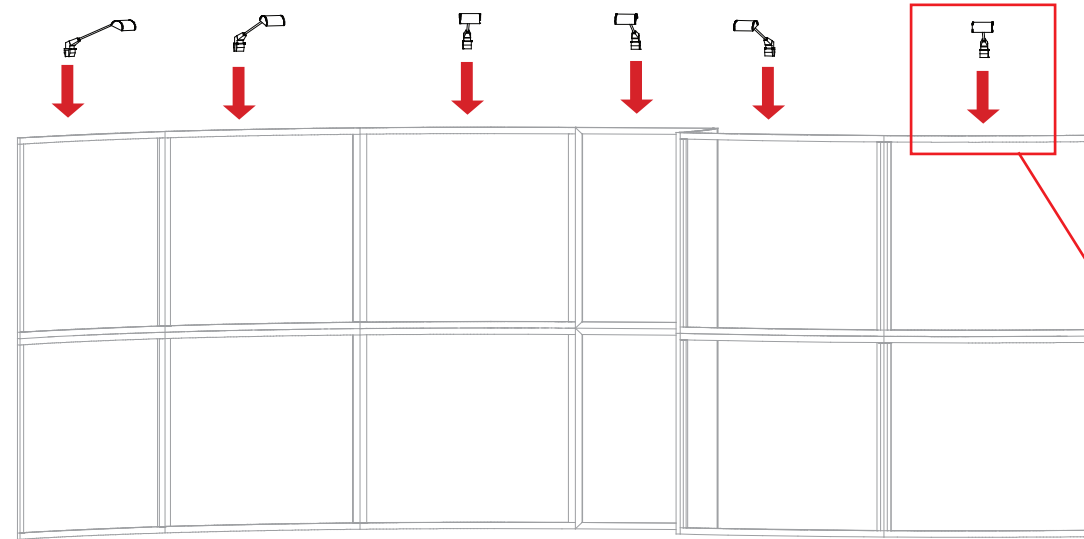





WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Qty.	Description
1	1	38" h Vertical Extrusion w/ Hinges
2	3	38" h Vertical Extrusion
3	1	38" h Vertical Extrusion w/ Door Stoppers
4	1	38" h Vertical Extrusion w/ Hinges
5	4	11.5" w Horizontal Extrusion
6	4	16.524" w Horizontal Extrusion
7	4	22.951" w Horizontal Extrusion
8		Internal Shelf Support

Steps:



- 1) Attach lower horizontal extrusions [5, 6 and 7] between vertical extrusions [1, 2, 3 and 4].
- 2) Place inserts and doors as shown.
- 3) Attach upper horizontal extrusions [5, 6 and 7] between vertical extrusions [1, 2, 3 and 4] and atop inserts and doors.
- 4) Velcro shelf supports to vertical extrusions [1, 2, 3 and 4] as shown.
- 5) Set internal shelves atop supports.
- 6) Set counter atop assembled pedestal.

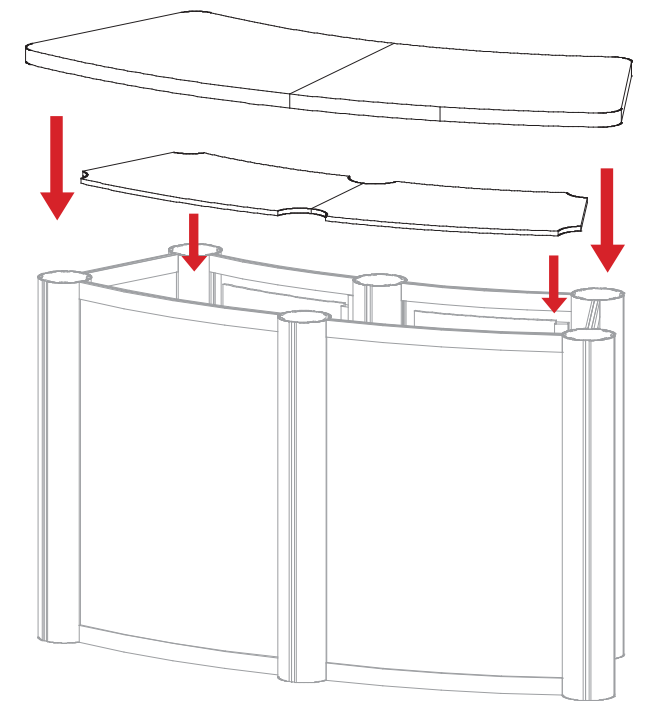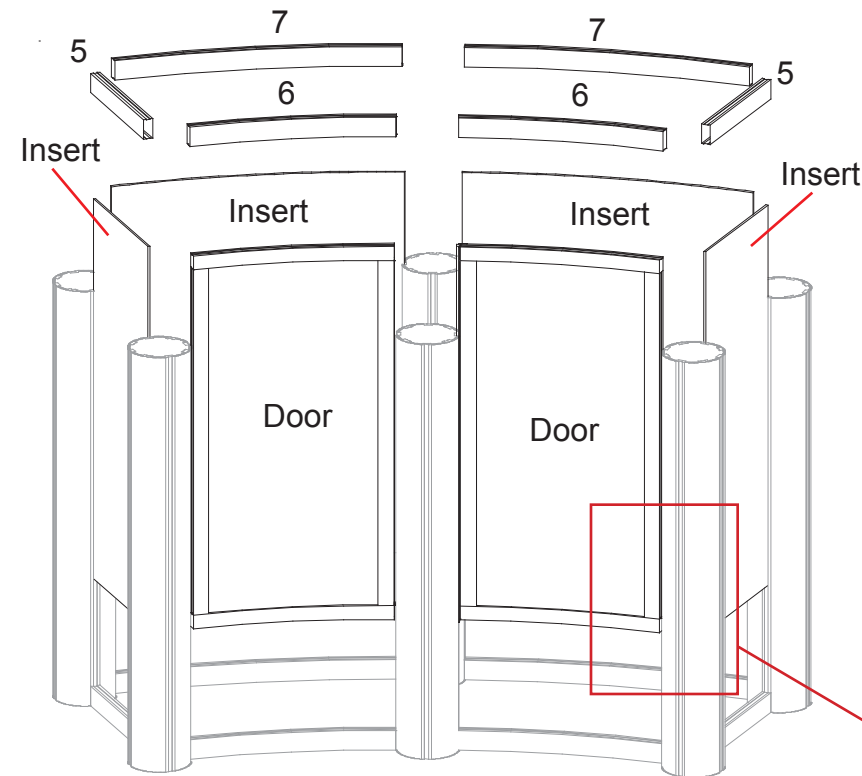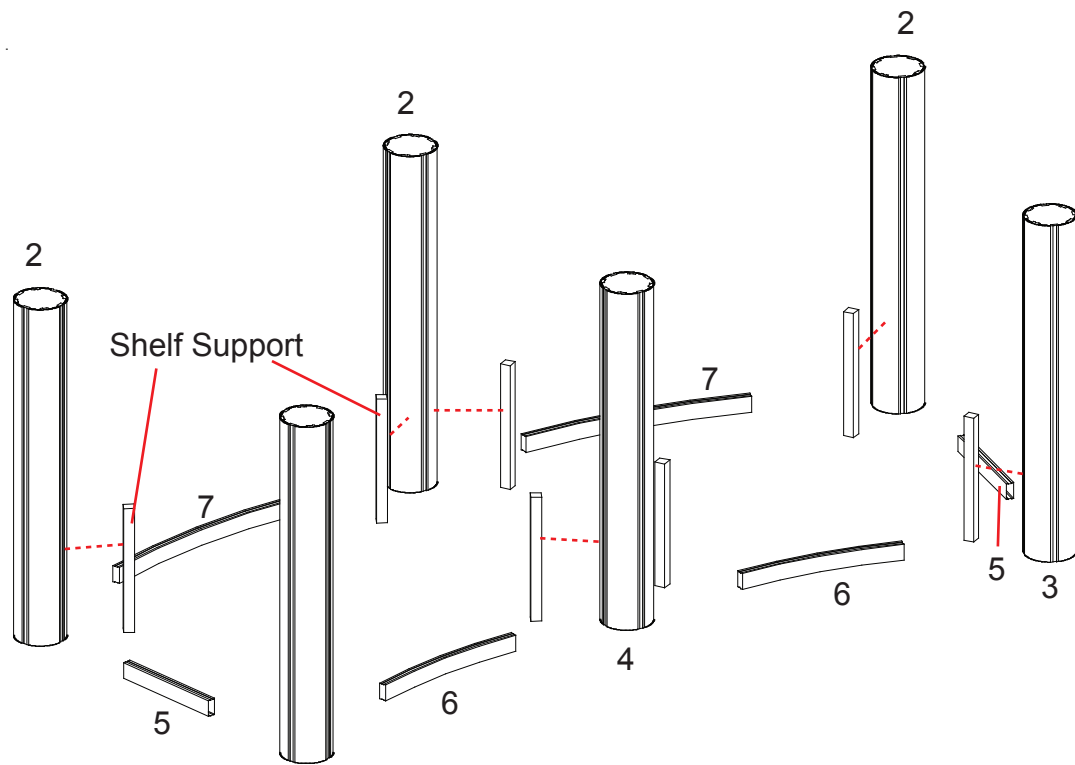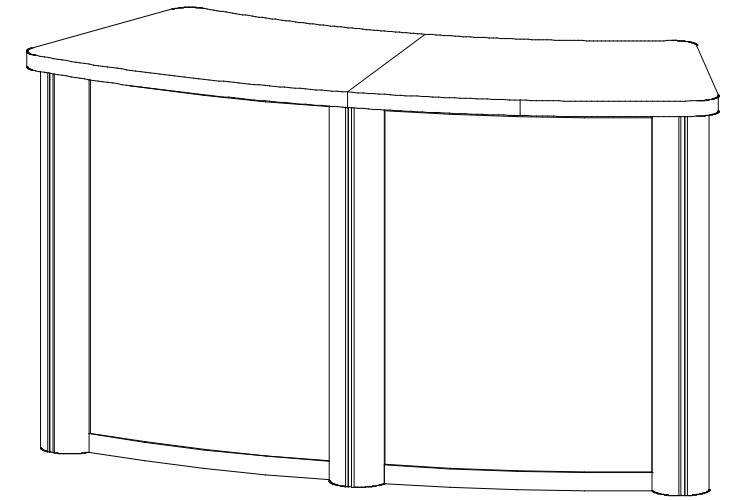

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
8	1	Base Plate
9	1	36" h Lower Vertical Extrusion
10	1	36" h Upper Vertical Extrusion
11	1	38" h Vertical Extrusion w/ Door Stopper
12	1	38" h Vertical Extrusion w/ Hinges
13	4	Curved Horizontal Extrusion
	3	Shelf Support



- Steps:
- 1) Attach lower vertical extrusion [9] to base plate [8], See detail D on general instruction page.
 - 2) Connect upper vertical extrusion [10] to lower vertical extrusion [9].
 - 3) Attach lower curved horizontal extrusions [13] between vertical extrusions [11 and 12].
 - 4) Place insert and door as shown.
 - 5) Attach upper curved horizontal extrusions [13] between vertical extrusions [11 and 12] and atop insert and door.
 - 6) Velcro shelf supports to vertical extrusions and to insert, then set internal shelf atop supports.
 - 7) Set counter atop assembled pedestal.
 - 8) Attach monitor mount to assembled vertical extrusion as shown.
 - 9) Repeat steps for additional pedestal

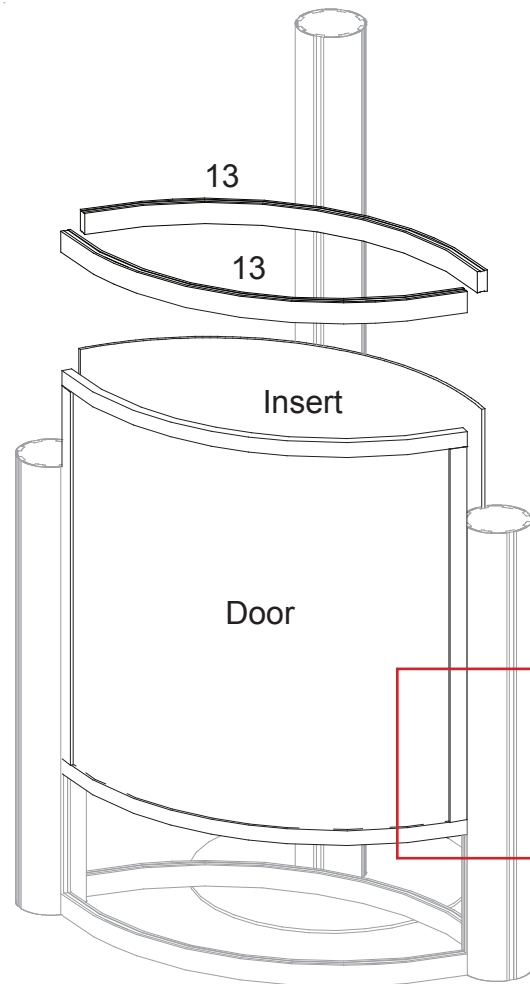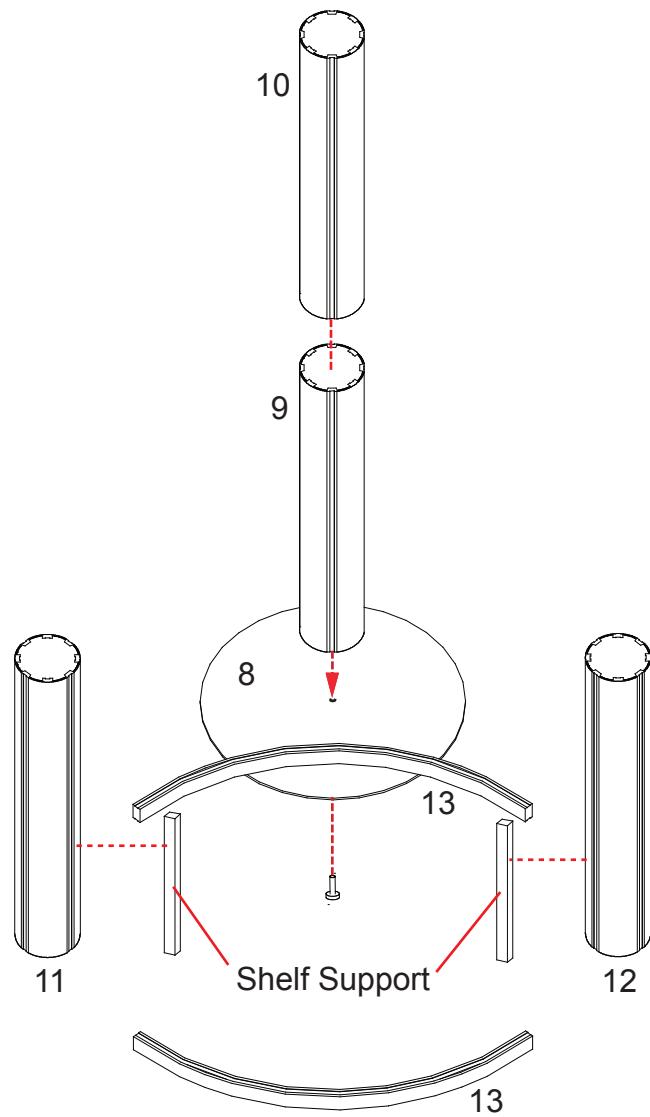

MONITOR MOUNT
Attach monitor mount to vertical extrusions after assembly.

Slide Mount into Groove of Vertical Extrusion. Tighten Setscrew

Slide Door into Place atop Hinge as shown.


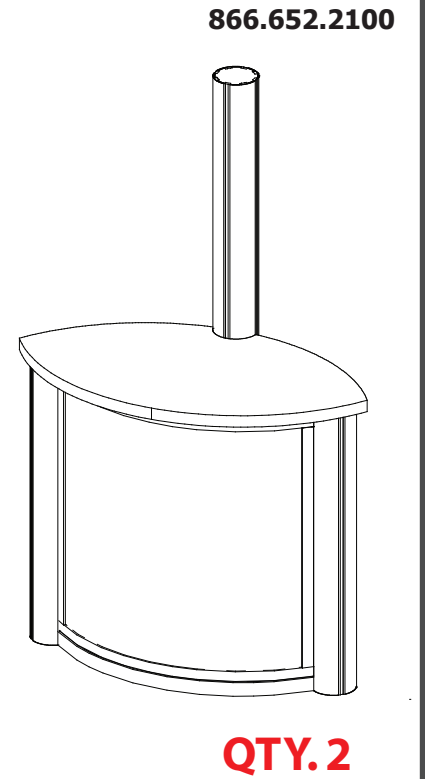
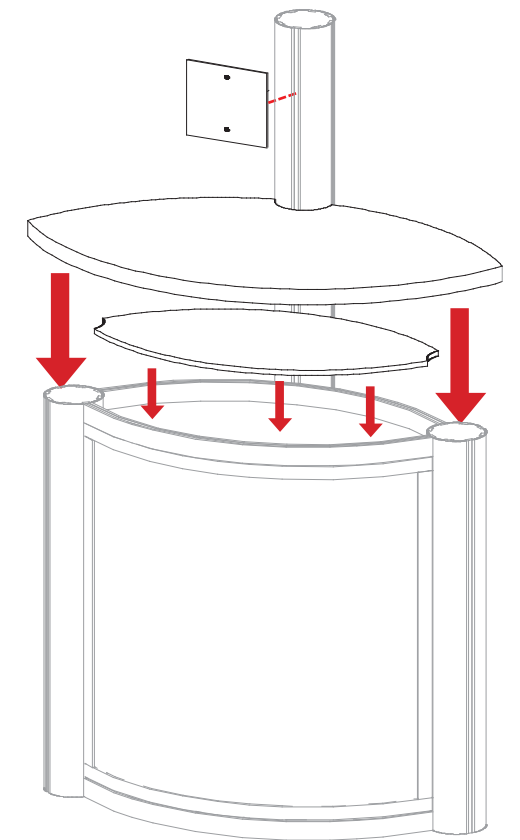


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
14	1	Base Plate
15	1	42" h Lower Vertical Extrusion
16	1	42" h Upper Vertical Extrusion

Steps:

- 1) Attach vertical extrusion [15] to base plates [14], See detail D on general instruction page.
- 2) Connect upper vertical extrusion [16] atop lower vertical extrusion [15]
- 3) Attach graphics to assembled vertical extrusion using stand-off caps as shown.
- 4) Attach light to top of assembled vertical extrusion as shown.

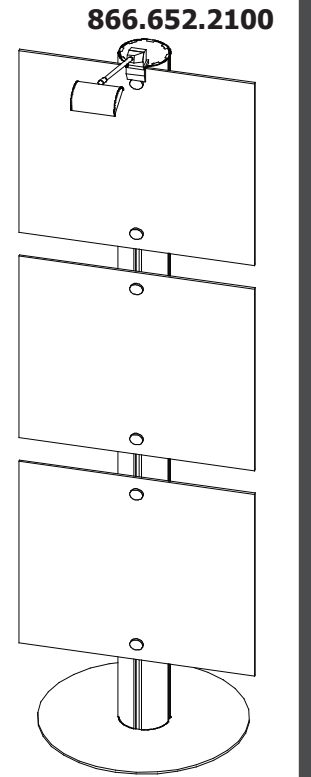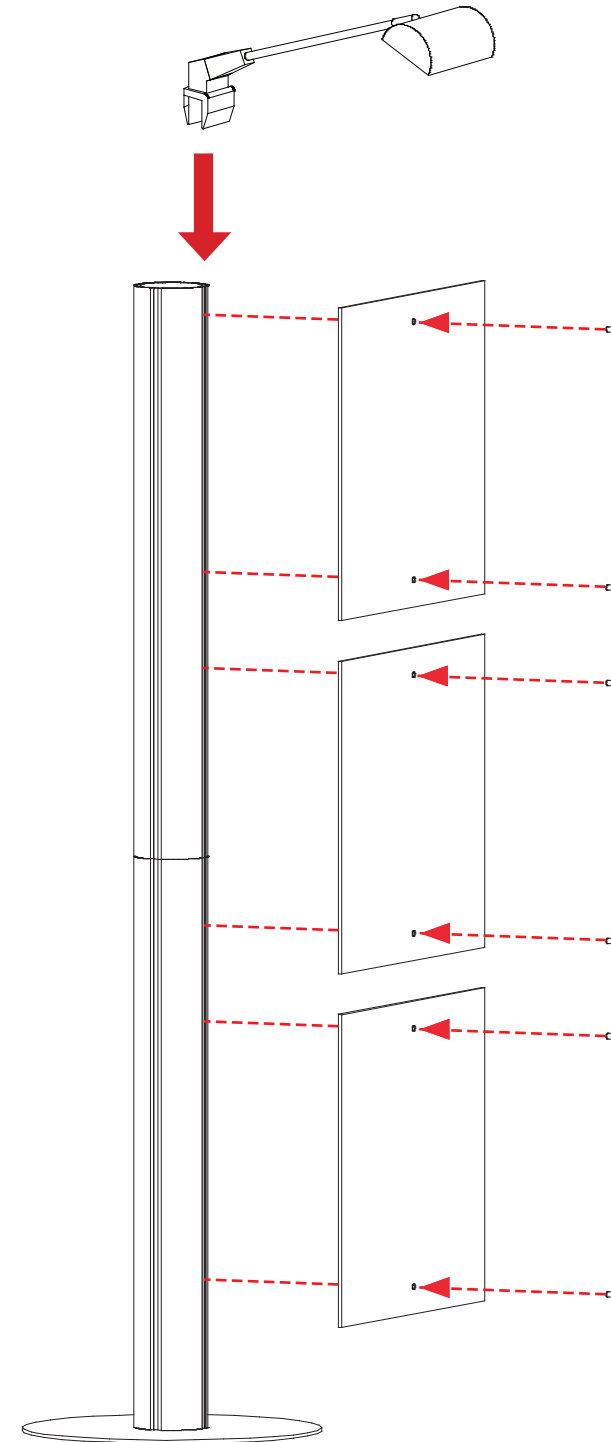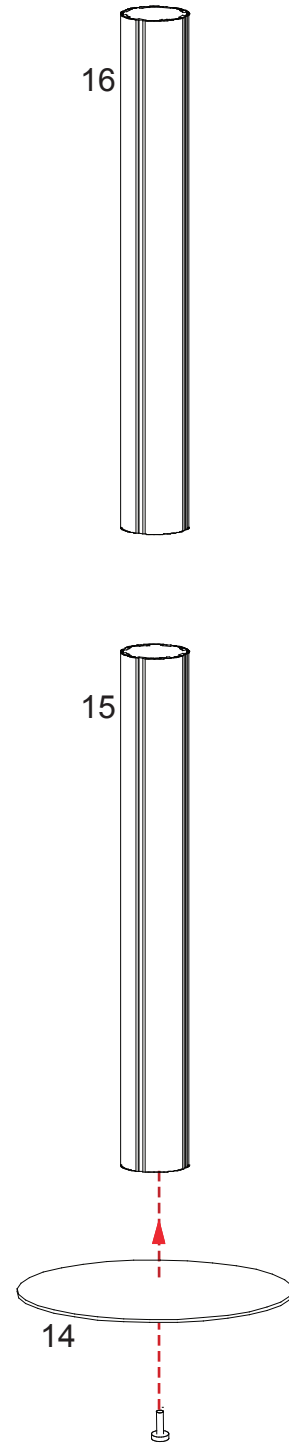

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

NOTE :

PDF copies of your Setup Instructions are available @ classicexhibits.com
See the search tool on the lower left hand corner of the Home page.

Enter the 5 digit Order #.

Search for Setup Instructions

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL
SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING