
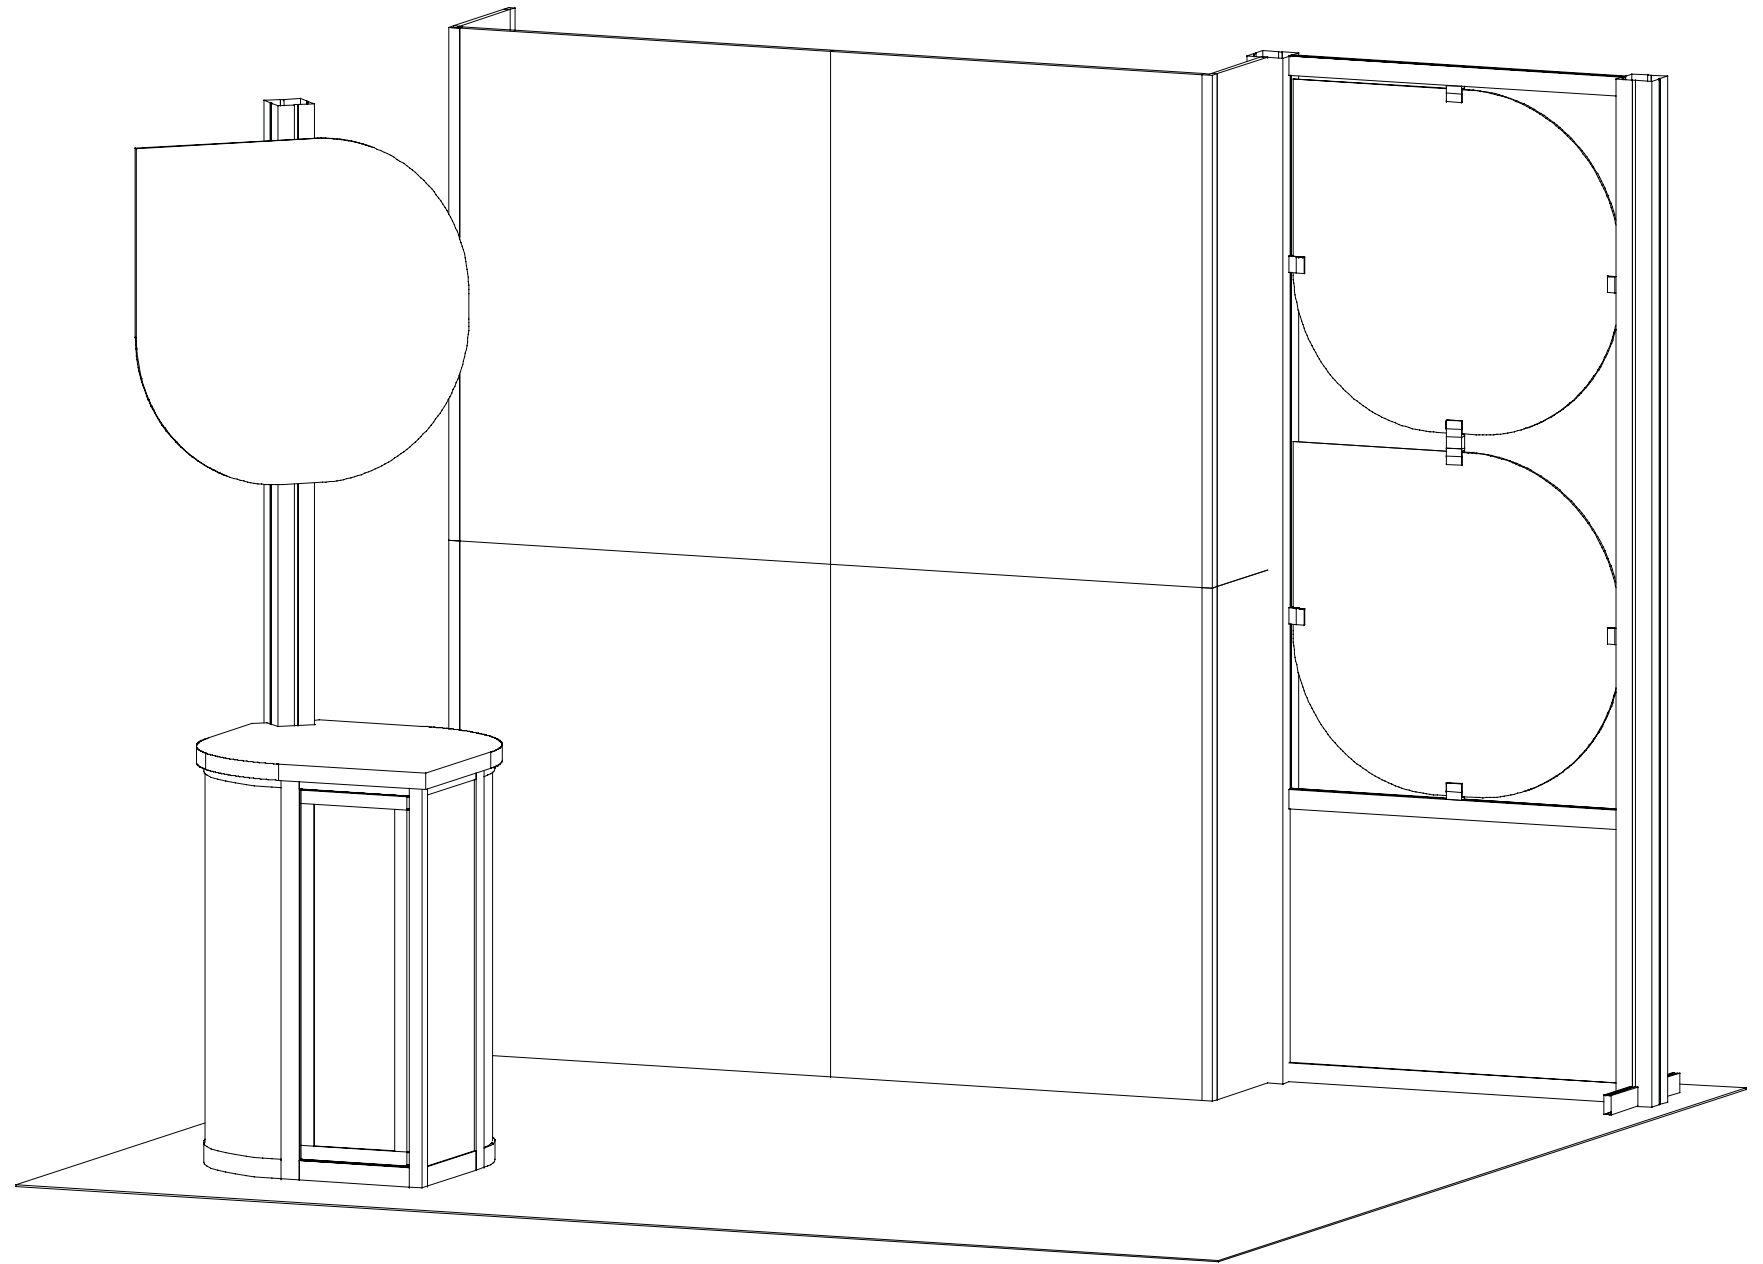


# euro It | *HYBRIDS*

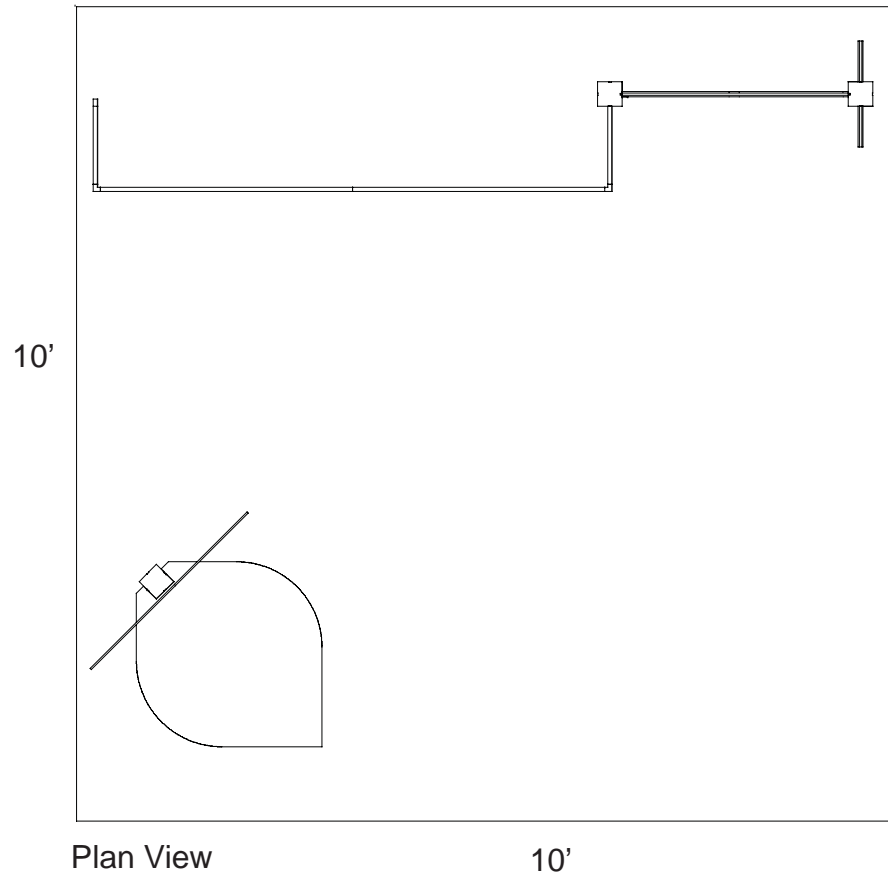

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

# euro lt | HYBRIDS

## Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

## Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

## General Setup Instructions for Extrusion System



The Tool

Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.



Typical Connection (cont'd)

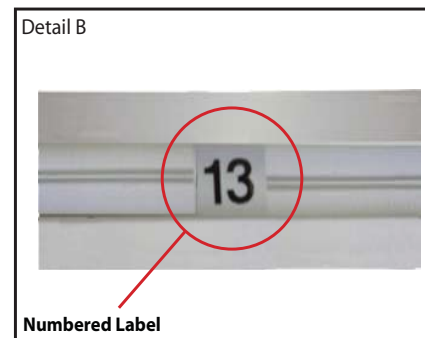


Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.




Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

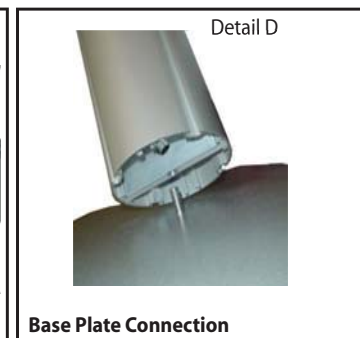

Base Plate Connection


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

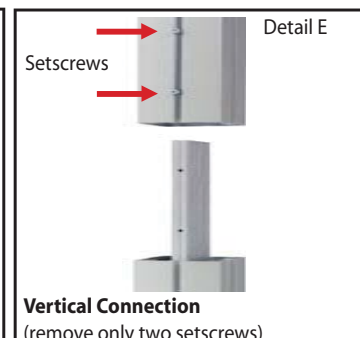

Vertical Connection (remove only two setscrews)


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

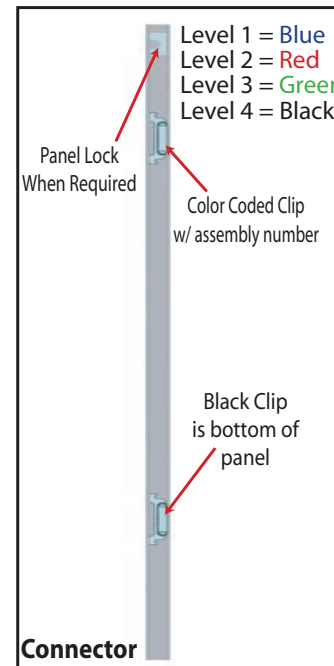


Connector

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

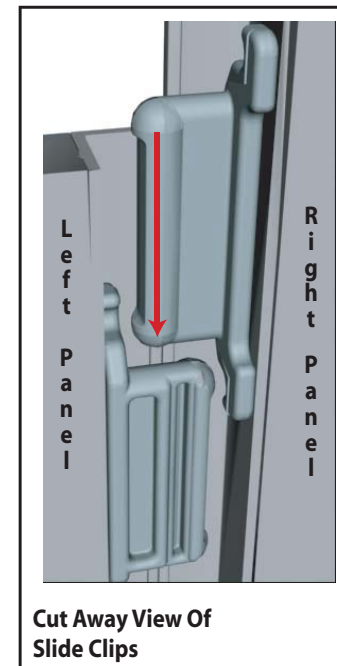


Cut Away View Of Slide Clips

Components connect together by aligning them and sliding downward connecting clips together.

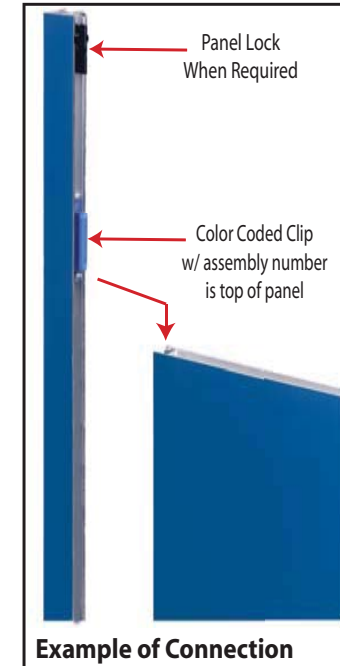

Example of Connection

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

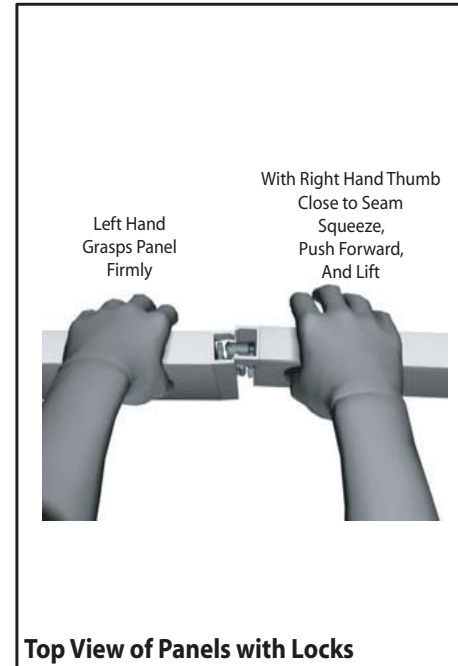


Top View of Panels with Locks

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**



866.652.2100

Part Number	Qty	Description
7	1	95" h Lower Vertical extrusion
13	1	95" h Lower Vertical extrusion
60	3	33.25" w Horizontal extrusion
61	2	6" Horizontal support piece

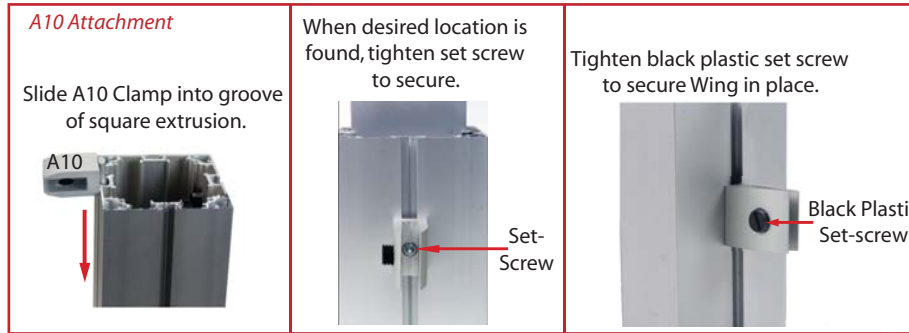

Steps


- 1) Connect lower horizontal extrusion [60] between vertical extrusions [7 and 13] placing insert as shown.
- 2) Connect support pieces [61] flush to bottom edge of vertical extrusion [13].
- 3) Slide lower A10 clamp into groove of middle extrusion [60] before connecting it between verticals [7 and 13] and atop insert as shown at right.
- 4) Attach graphic panels by inserting A10s in the groove of the left and right vertical extrusions [7 and 13], place lower graphic and tighten A10's to hold in place.
- 5) Attach middle double sided A10 to lower graphic, place upper graphic and tighten into place using A10's in the verticals and middle.
- 6) Attach A10 to upper horizontal [60] then connect horizontal [60] between vertical extrusions [7 and 13] tightening A10 onto graphic.

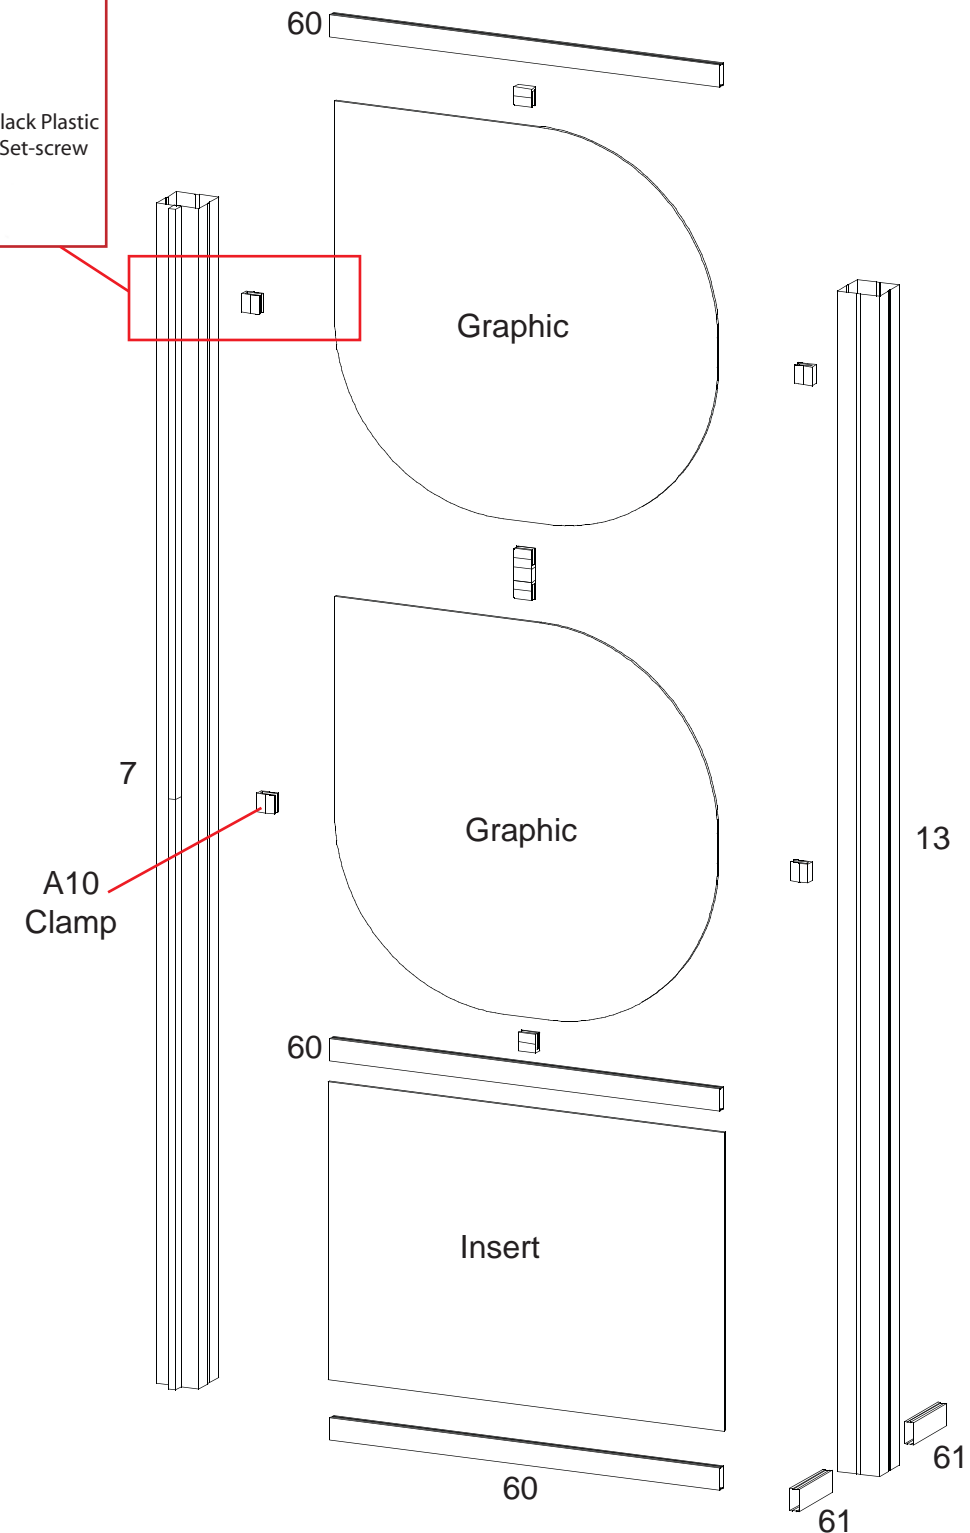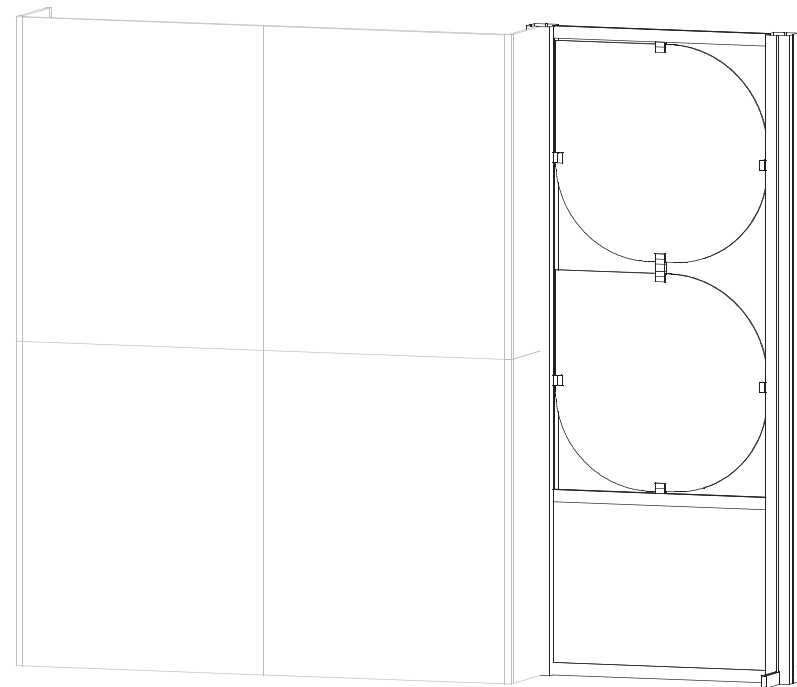





**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

866.652.2100

Item Number	Description
1	11.5"w x 47.5"h Flat Panel
2	47.5"h 90° Connector
3	37.046"w x 47.5"h Flat Panel w/ wood core
4	37.046"w x 47.5"h Flat Panel w/ wood core
5	47.5"h 90° Connector
6	11.5"w x 47.5"h Flat Panel

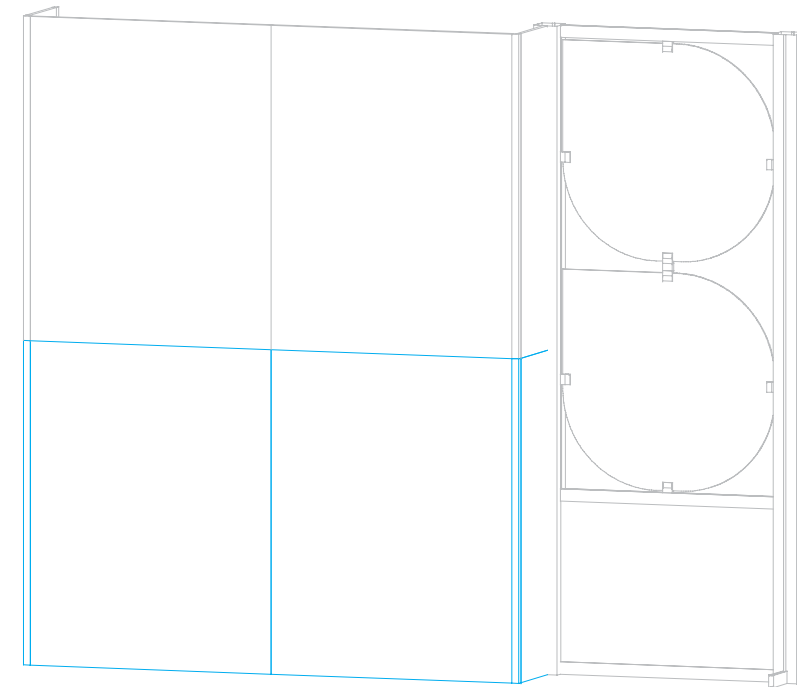


Steps:  
 Connect panels together in numerical order starting with #1, end by connecting it to the end cap that is permanently connected to the square extrusion [7] as shown in page 1 of setups.

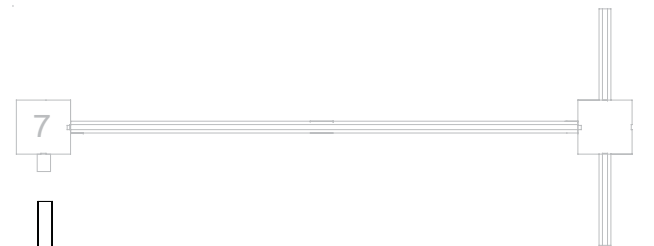

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**



866.652.2100

Item Number	Description
1a	11.5"w x 47.5"h Flat Panel
2a	47.5"h 90° Connector
3a	37.046"w x 47.5"h Flat Panel w/ wood core
4a	37.046"w x 47.5"h Flat Panel w/ wood core
5a	47.5"h 90° Connector
6a	11.5"w x 47.5"h Flat Panel

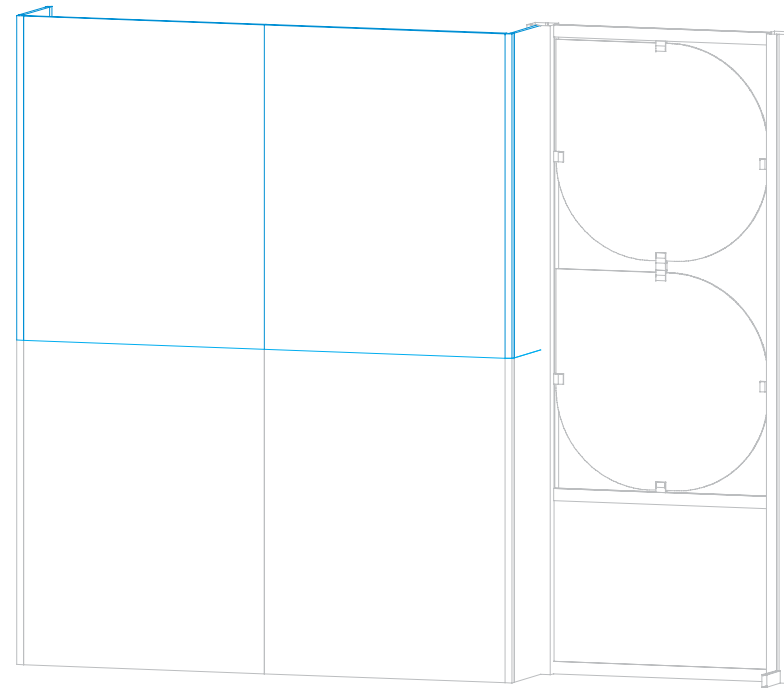


Steps:


Connect panels together in numerical order starting with #1a, end by connecting it to the end cap that is permanently connected to the square extrusion [7] as shown in page 1 of setups



3a



4a

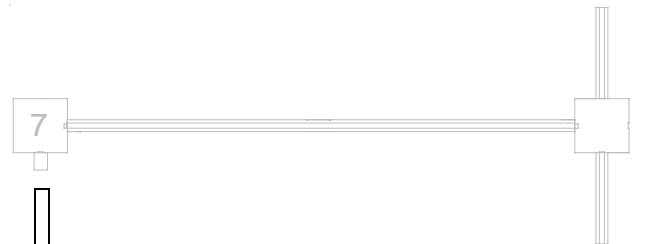

6a





5a

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Part Number	Qty	Description
50	1	96" h Lower Vertical extrusion
50A	2	38" h Vertical Connector extrusion
52	4	7.209" w Horizontal extrusion
53	2	38" h Vertical extrusion
54	4	18.0657" w Curved Horizontal extrusion
55	1	38" h Vertical extrusion
56	4	11.09" w Horizontal extrusion
57	1	38" h 90° Vertical Connector extrusion
58	1	38" h Vertical extrusion


**Steps**

- 1) Connect lower horizontal extrusions [52 thru 56] between vertical extrusions [50A thru 58] as shown.
- 2) Place inserts and doors as indicated.
- 3) Connect upper horizontal extrusions [52 thru 56] between vertical extrusions [50A thru 58] as shown.

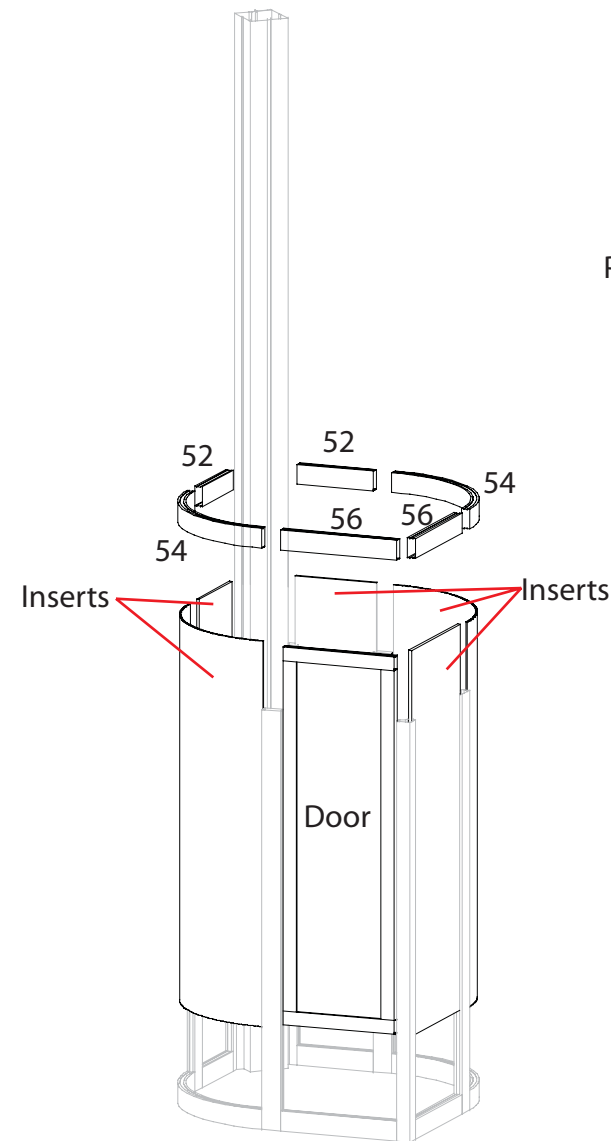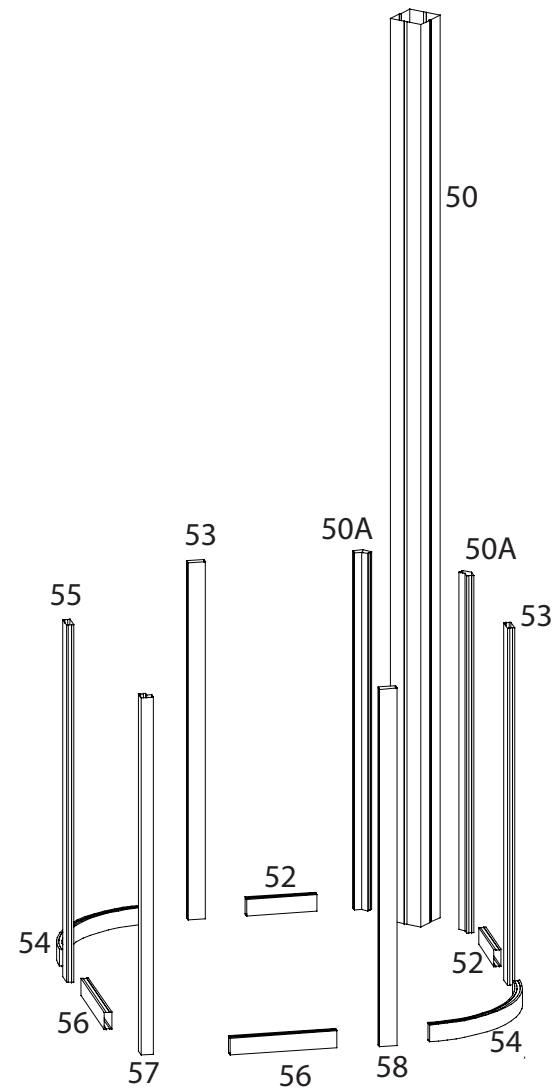


Place internal shelf atop  
Velcroed supports.

Set Counter atop  
assembled pedestal.

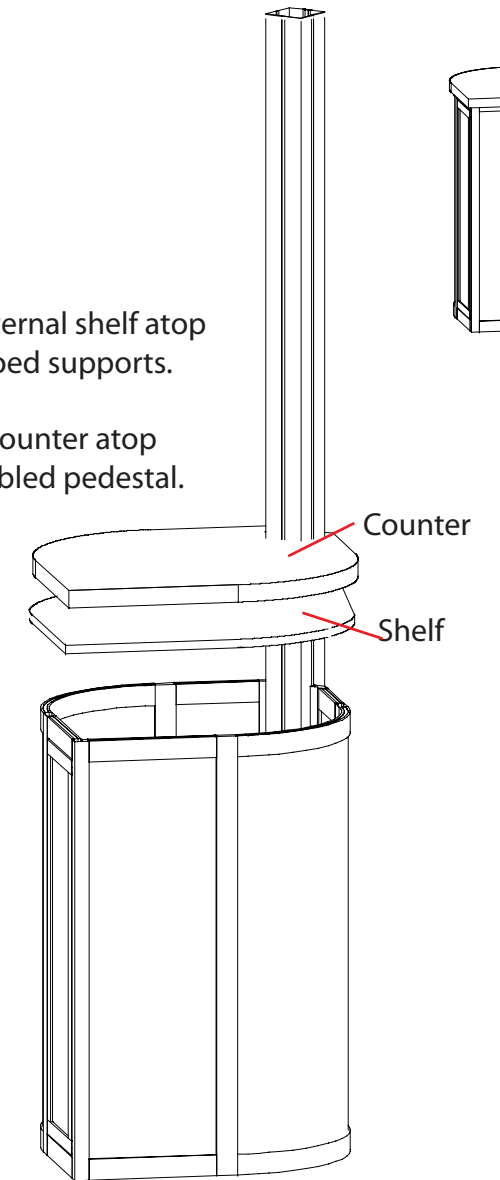

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

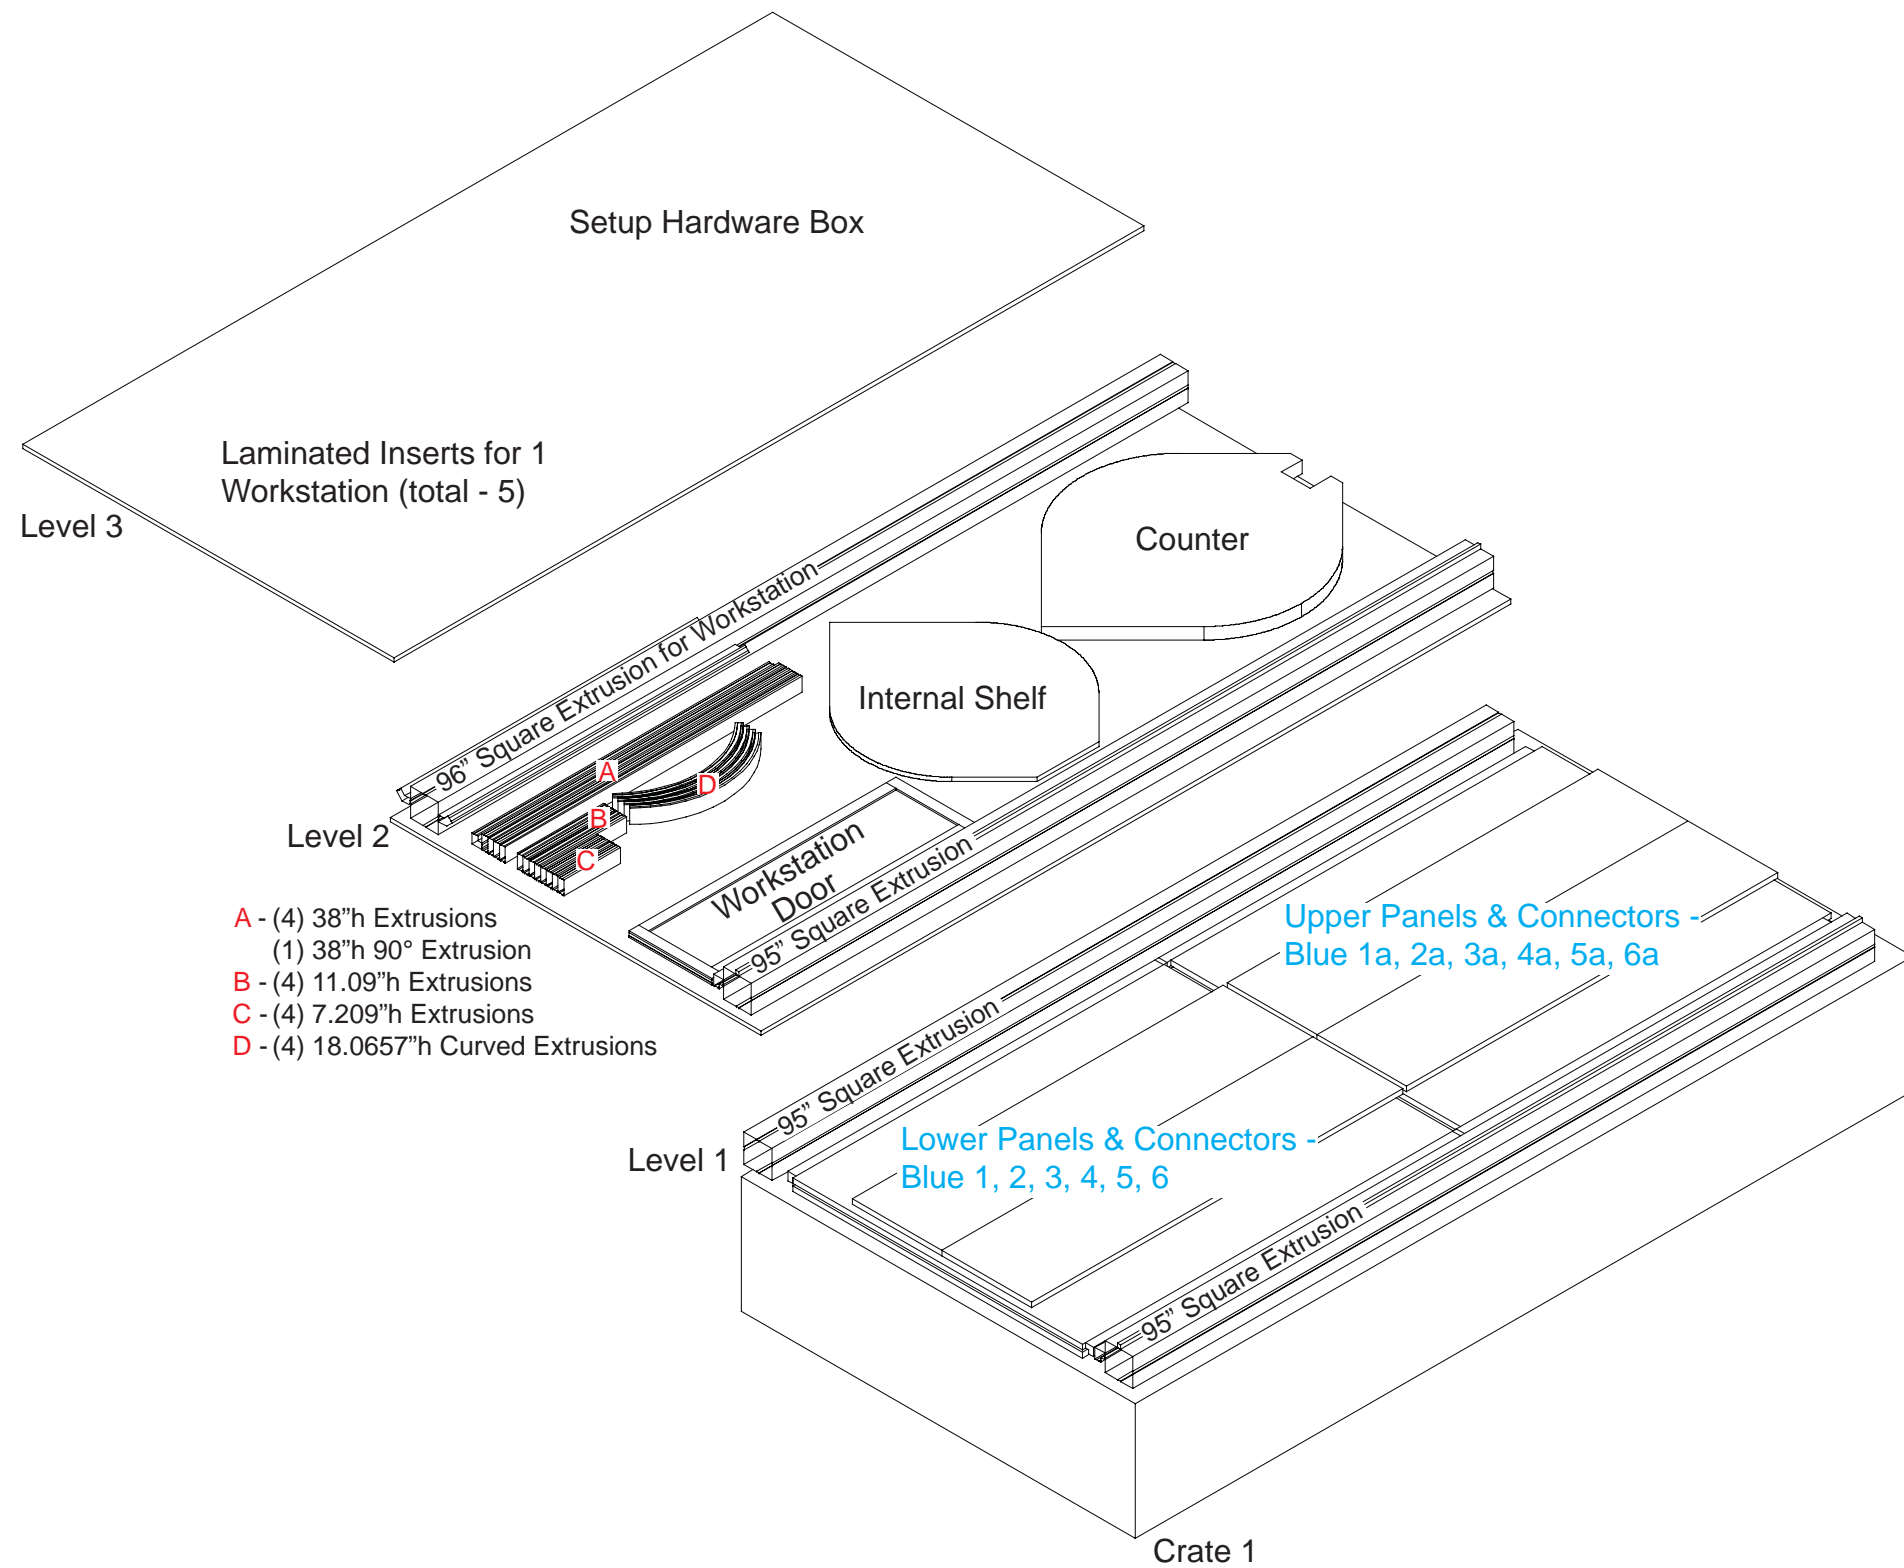

Level 3



Level 2



Level 1

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**