
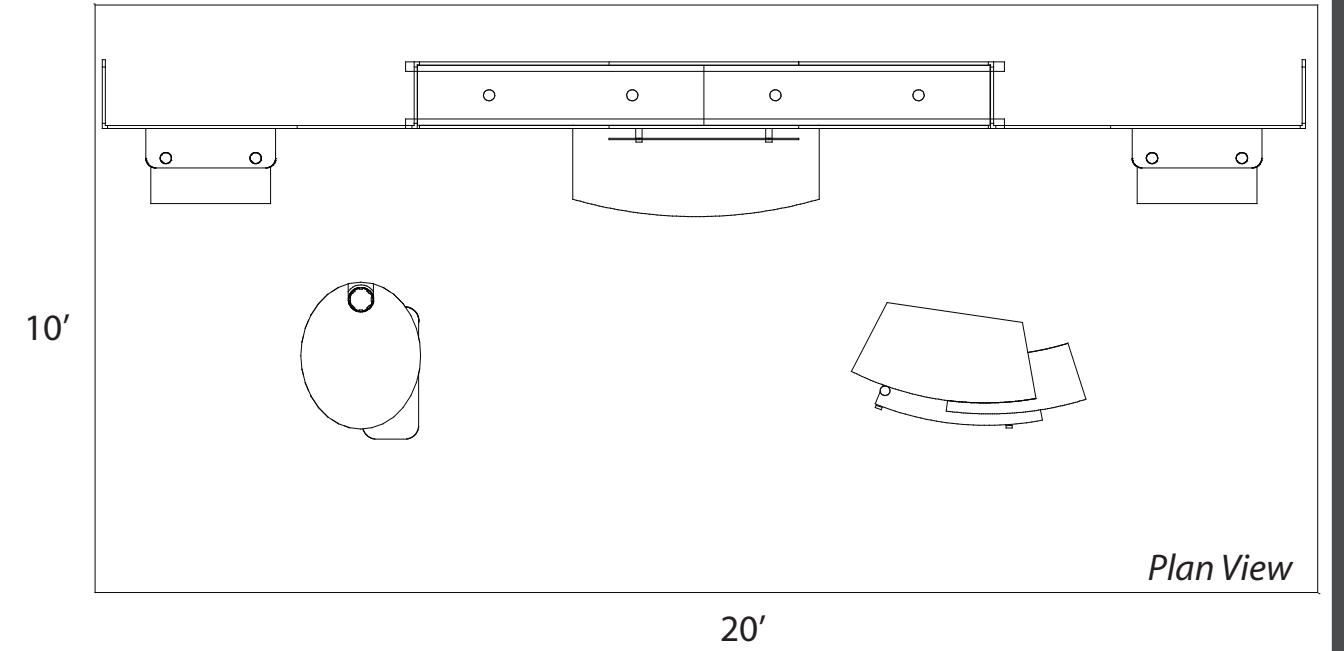


euro It | HYBRIDS

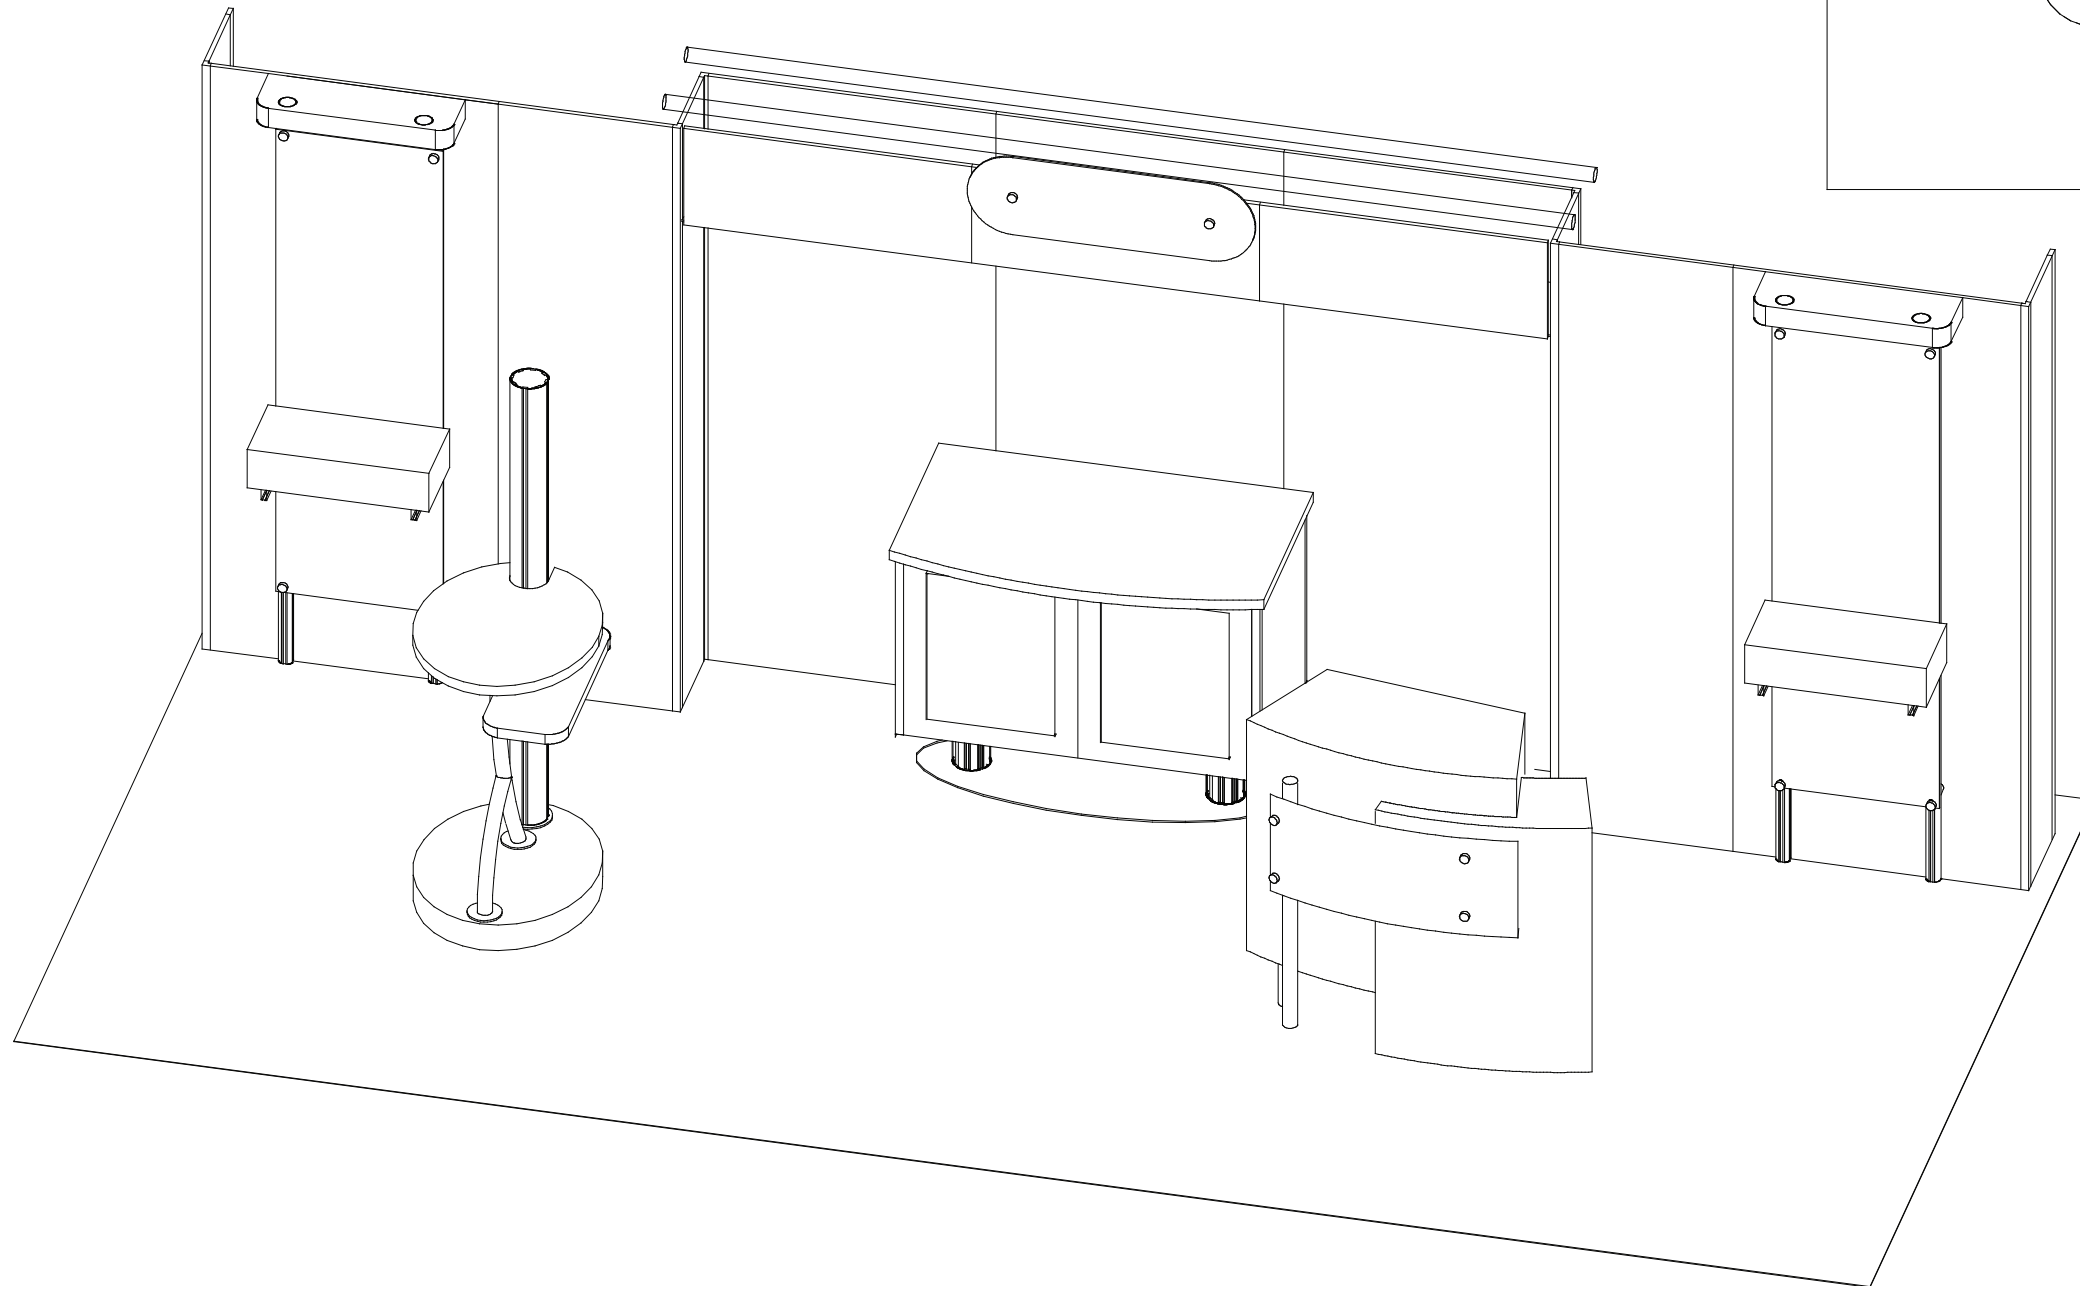

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Extrusion System




Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.

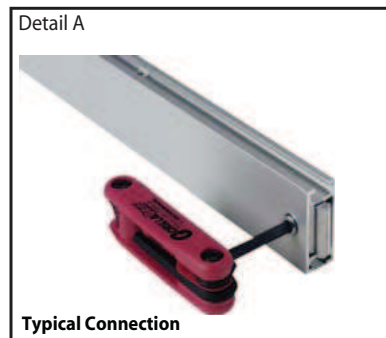


Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

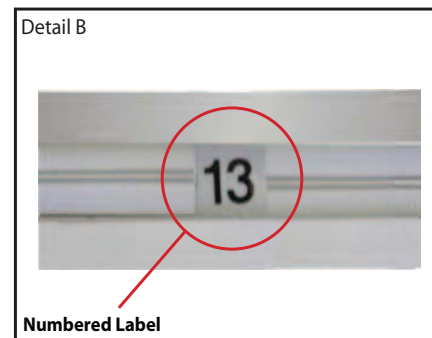


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

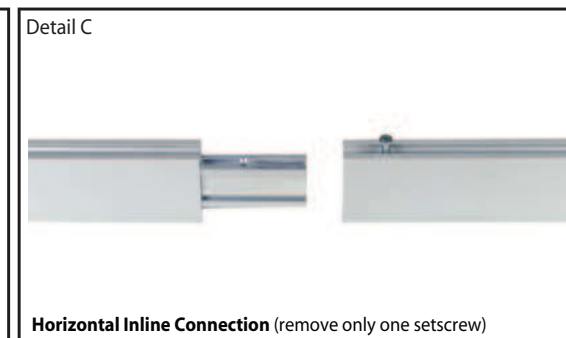

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

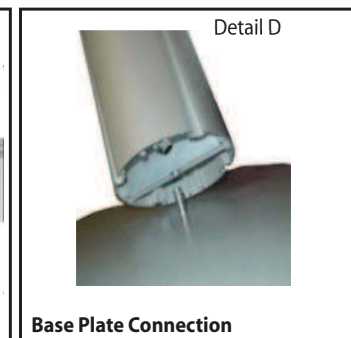


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

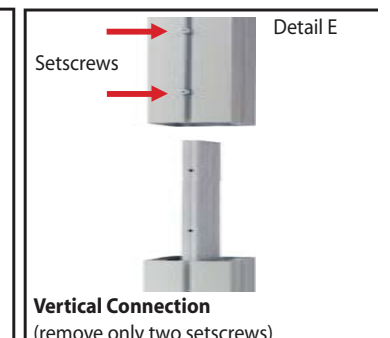


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

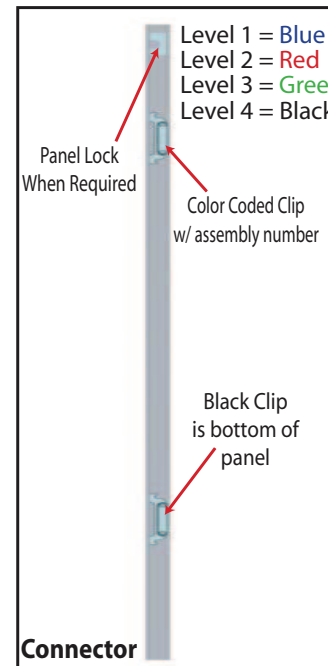


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

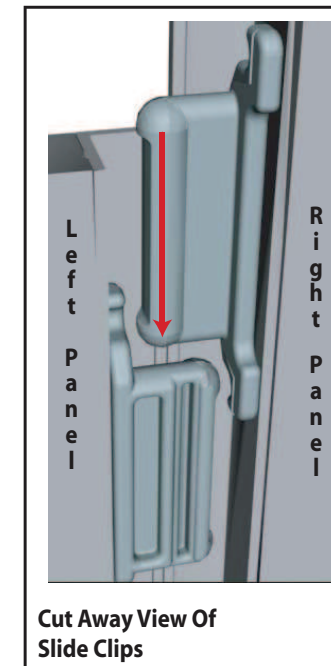

Components connect together by aligning them and sliding downward connecting clips together.

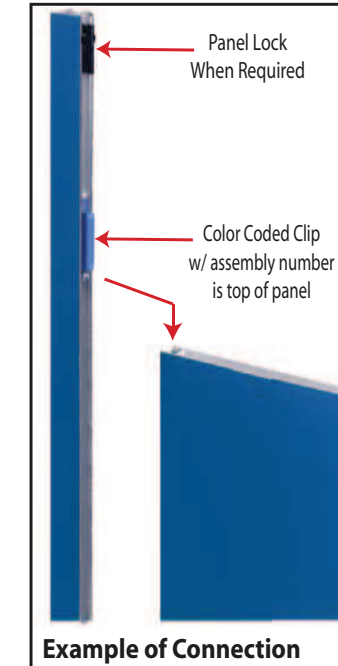

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.



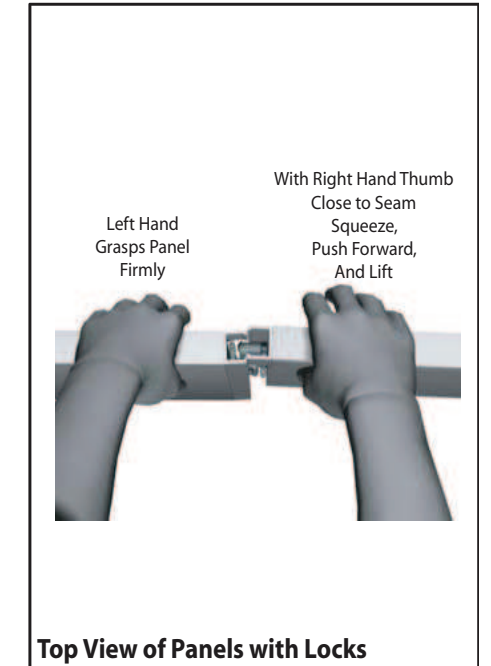


The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item Number	Description
1	95”h End Cap
2	11.5”w x 95”h Flat Panel
3	95”h 90° Connector
4	36”w x 96”h Wood Core Panel
5	19”w x 96”h Flat Panel
6	95”h 90° Connector w/ T Connector for Header Attachment
7	11.5”w x 95”h Flat Panel
8	95”h 90° Connector
9	38”w x 96”h Flat Panel
10	38”w x 96”h Wood Core Panel
11	38”w x 96”h Flat Panel
12	95”h 90° Connector
13	11.5”w x 95”h Flat Panel
14	95”h 90° Connector w/ T Connector for Header Attachment
15	19”w x 95”h Flat Panel
16	36”w x 96”h Wood Core Panel
17	95”h 90° Connector
18	11.5”w x 95”h Flat Panel
19	95”h End Cap

Steps:
 1) Assemble by starting at panel #1* and continue in numerical order.

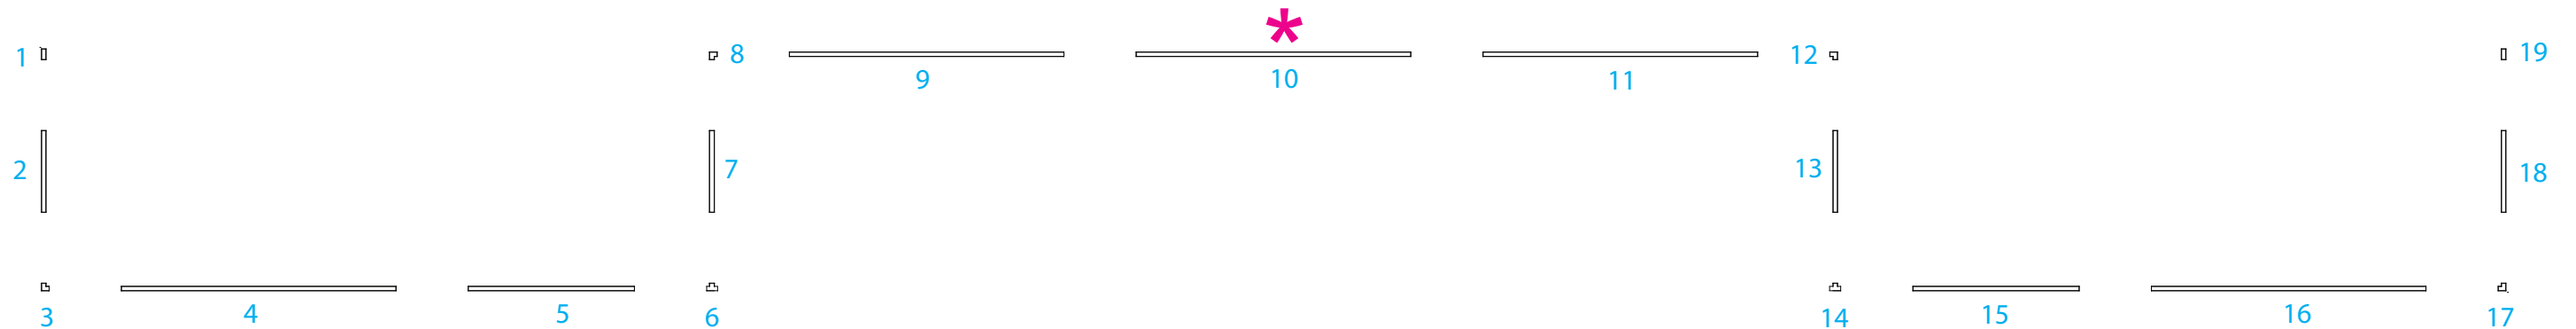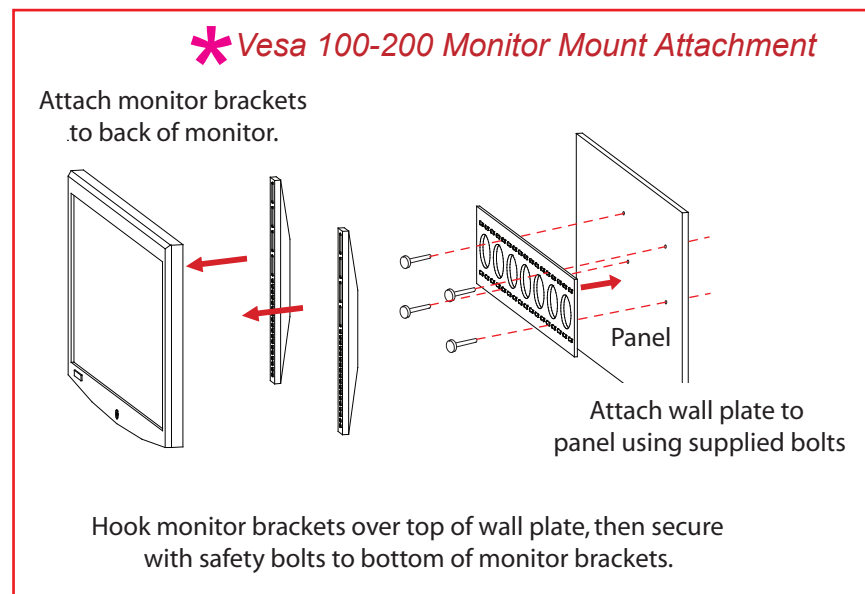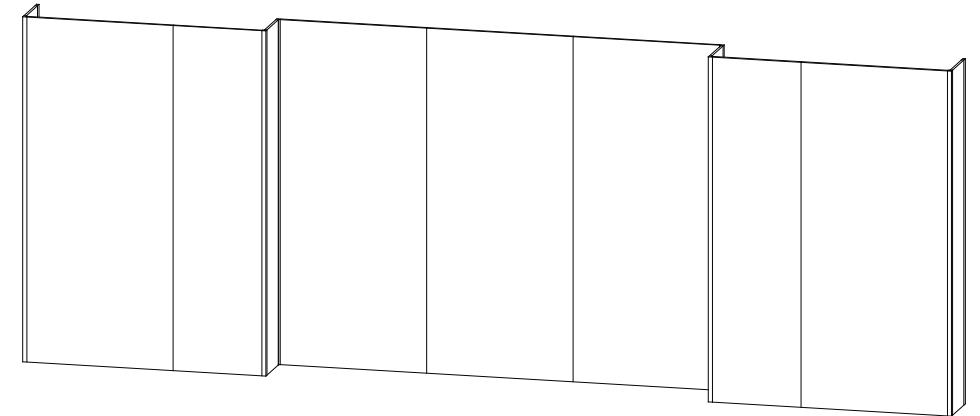

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

LT Panel Part List:


Item Number	Description
9	38" w x 15" h Flat Panel
10	38" w x 15" h Flat Panel
11	38" w x 15" h Flat Panel

Extrusion Part List:

Item Number	QTY.	Description
D	2	Canopy Attachment

Steps:

- 1) Attach header panel #9 to T connector.
- 2) Attach header panel #11 to T connector.
- 3) Attach header panel #10 between panel #9 and 11.
- 4) Attach pins to back of panels as indicated.
- 5) Set 2-piece ceiling atop pins, see ceiling placement detail.
- 6) Attach canopy attachment [D] to connectors as indicated.

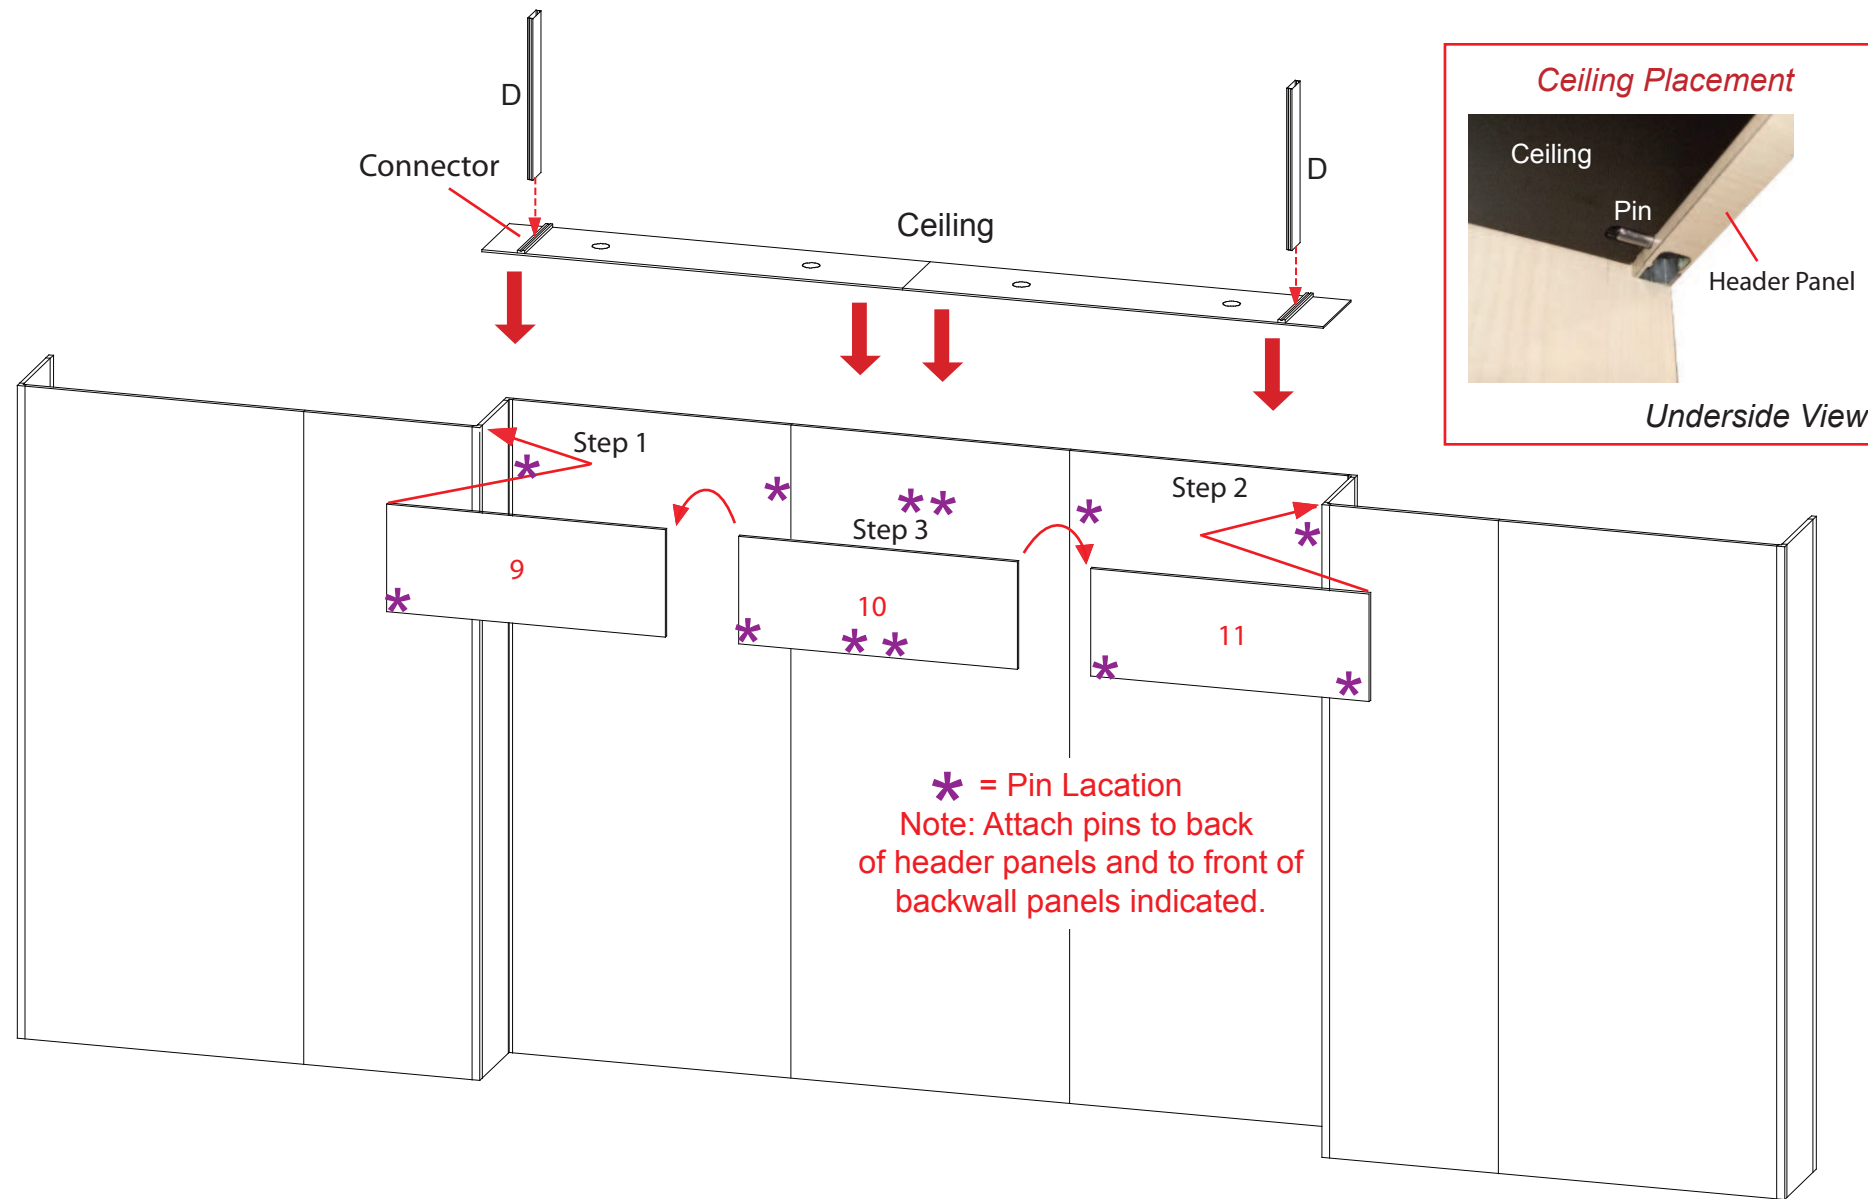


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
1	2	84”h Round Vertical Extrusion
1A	2	Support Leg
2	2	84”h Round Vertical Extrusion
2A	2	Support Leg
3	2	18”w Horizontal Extrusion
4	2	18”w Horizontal Extrusion
5	2	18”w Horizontal Extrusion
6	2	Extrusion Support
7	2	Extrusion Support

Steps:

- 1) Assemble Modul Frame together by attaching horizontal extrusions [3, 4 and 5] between vertical extrusions [1 and 2], and attach leg supports to vertical extrusions [1A to 1 and 2A to 2].
- 2) Repeat step for additional frame.
- 3) Attach assembled frame to assembled backwall panel #4 and 16 using stand-offs.
- 4) Attach frosted plex to assembled frame using stand-off caps.
- 5) Attach extrusion supports [6 and 7] thru frosted plex to assembled frame as shown.
- 6) Set boxes atop supports.
- 7) Hook small ceiling to top of assembled backwall and rest on top of frame.
- 8) Attach oval header to assembled header panel #10 using stand-offs as shown.

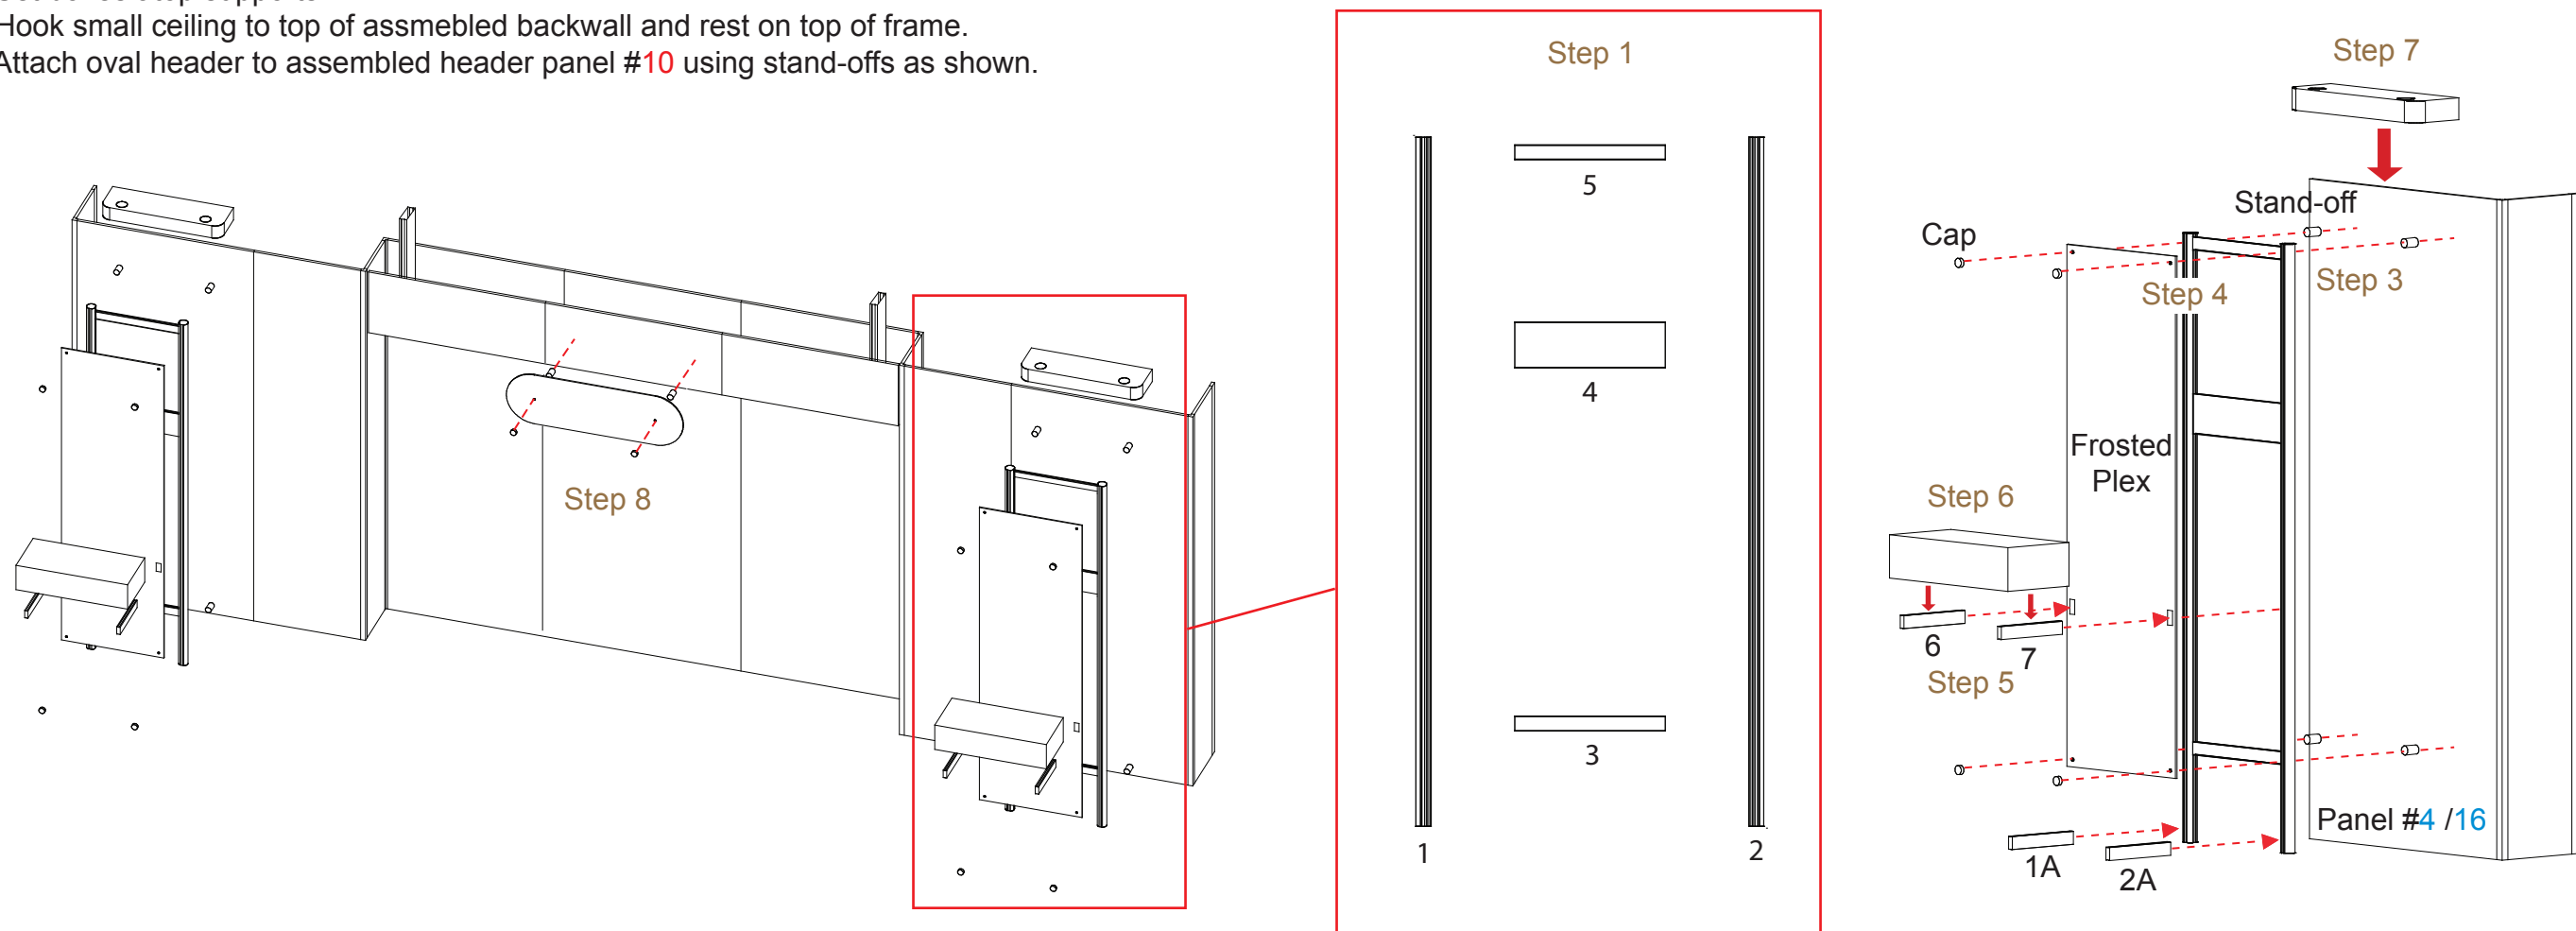


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Quantity	Description
A	2	Round extrusion
B	2	Round extrusion
C	1	Cross Member Extrusion
D	2	Canopy Attachment
E	2	Cross Member Extrusion

Steps:

- 1) Connector round extrusions together [A to A and B to B].
- 2) Connect round extrusion assemblies together using cross member extrusions [C and E].
- 3) Apply pillow case cover to assembled canopy.
- 4) Attach assembled canopy w/ cover to canopy attachment [D].

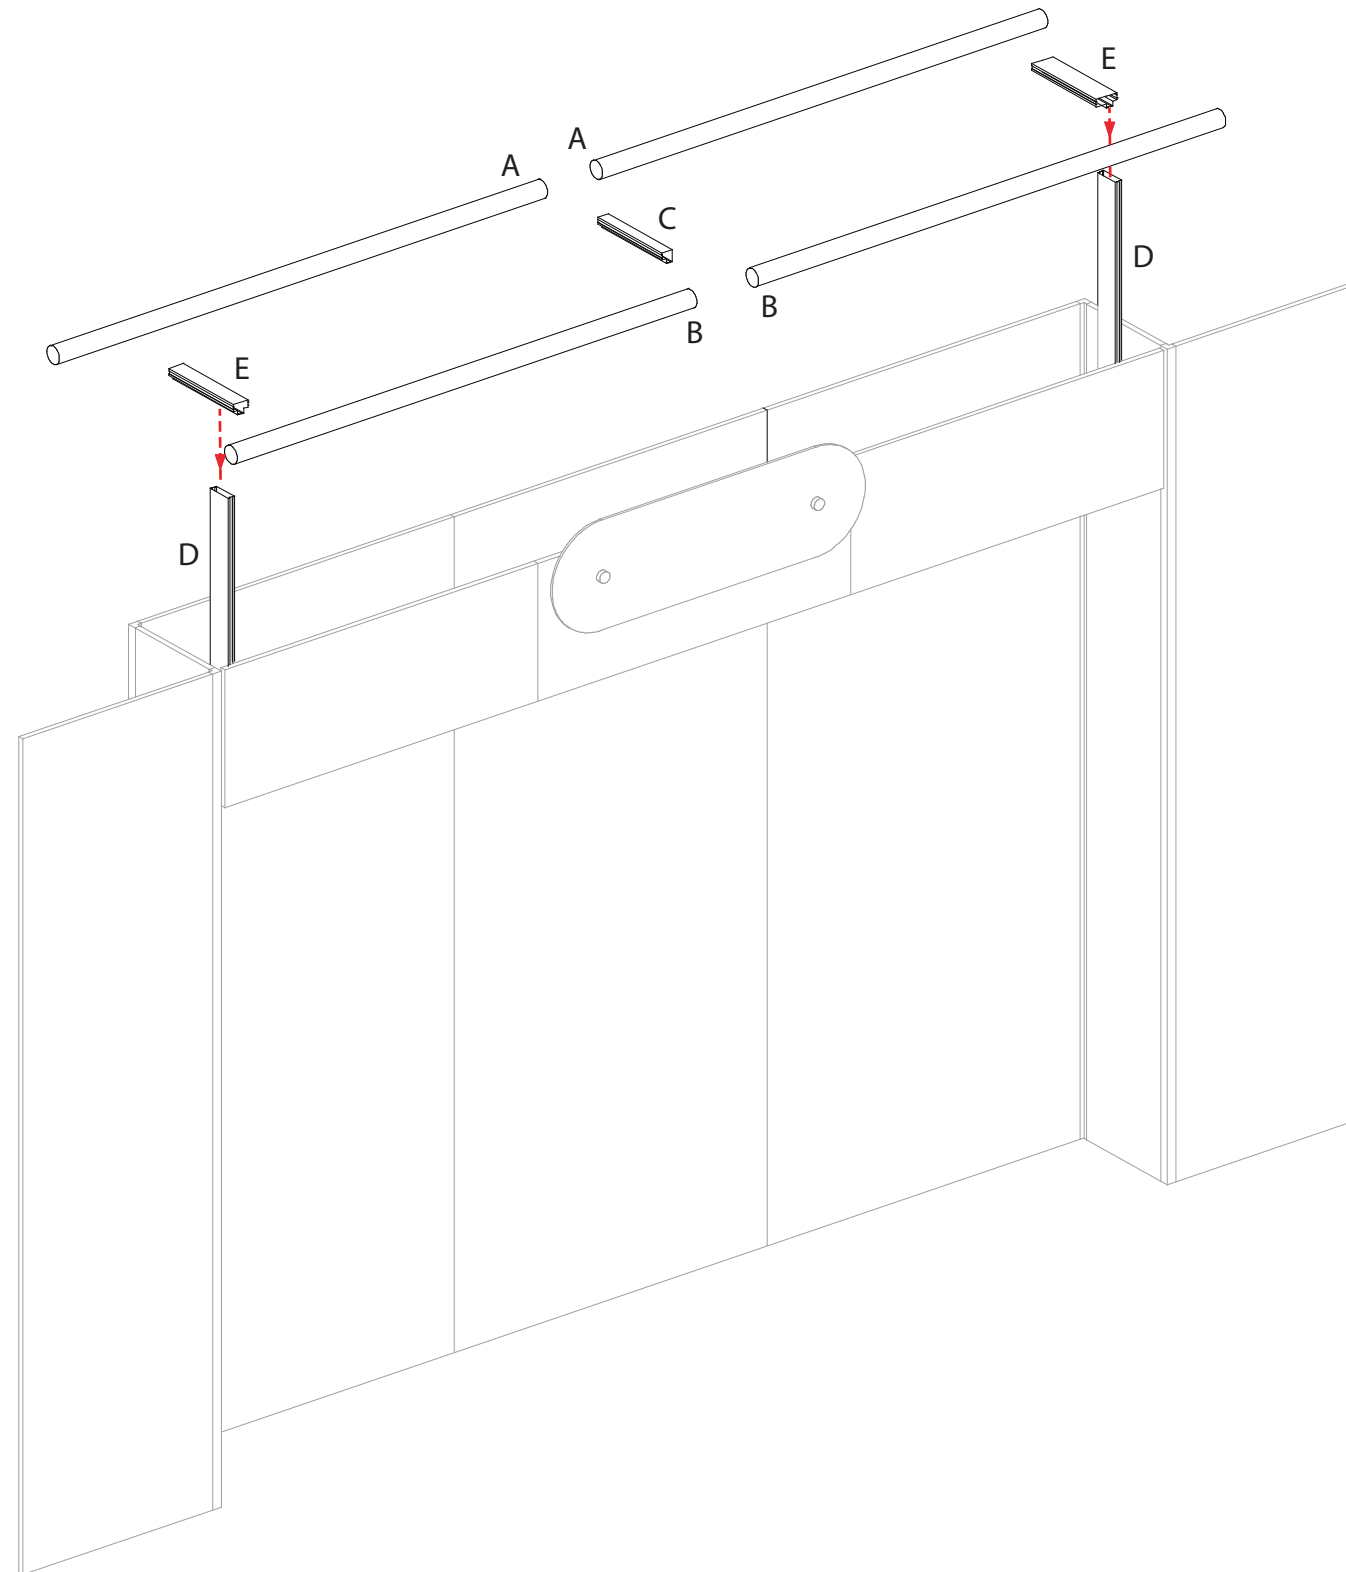


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100


Item	Qty.	Description
8	1	Laminated Wood Base
9	1	6"d Base Plate
10	1	34" Lower Vertical Extrusion
11	1	34" Upper Vertical Extrusion
12	1	Curved Extrusion
13	1	Curved Extrusion
14	1	13.845" Horizontal Support
15	1	13.725" Horizontal Support

Steps:



- 1) Connect vertical extrusion [10] to base plate [9], see detail D on general instruction page.
- 2) Connect upper vertical [11] to lower vertical [10].
- 3) Attach curve extrusion [12] to wood base [8], secure with supplied wing nuts.
- 4) Attach curve extrusion [13] to curve extrusion [12], then secure bottom with supplied wing nuts
- 5) Attach horizontal extrusions [14 and 15] between vertical extrusion [10] and curve extrusion [12].
- 6) Attach counter top and shelf to assembled workstation.

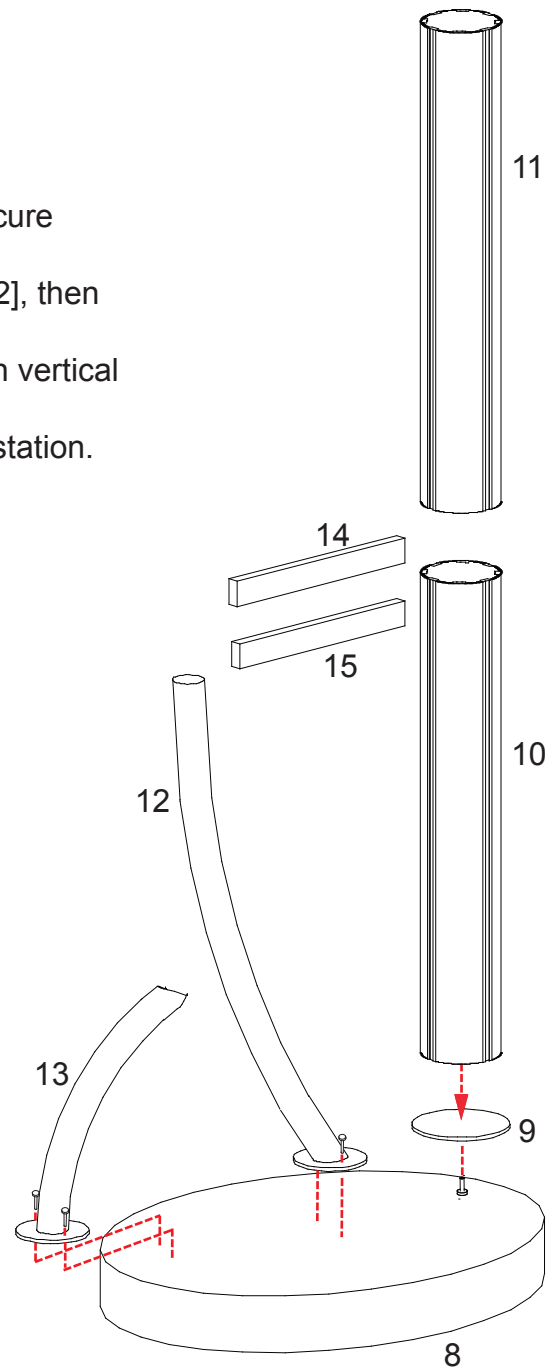

Place Counter atop Horizontal Support, then secure with Hardware Provided to Vertical Assembly.

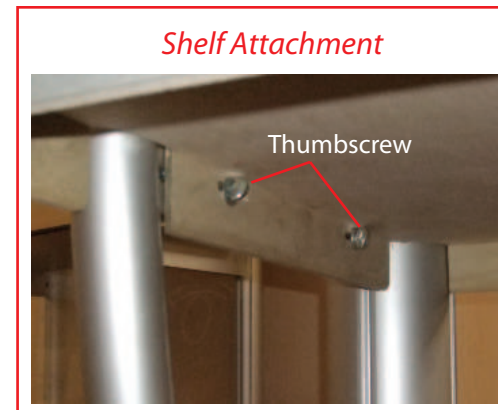

Attach Shelf to Horizontal Extrusion by Using Thumbscrews Provided, see shelf attachment detail.

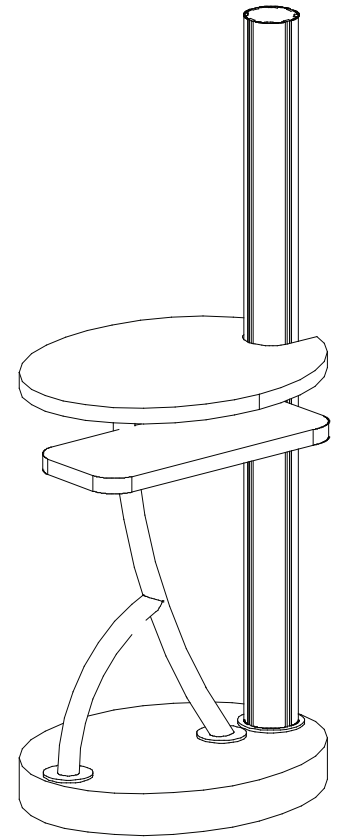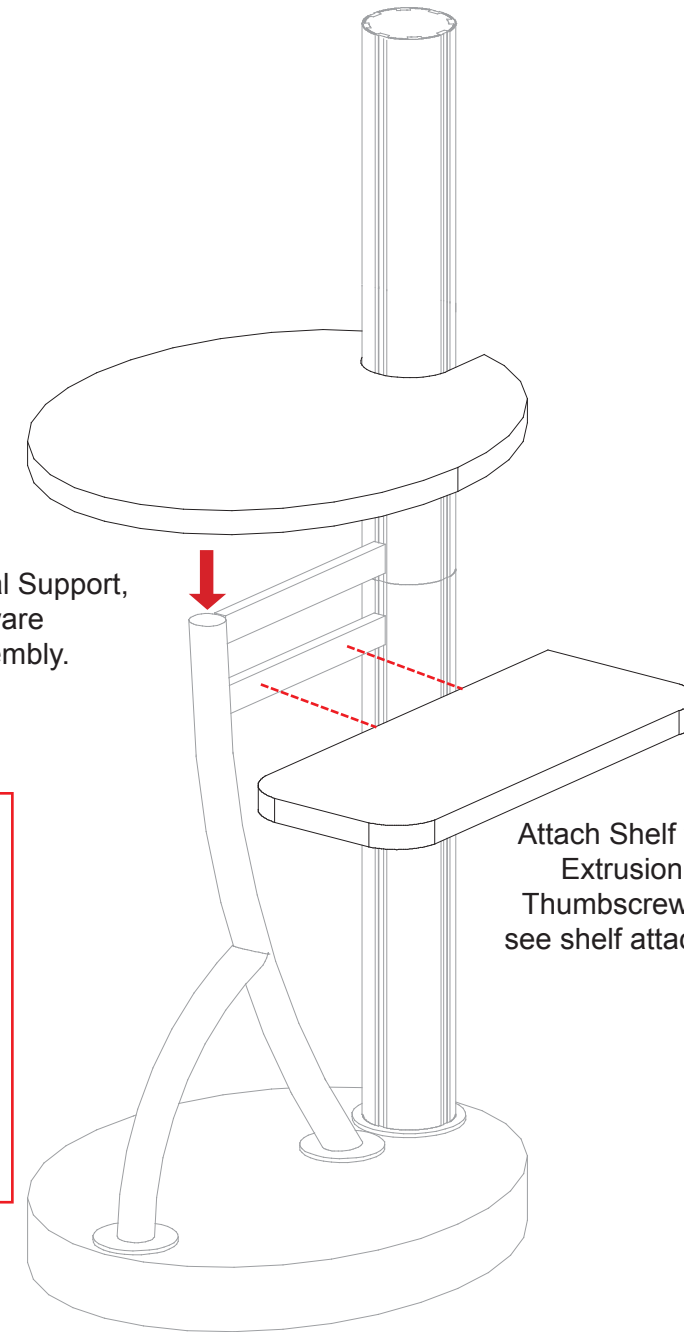

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

LT Panel Part List:



Number	Description
20	23"w x 28.5"h Flat Panel
21	28.5"h 90° Connector
22	23"w x 28.5"h Door Panel
23	23"w x 28.5"h Door Panel
24	28.5"h 90° Connector
25	23"w x 28.5"h Flat Panel
26	28.5"h 90° Connector
27	46"w x 28.5"h Flat Panel
28	28.5"h 90° Connector

Modul Extrusion Part List:

Item	Qty.	Description
16	1	Base Plate
17	2	9" Extrusion Leg


Steps:

- 1) Attach extrusion legs [17] to base plate [16].
- 2) Attach floor to extrusion legs as shown.
- 3) Assemble pedestal by starting at panel #20 and continue in numerical order.
- 4) Se assembled LT pedestal atop assembled base.
- 5) Velcro internal shelf supports to inside of pedestal, then set internal shelf atop supports.
- 6) Place counter atop assembled pedestal.

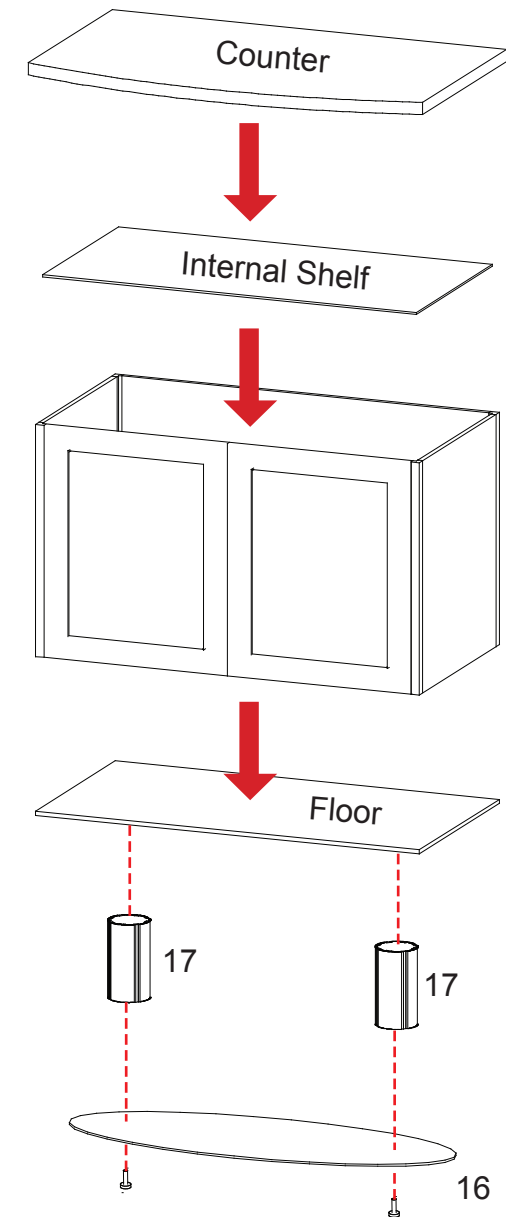
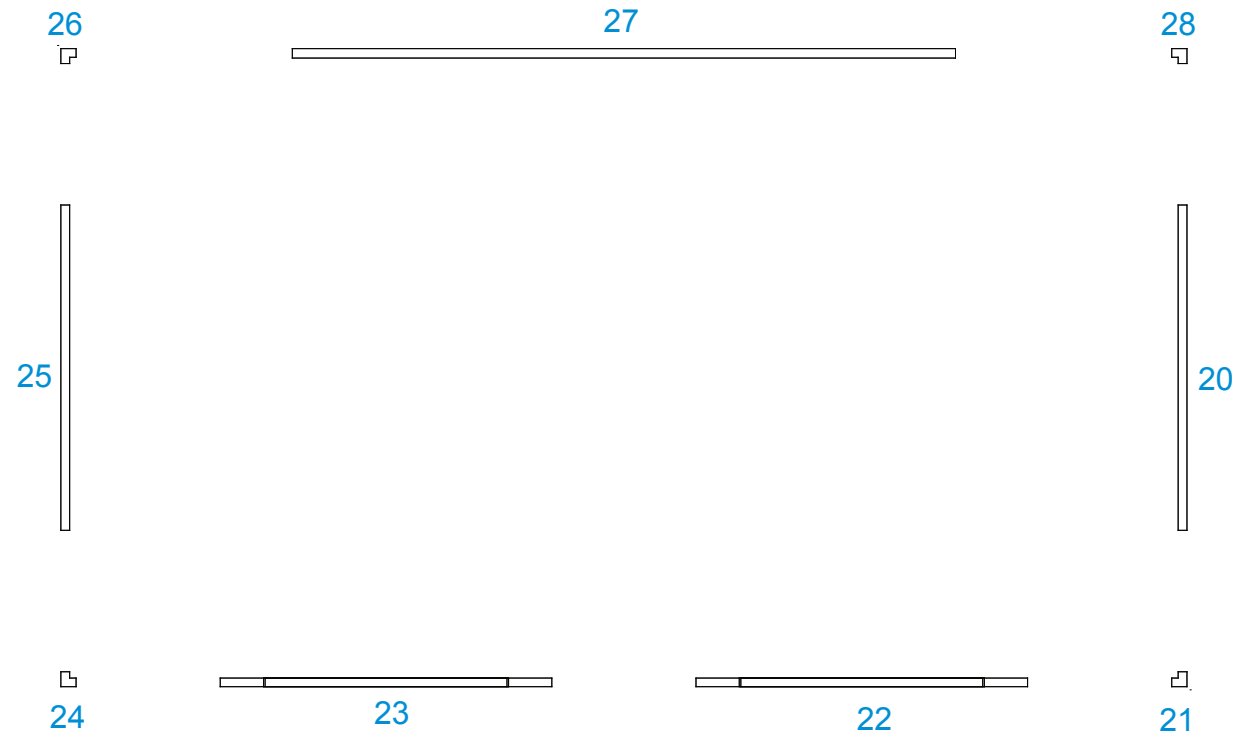


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

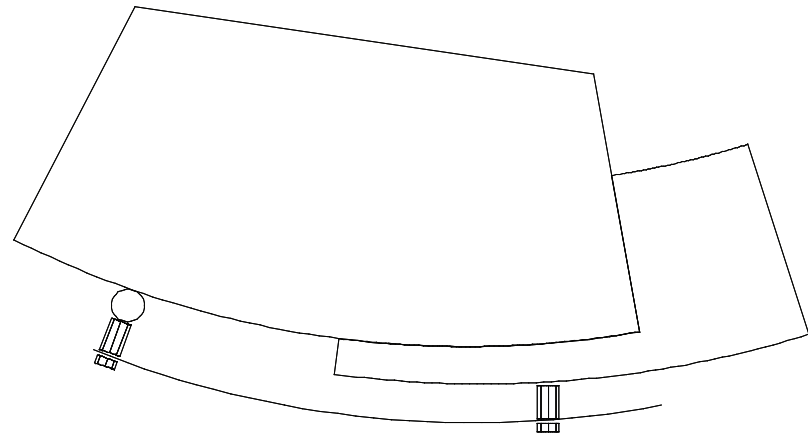

Top View

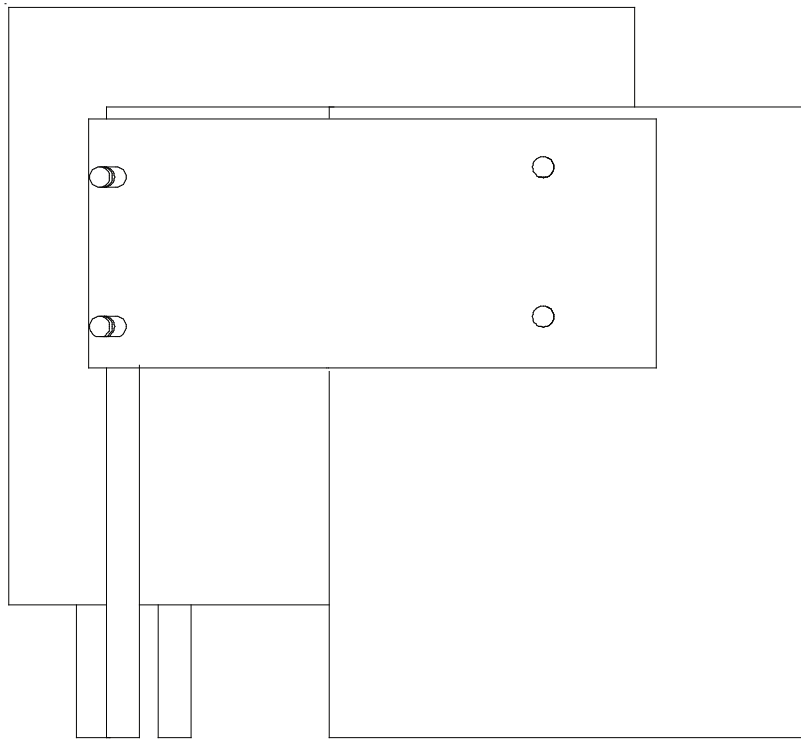
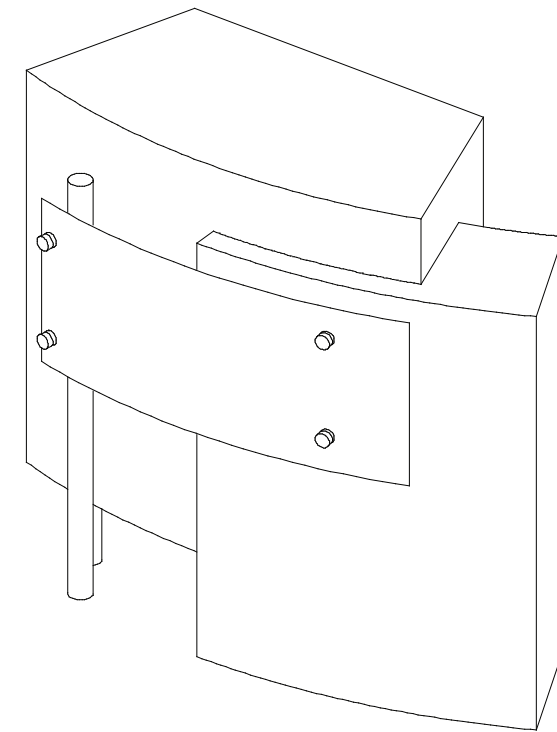


Front View

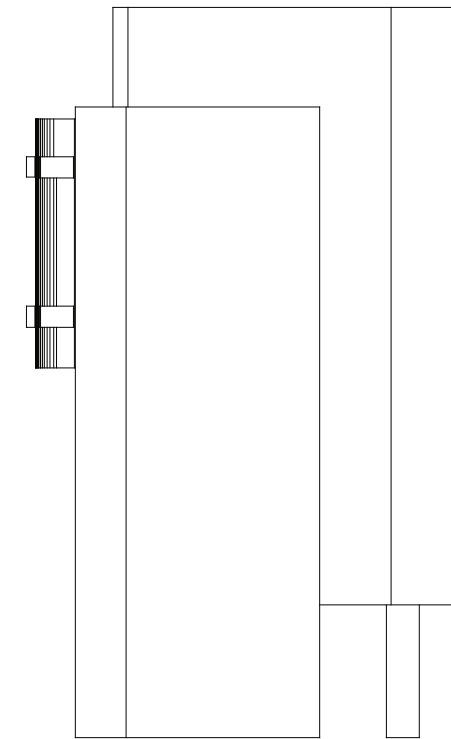


Side View

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

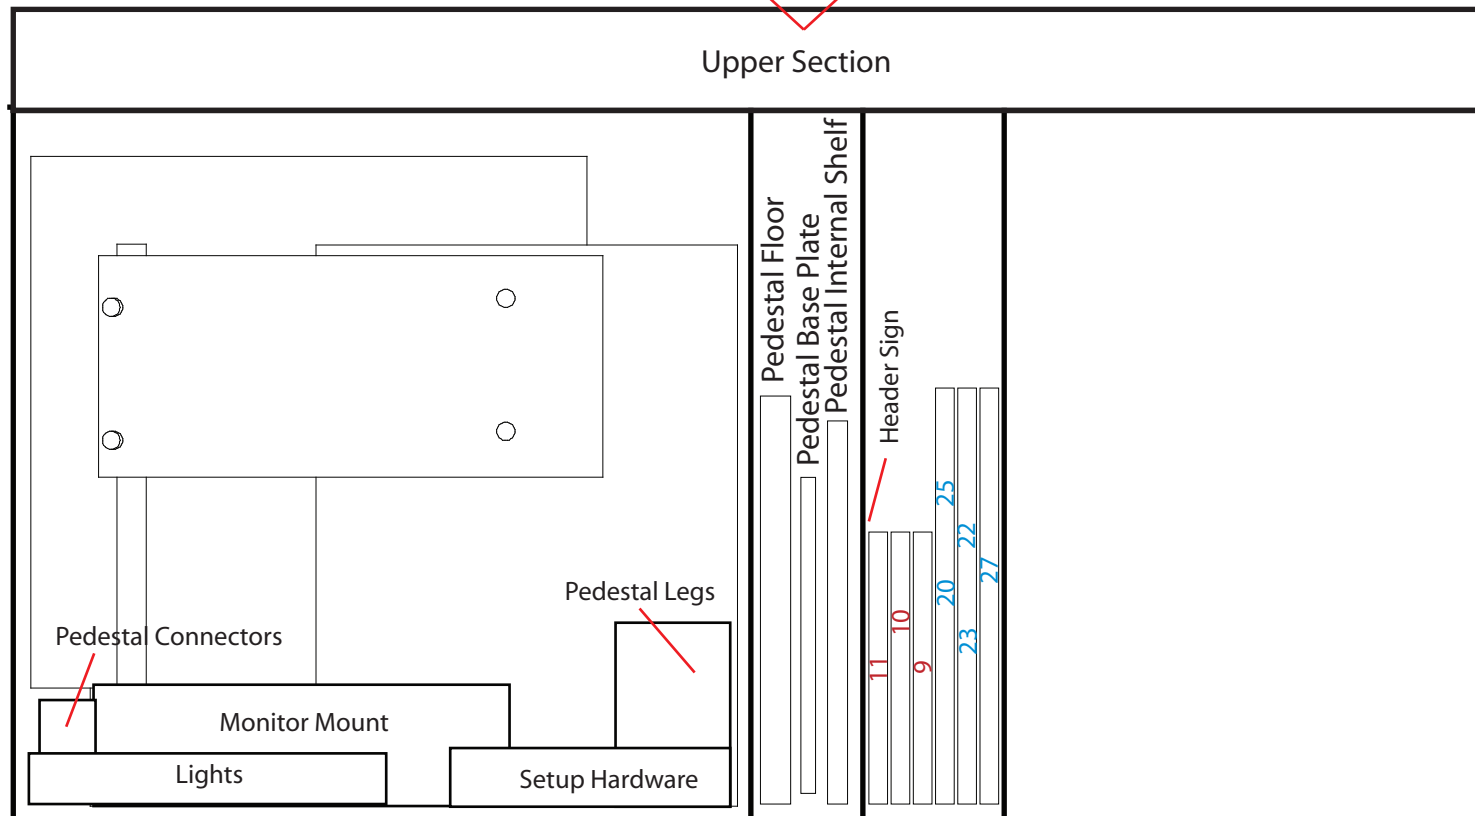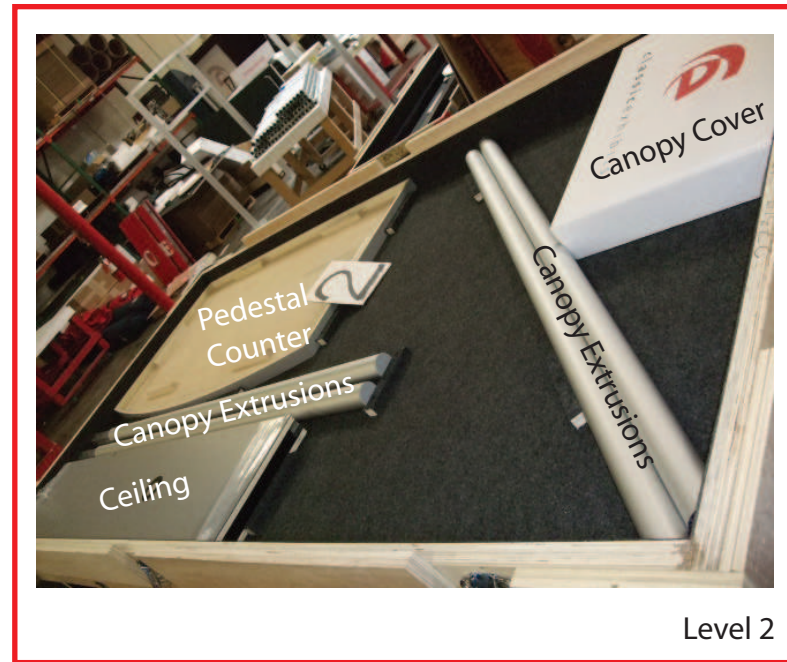

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Workstation Shelf
Workstation Counter
Small Ceiling

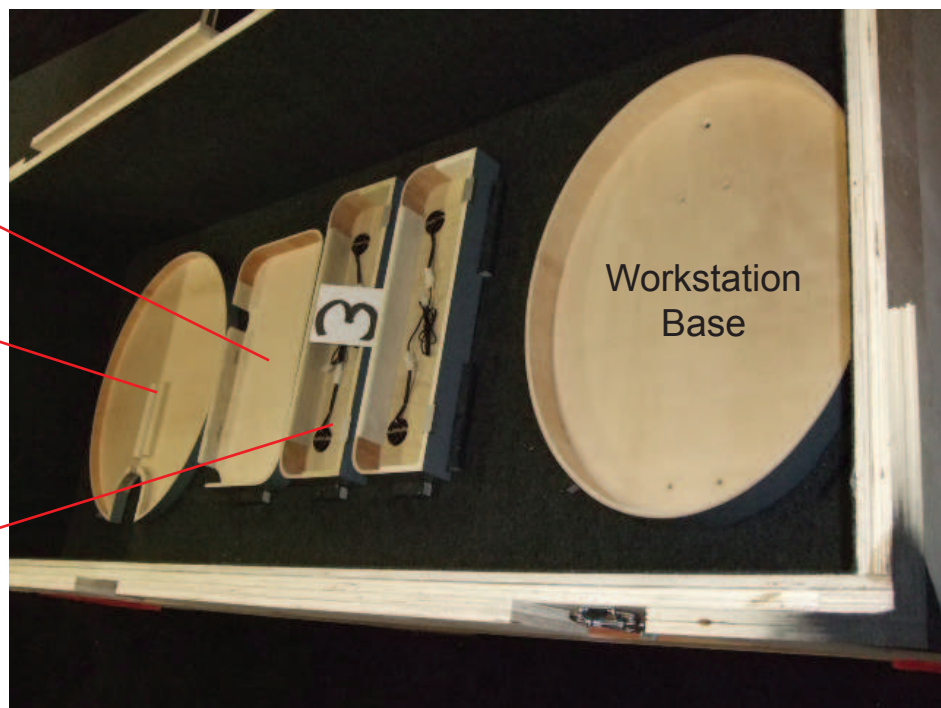

Level 3



Level 4



Level 1



Level 2

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING