
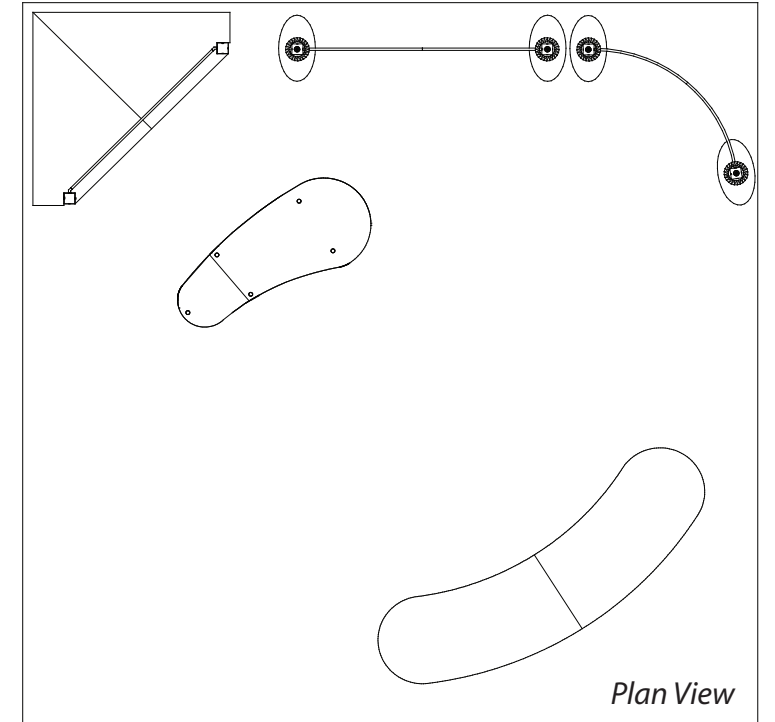


# euro It | HYBRIDS

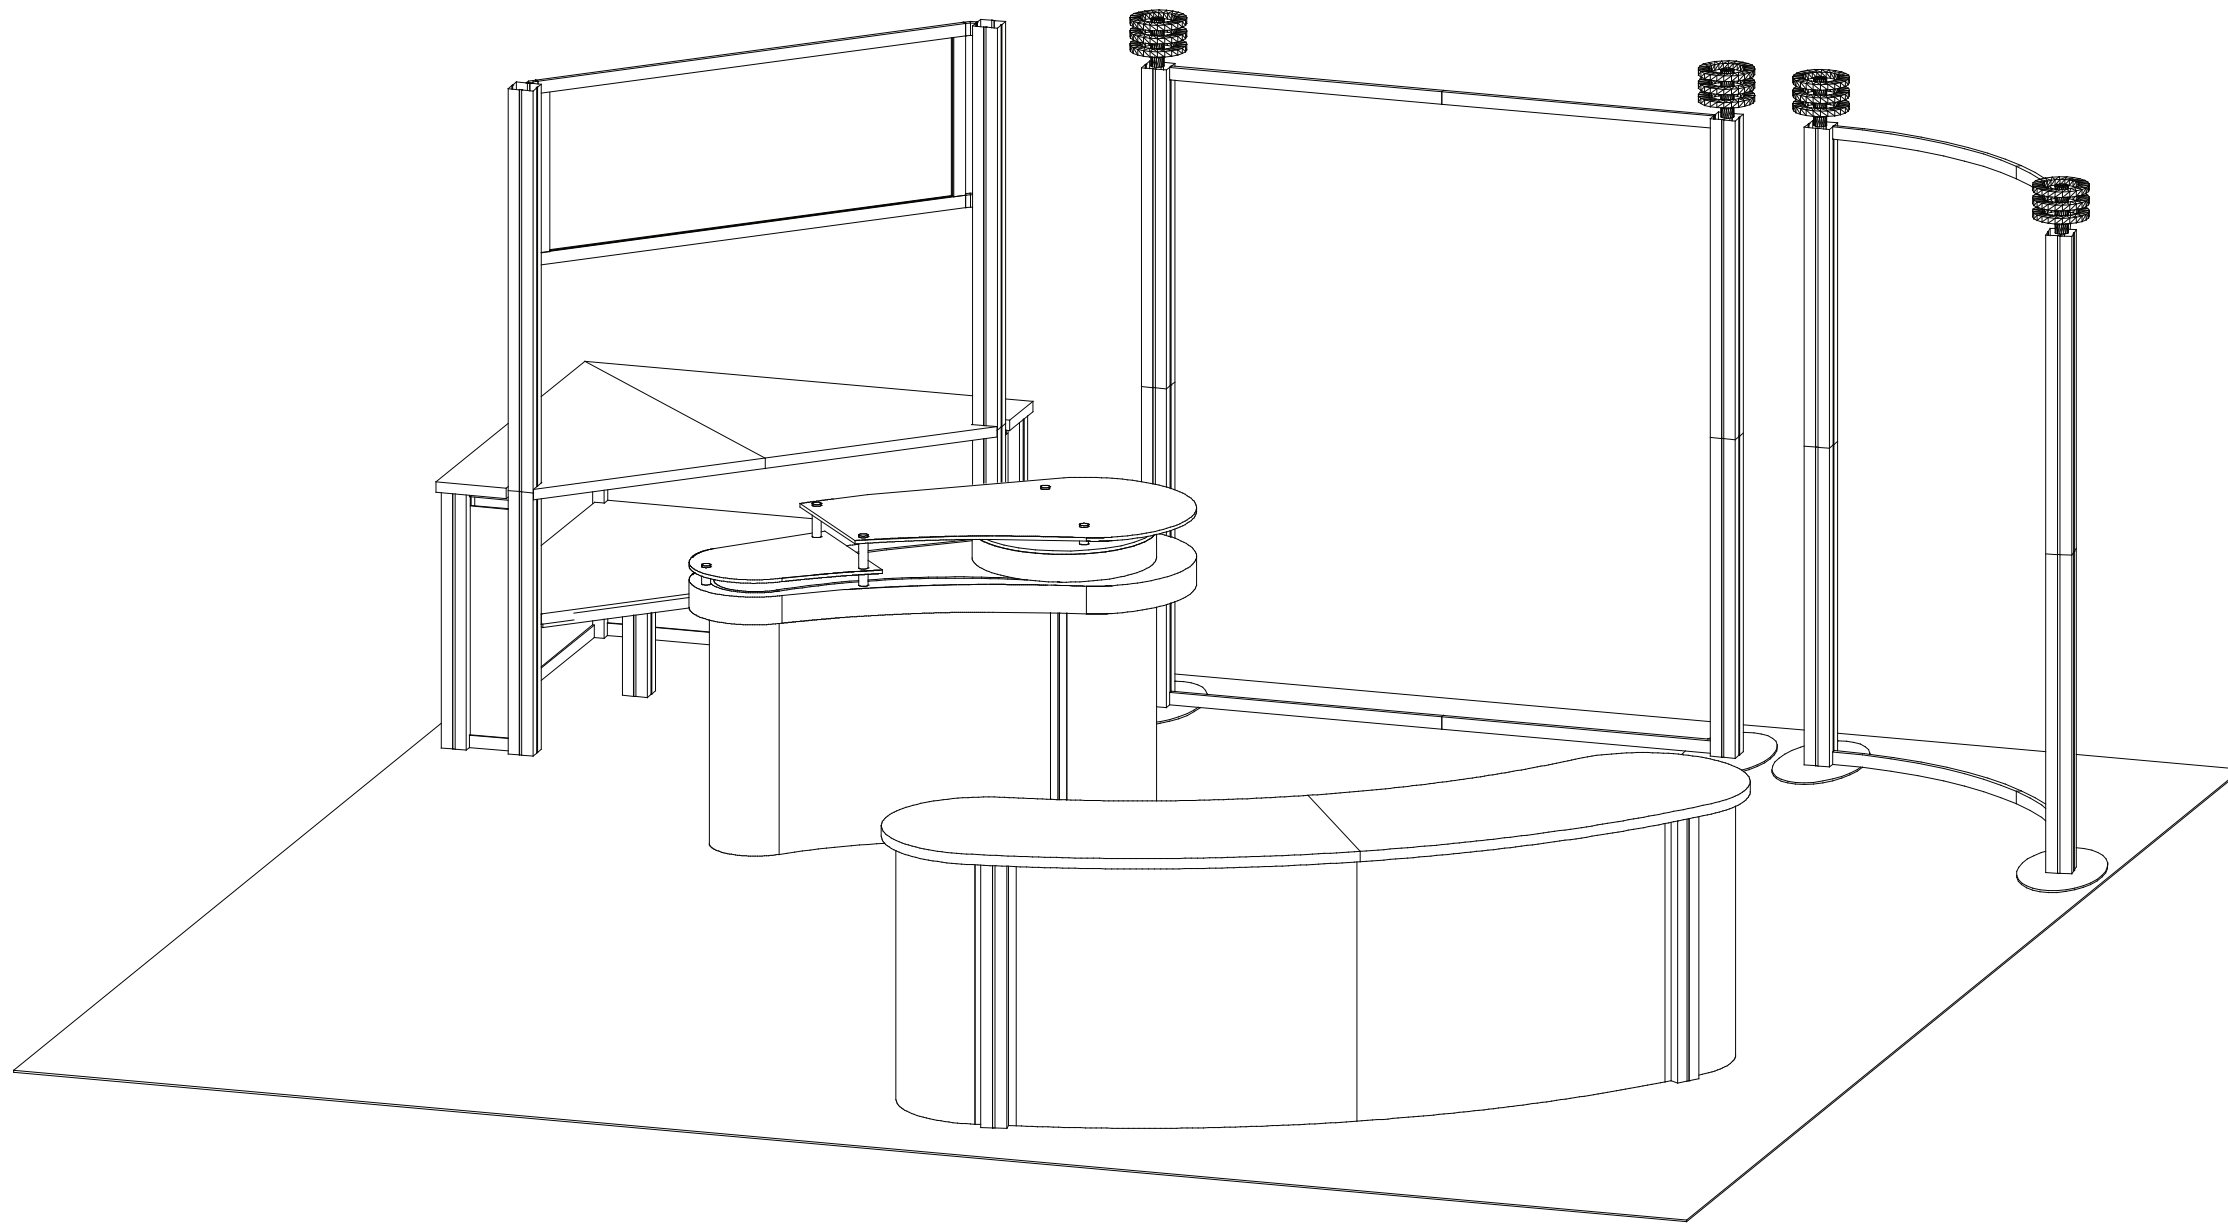

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

# euro lt | HYBRIDS

## Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


## Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



## General Setup Instructions for Extrusion System




Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.

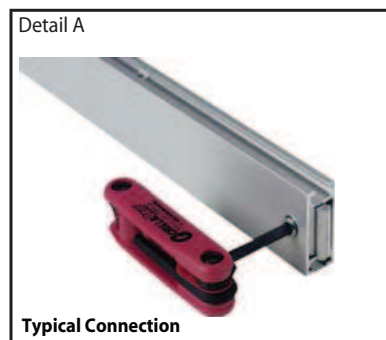


Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

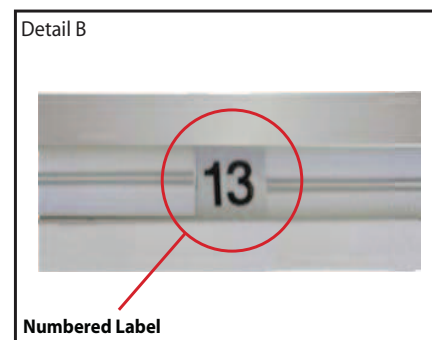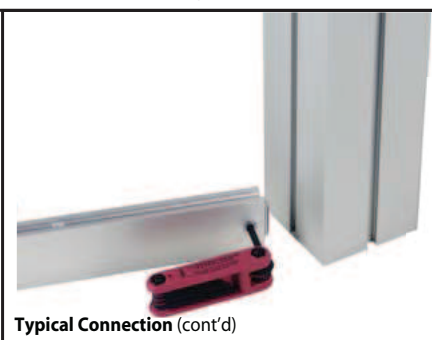


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

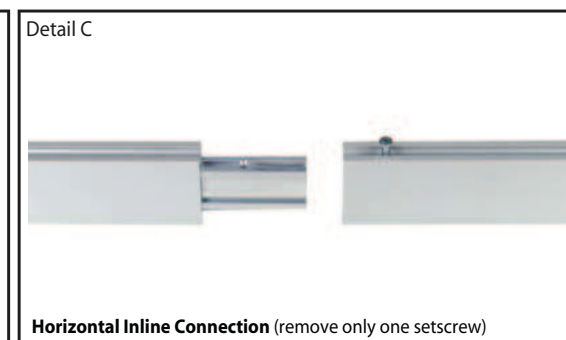

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

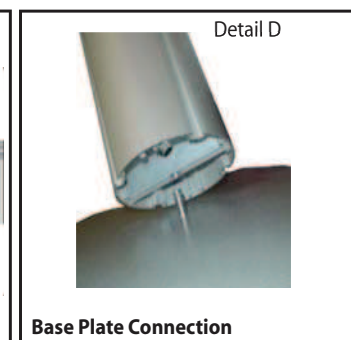


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

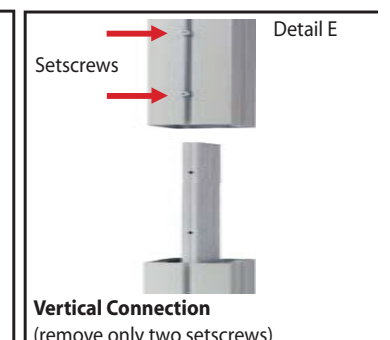


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

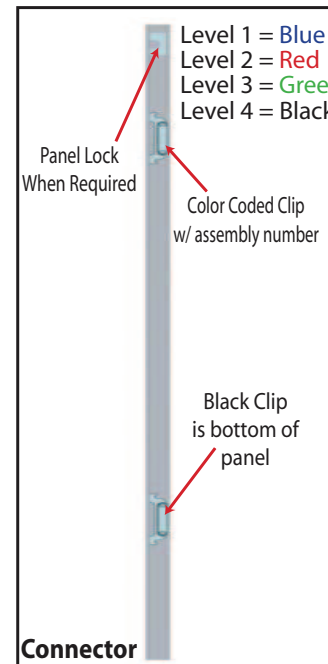


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

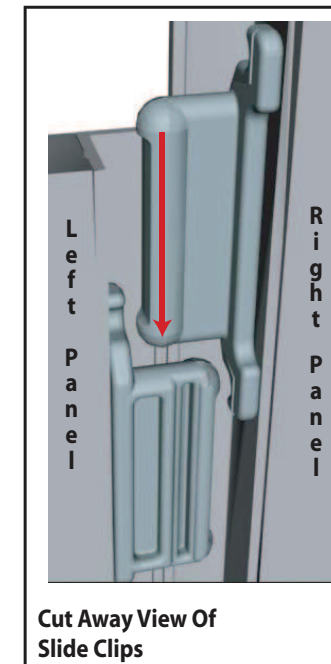

Components connect together by aligning them and sliding downward connecting clips together.

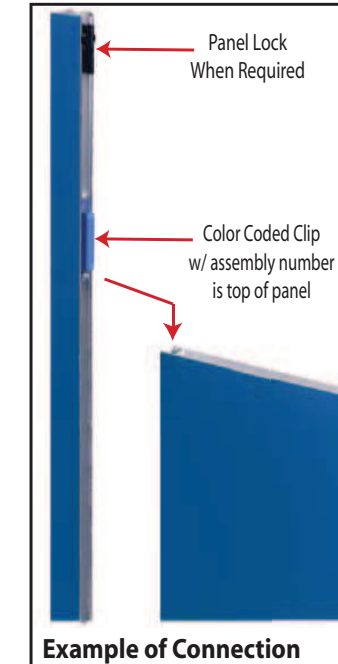

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

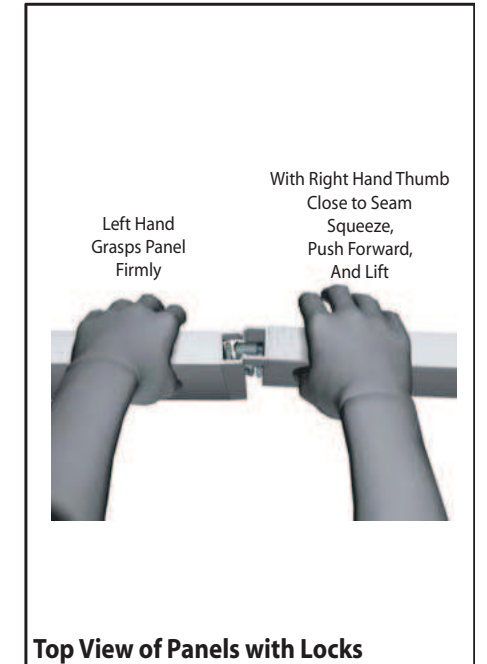

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.



**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

866.652.2100

Item	Qty.	Description
1	4	Base Plate
2	4	46" h Lower Vertical Extrusion
3	4	46" h Upper Vertical Extrusion
4a/4b	1/1	39" w Horizontal Extrusion w/ Velcro Attached to Front Top Edge of Extrusion
5a/5b	1/1	39" w Horizontal Extrusion w/ Velcro Attached to Front Bottom Edge of Extrusion
6a/6b	1/1	33" w Formed Horizontal Extrusion w/ Velcro Attached to Front Top Edge of Extrusion
7a/7b	1/1	33" w Formed Horizontal Extrusion w/ Velcro Attached to Front Bottom Edge of Extrusion

Steps:

- 1) Attach vertical extrusions [2] to base plates [1], see detail D on general info page.
- 2) Attach upper vertical extrusions [3] atop [2].
- 3) Connect horizontal extrusions [4a to 4b, 5a to 5b, 6a to 6b, 7a to 7b] together.
- 4) Attach horizontal assemblies between vertical extrusions [2 and 3] as shown.
- 5) Attach finials to top of vertical assemblies.
- 6) Attach lights to top of assembled stands where desired.

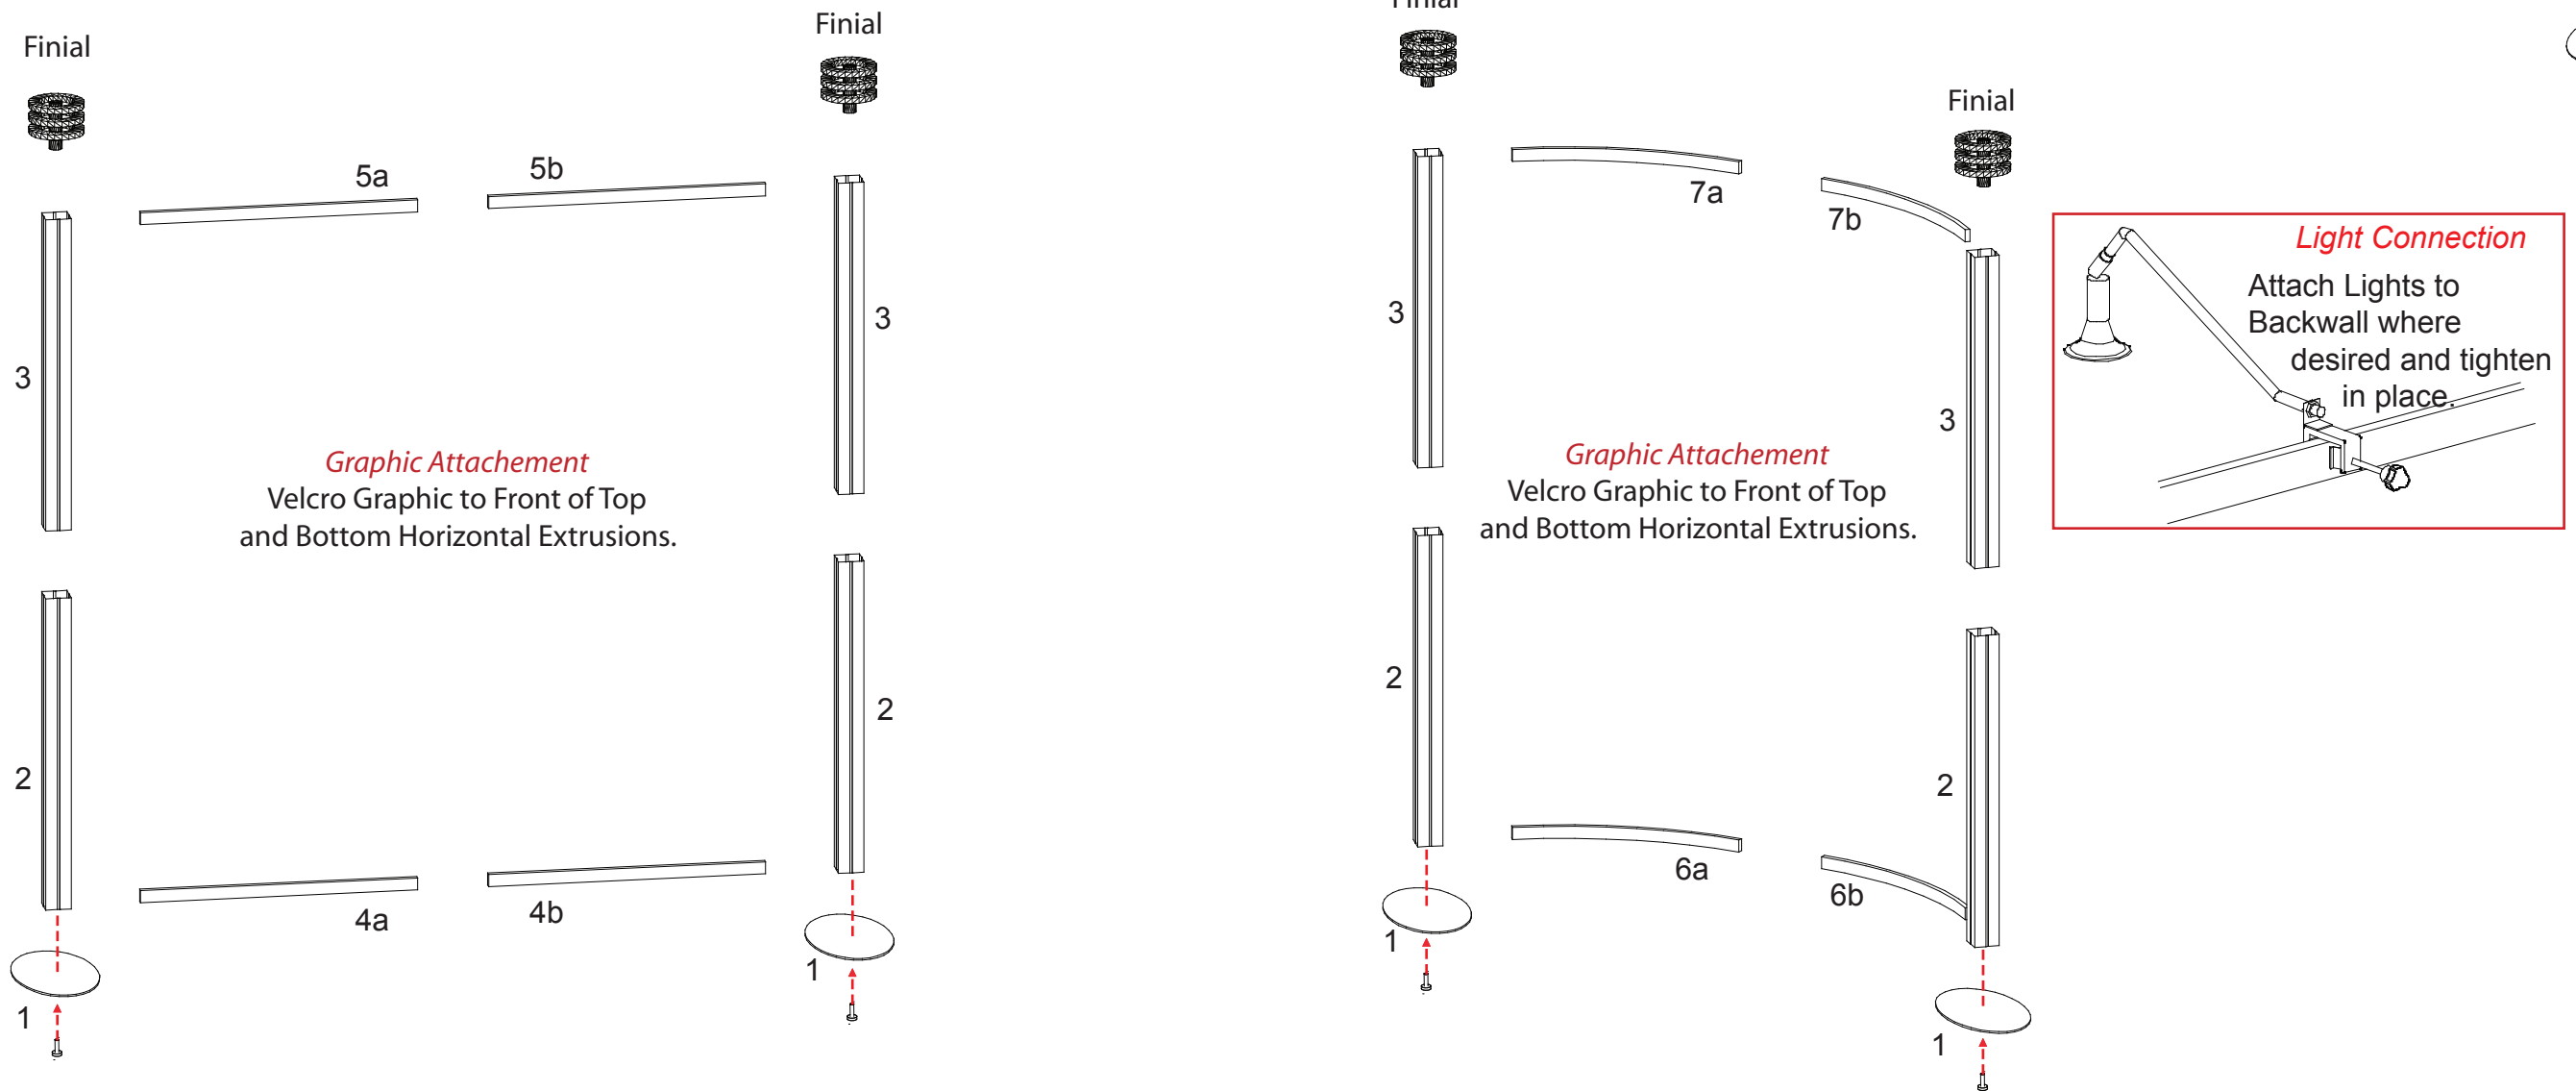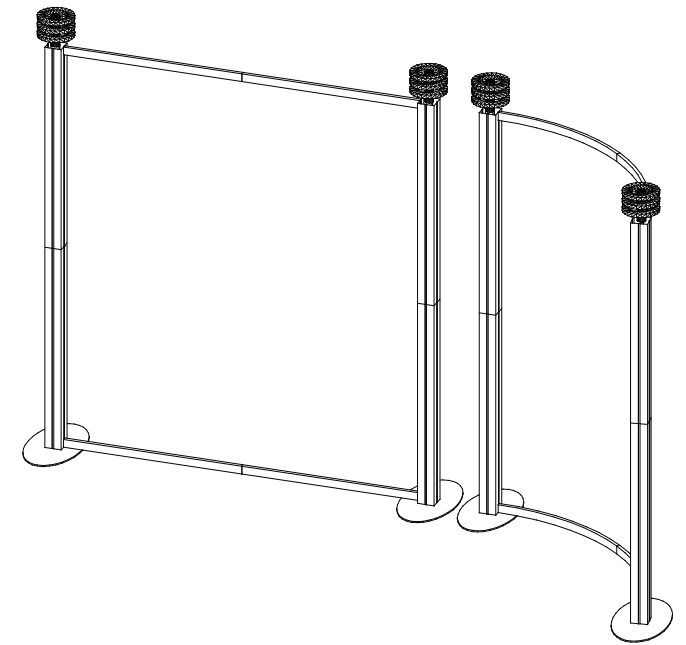

*Graphic Attachement*  
Velcro Graphic to Front of Top and Bottom Horizontal Extrusions.

*Graphic Attachement*  
Velcro Graphic to Front of Top and Bottom Horizontal Extrusions.





*Light Connection*  
Attach Lights to Backwall where desired and tighten in place.

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

866.652.2100

Item	Qty.	Description
8	2	58" h Lower Vertical Extrusion w/ Connectors Attached
9	2	19" h Support Leg Extrusion
10	2	38" h Lower Vertical Extrusion
10a	1	38" h Lower Vertical Extrusion
11	1	38" h Upper Vertical Extrusion w/ Connector Attached
12	1	38" h Upper Vertical Extrusion w/ Connector Attached
13	2	65.118" w Horizontal Extrusion
14	4	56" w Horizontal Extrusion
15	4	6" w Horizontal Extrusion
16	2	65.118" w Horizontal Extrusion
17	2	23" w Vertical Extrusion

- Steps:
- 1) Attach upper vertical extrusions atop lower vertical extrusions [11 to 8 and 12 to 8].
  - 2) Attach horizontal extrusions [13, 14 and 15] between vertical extrusions as shown.
  - 3) Place inserts as indicated.
  - 4) Assemble header by attaching vertical extrusions [17] between horizontal extrusions [16], placing insert as shown.
  - 5) Attach assembled header between vertical extrusions [11 and 12].
  - 6) Place support legs as indicated, then set shelf atop support legs, pin and horizontal extrusion [13].
  - 7) Attach horizontal extrusions [13, 14 and 15] between vertical extrusions and atop inserts as shown.
  - 8) Place counter top on assembled base and secure with thumbscrews.

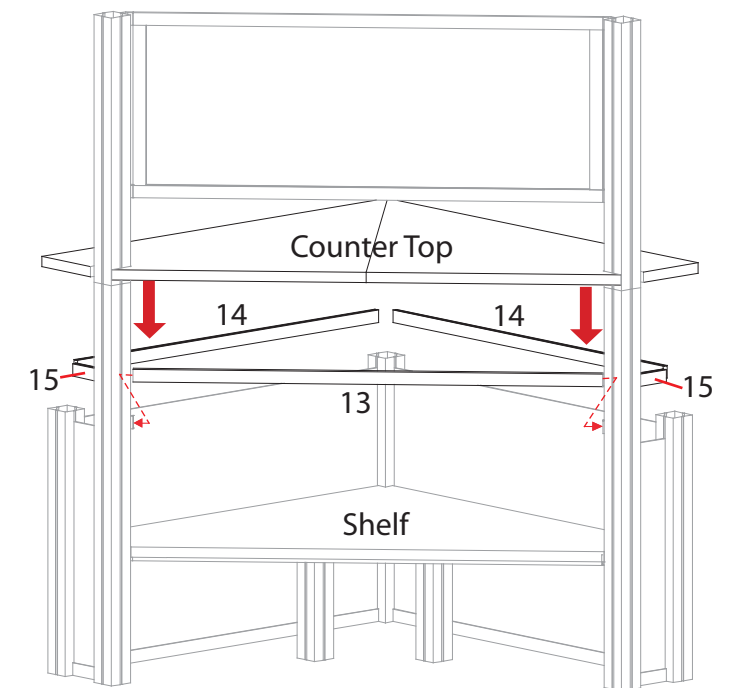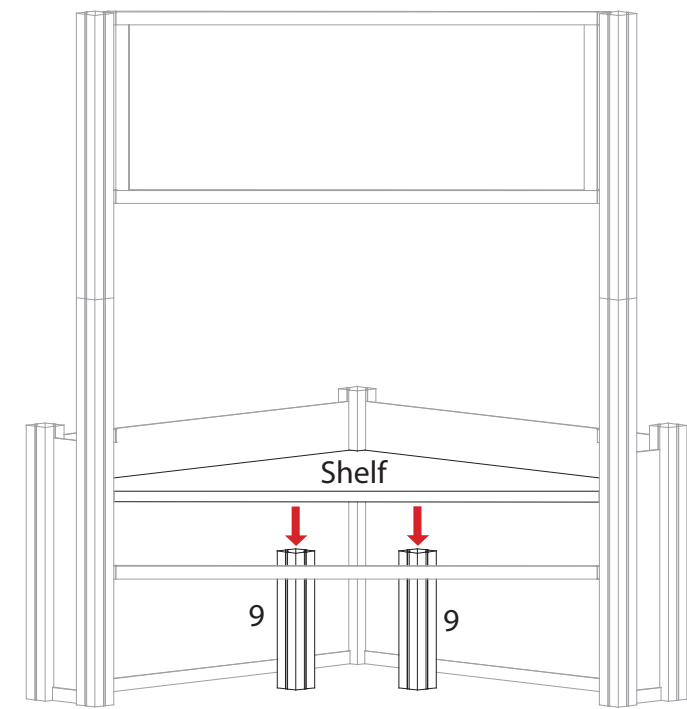
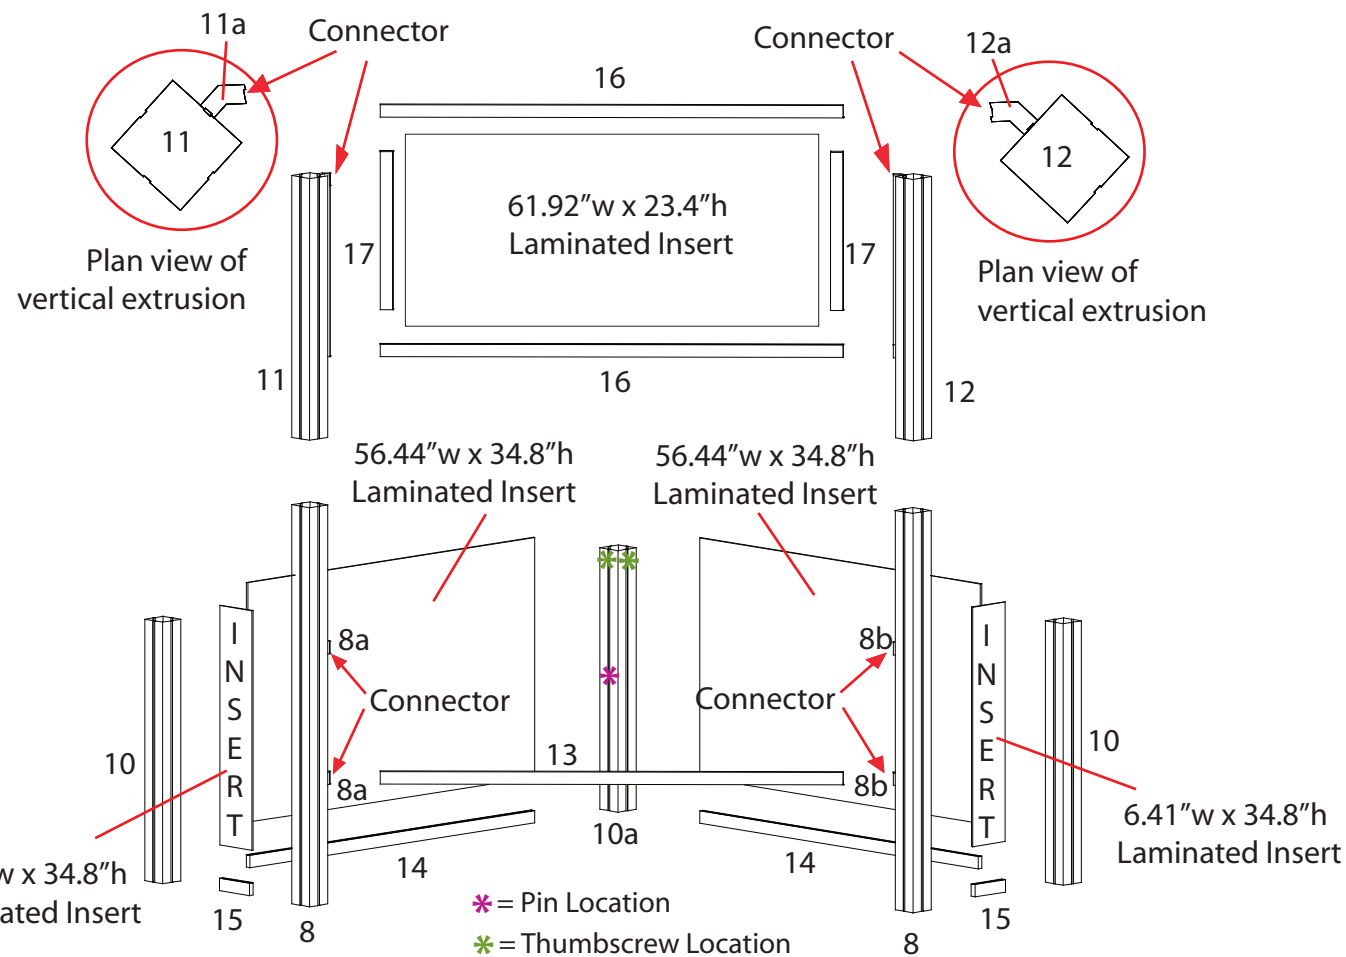
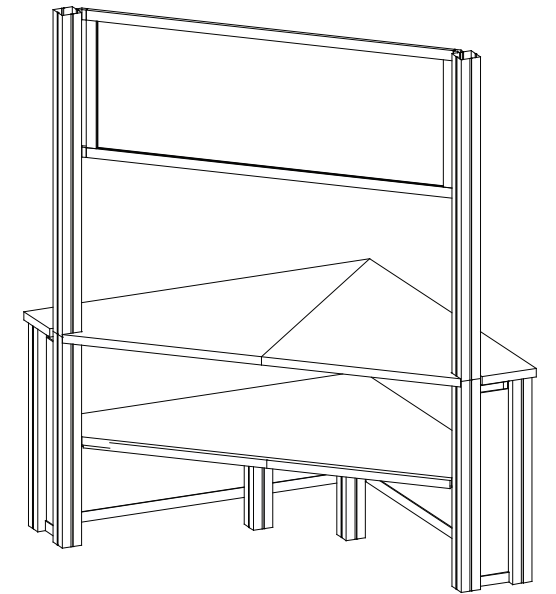


**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

866.652.2100

Item Number	Description
18	48.31"r x 38"h Curve Panel
19	189.06"r x 38"h Curve Panel w/ Door
20	5.75"r x 38"h Half Curve Panel
21	38"h Flex Connector
22	11.5"r x 38"h Half Curve Panel
23	38"h Flex Connector

- Steps:
- 1) Assemble pedestal base by starting at panel #18\* and continue in numerical order.
  - 2) Velcro internal shelf supports inside assembled base.
  - 3) Set internal shelf atop supports.
  - 4) Place counter top on assembled base.
  - 5) Assemble counter base and counter together

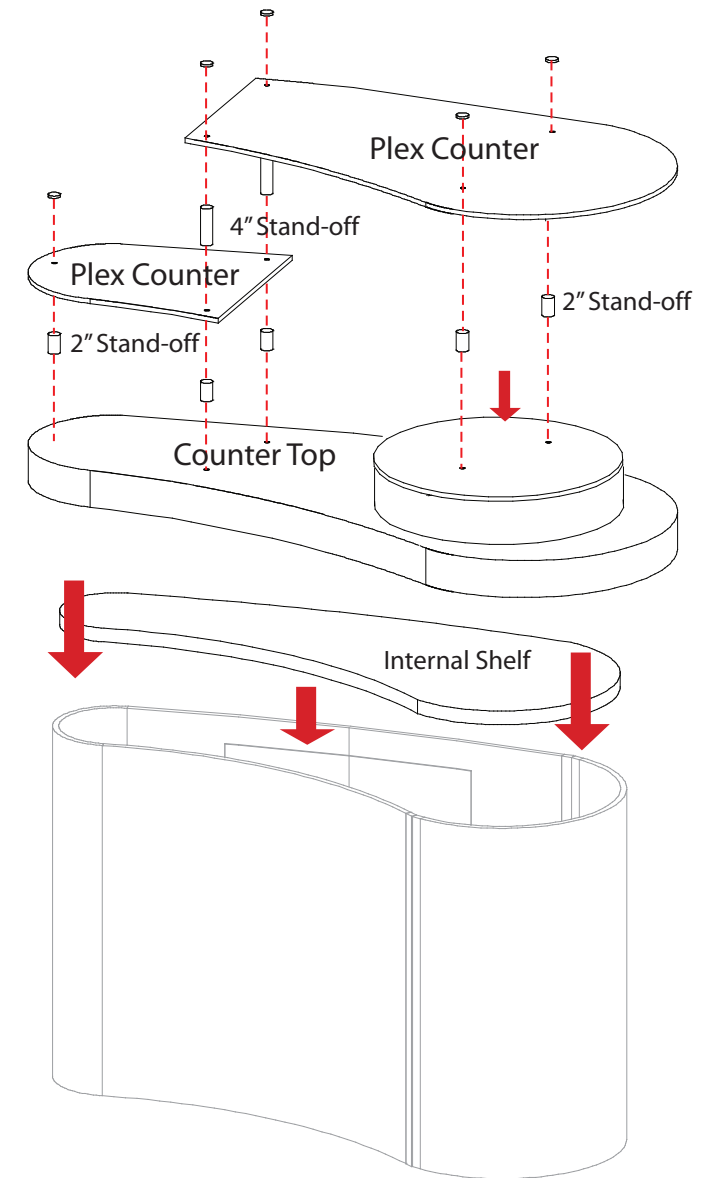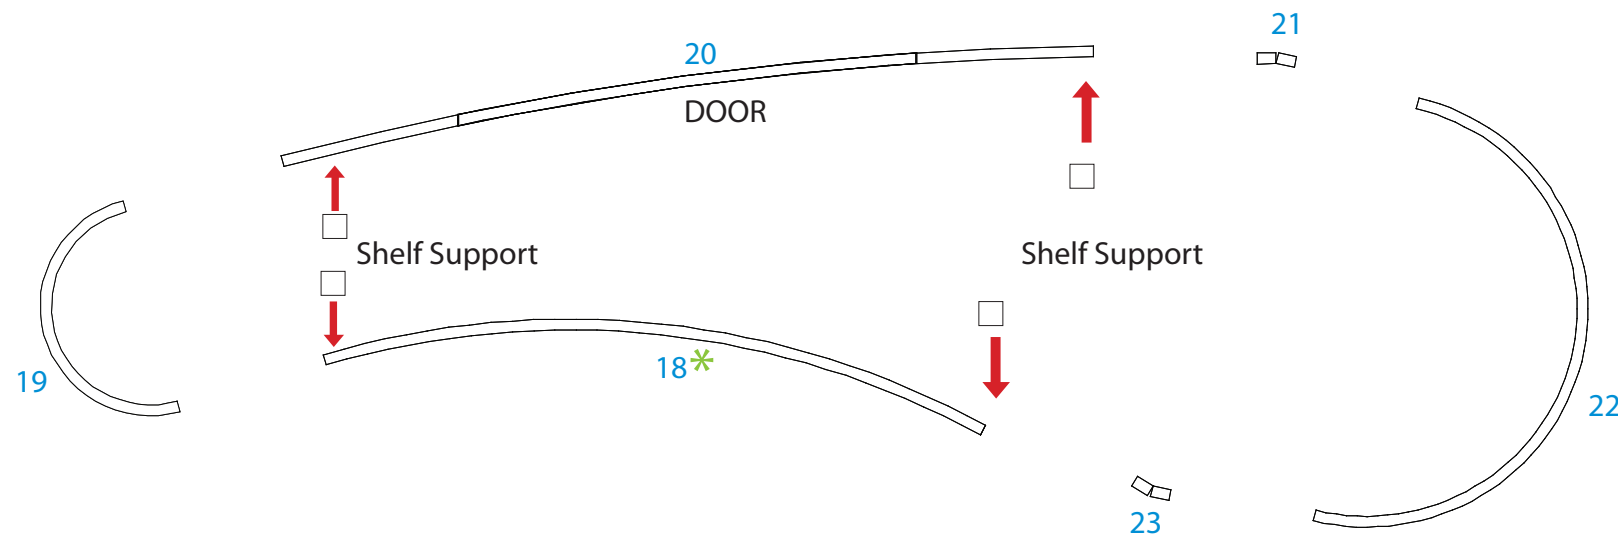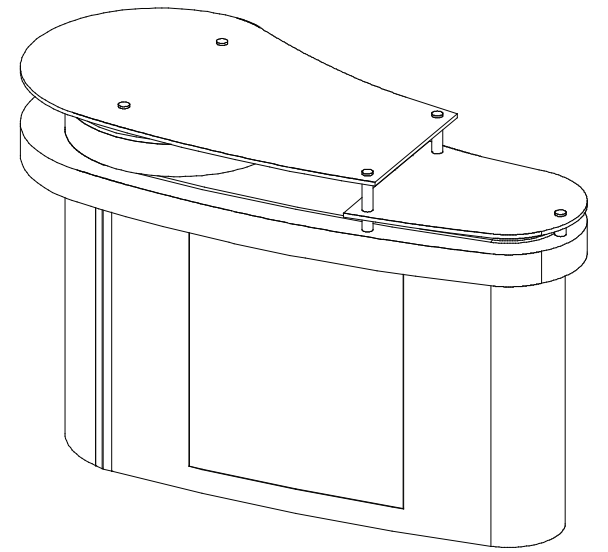

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

866.652.2100

*Modul Extrusion Part List:*



Item	Qty.	Description
24	1	38" h Vertical Extrusion w/ Connectors Attached
27	1	38" h Vertical Extrusion w/ Connectors Attached
29	1	38" h Vertical Extrusion w/ Connectors Attached
32	1	38" h Vertical Extrusion w/ Connectors Attached

*EURO LT Panel Part List:*














Item Number	Description
25	37.1" r x 38" h Curve Panel w/ Door
26	37.1" r x 38" h Curve Panel w/ Door
28	11.5" r x 38" h Half Curve panel
30	10" r x 38" h Curve Panel w/ Door
31	10" r x 38" h Curve Panel w/ Door
33	11.5" r x 38" h Half Curve panel

Steps:


- 1) Assemble counter base by starting at modul extrusion [24], and continue in numerical order.
- 2) Velcro vertical supports inside assembled base, then place internal shelf atop supports.
- 3) Set counter atop assembled base.

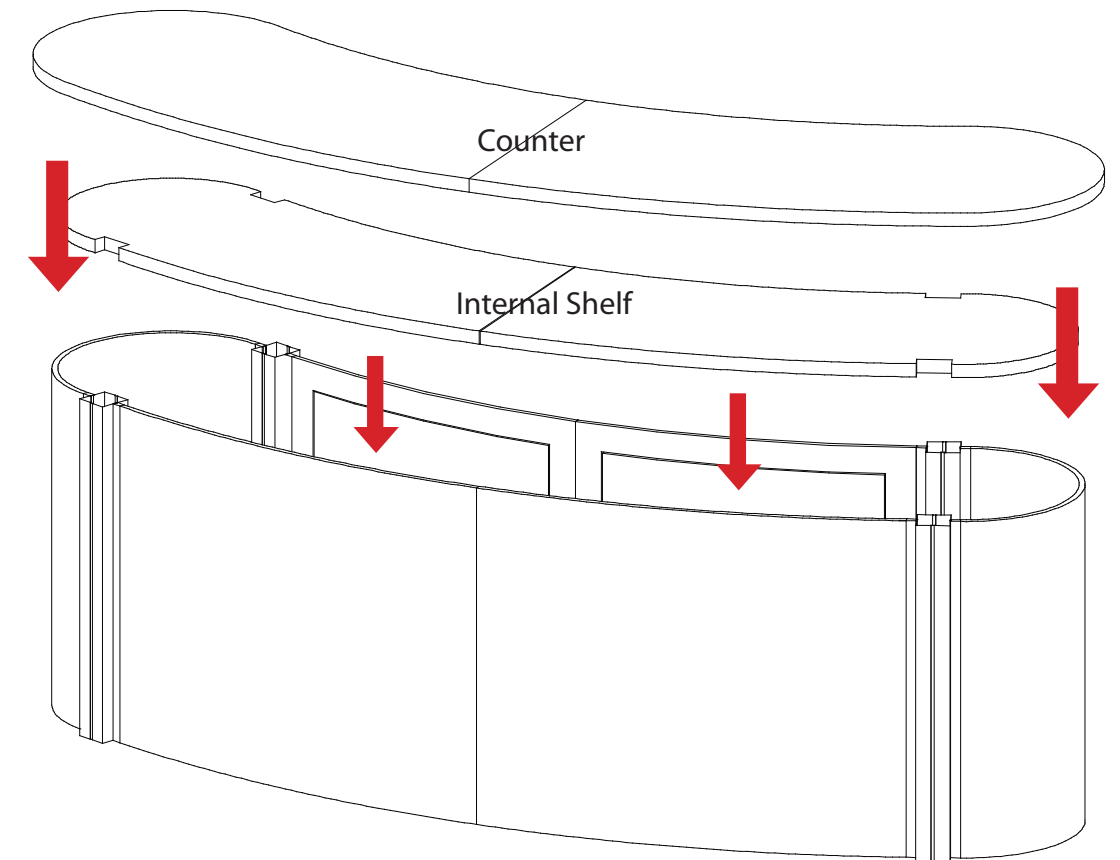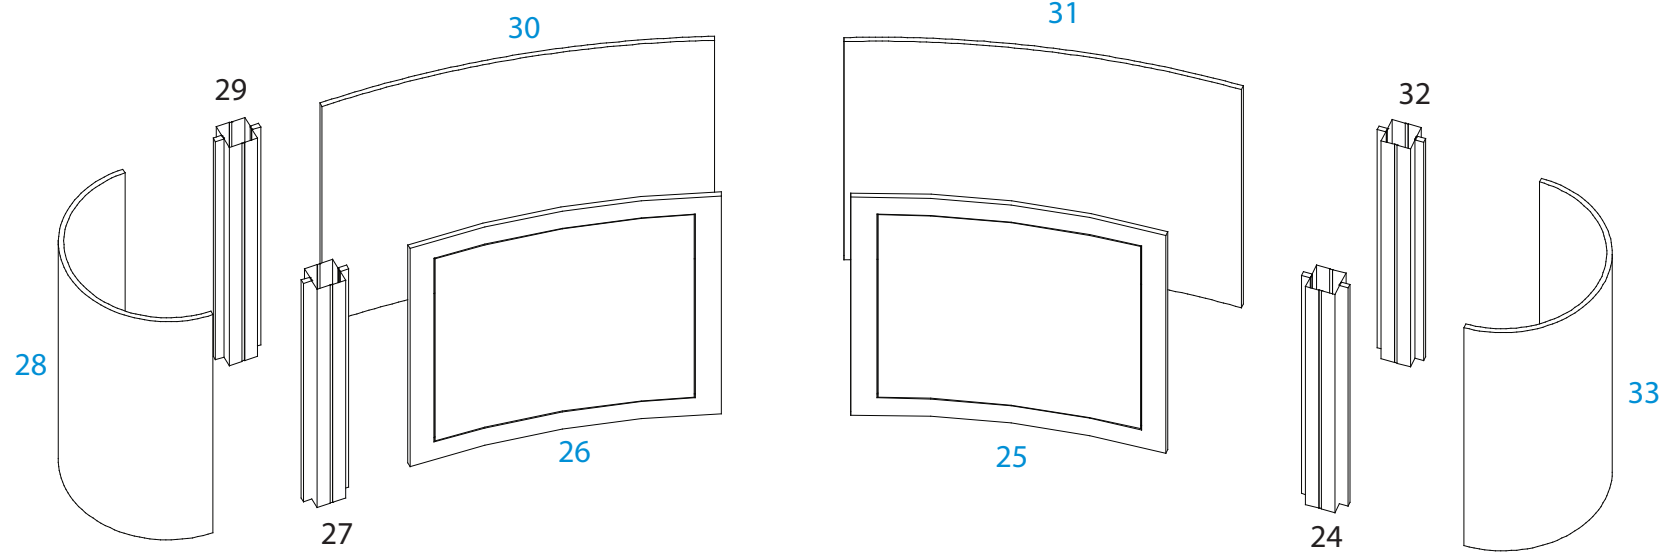

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

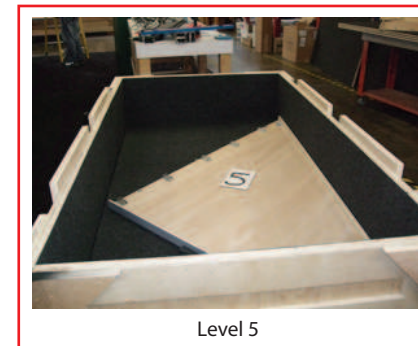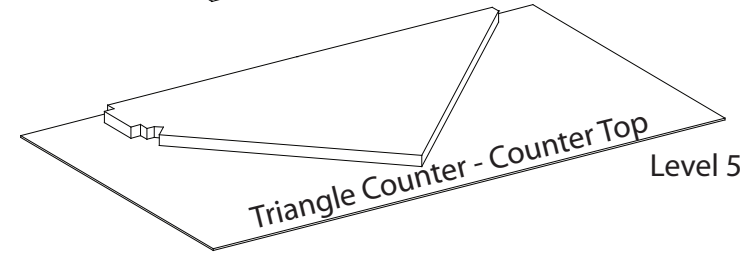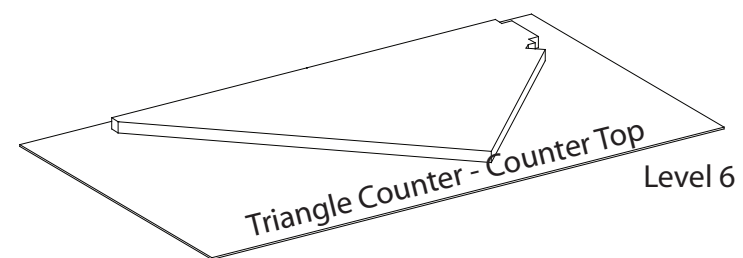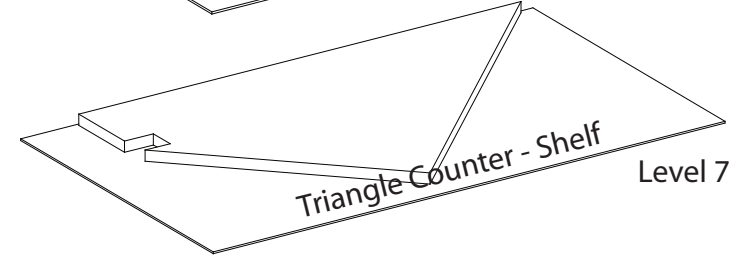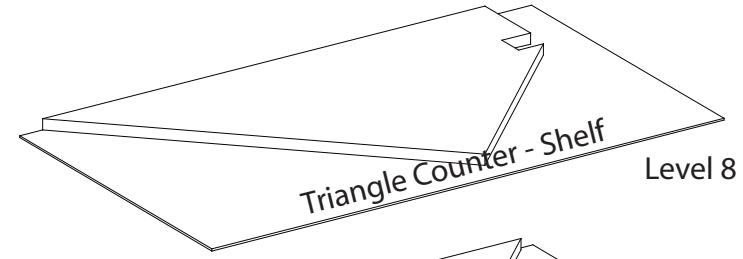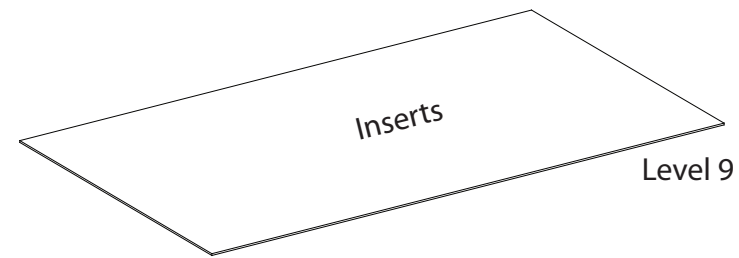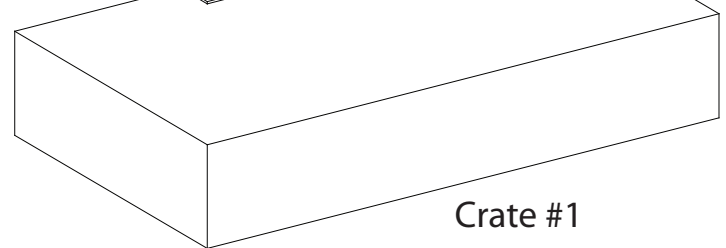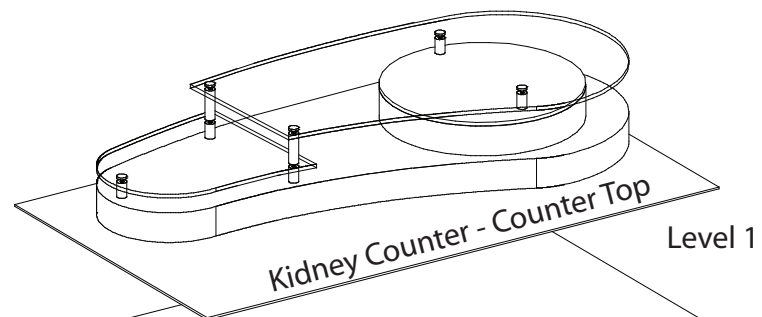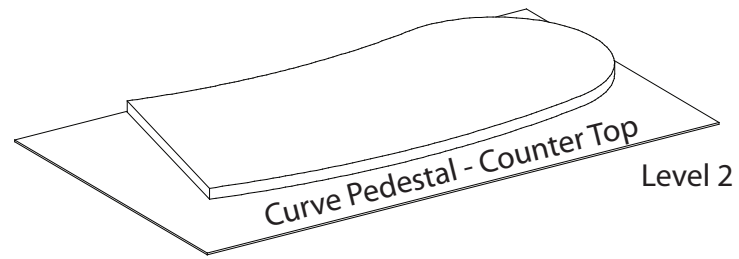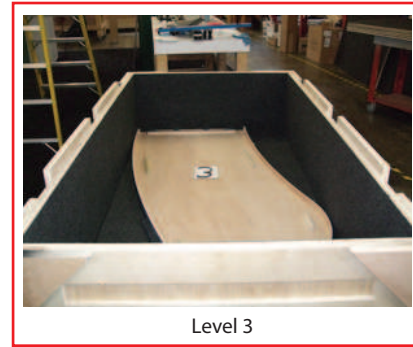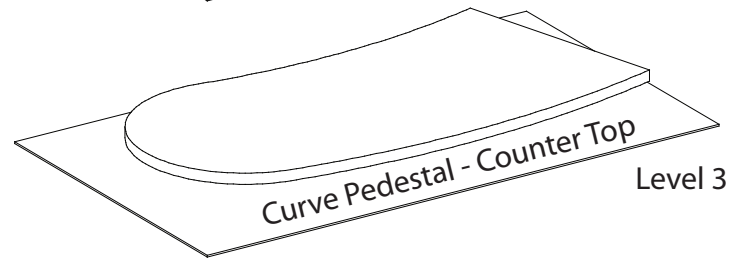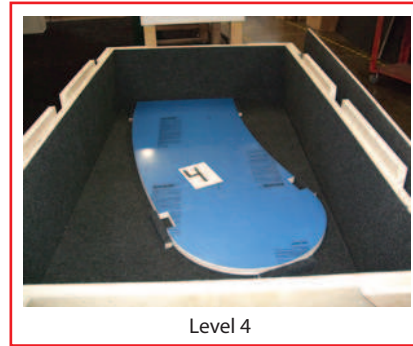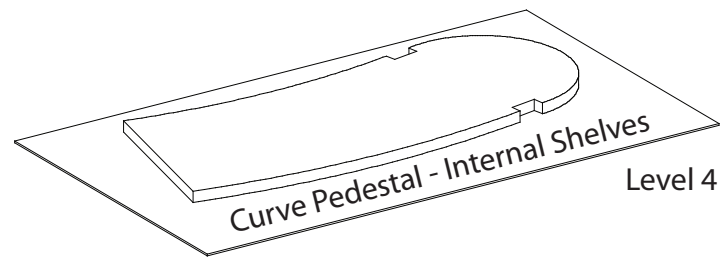


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

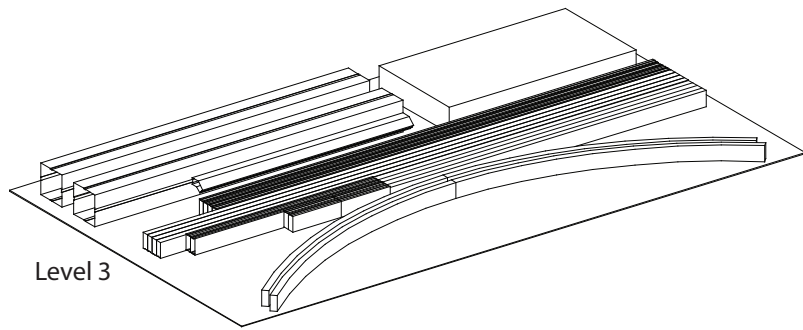


Level 3

- Level 3 Part List:
- (2) 38" h Extrusion
  - (4) 56" w Extrusion
  - (4) 65.118" w Extrusion
  - (2) 23" h Extrusion
  - (4) 39" w Extrusion
  - (4) 6" w Extrusion
  - (4) 33" Curved Extrusion

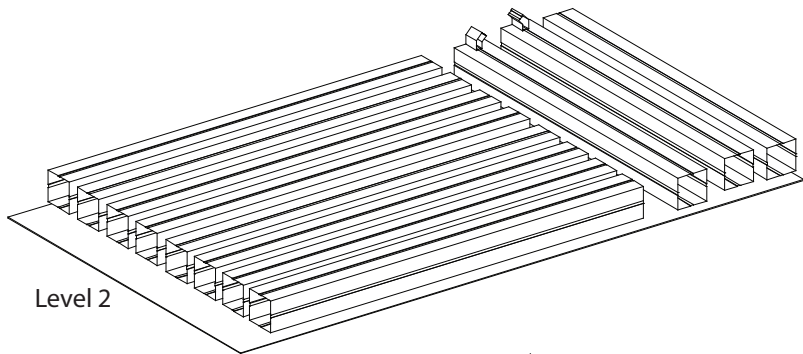

Level 2

- Level 2 Part List:
- (8) 46" h Extrusion
  - (3) 38" h Extrusion

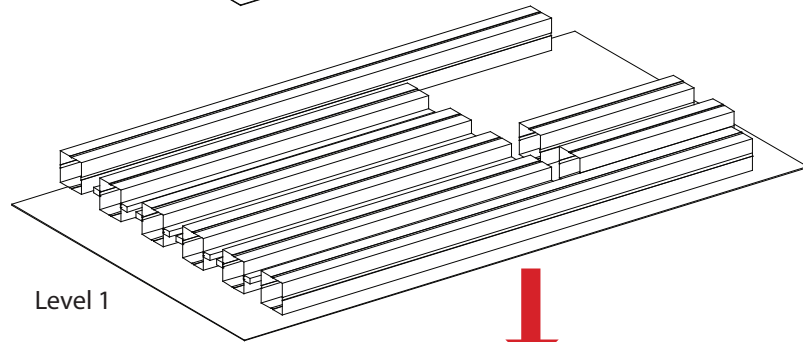


Level 1


- Level 1 Part List:
- (1) 58" h Extrusion
  - (4) 38" h Extrusion for Curve Pedestal
  - (2) 19" h Support Leg Extrusion
  - (1) 58" h Extrusion




Upper Section for Modul Extrusions

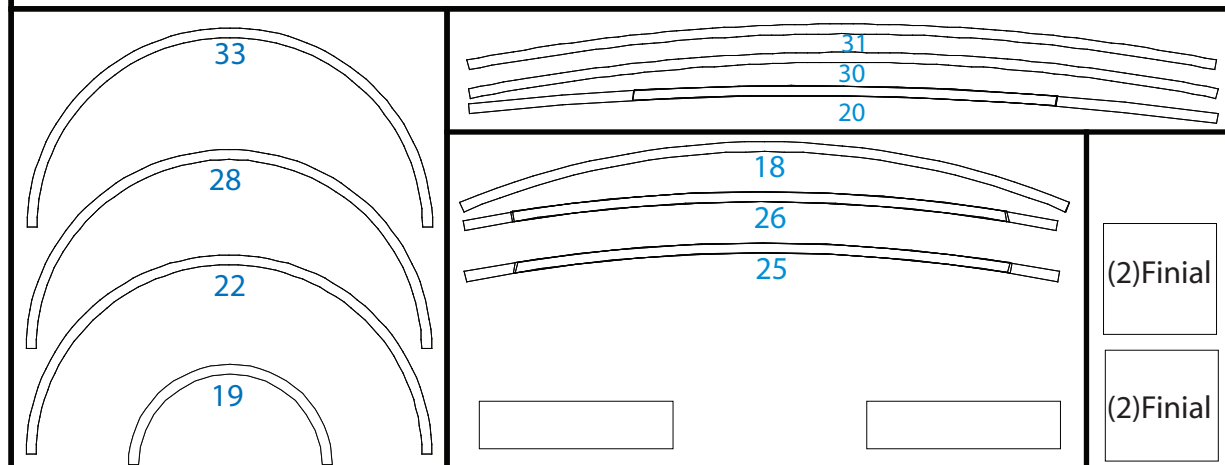

Level 3

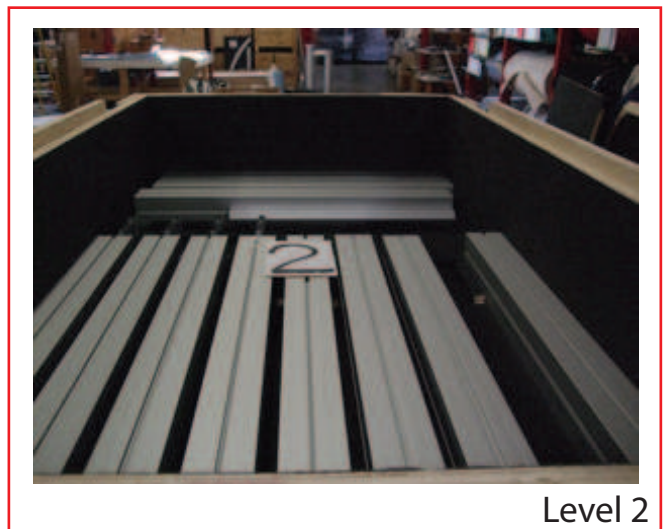

Level 2

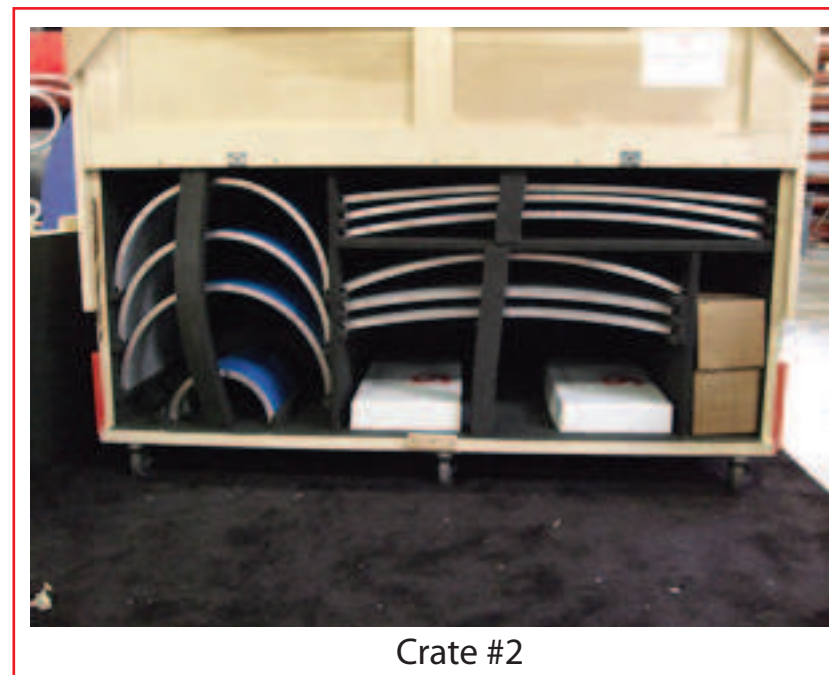

Crate #2



Level 1

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING