

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING



Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

General Setup Instructions for Extrusion System



The Tool

Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.



Typical Connection (cont'd)

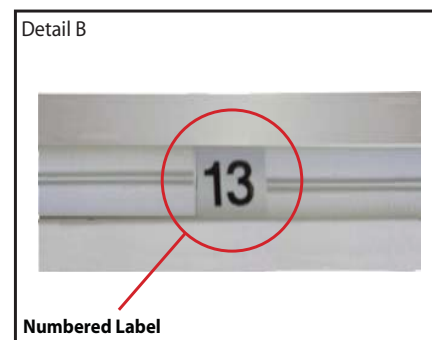


Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.




Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

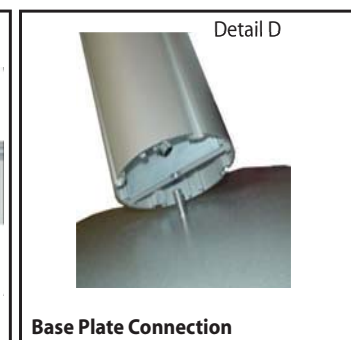

Base Plate Connection


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

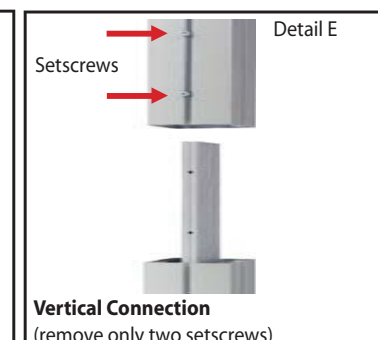

Vertical Connection (remove only two setscrews)


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

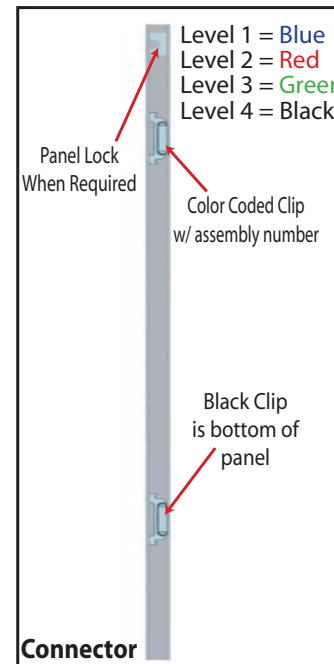


Connector

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

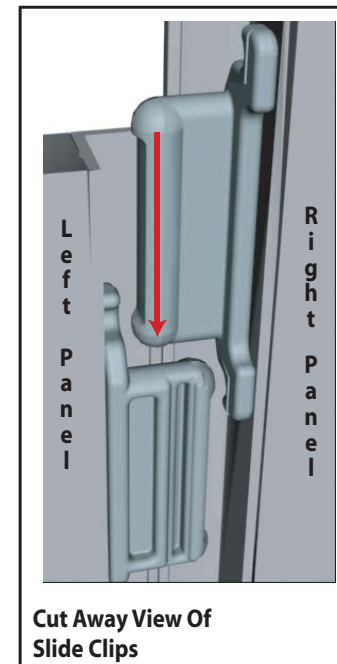


Cut Away View Of Slide Clips

Components connect together by aligning them and sliding downward connecting clips together.

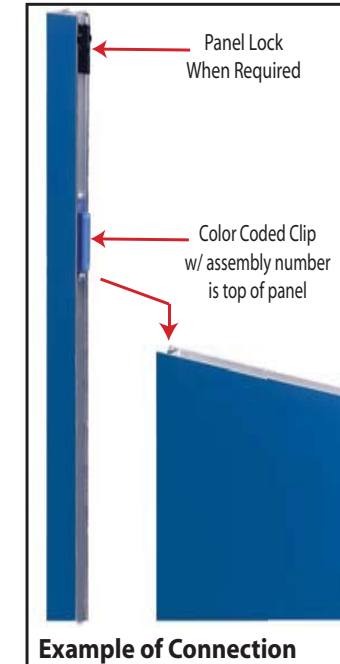

Example of Connection

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

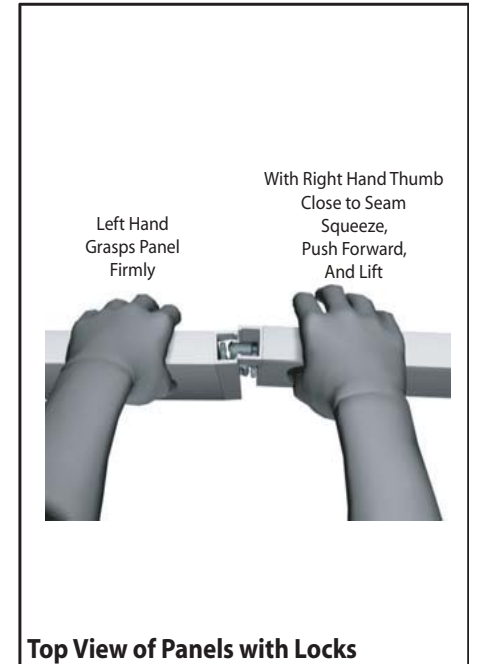

Top View of Panels with Locks

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
1	2	Round Base Plate
1a	1	Base Plate w/ 2 Holes
2a	1	47.75" Vertical Extrusion
2b	1	48" Vertical Extrusion
3a/3b	2/2	48" 90° Corner Extrusion
4a	1	47.75" Round Vertical Extrusion
4b	1	48" Round Vertical Extrusion
5a	1	47.75" Round Vertical Extrusion
5b	1	48" Round Vertical Extrusion
6	1	Vertical Support Extrusion
7	1	Counter Support
8	1	47.20" Curved Extrusion
9	1	47.20" Curved Extrusion
10a	1	40" Horizontal Extrusion
11a	1	40" Horizontal Extrusion
12	4	17.87" Curved Extrusion

Steps:

- 1) Connect extrusions [2a to 2b, 3a to 3b, 4a to 4b and 5a to 5b] together.
- 1) Attach vertical vertical extrusion [2a/2b and 5a/5b] to base plates [1] as shown, see detail D on general info page.
- 2) Attach vertical extrusion [4a/4b] and vertical support extrusion [6] to base plate [1a] as shown.
- 3) Attach curved horizontal extrusions [8 and 9] between vertical extrusions [2a/2b and 3a/3b] and horizontal extrusions [10a and 11a] between vertical extrusions [3a/3b and 5a/5b].
- 4) Attach curved horizontal extrusions [12] between vertical extrusions [3a/3b and 4a/4b], placing inserts [A] where indicated.
- 5) Attach horizontal extrusions [7] between vertical extrusions [4a and 6].
- 6) Attach counter top atop counter support and secure with thumbscrews to vertical extrusion [4a].
- 7) Apply graphics to assembled backwall

Thumbscrew Attachment

After setting counter on horizontal support, put washer on thumbscrew, and attach thumbscrew through counter to vertical extrusion as shown.

Note: attach grommet cover after attaching thumbscrews

Note: Attaching Graphics
Attach Backwall Graphics to Velcro by wrapping the Graphic over the Top of the Upper Horizontals and under the Bottom of the Lower Horizontals

Note: Attaching Graphics
Attach Backwall Graphics to Velcro by wrapping the Graphic over the Top of the Upper Horizontals and under the Bottom of the Lower Horizontals

* = Thumbscrew Location
A = Perforated Metal Insert


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
24	1	57.2" w Curved Horizontal Extrusion
25	1	57.2" w Curved Horizontal Extrusion
26	2	11.42" h Vertical Extrusion


Steps:

- 1) Assemble header by attaching vertical extrusions [26] between curve extrusions [24 and 25] as shown.
- 2) Apply graphic to assembled header, then hook header to top of vertical extrusions as indicated.

Hook assembled frame to top of assembled backwall.

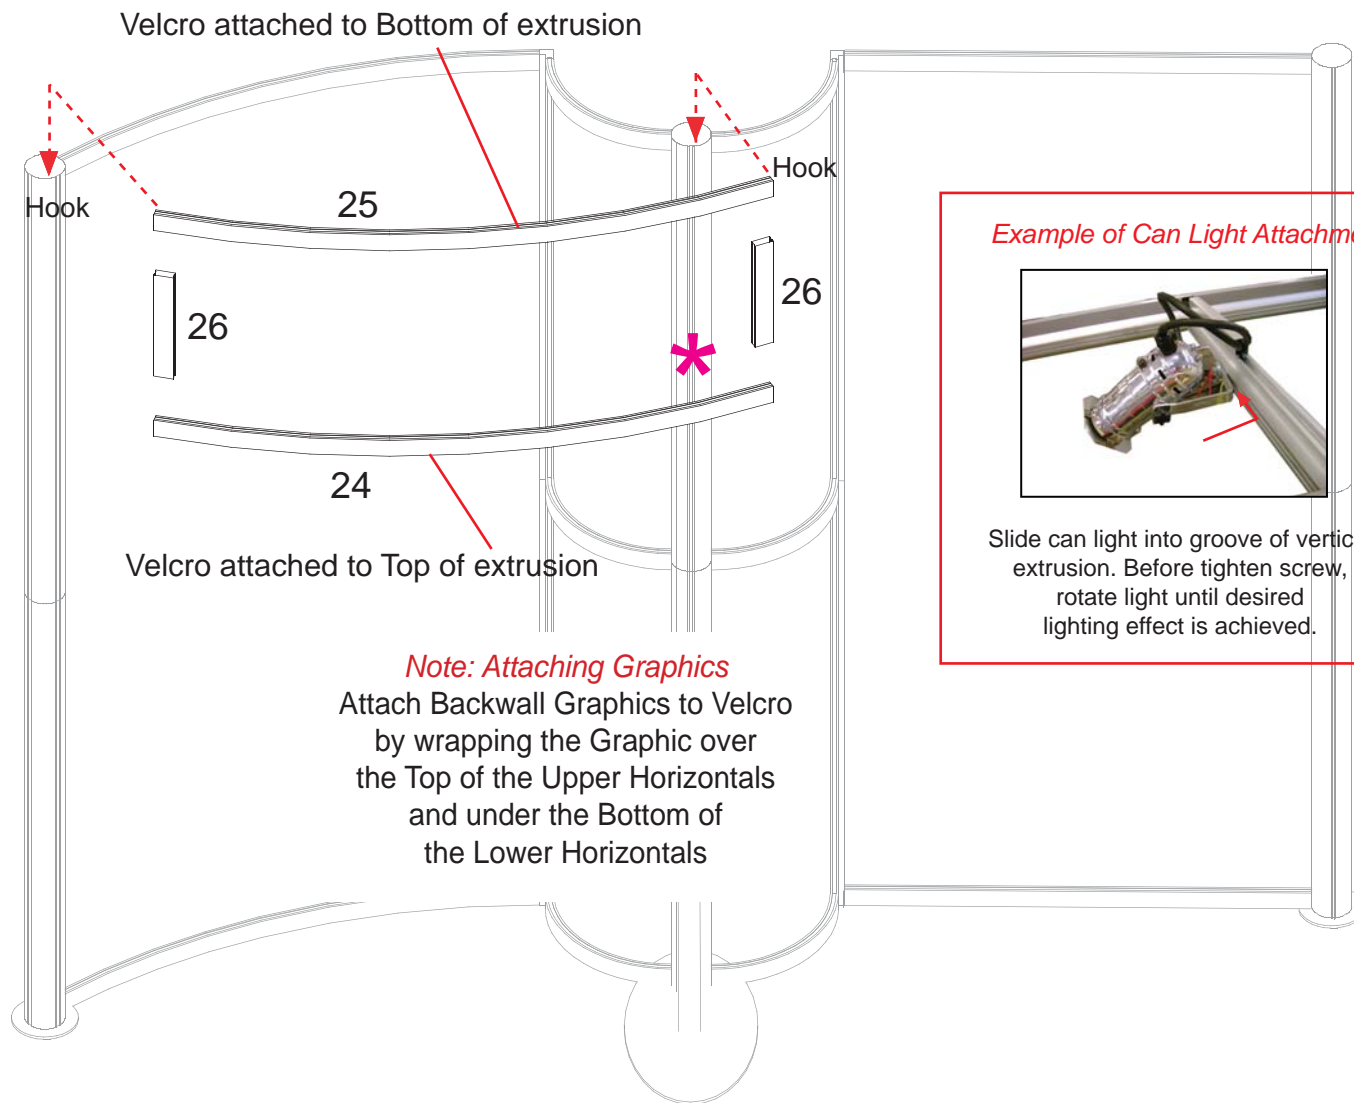


Example of Can Light Attachment



Slide can light into groove of vertical extrusion. Before tighten screw, rotate light until desired lighting effect is achieved.


Literature Rack (Optional)

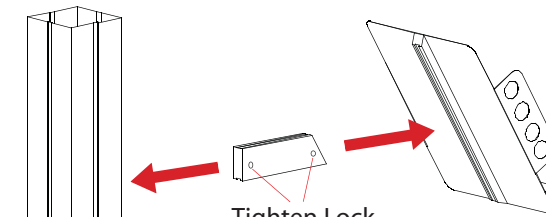

Tighten Lock to Secure

Attach connector piece to rack as shown. Then connect assembled literature rack to vertical extrusion.


Example of Monitor Mount Attachment



Insert connectors into groove of extrusion and attach plate.



When in desired location tighten in place.

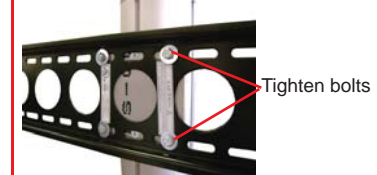

Attach Mount by tightening screws on frontside of Monitor Mount.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL
SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING