
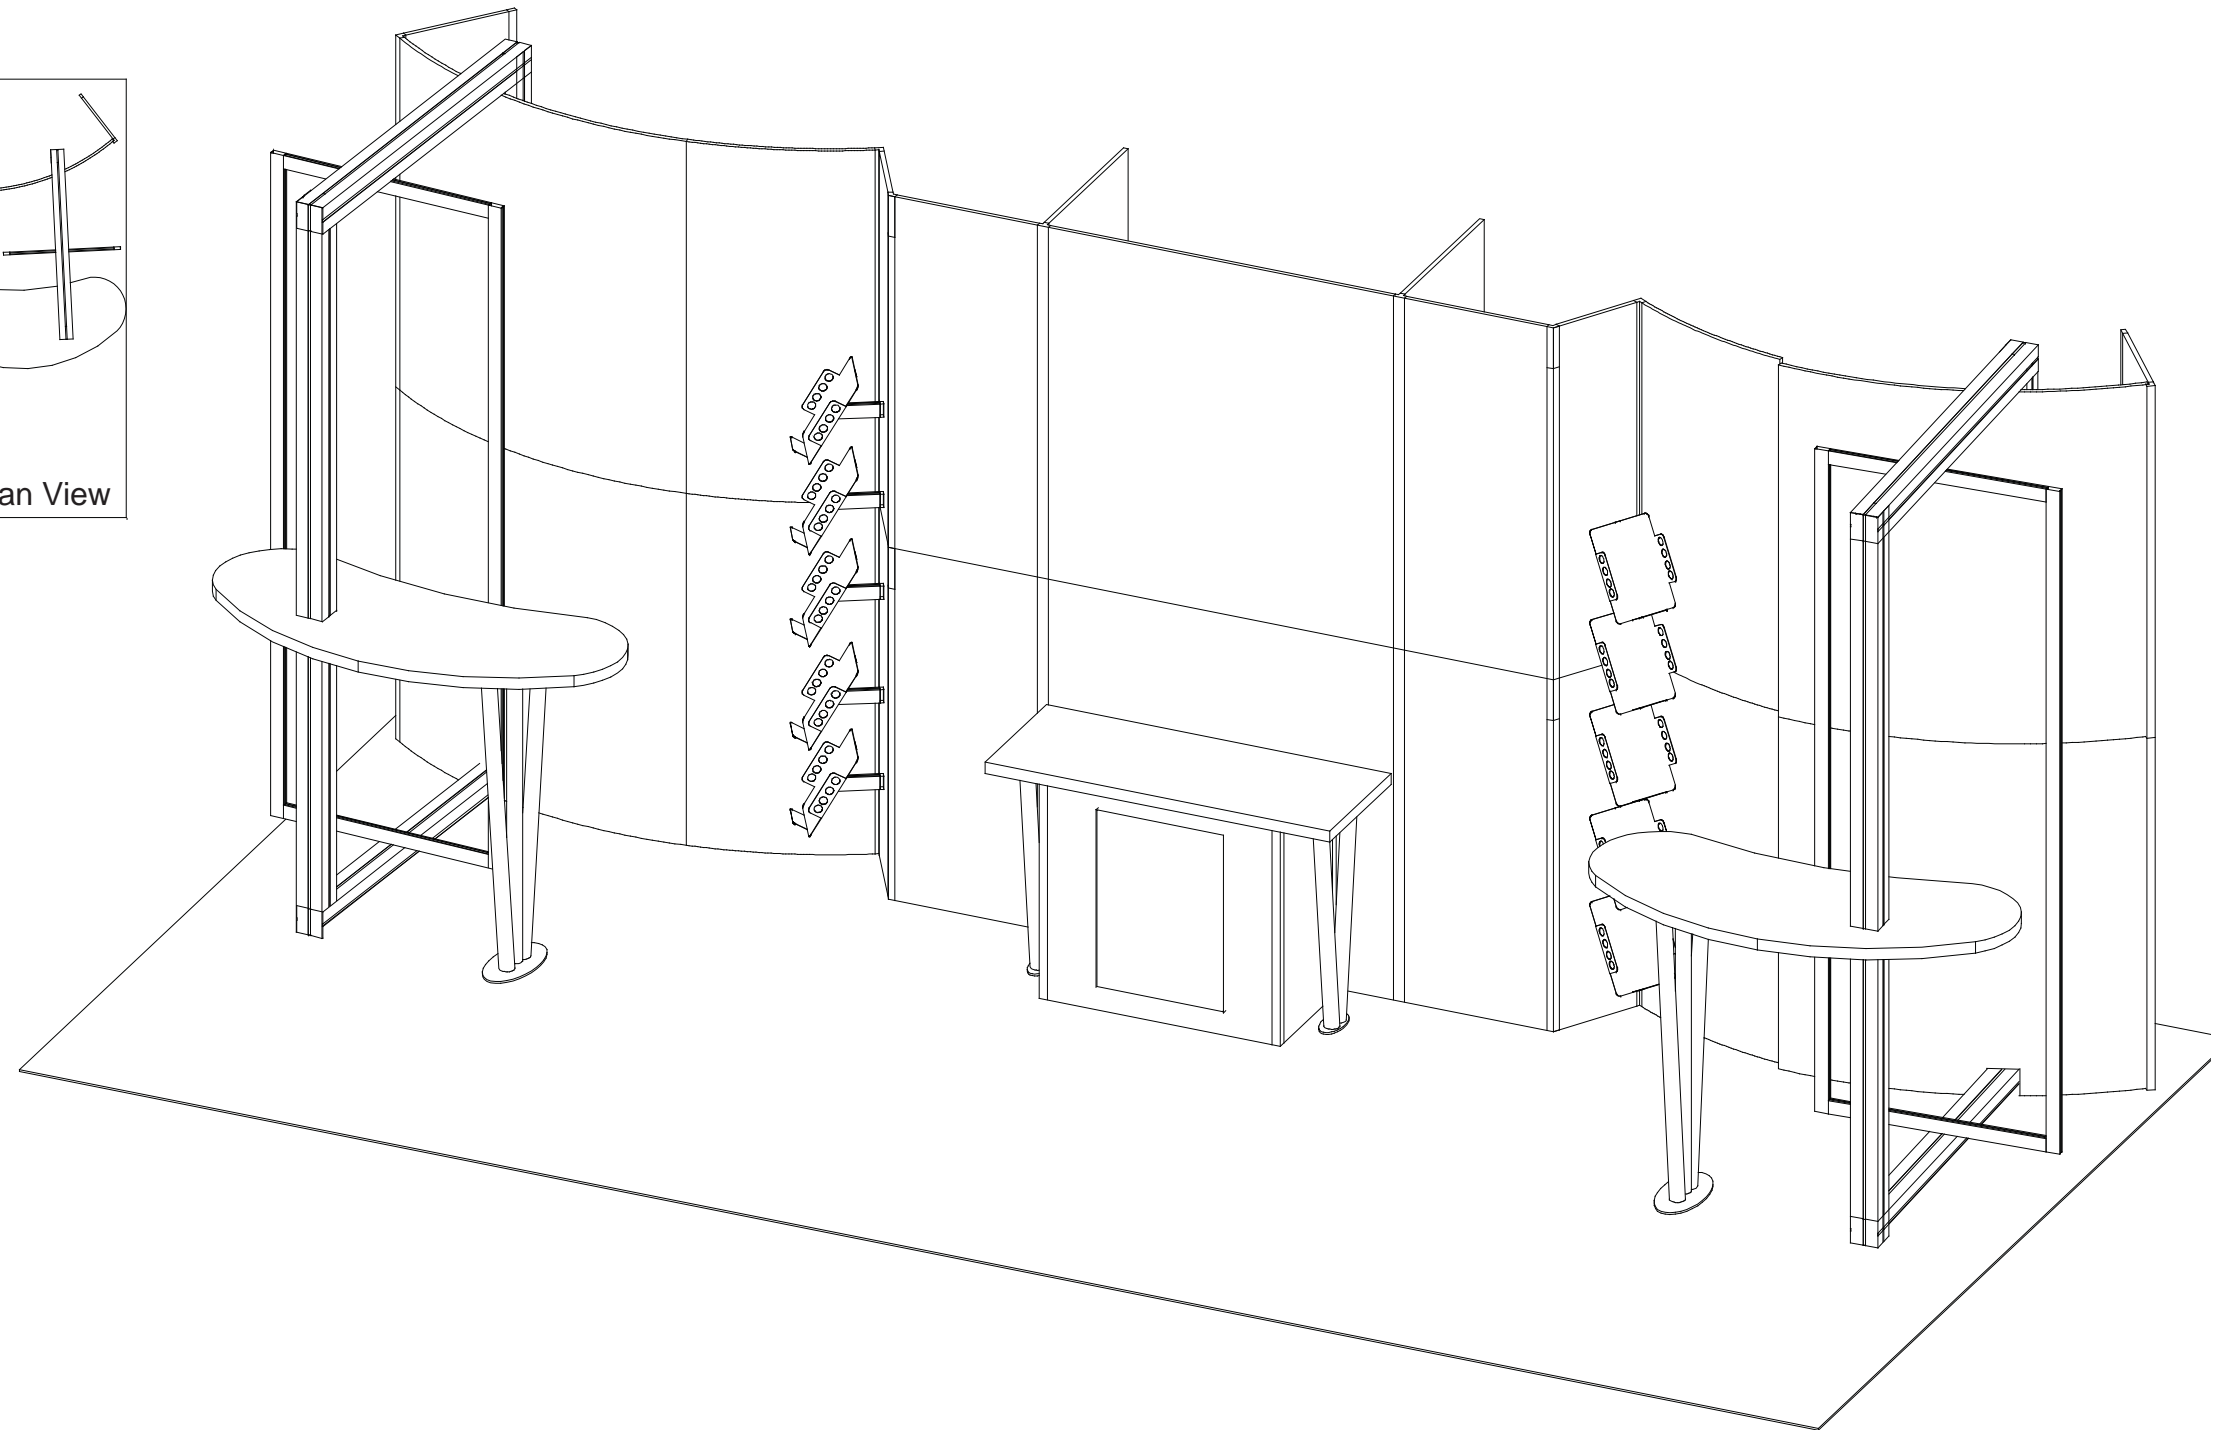


euro It | *HYBRIDS*

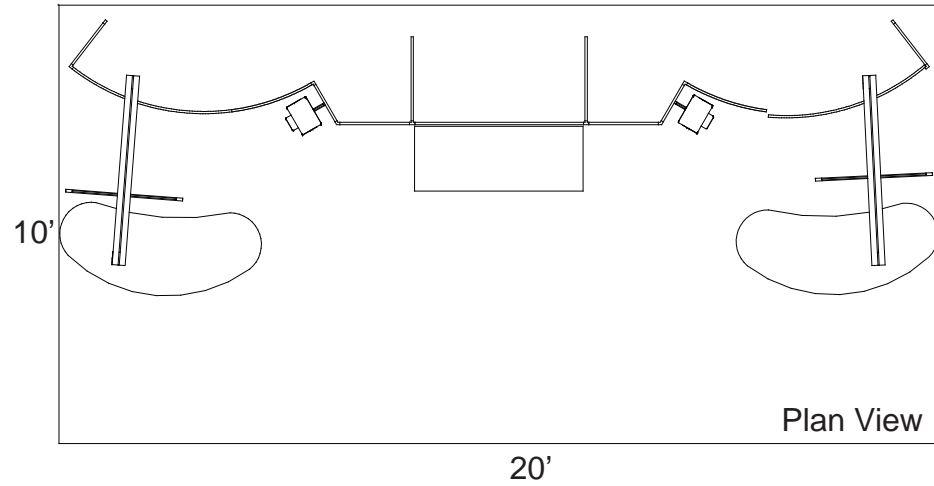

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

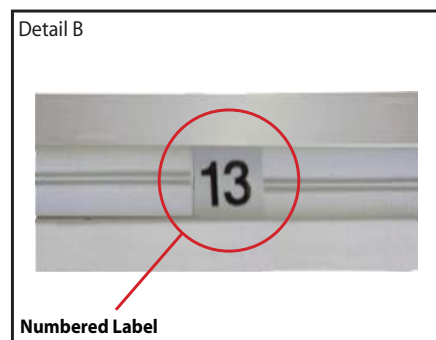


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

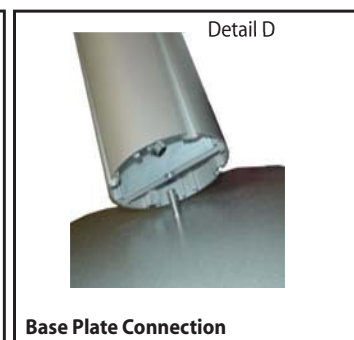


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

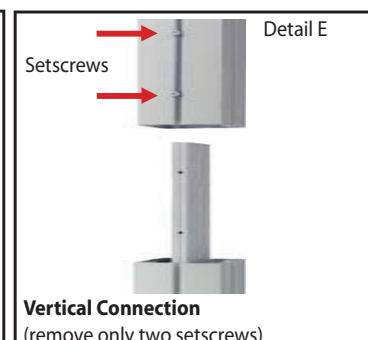


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

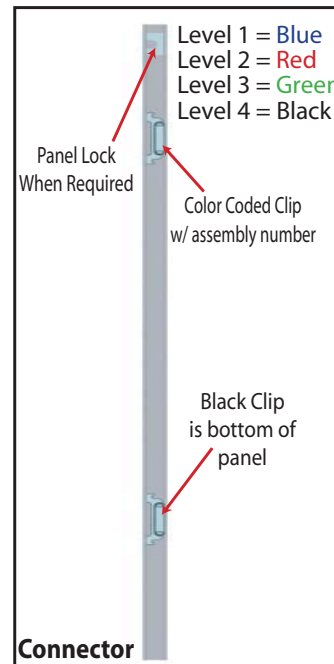


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

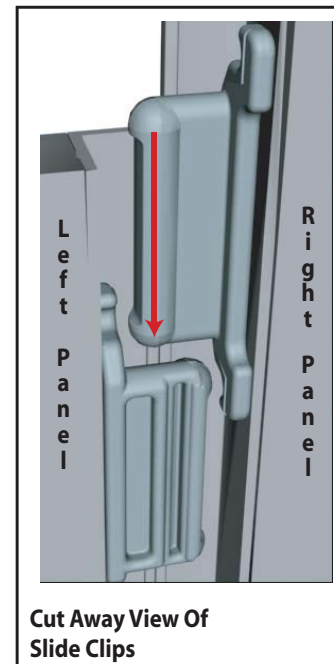

Components connect together by aligning them and sliding downward connecting clips together.

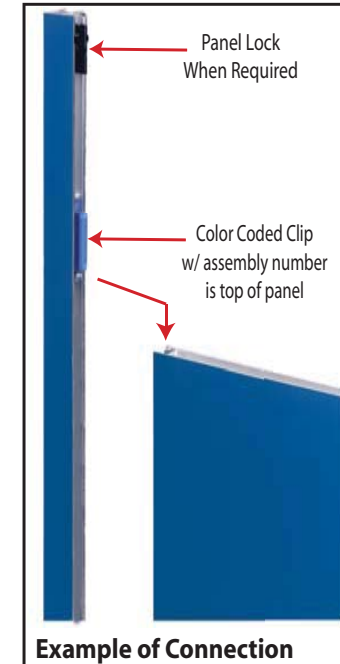

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

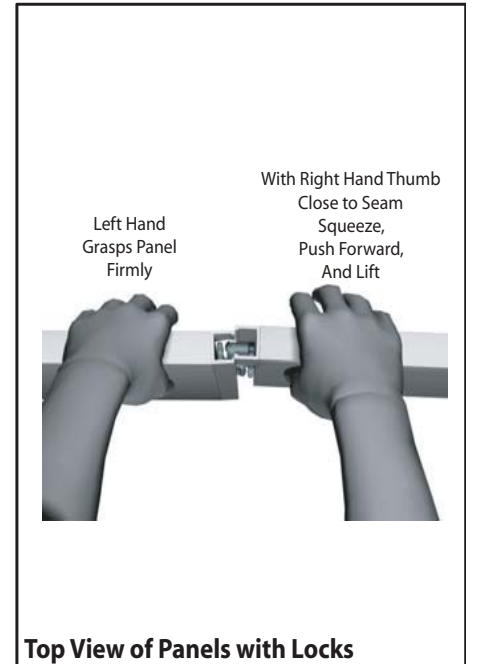

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING





866.652.2100

Part Number	Qty for Step	Description
1	1	98.583”h Vertical Extrusion
2	1	98.583”h Vertical Extrusion
3	1	52”w Horizontal Extrusion

Steps

- 1) Slide kidney shaped counter from bottom side of vertical extrusion [1] up then connect round base plate [1A] to vertical extrusion [1] referring to detail D on the General Information page. Repeat with opposing side vertical [4] and base plate [4A].
- 2) Connect lower horizontal extrusion [3 and 6] between vertical extrusions [1 and 2] and [4 and 5] as shown.

NOTE: Upper Horizontal extrusions [3 and 6] can not be assembled until AFTER the Euro LT Panel Section is Assembled.

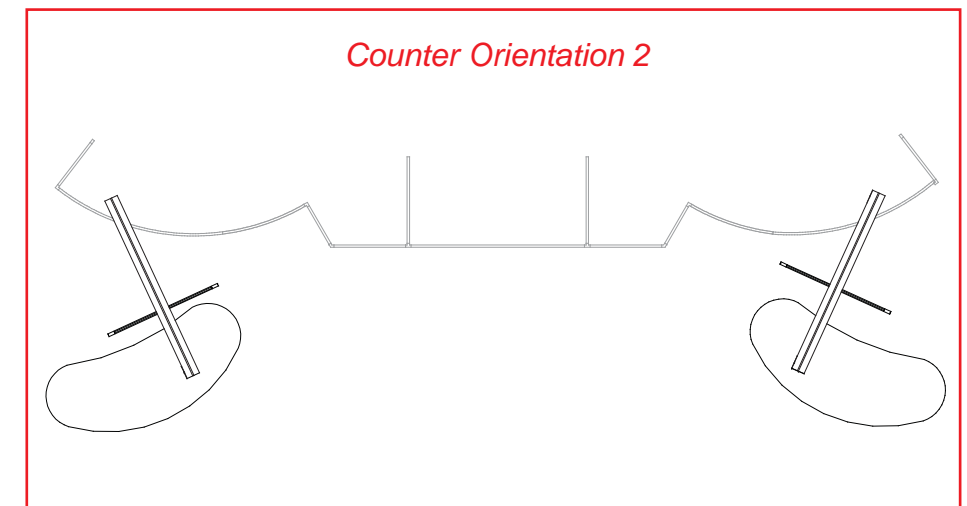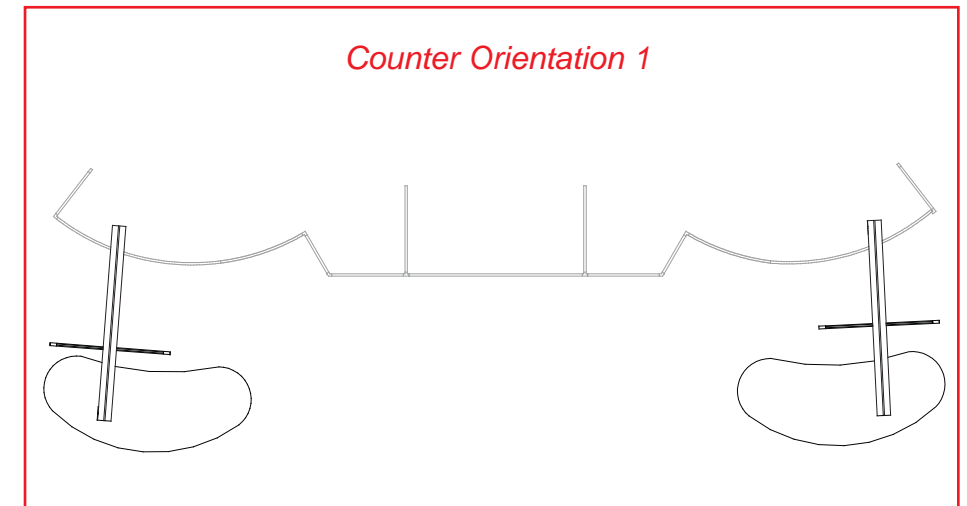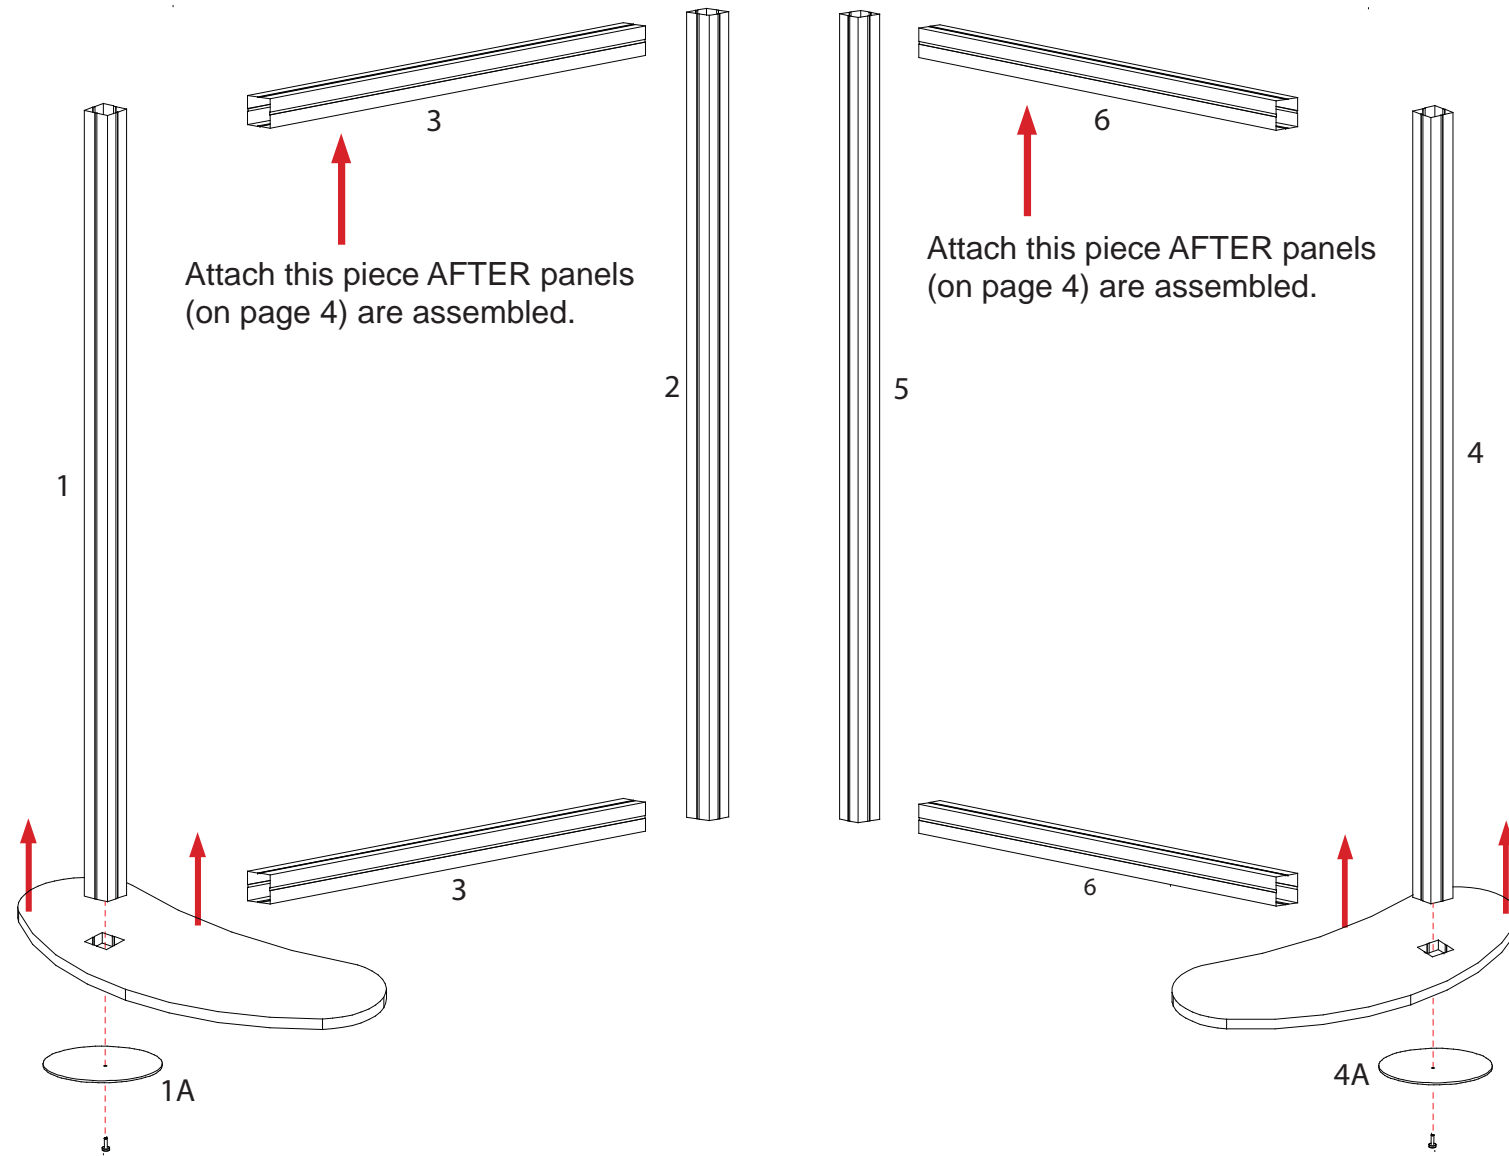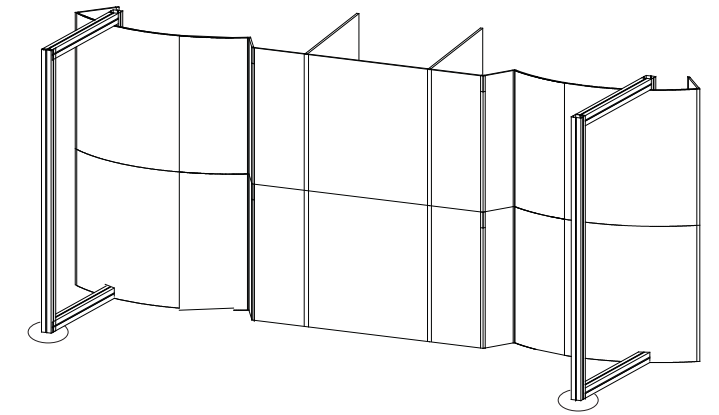



WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Qty	Description
12	2	Oval Base
13	1	41.75" Middle Leg Support
14	1	42" Tapered Leg Support
15	1	42" Tapered Leg Support
16	1	41.75" Middle Leg Support
17	1	42" Tapered Leg Support
18	1	42" Tapered Leg Support

Steps:


- 1) Attach support extrusions [13, 14, and 15] to base plate [12], NOTE: side bolt goes in at an angle.
- 2) Repeat step 1 for support extrusions [16, 17, and 18].
- 3) Place assembled supports under the kidney shaped counter top and secure to top using hardware provided.

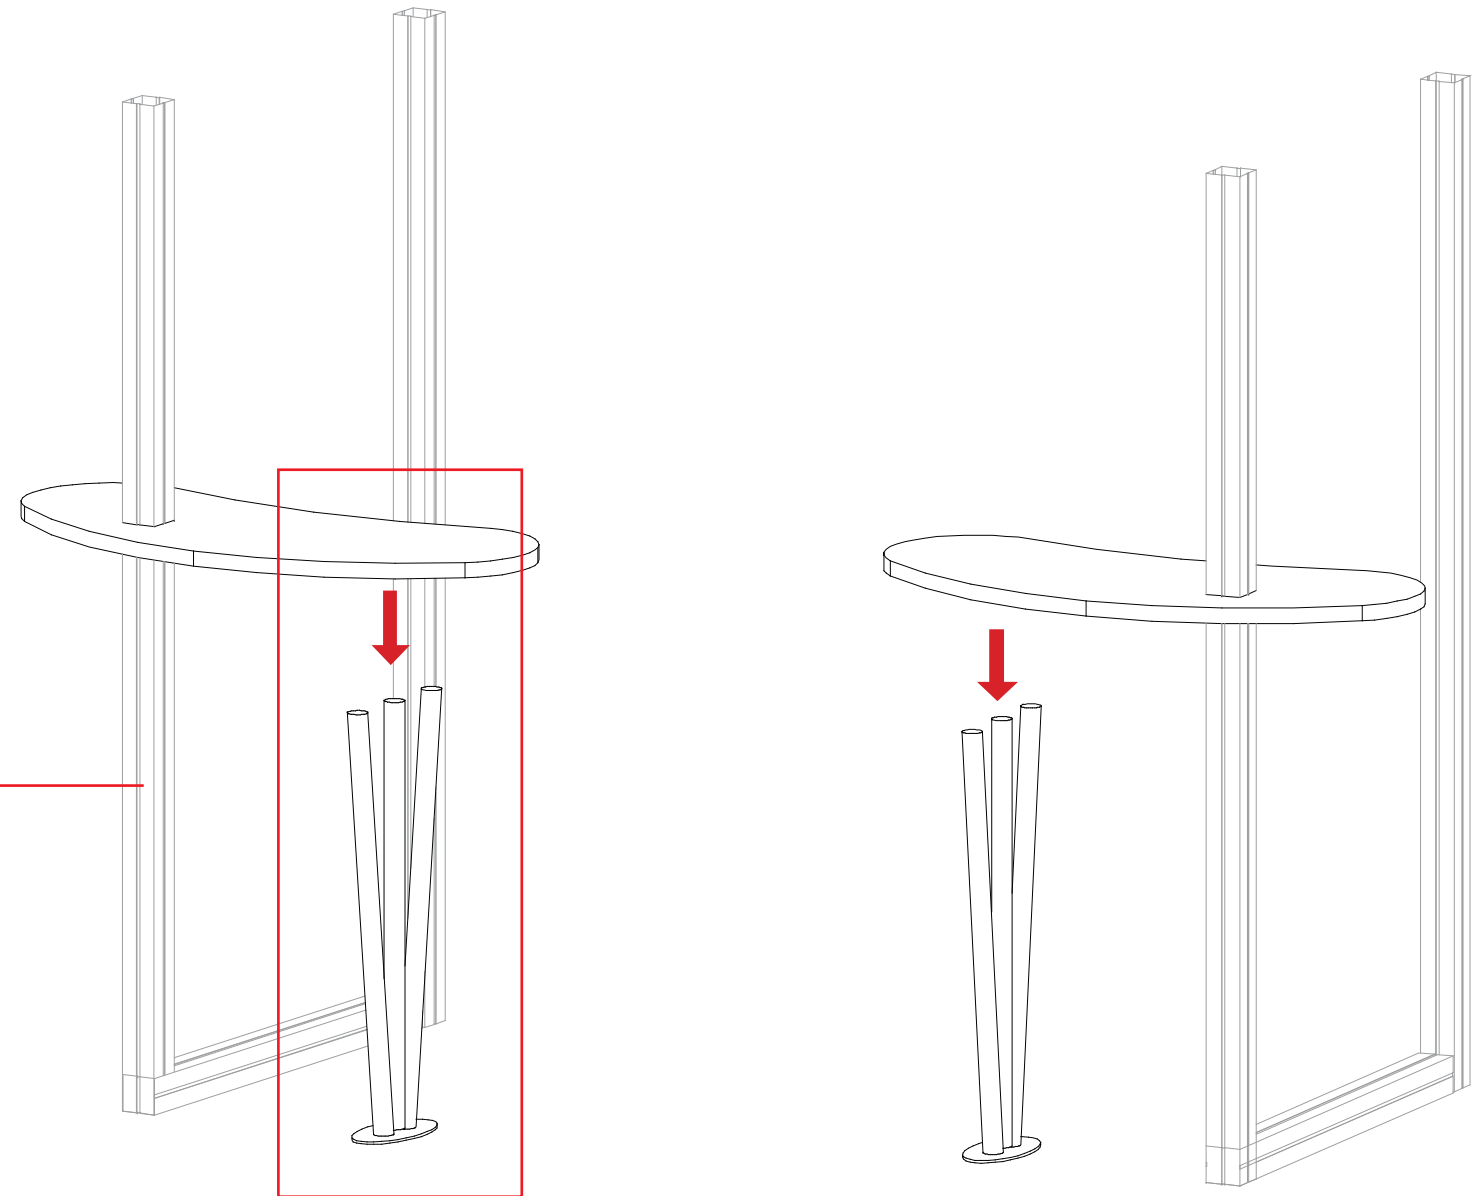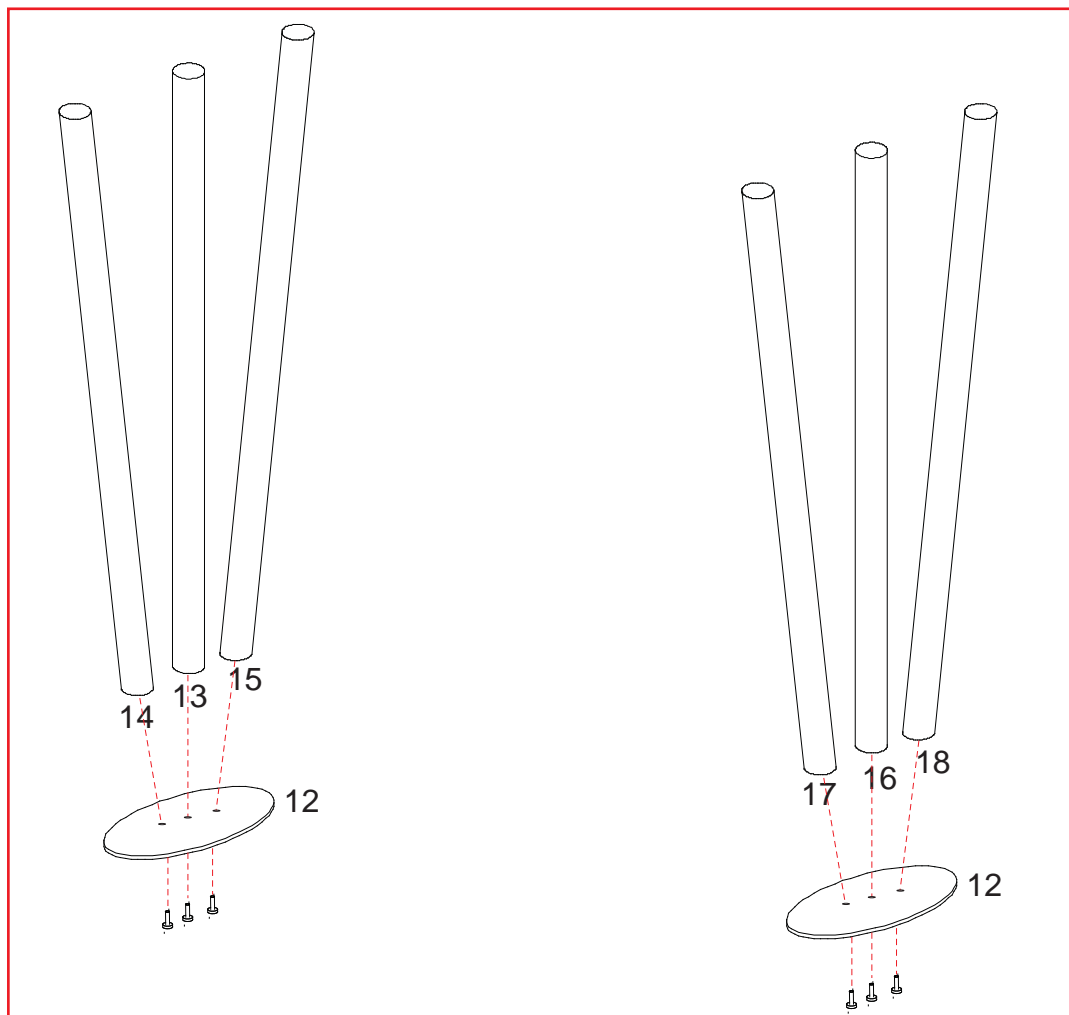


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	47" h End Cap
2	14.125" w x 47" h Flat Panel
3	47" h 90° Connector
4	57.5" r x 47" h Eighth Curve Panel
5	57.5" r x 47" h Sixteenth Curve Panel
6	47" h 90° Connector
7	11.5" w x 47" h Flat Panel w/ Connectors Attached for Literature Rack Attachment
8	47" h 120° Connector
9	19" w x 47" h Flat Panel
9a	47.5" h T Connector
9b	23" w x 47.5" h Flat Panel
10	46" w x 47" h Flat Panel
10a	47.5" h T Connector
10b	23" w x 47.5" h Flat Panel
11	19" w x 47" h Flat Panel
12	47" h 120° Connector
13	11.5" w x 47" h Flat Panel w/ Connectors Attached for Literature Rack Attachment
14	47" h 90° Connector
15	57.5" r x 47" h Sixteenth Curve Panel
16	57.5" r x 47" h Eighth Curve Panel
17	47" h 90° Connector
18	14.125" w x 47" h Flat Panel
19	47" h End Cap

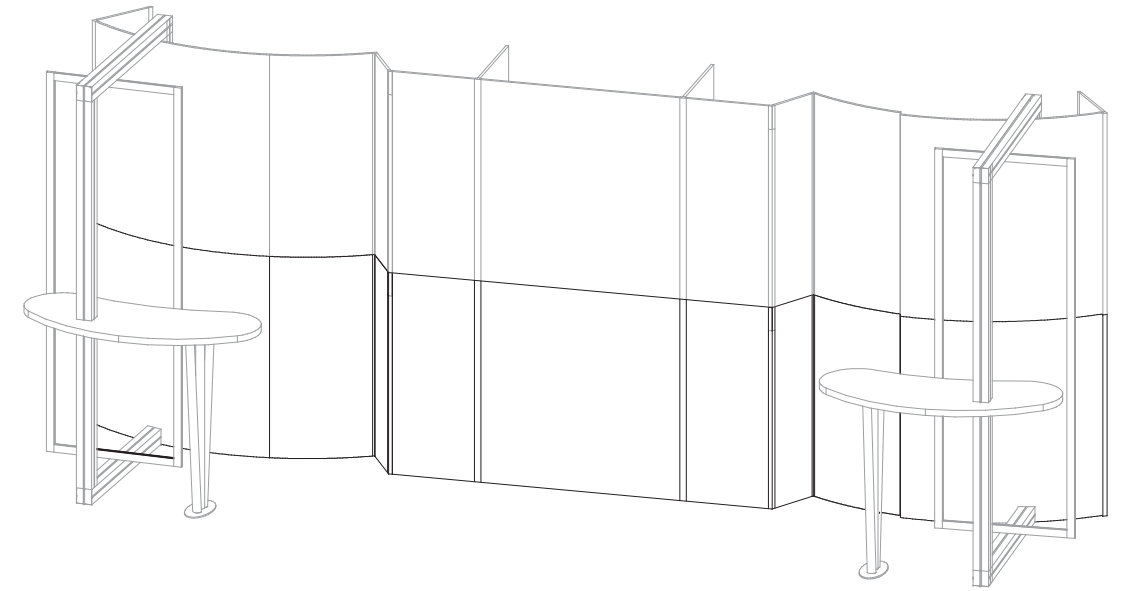


Steps:
Connect panels together in numerical order as shown in illustrations.

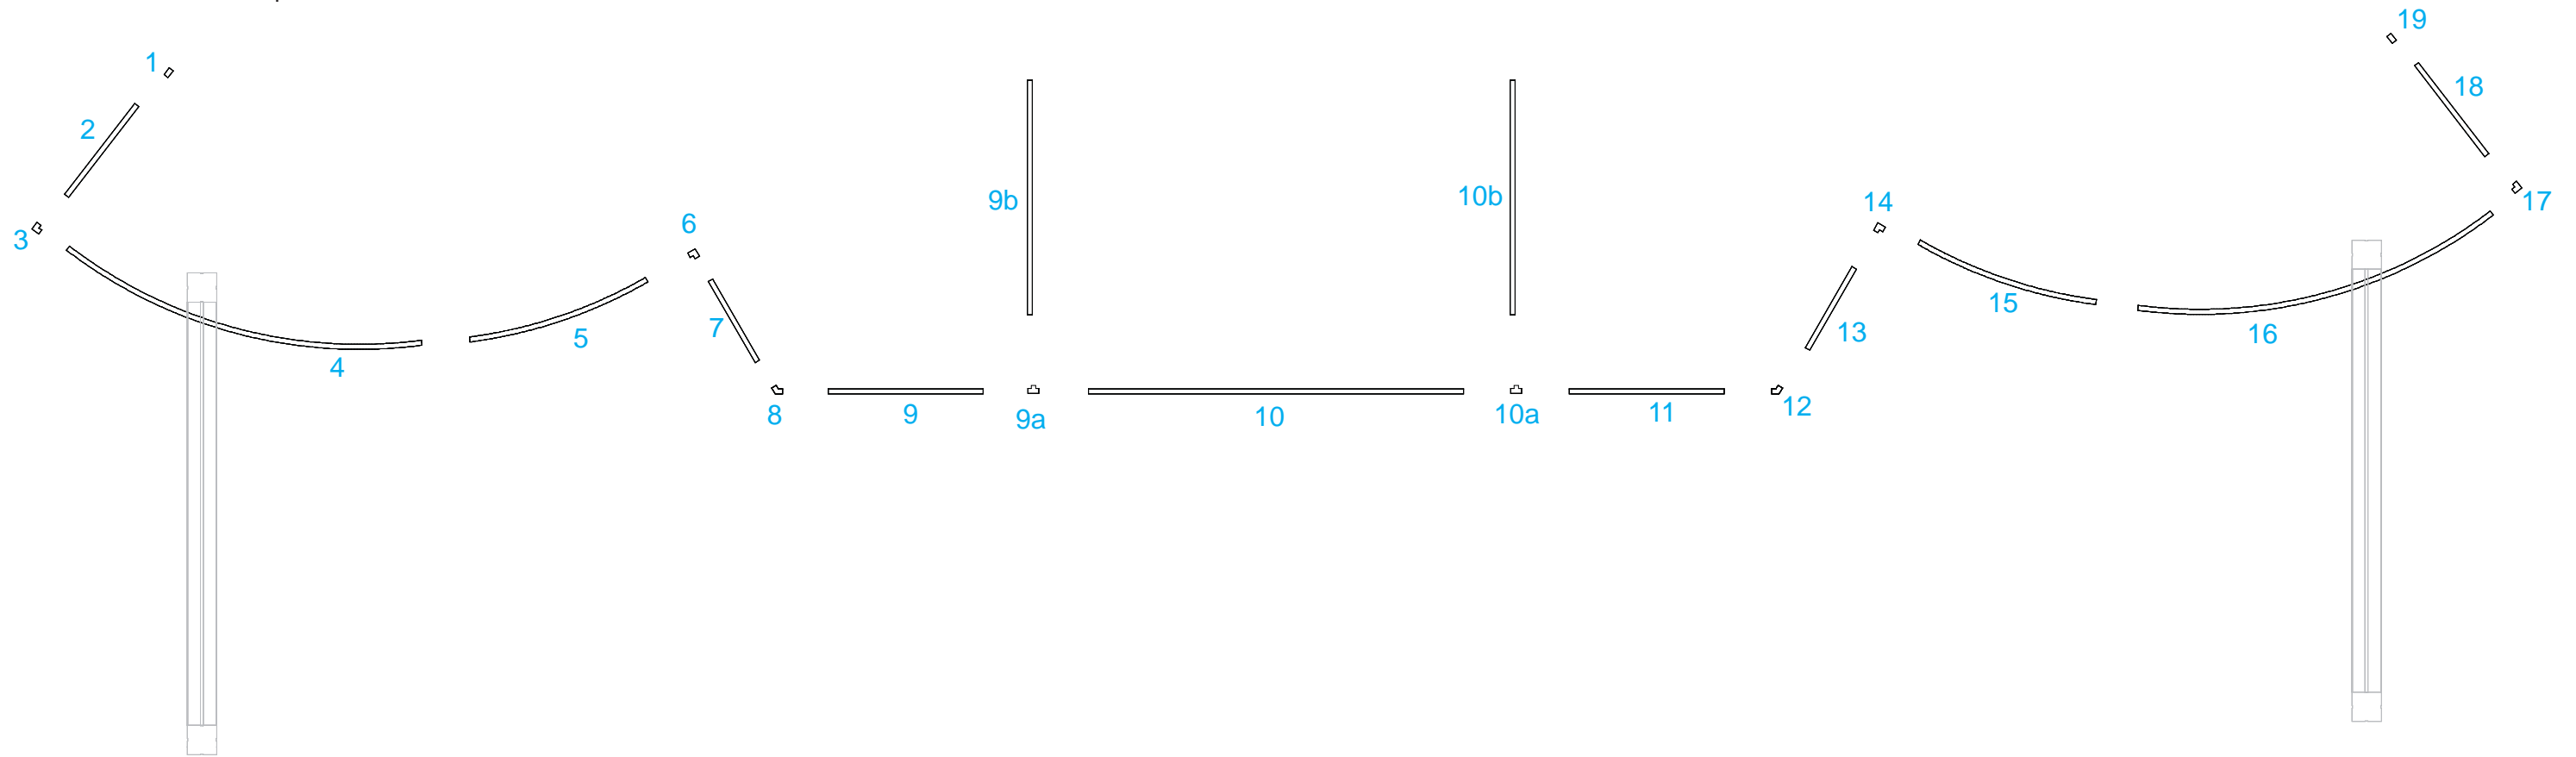


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	47" h End Cap
2	14.125" w x 47" h Flat Panel
3	47" h 90° Connector
4	57.5" r x 47" h Eighth Curve Panel
5	57.5" r x 47" h Sixteenth Curve Panel
6	47" h 90° Connector
7	11.5" w x 47" h Flat Panel w/ Connectors Attached for Liturature Rack Attachment
8	47" h 120° Connector
9	19" w x 47" h Flat Panel
9a	47.5" h T Connector
9b	23" w x 47.5" h Flat Panel
10	46" w x 47" h Flat Panel
10a	47.5" h T Connector
10b	23" w x 47.5" h Flat Panel
11	19" w x 47" h Flat Panel
12	47" h 120° Connector
13	11.5" w x 47" h Flat Panel w/ Connectors Attached for Liturature Rack Attachment
14	47" h 90° Connector
15	57.5" r x 47" h Sixteenth Curve Panel
16	57.5" r x 47" h Eighth Curve Panel
17	47" h 90° Connector
18	14.125" w x 47" h Flat Panel
19	47" h End Cap

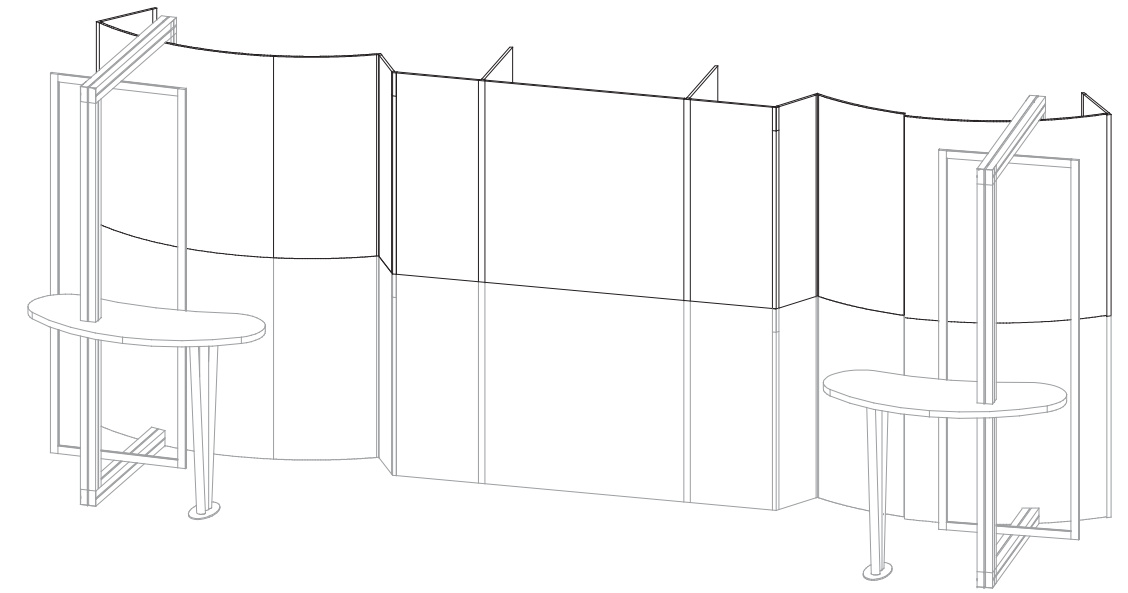

Steps:
Connect panels together in numerical order as shown in illustrations.

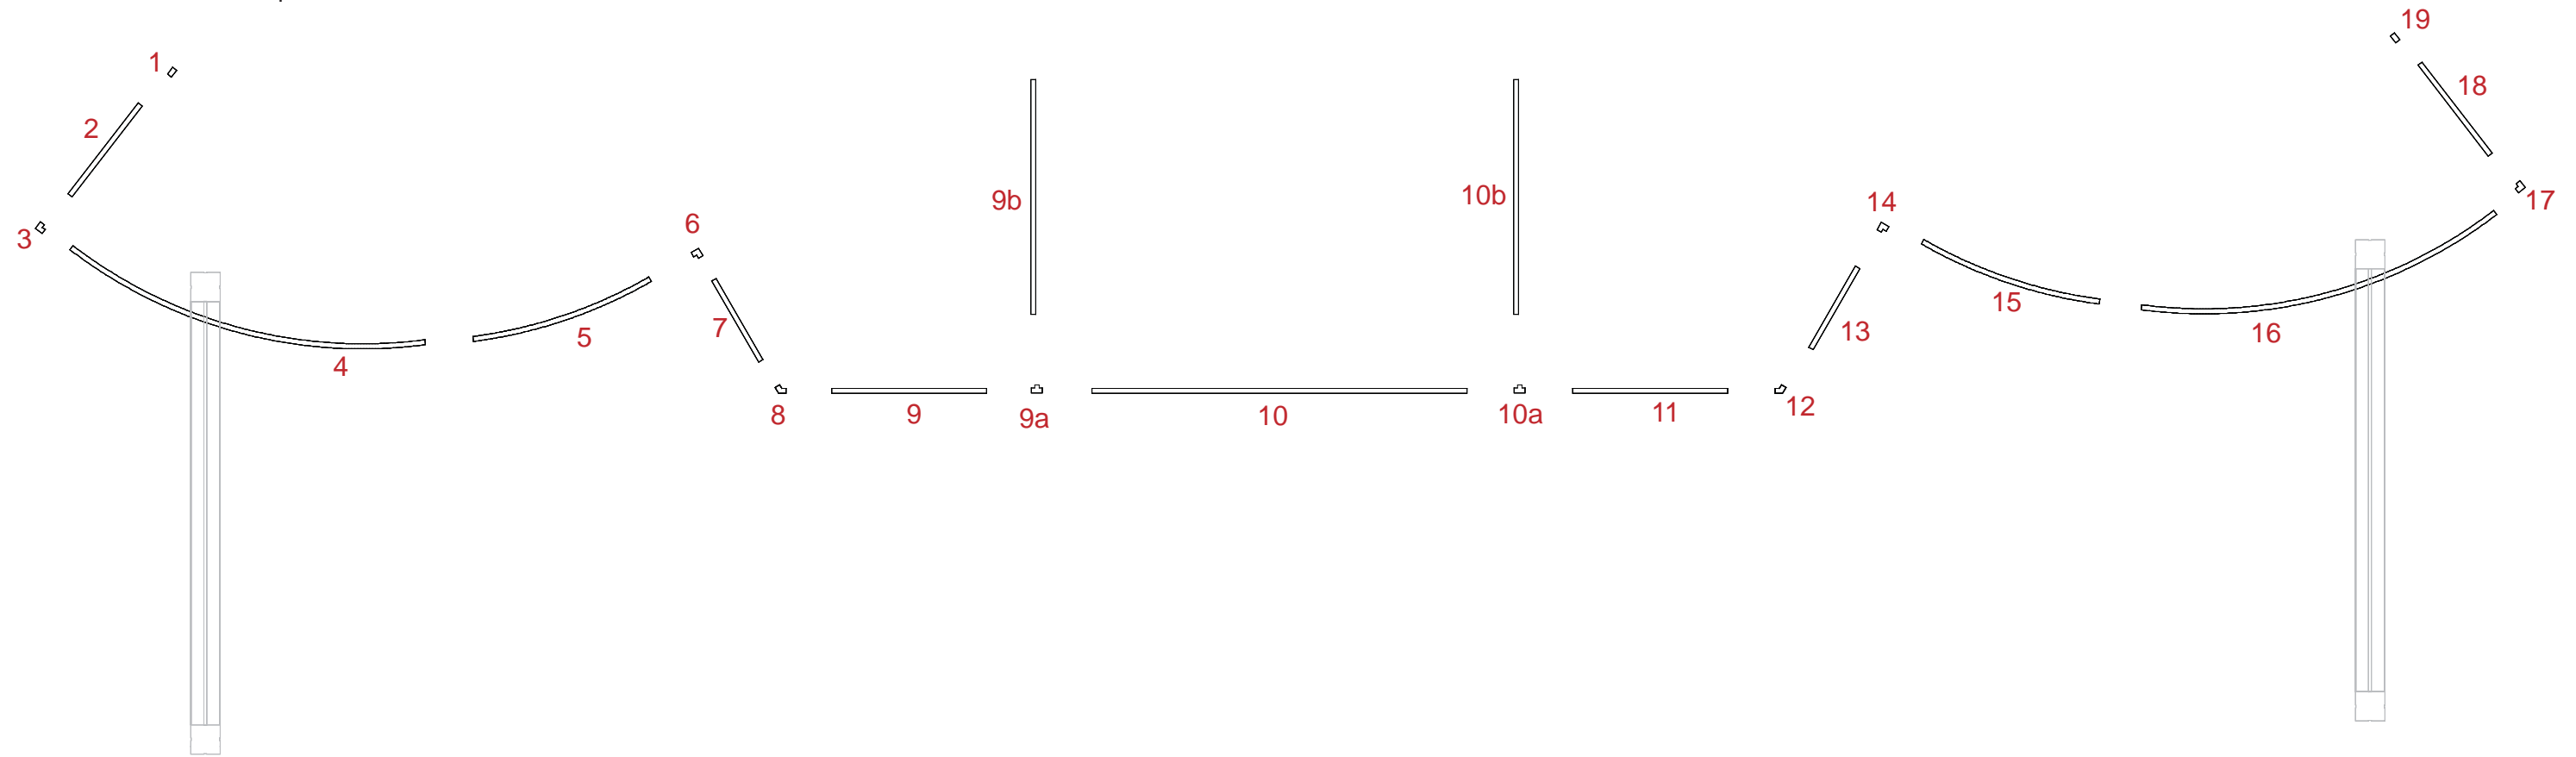




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Part Number	Qty for Step	Description
19	4	28.418" h Horizontal Extrusion
20	4	89.457" h Vertical Extrusion



Steps

- 1) Connect horizontal extrusions [19] between vertical extrusions [20] as shown below.
- 2) Then apply graphic to frame and rest frame atop pin as shown in detail below.
- 3) While holding frame in place continue on to next page to attach upper Horizontal extrusion.

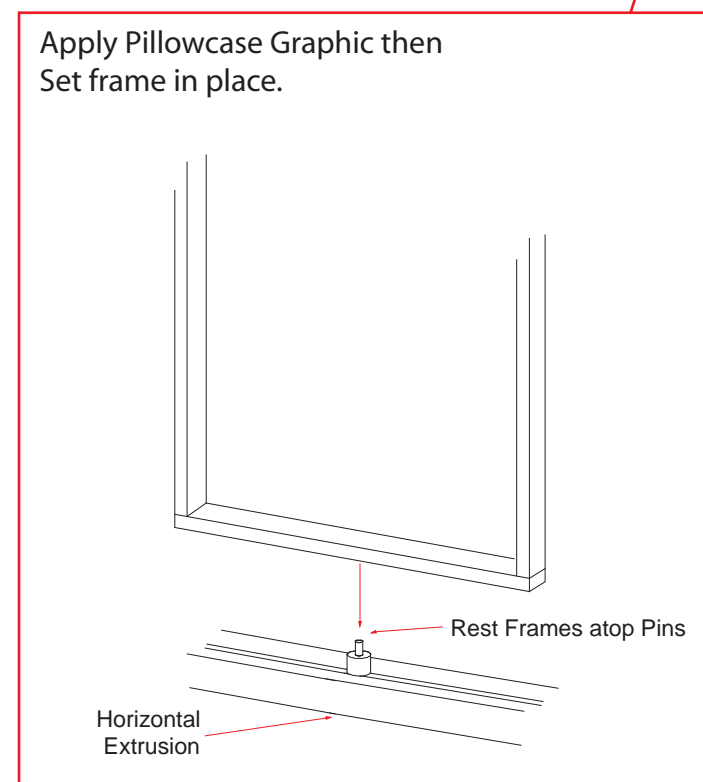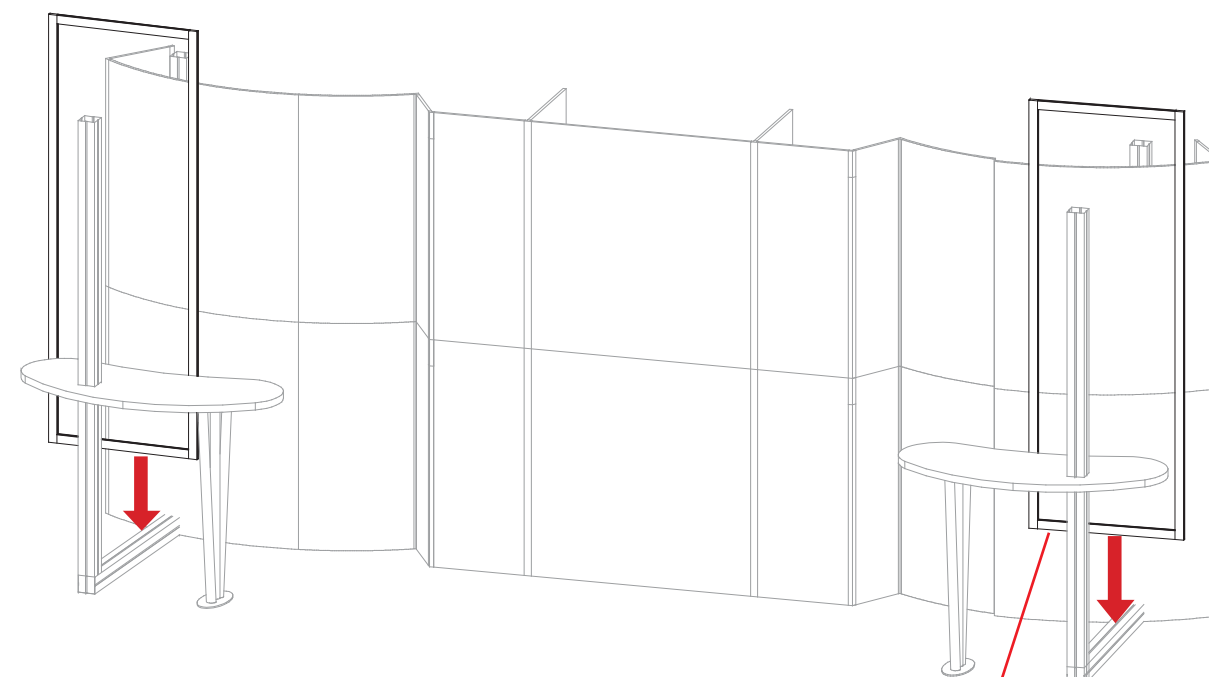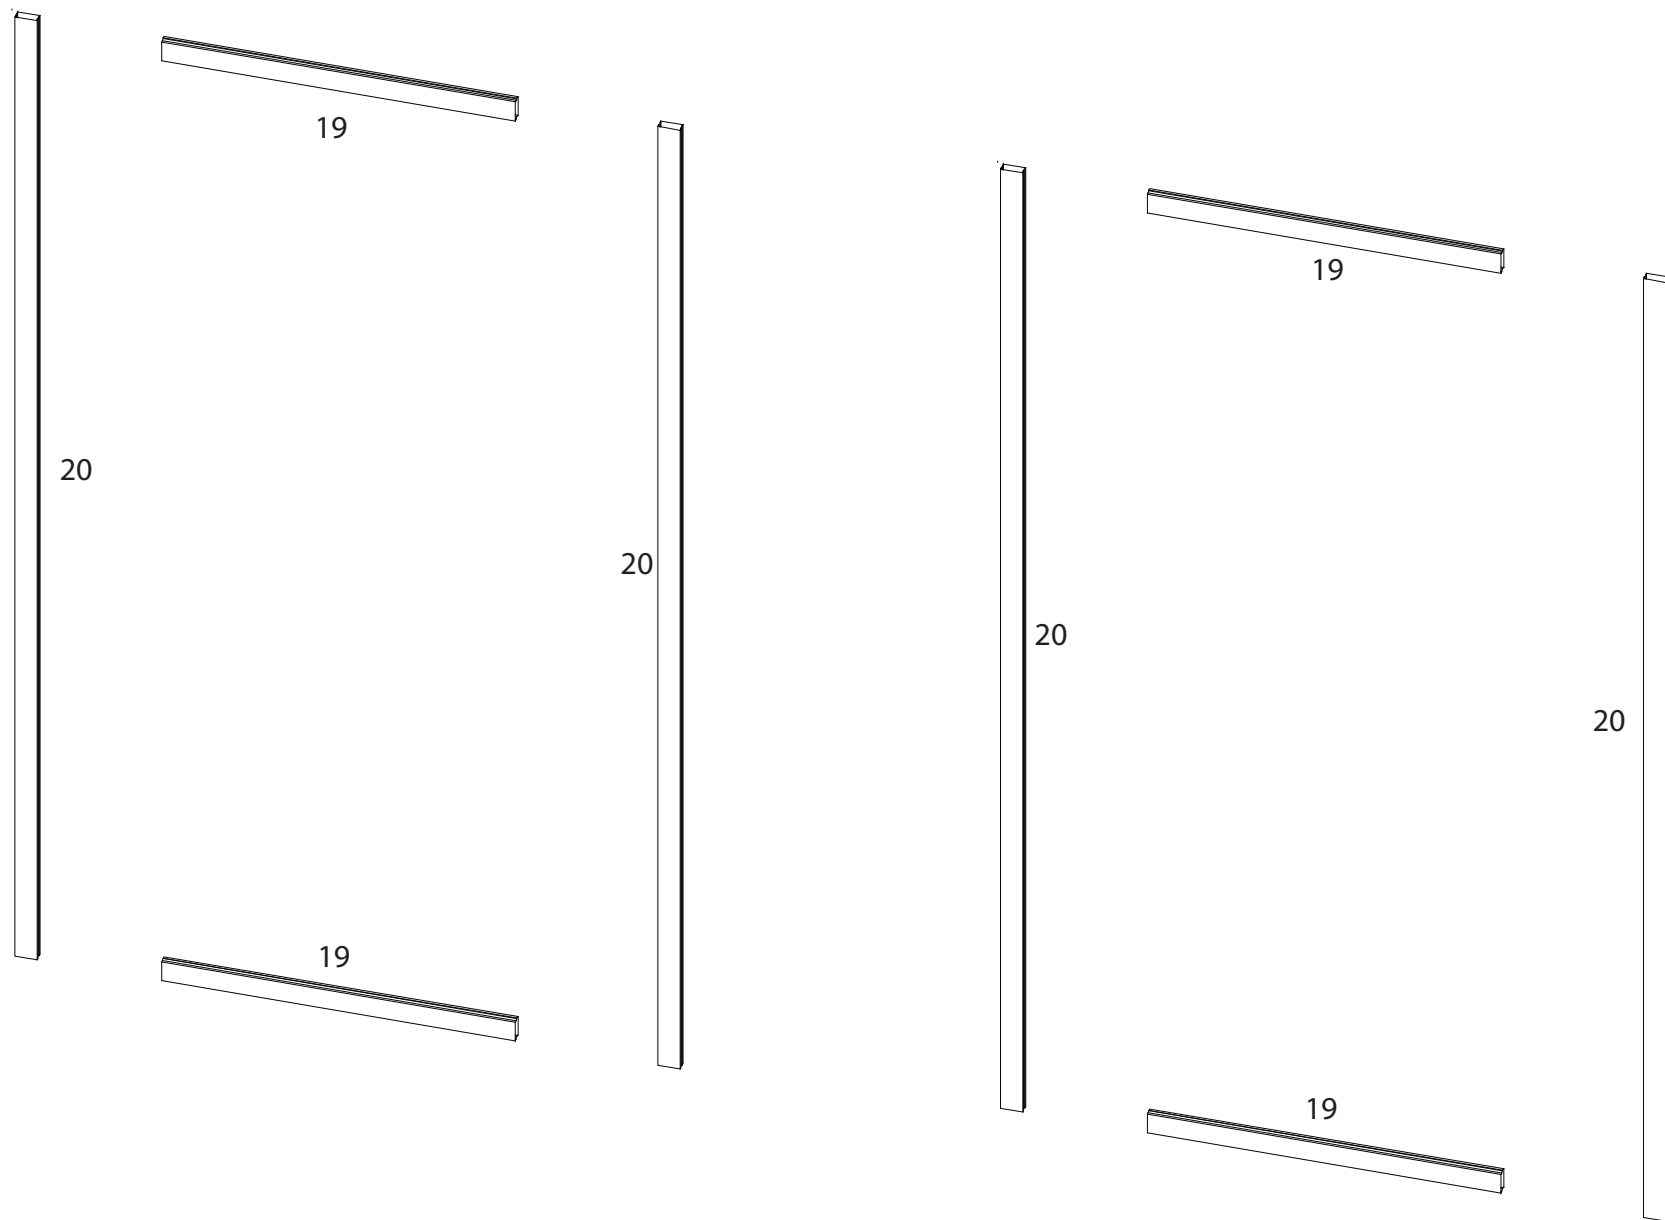

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

When panels are assembled connect horizontal extrusions [3 and 6] between vertical extrusions [1 and 2].

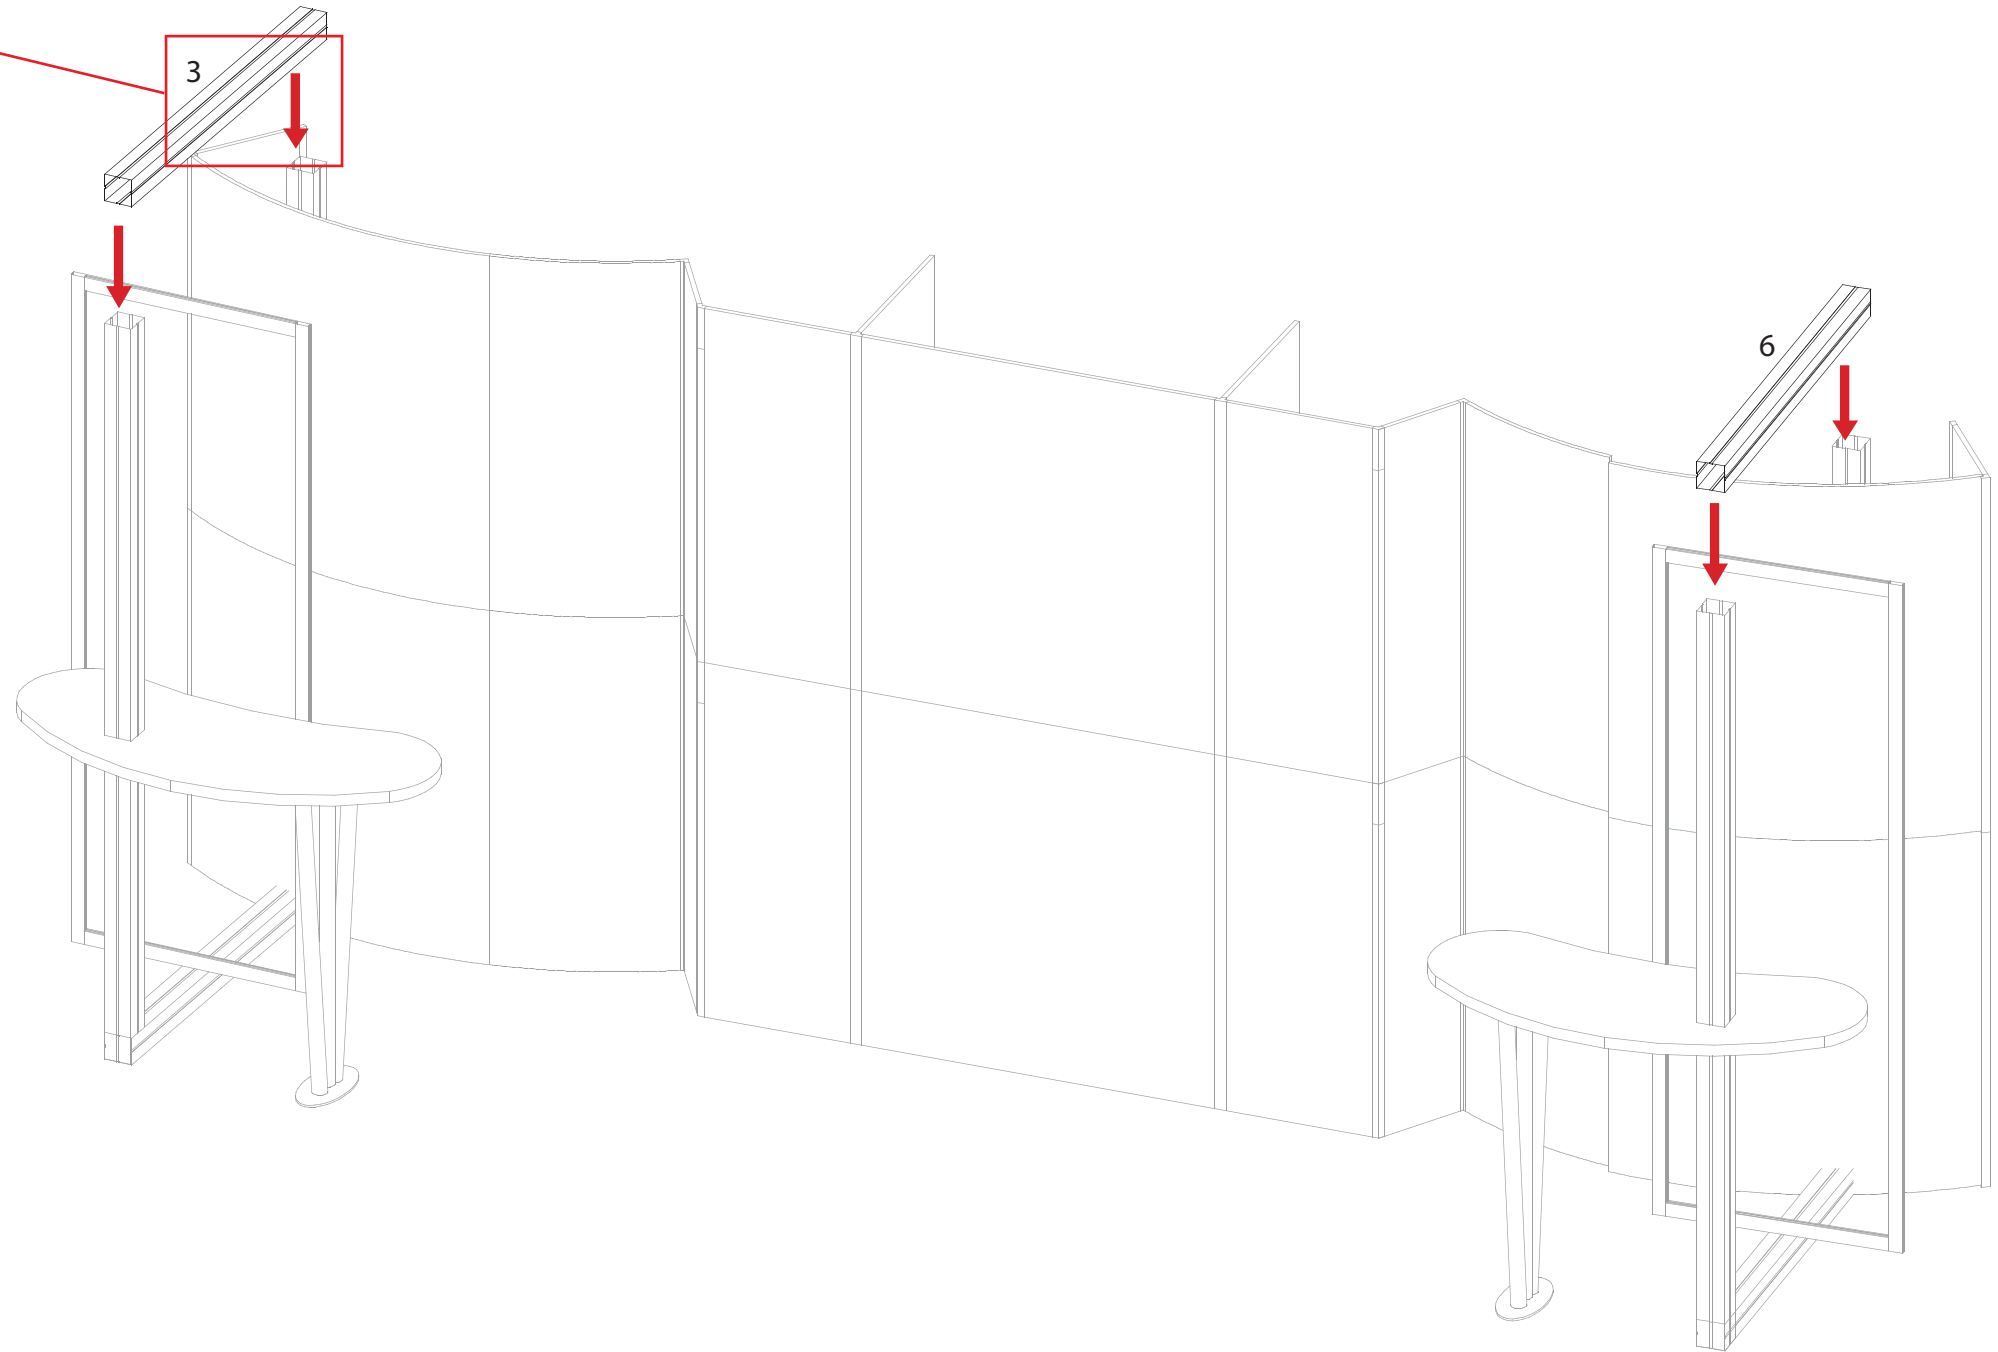
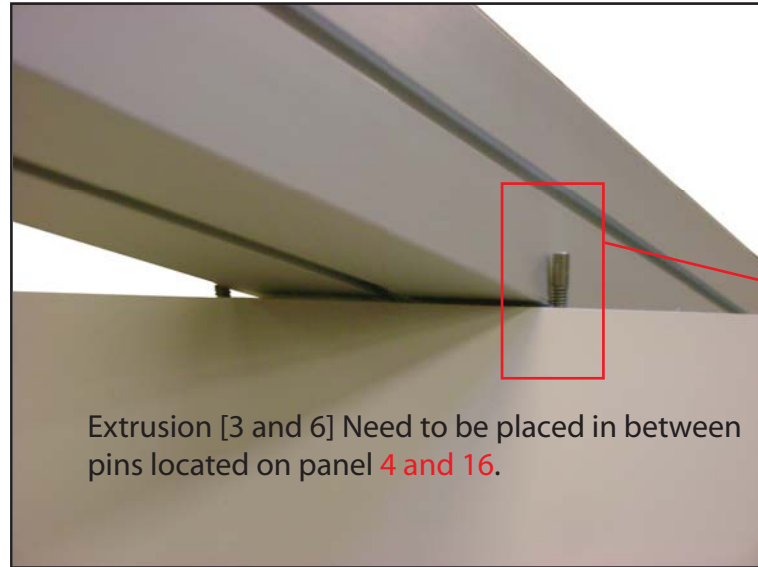


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
20	30"h 90° Connector
21	14.125"w x 30"h Flat Panel
22	30"h 90° Connector
23	30"w x 30"h Flat Panel w/ Door
24	30"h 90° Connector
25	14.125"w x 30"h Flat Panel
26	30"h 90° Connector
27	30"w x 30"h Flat Panel

Steps:
Connect panels together in numerical order as shown in illustrations.

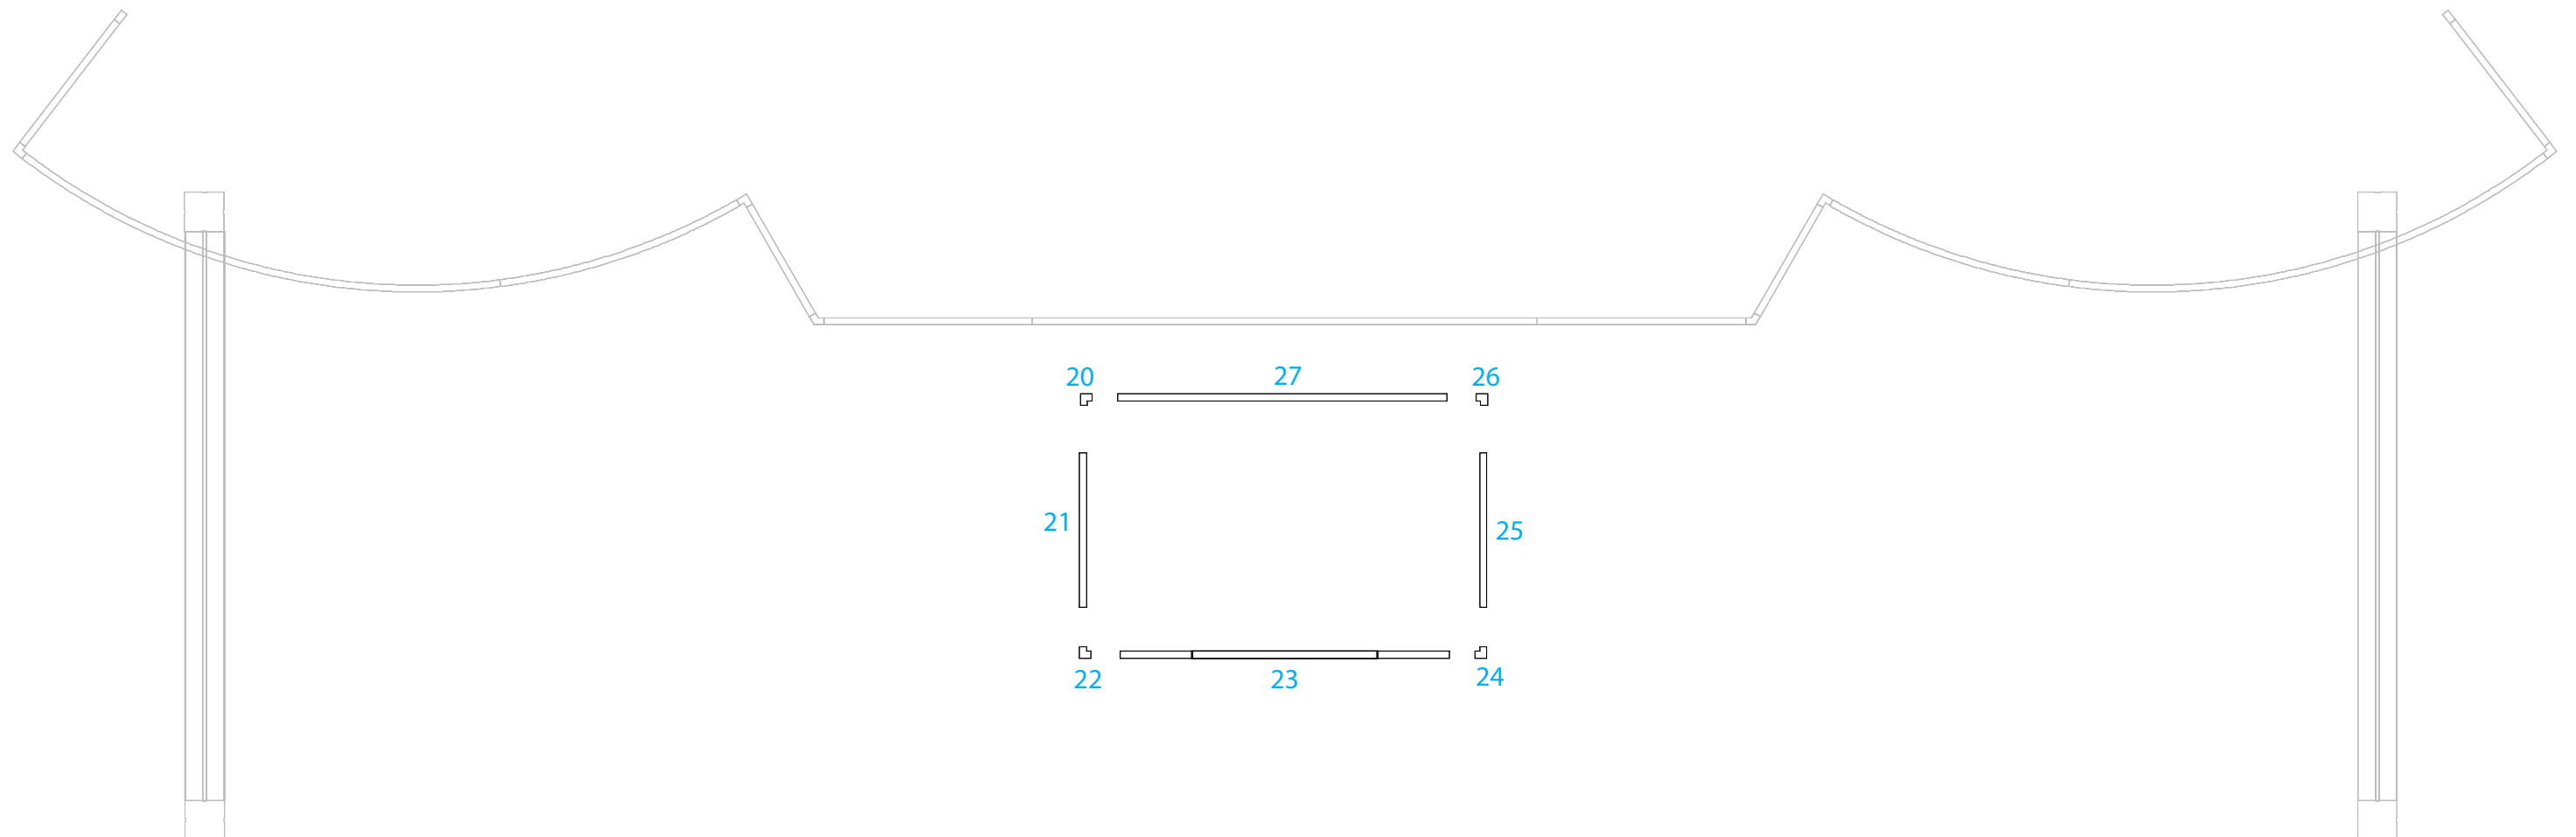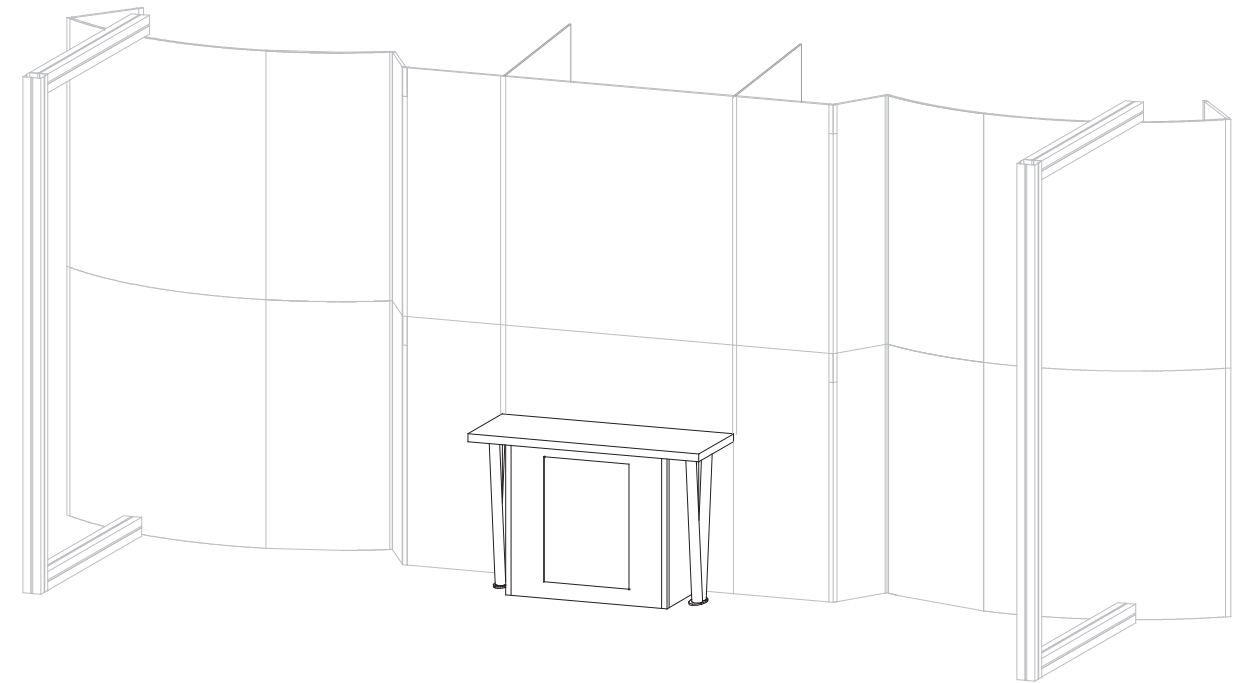



WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Qty	Description
7	2	Small Oval Base
8	1	29.75" Tapered Leg Support
9	1	29.75" Tapered Leg Support
10	1	29.75" Tapered Leg Support
11	1	29.75" Tapered Leg Support

Steps:

- 1) Attach tapered extrusions [8 and 9] to base plate [7], NOTE: bolt goes in at an angle.
- 2) Repeat step 1 for tapered extrusions [10 and 11].
- 3) Place assembled tapered supports next to assembled backwall pedestal and place counter atop.
- 4) Attach literature racks to assembled backwall, see literature rack attachment.

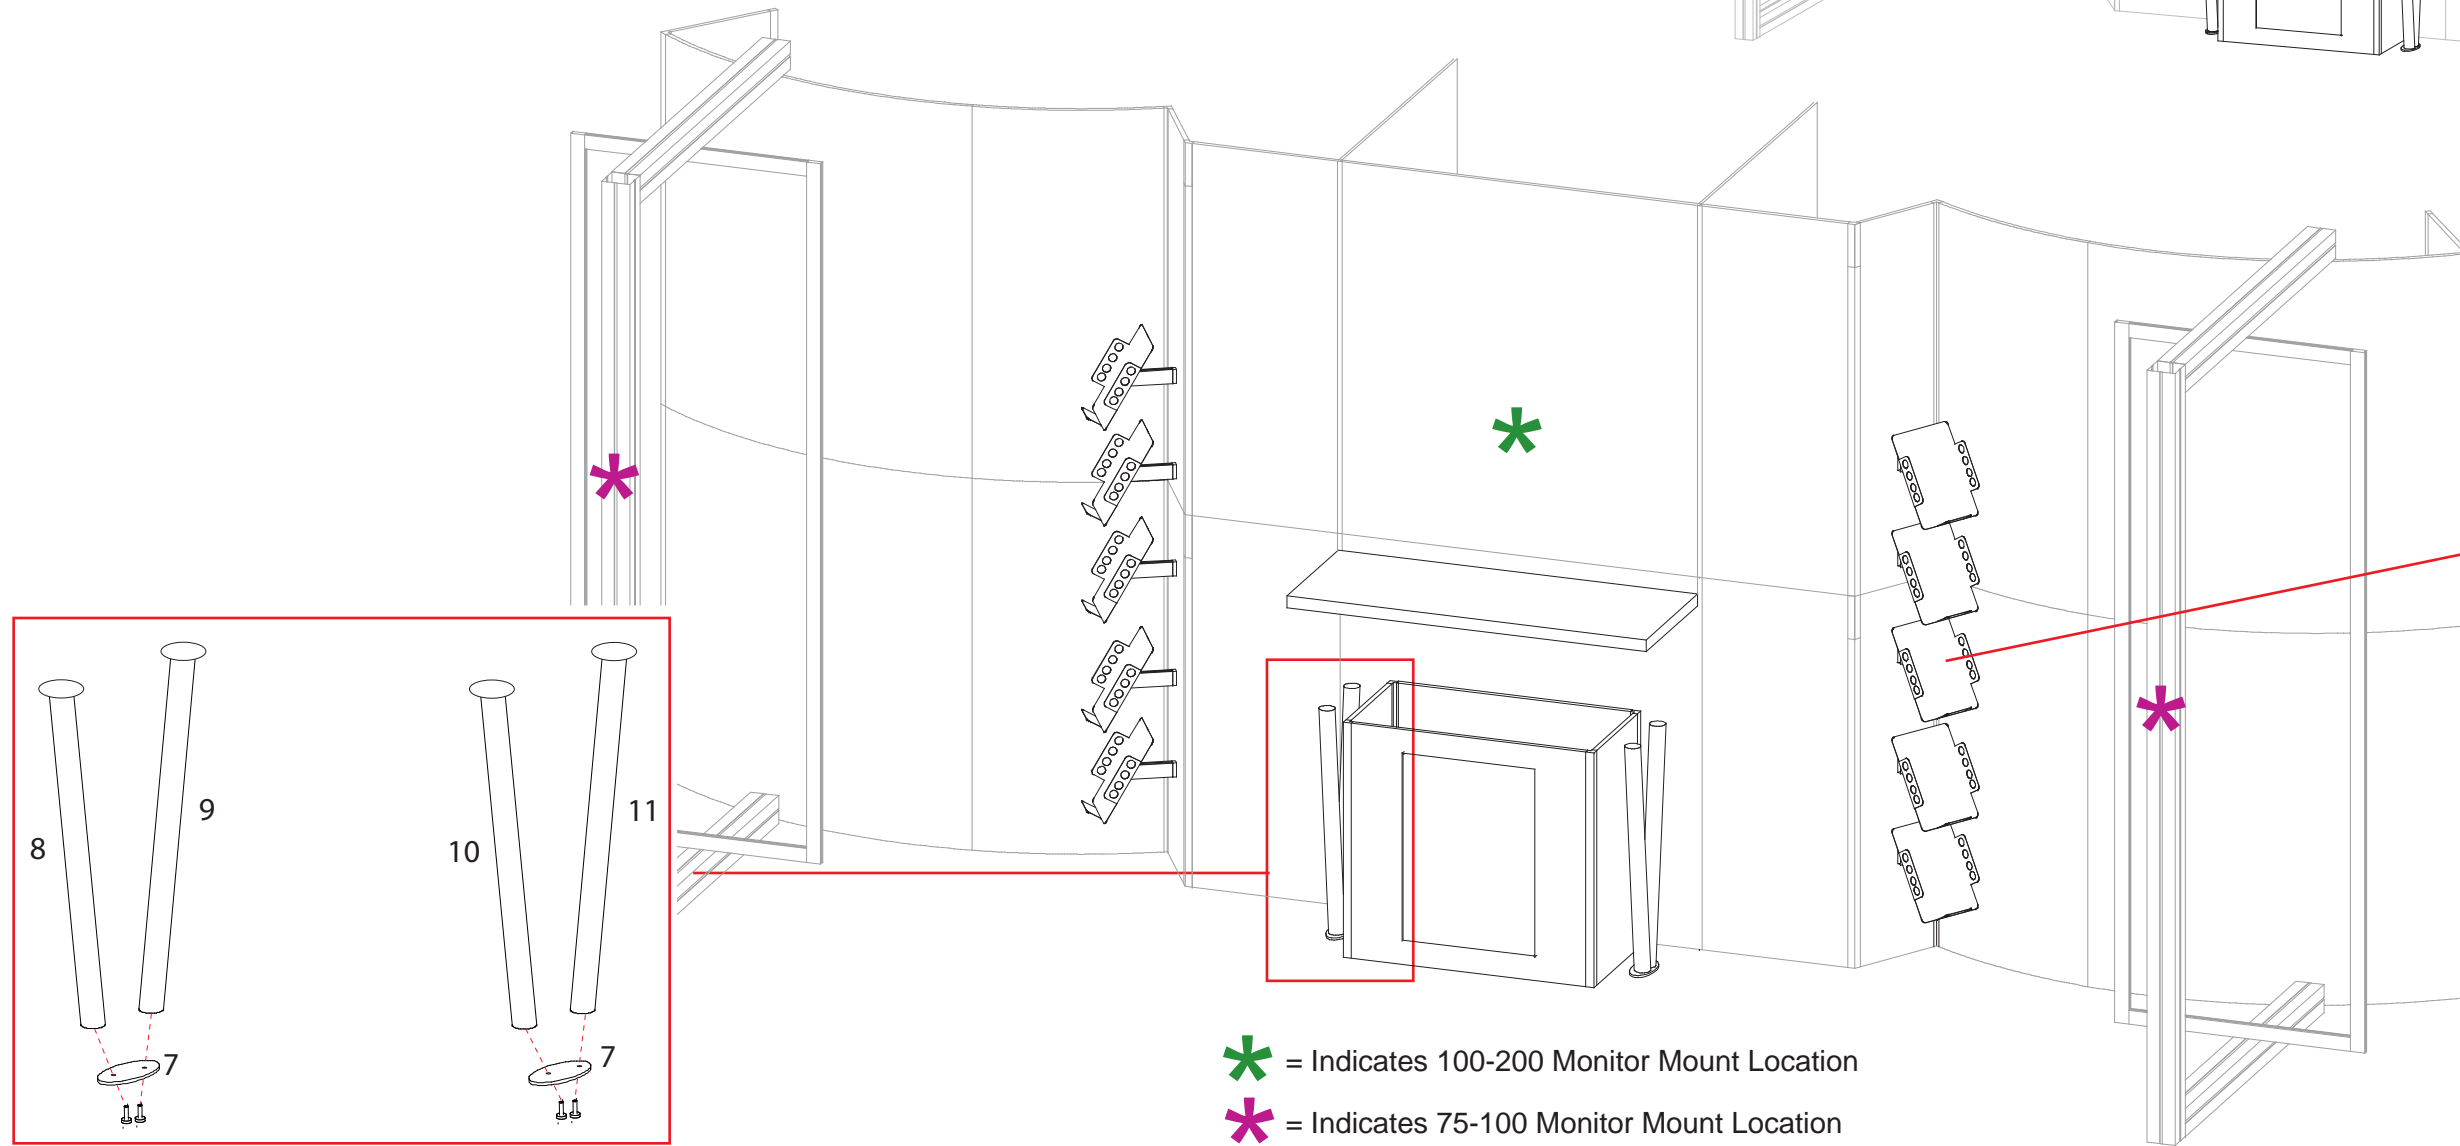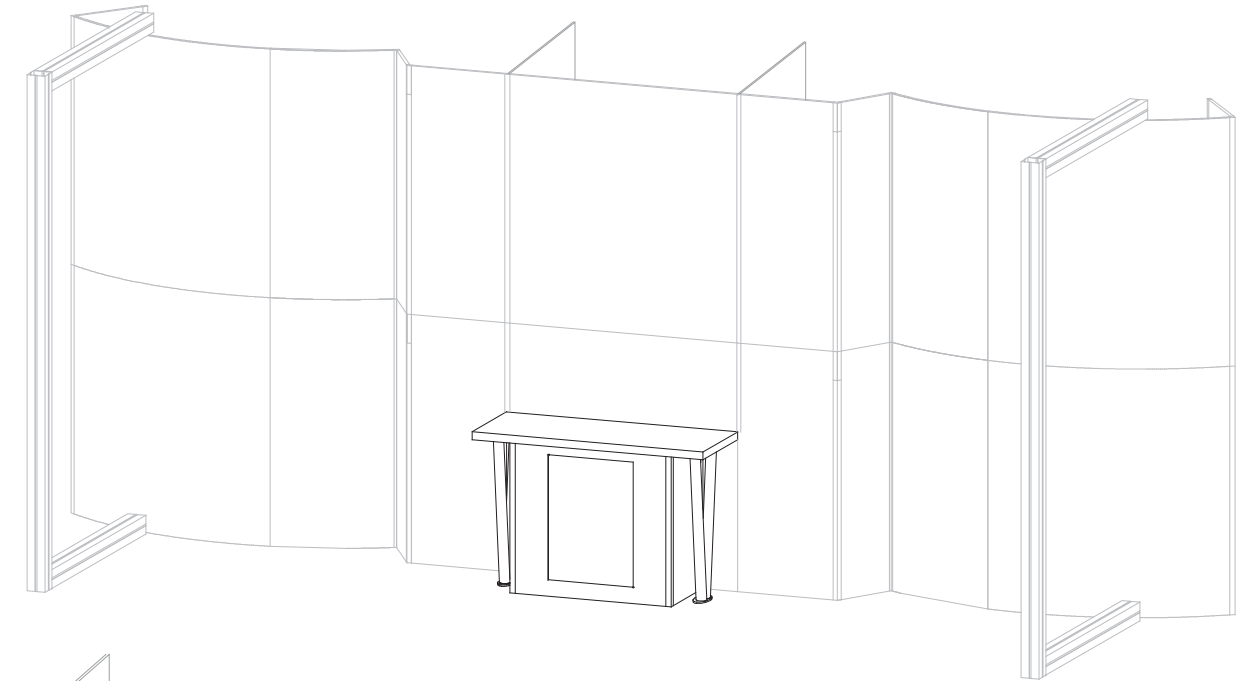

Literature Rack Attachment


Tighten Lock to Secure

Attach connector piece to rack as shown.

Then connect assembled literature rack to vertical extrusion.

* = Indicates 100-200 Monitor Mount Location
 * = Indicates 75-100 Monitor Mount Location

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

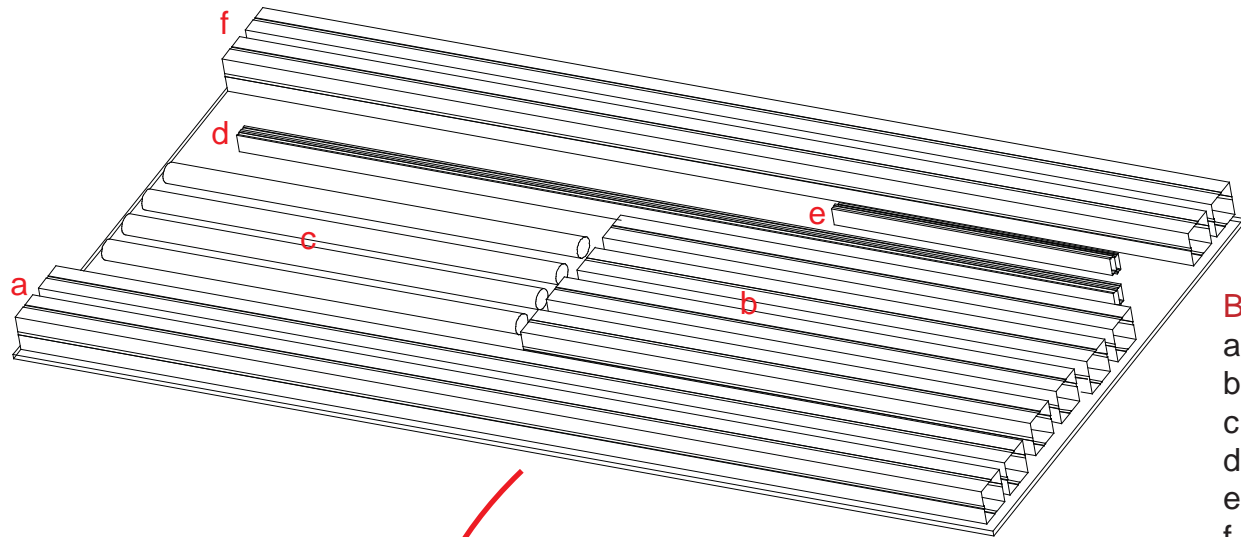


- B** Modul Extrusion Part List :
- a - (2) 98.58" Square Extrusion
 - b - (4) 52" Square Extrusion
 - c - (4) 29.75" Leg Support Extrusion
 - d - (4) 89.457" Extrusion
 - e - (4) 28.418" Extrusion
 - f - (2) 98.58" Square Extrusion



Modul Extrusions



Setup Hardware

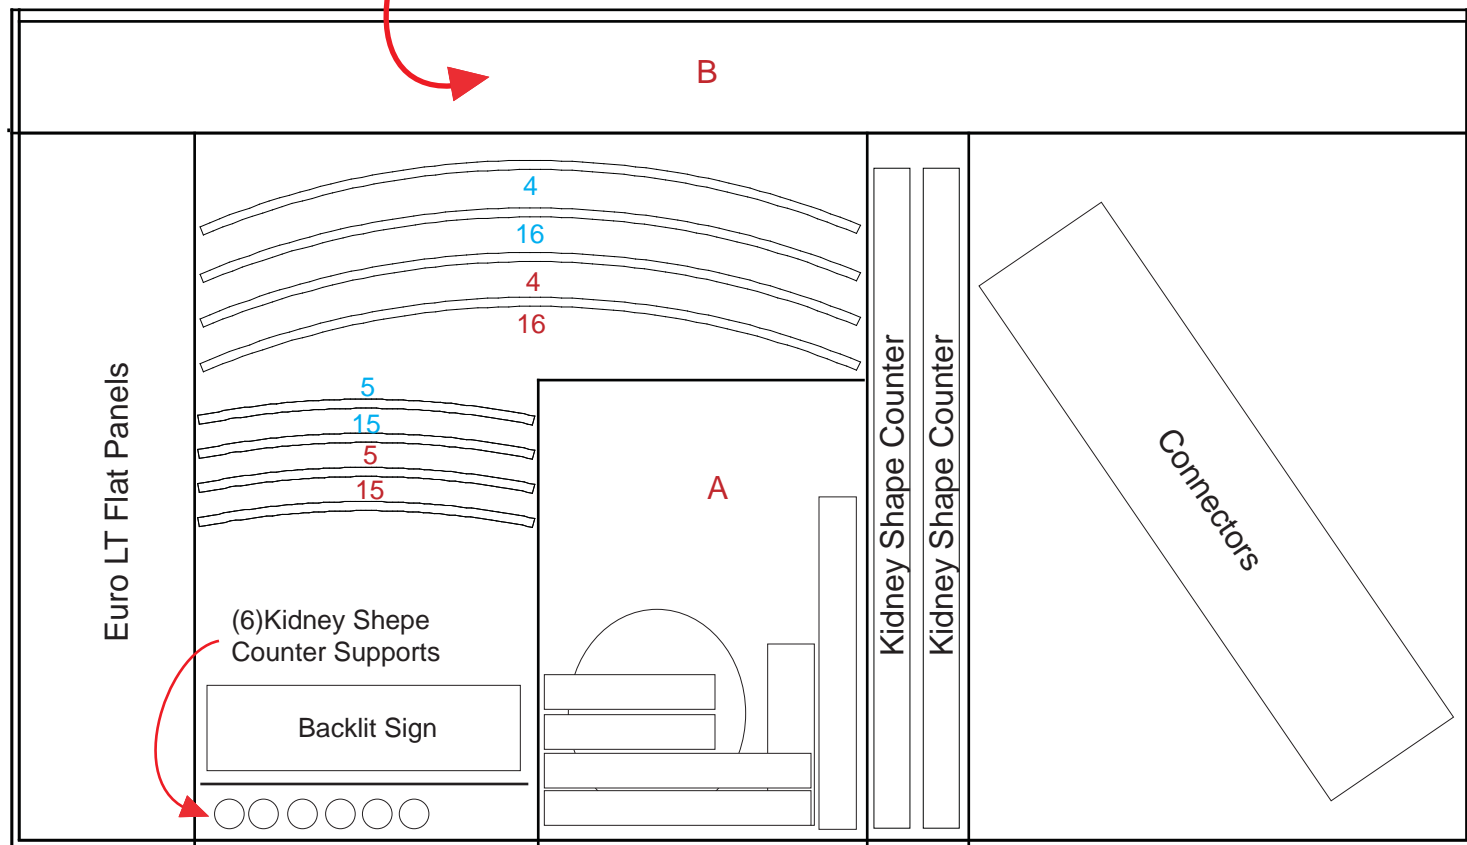

- A:** Item List
- Setup Hardware
 - LED Lights
 - Literature Racks
 - Base Plates
 - Round Base Plates
 - Monitor Mounts



Front View of Crate

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING