
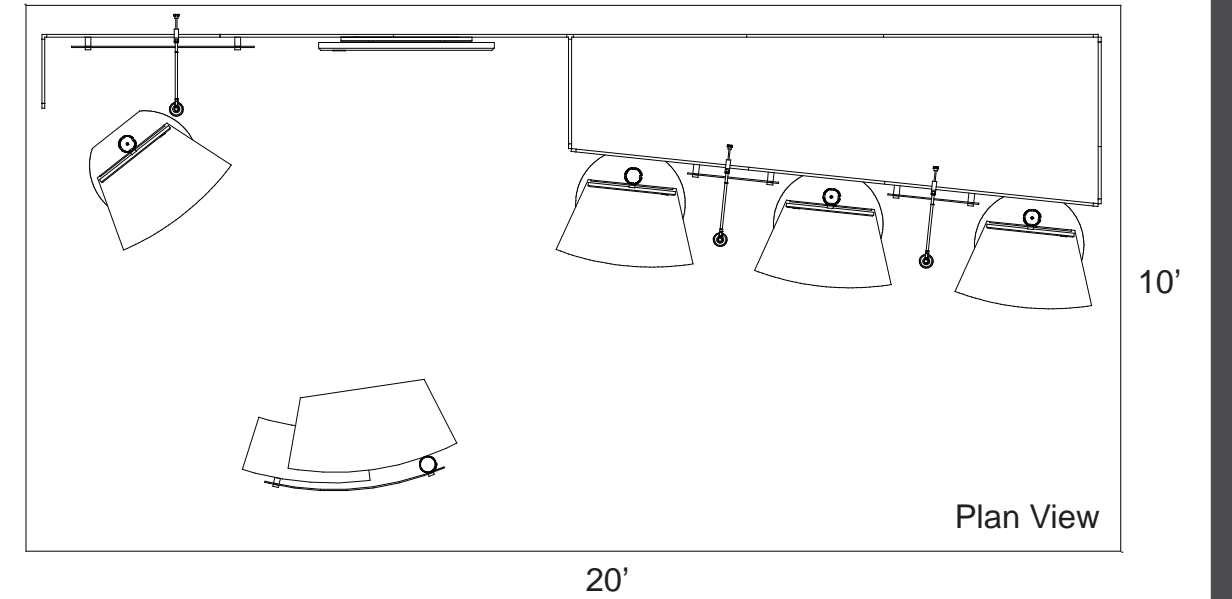


euro It | *HYBRIDS*

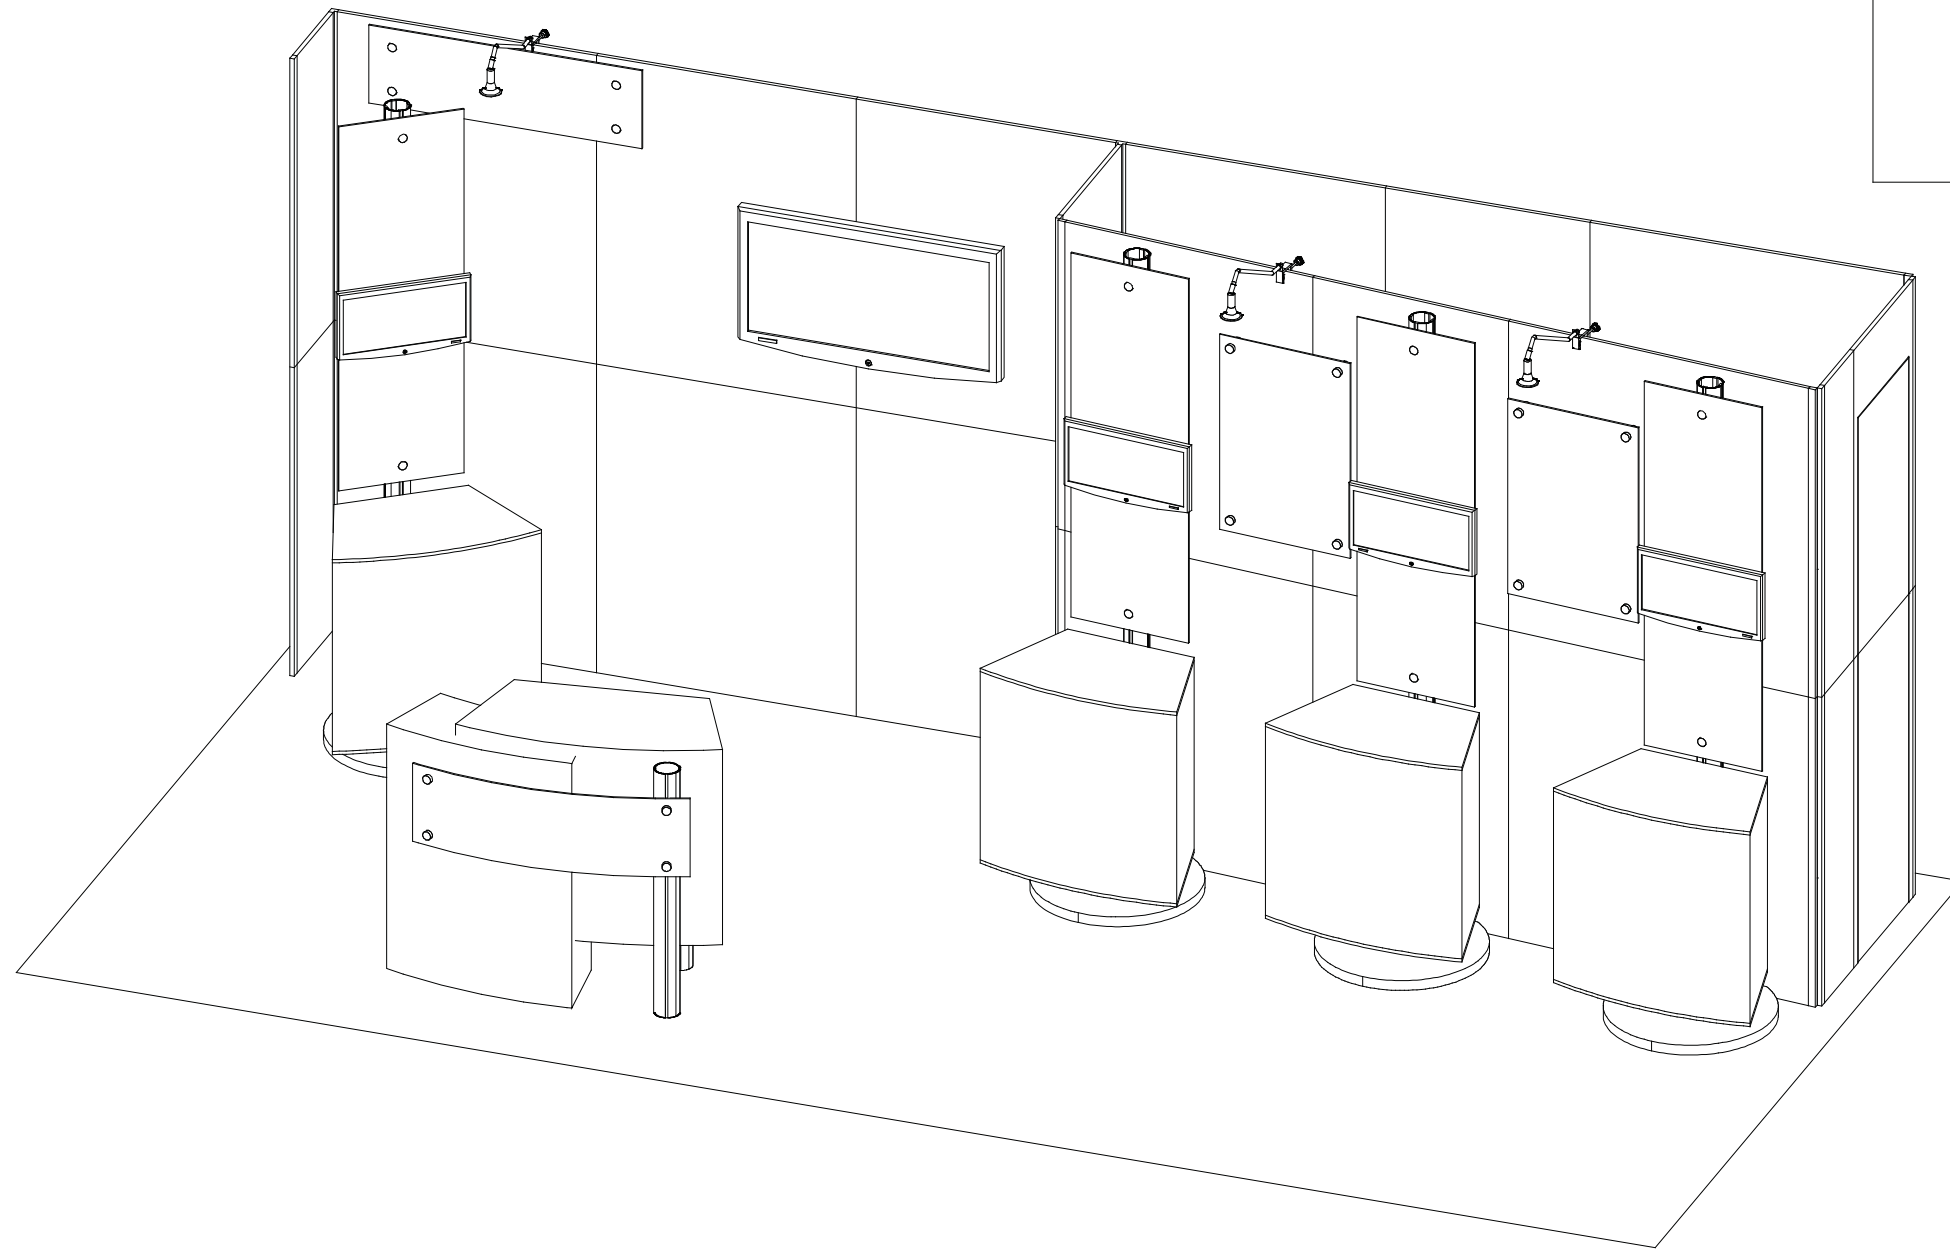

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Extrusion System




Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

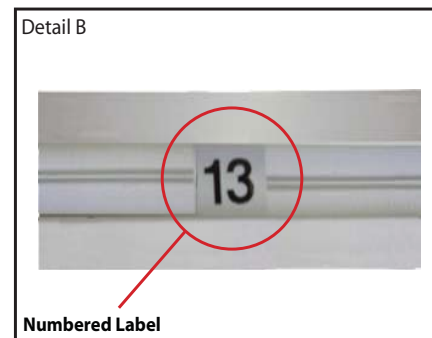


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

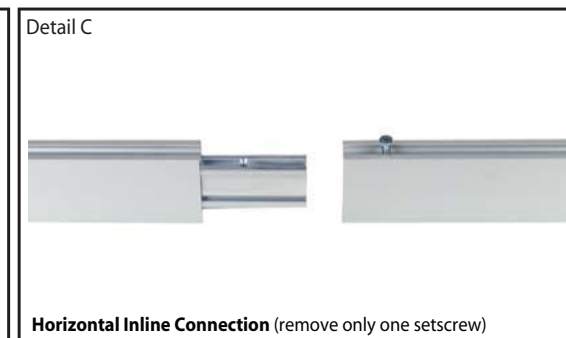

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

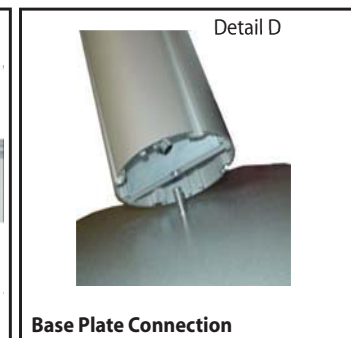


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

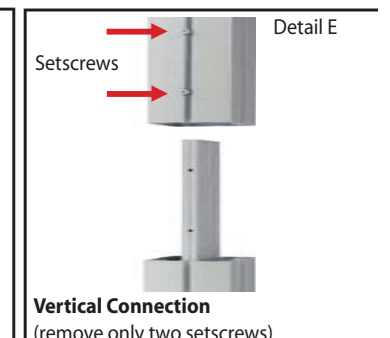


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

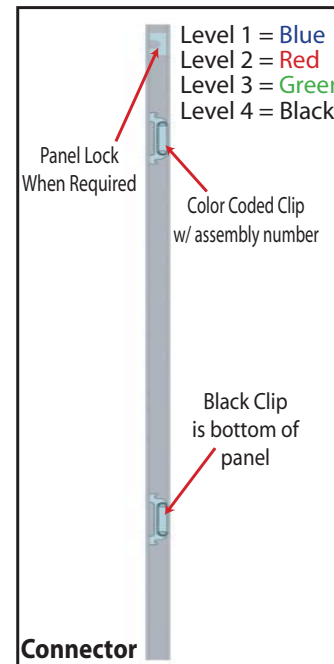


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

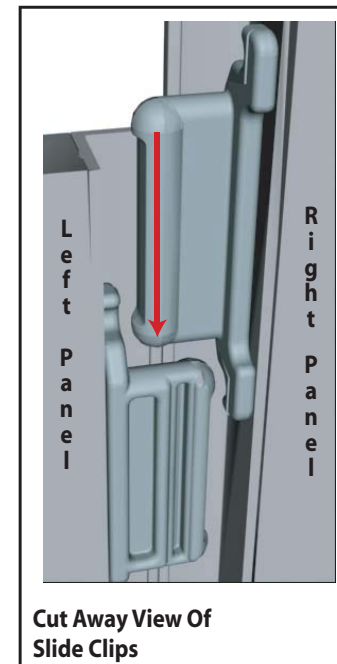

Components connect together by aligning them and sliding downward connecting clips together.

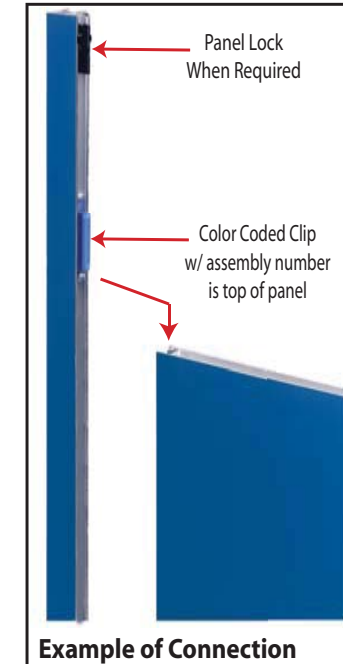

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

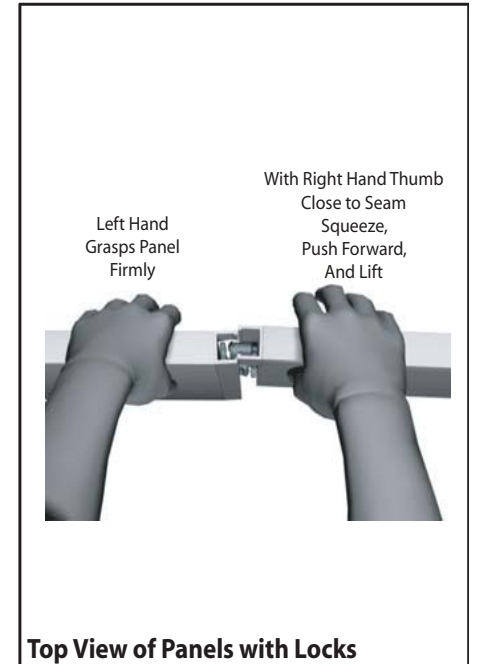



The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	23"w x 47.5"h Flat Panel
3	38"w x 47.5"h Flat Panel
4	30"w x 47.5"h Flat Panel
5	46"w x 47.5"h Flat Panel
9	46"w x 47.5"h Flat Panel
10	30"w x 47.5"h Flat Panel
11	38"w x 47.5"h Flat Panel
13	47.5"h End Cap
14	14.125"w x 47.5"h Flat Panel
14a	47.5"h 90° Connector
15	38"w x 47.5"h Flat Panel
16	38"w x 47.5"h Flat Panel
17	38"w x 47.5"h Flat Panel
18	47.5"h T Connector
19	47.5"h Flex Connector
20	Lower Section Door
20a	Door Stop
21	11.5"w x 47.5"h Flat Panel
22	47.5"h Flex Connector
23	47.5"h Flex Connector

Steps:
1) Assemble by starting at End Cap #13.

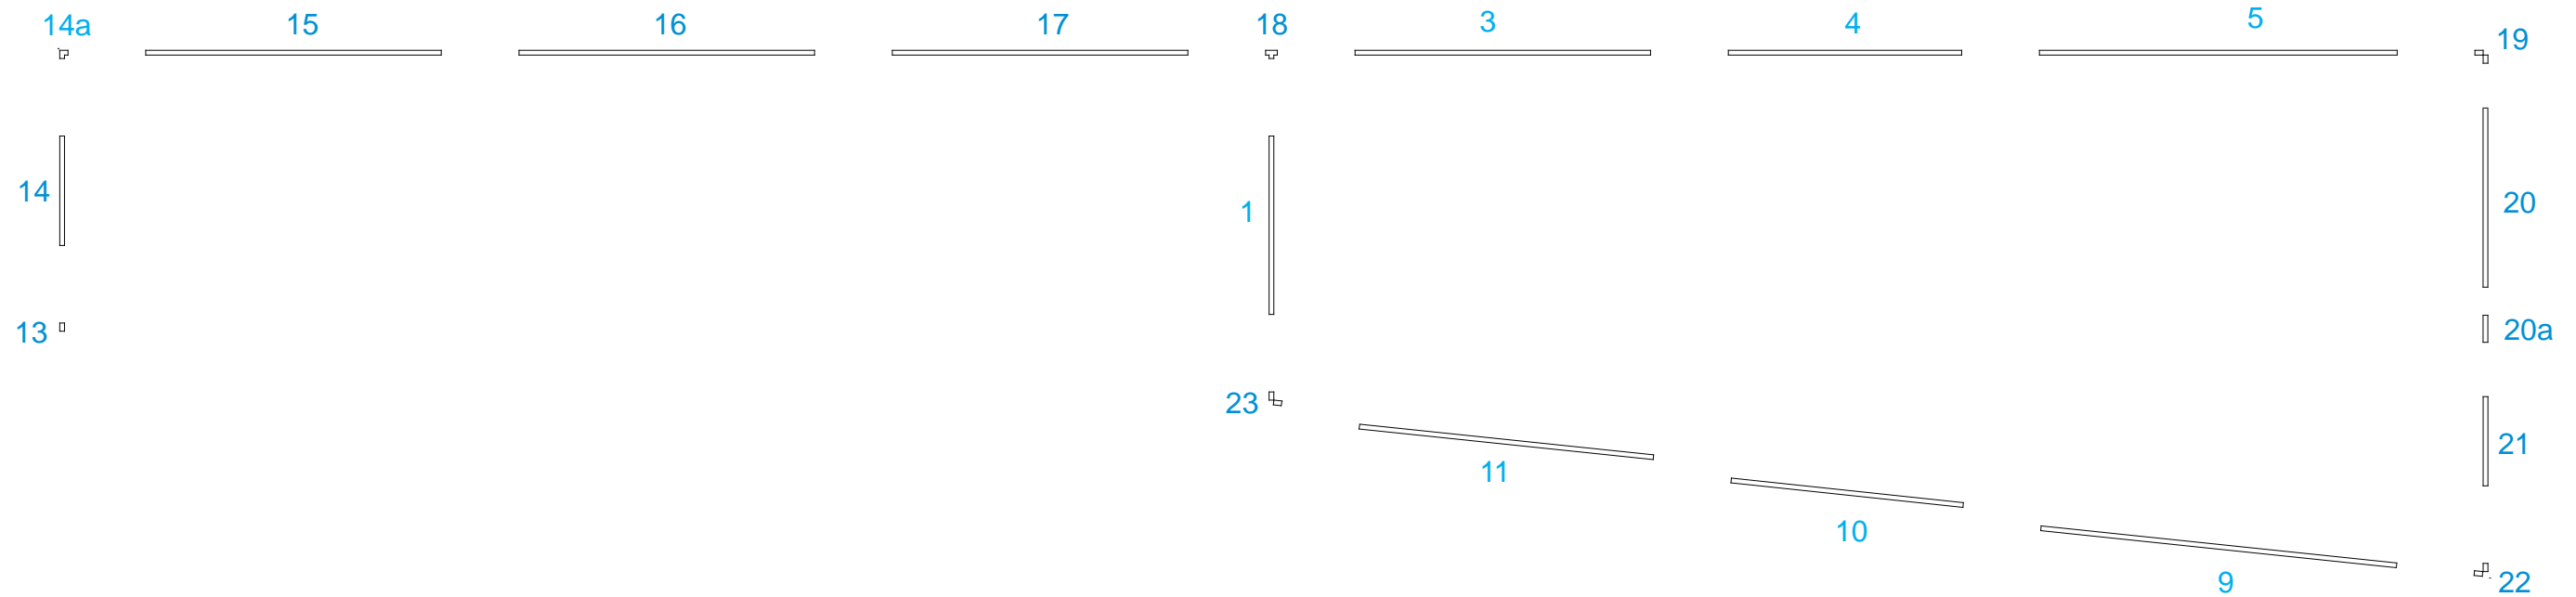
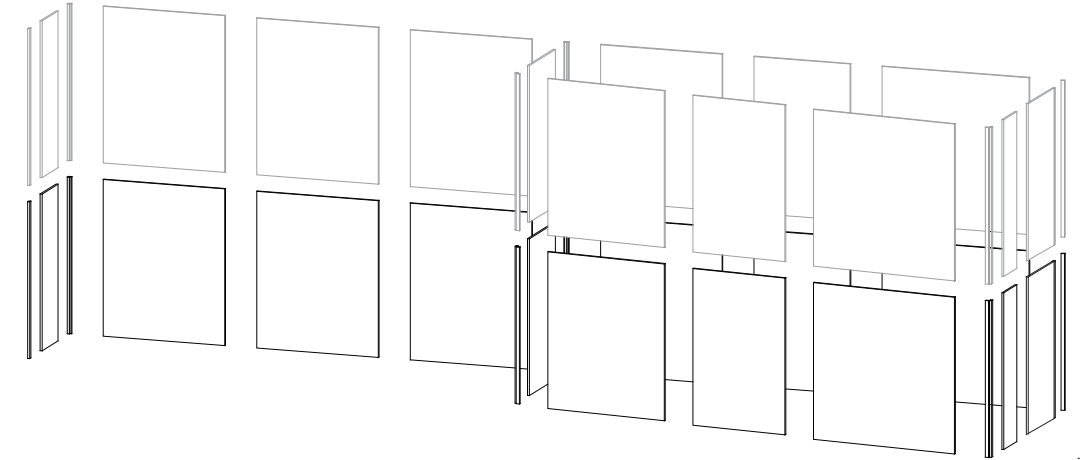


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100





Item Number	Description
1	23"w x 47.5"h Flat Panel
3	38"w x 47.5"h Flat Panel
4	30"w x 47.5"h Flat Panel
5	46"w x 47.5"h Flat Panel
9	46"w x 47.5"h Flat Panel
10	30"w x 47.5"h Flat Panel
11	38"w x 47.5"h Flat Panel
13	47.5"h End Cap
14	14.125"w x 47.5"h Flat Panel
14a	47.5"h 90° Connector
15	38"w x 47.5"h Flat Panel
16	38"w x 47.5"h Flat Panel
17	38"w x 47.5"h Flat Panel
18	47.5"h T Connector
19	47.5"h Flex Connector
20	Upper Section Door
21	11.5"w x 47.5"h Flat Panel
22	47.5"h Flex Connector
23	47.5"h Flex Connector

Steps:
1) Assemble by starting at End Cap #13.

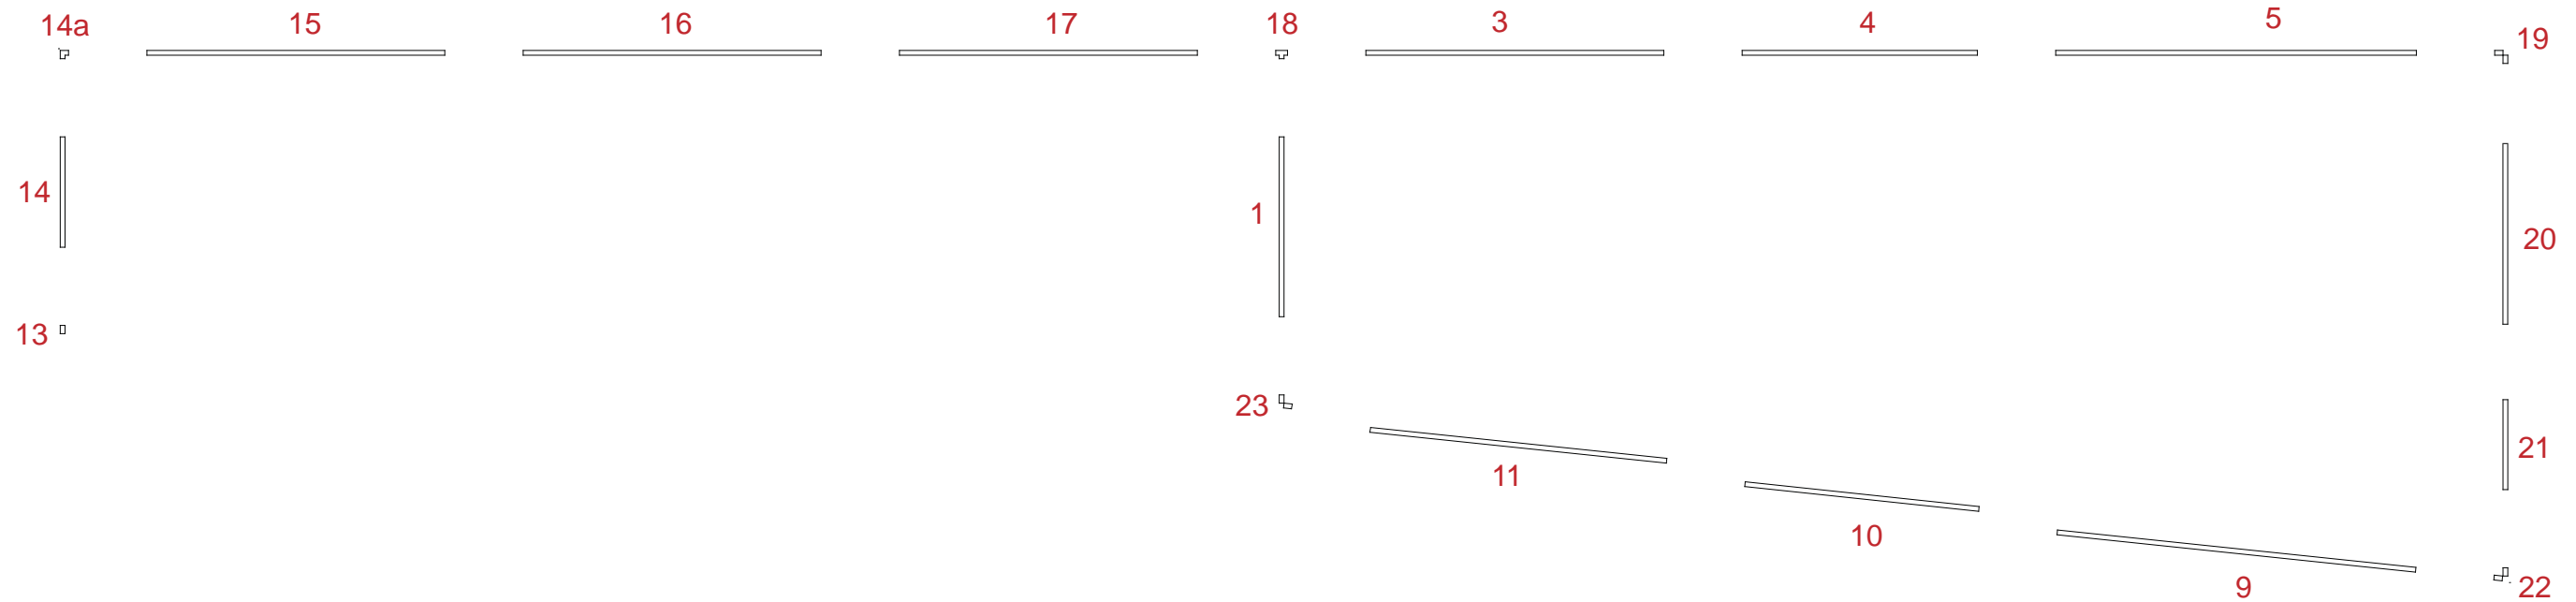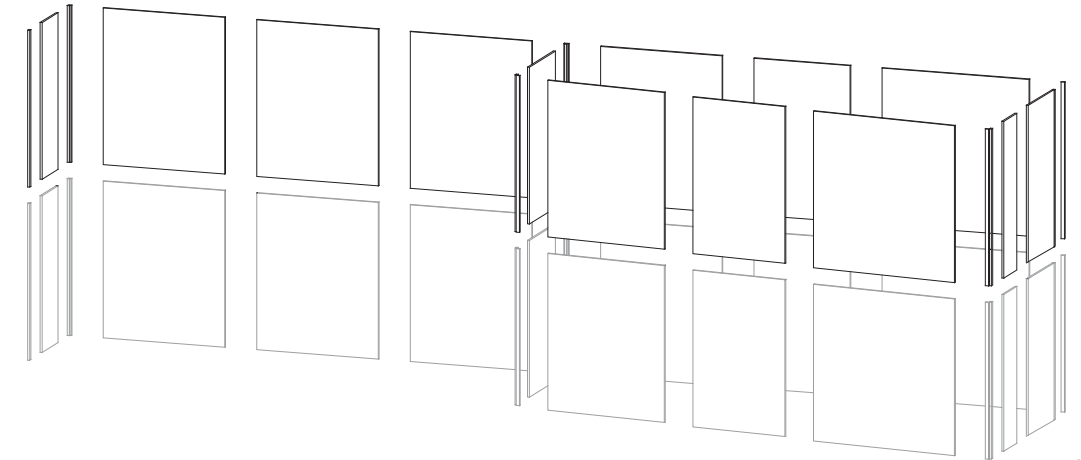

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

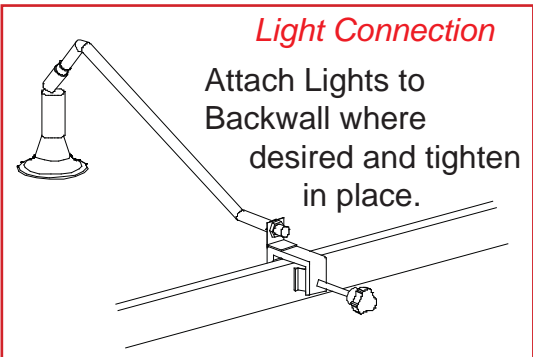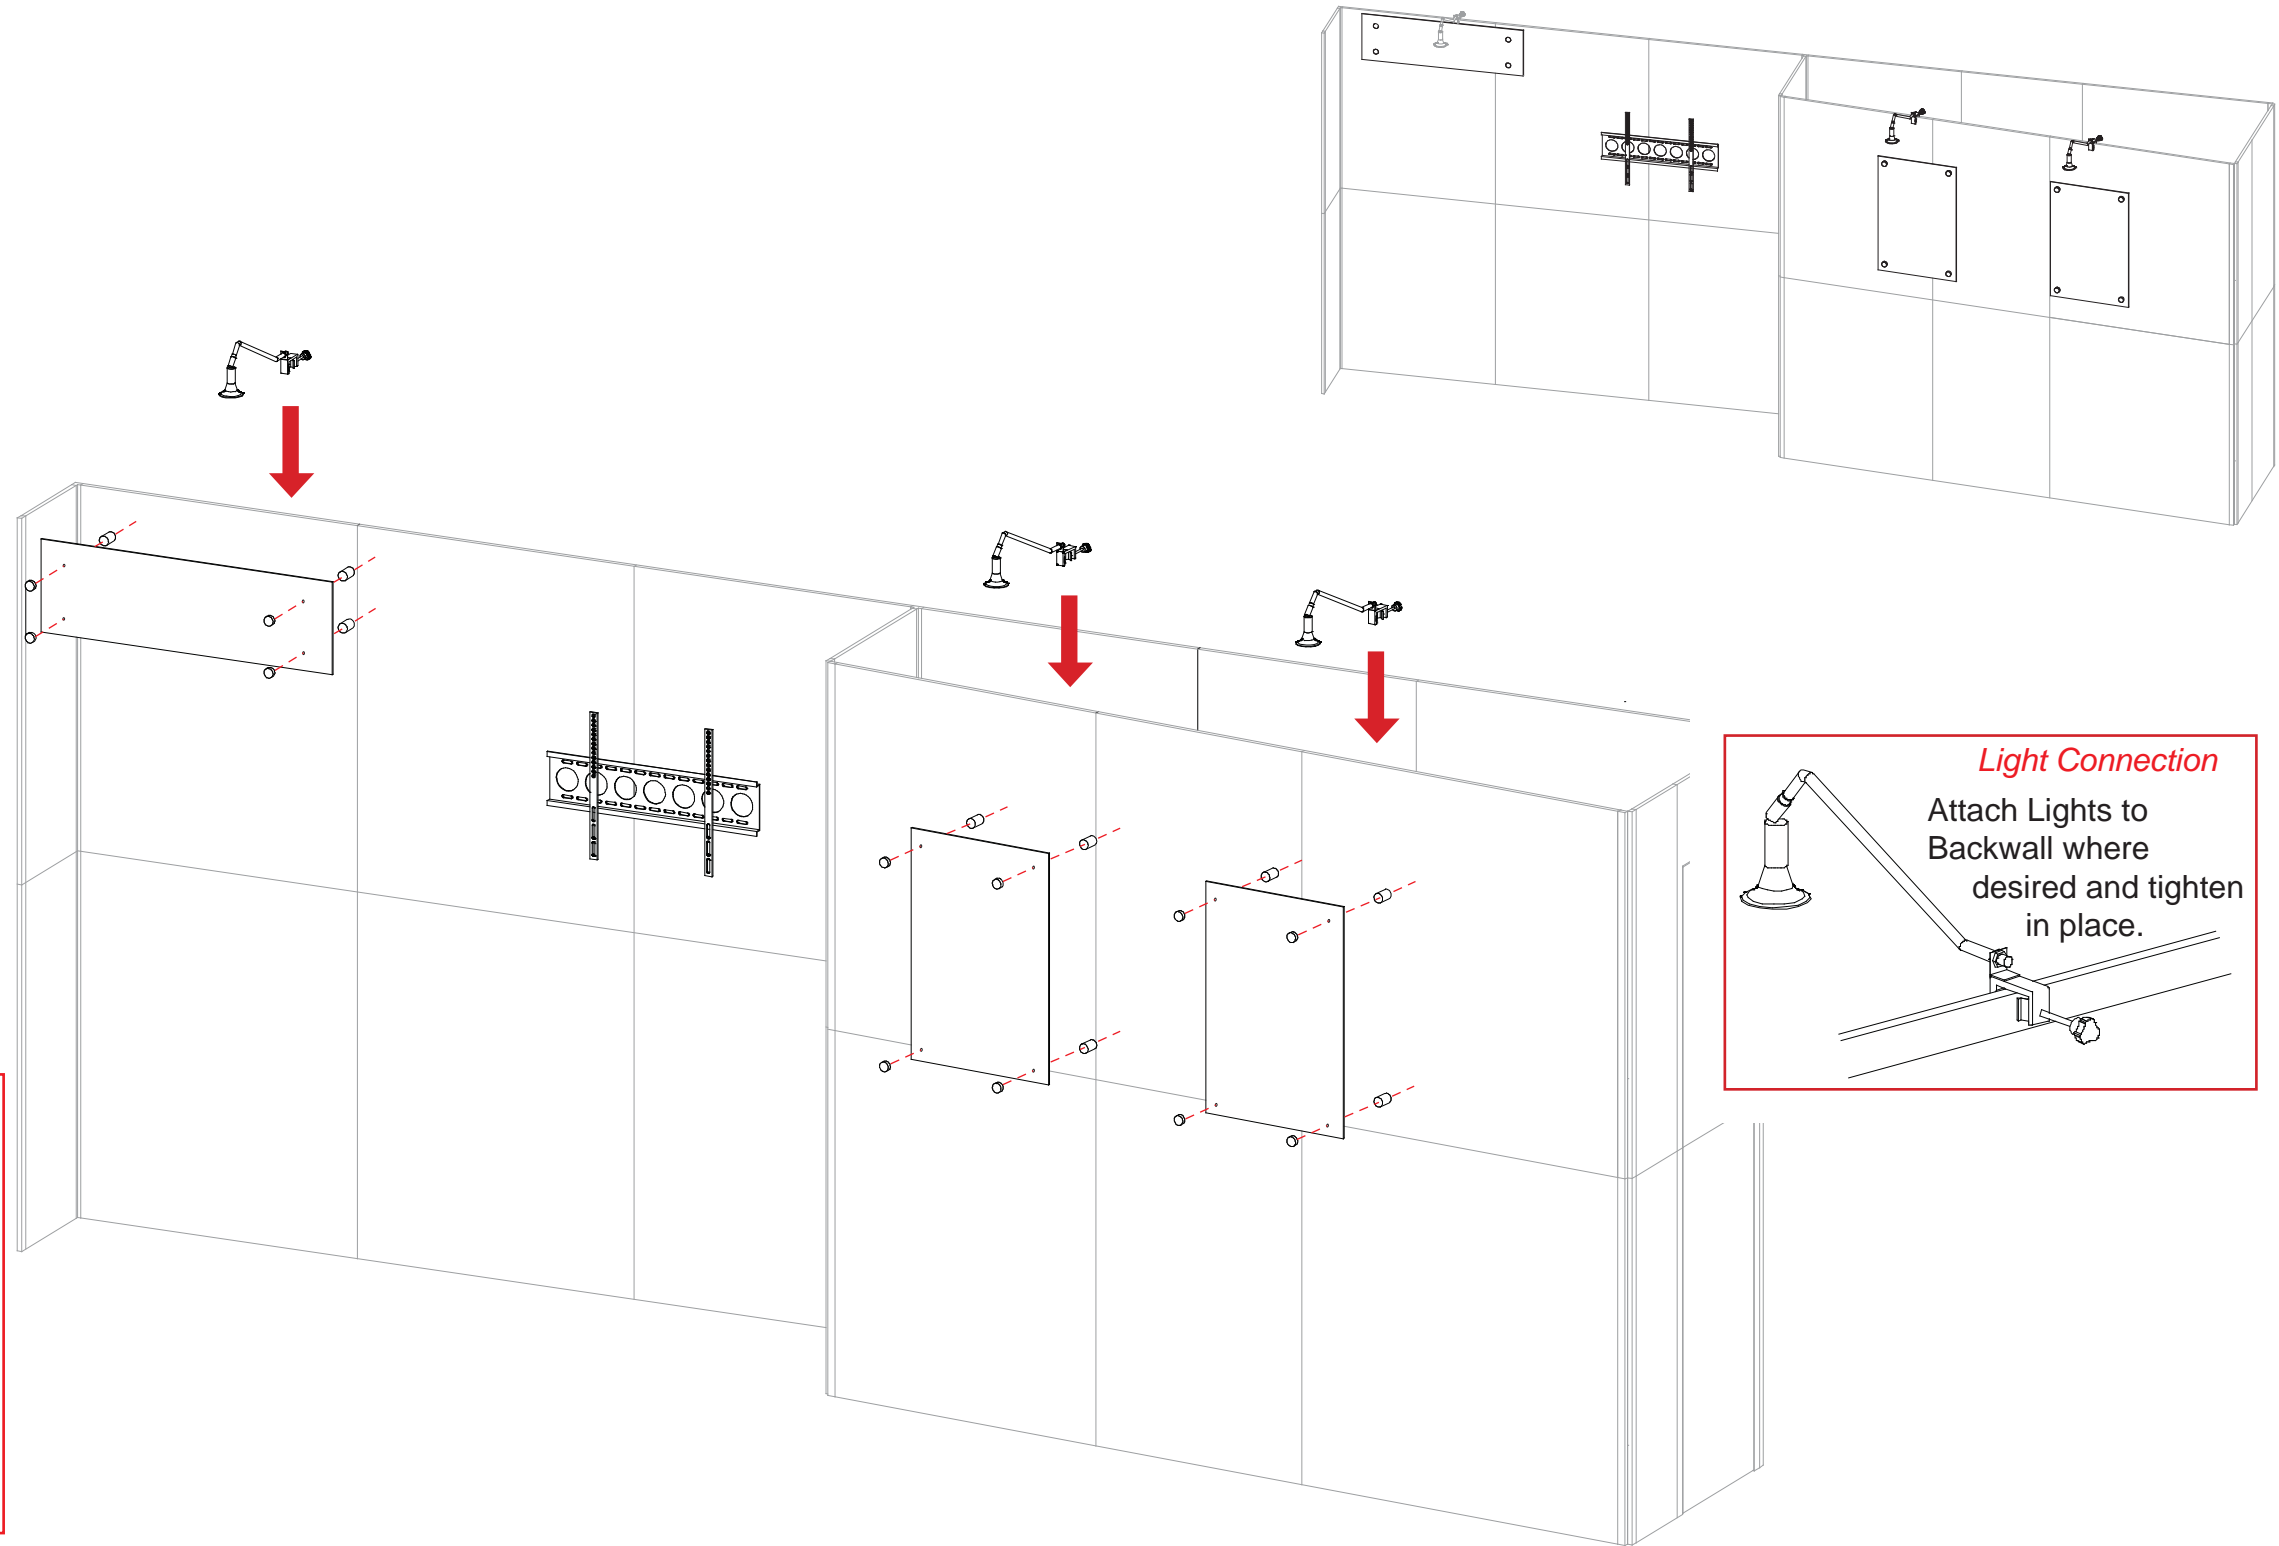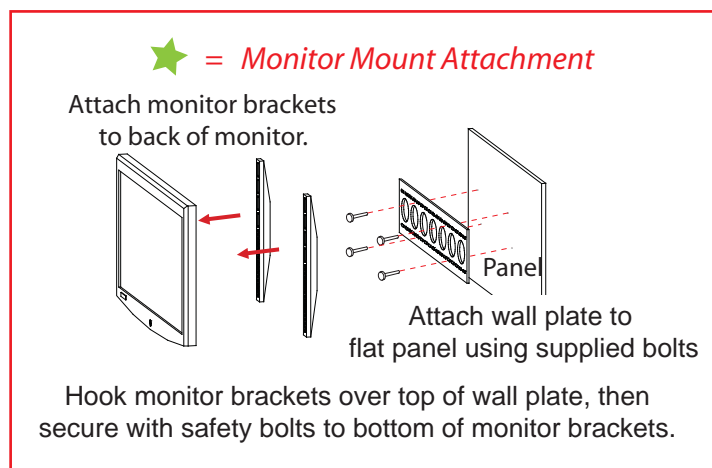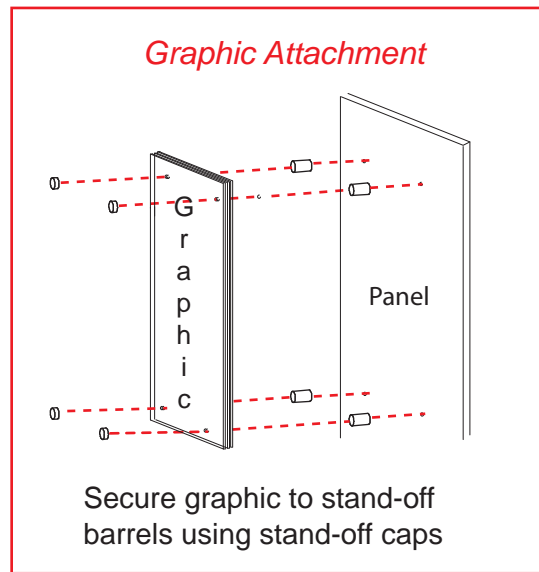

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Qty. per Step	Description
1	1	Base Plate
2	1	47.25"h Vertical Extrusion
3	1	46"h Vertical Extrusion


Steps:

- 1) Attach low vertical extrusion [2] to base [1], see detail D on general information page.
- 2) Attach upper vertical extrusion [3] atop lower vertical extrusion [2].
- 3) Attach frosted plex to vertical assembly using screw caps.
- 4) Attach counter to vertical assembly using screw caps.
- 5) Repeat steps for additional workstation.

* = Indicates connector for Plex attachment


* = Indicates connector for Monitor Mount attachment

Note: Connectors should remain assembled with vertical extrusion


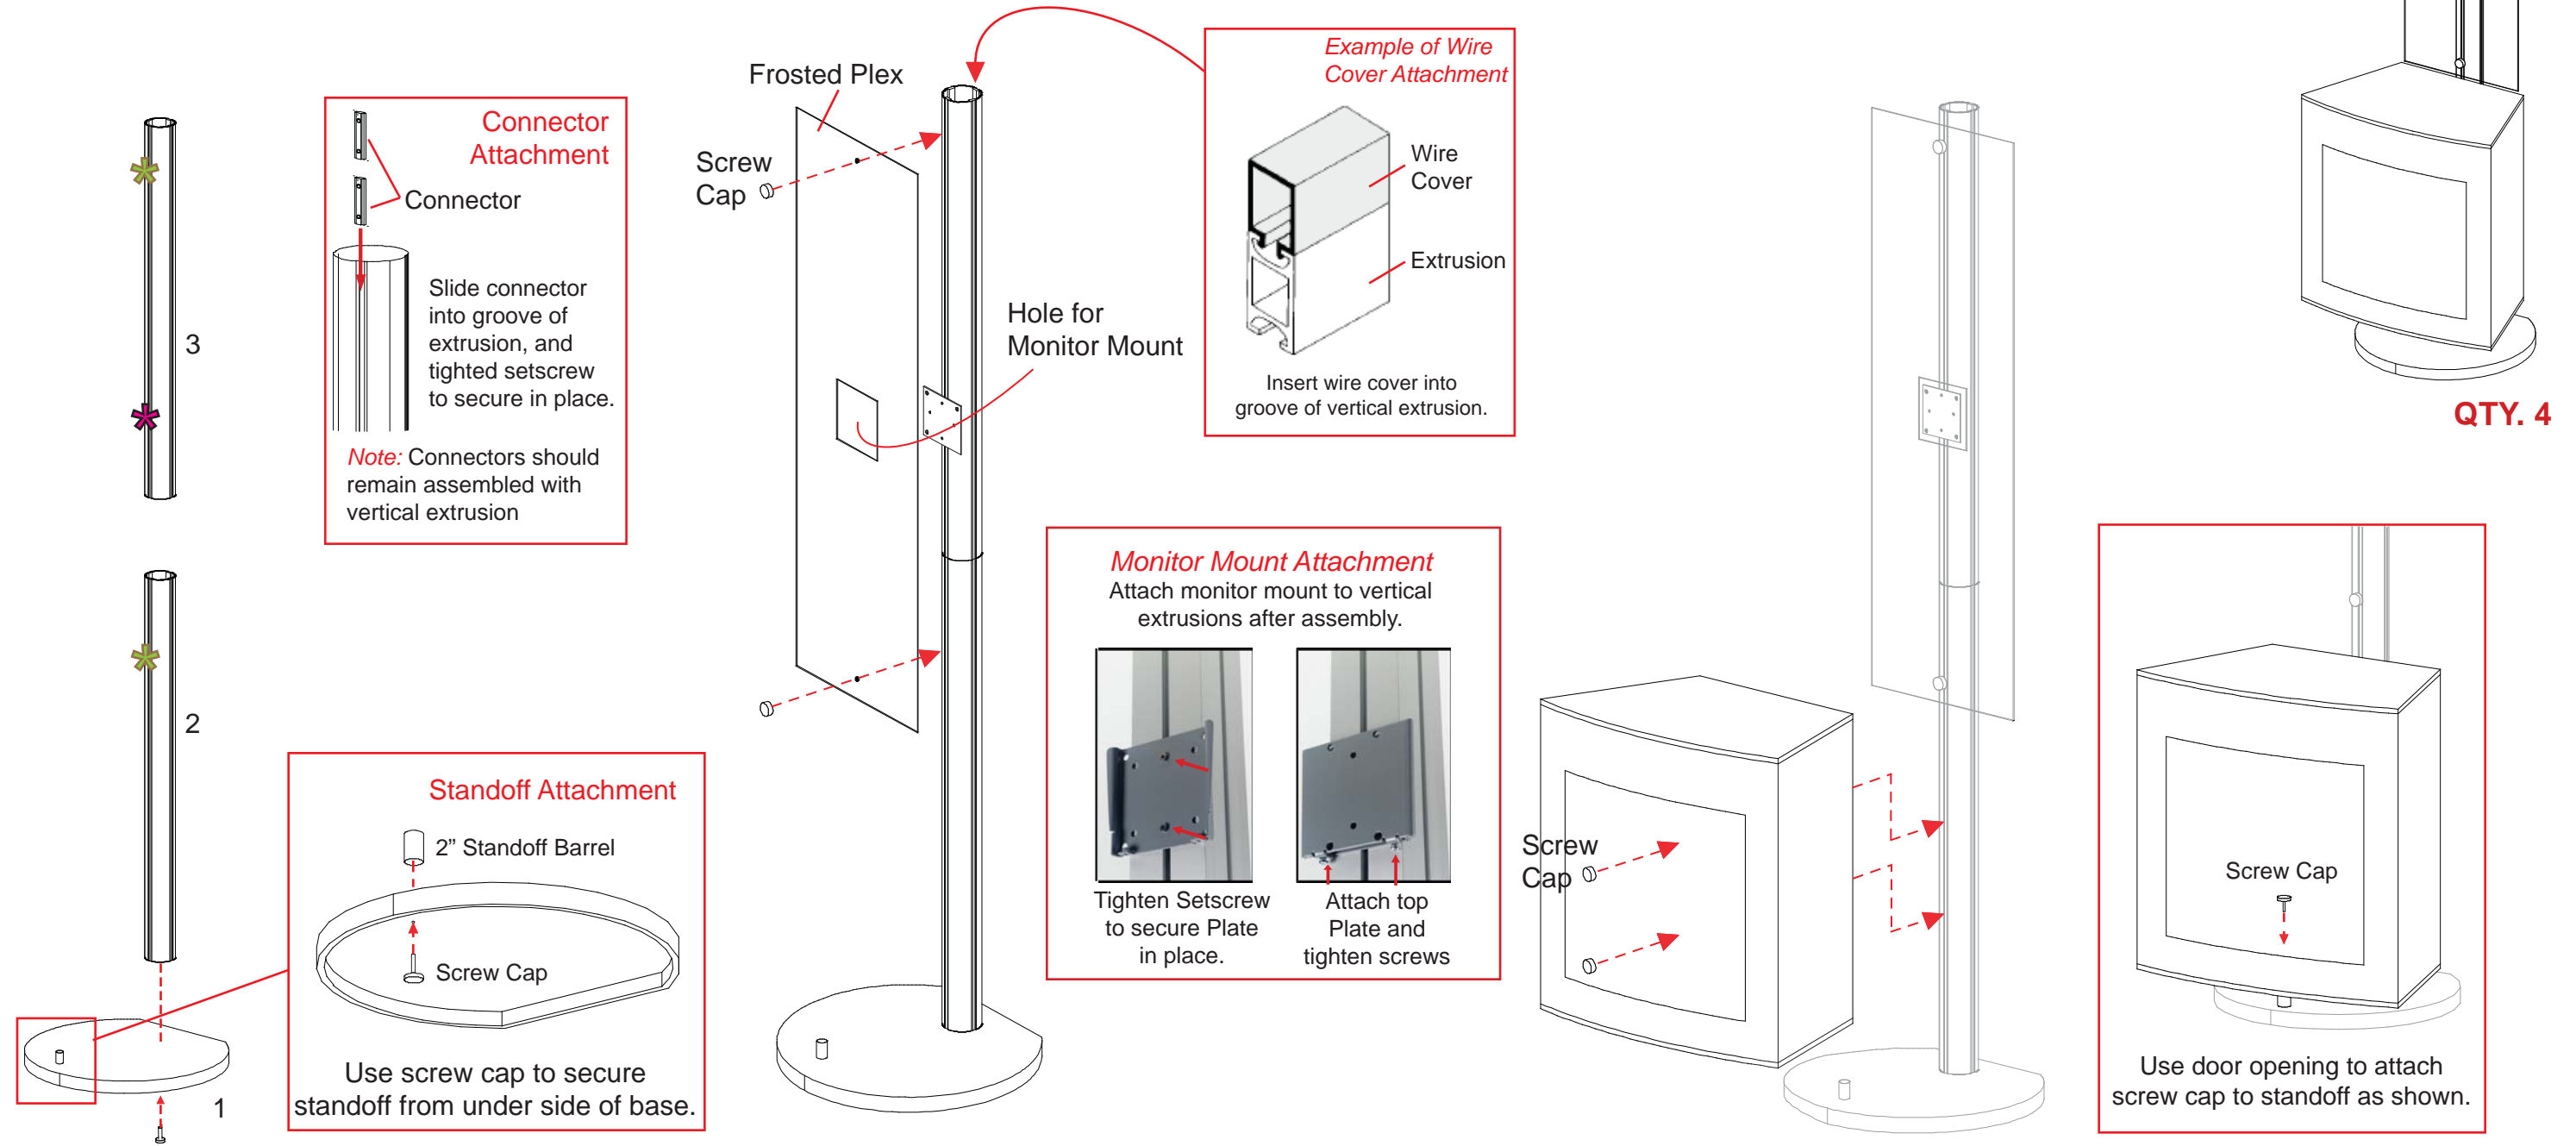


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100


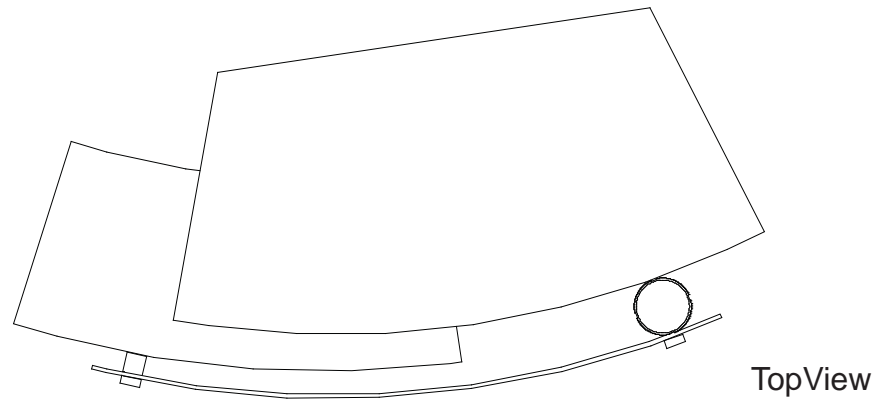


Isometric View

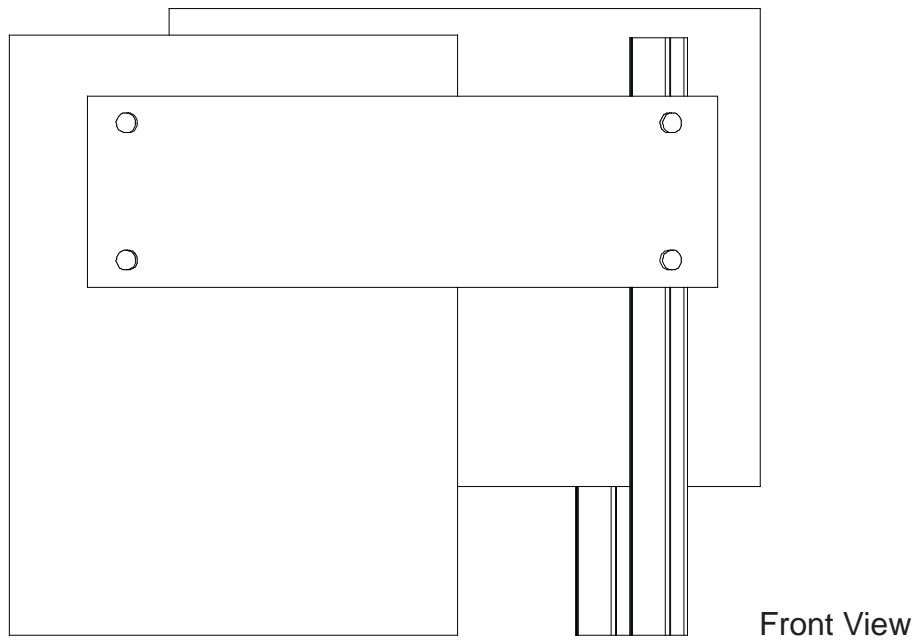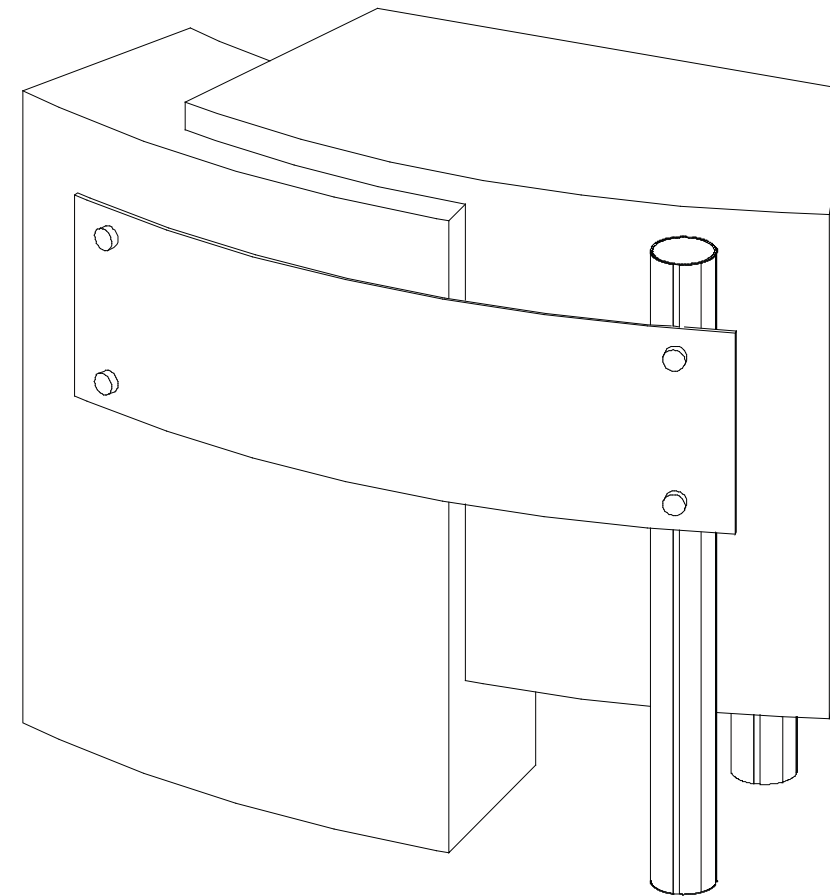

Note: Pedestal should remain assembled when shipping.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

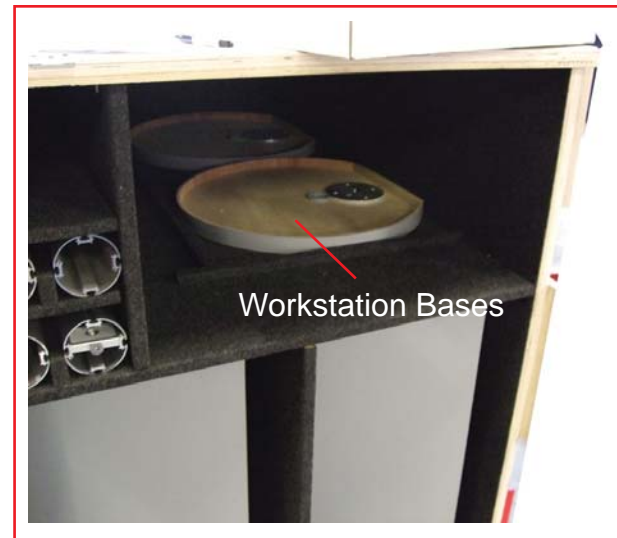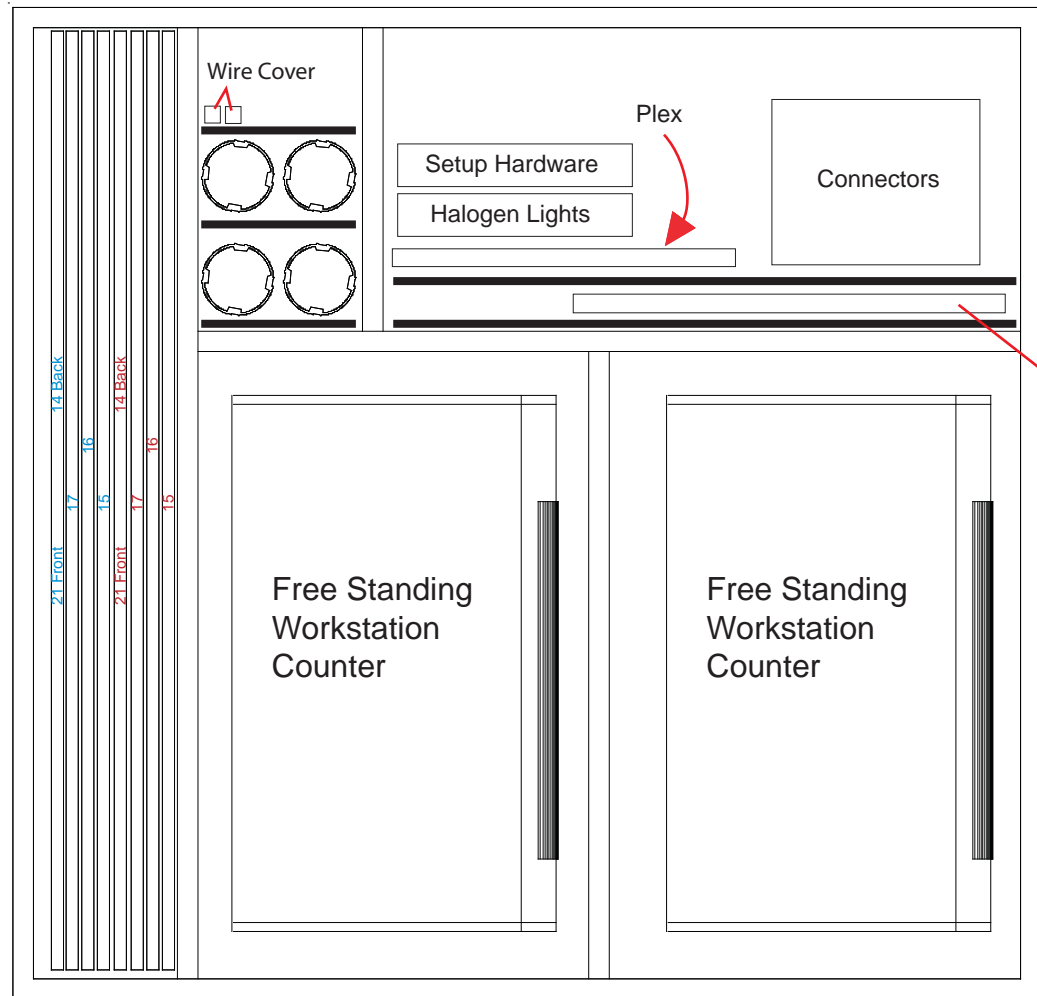

Workstation Bases



Front View of Crate

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING