
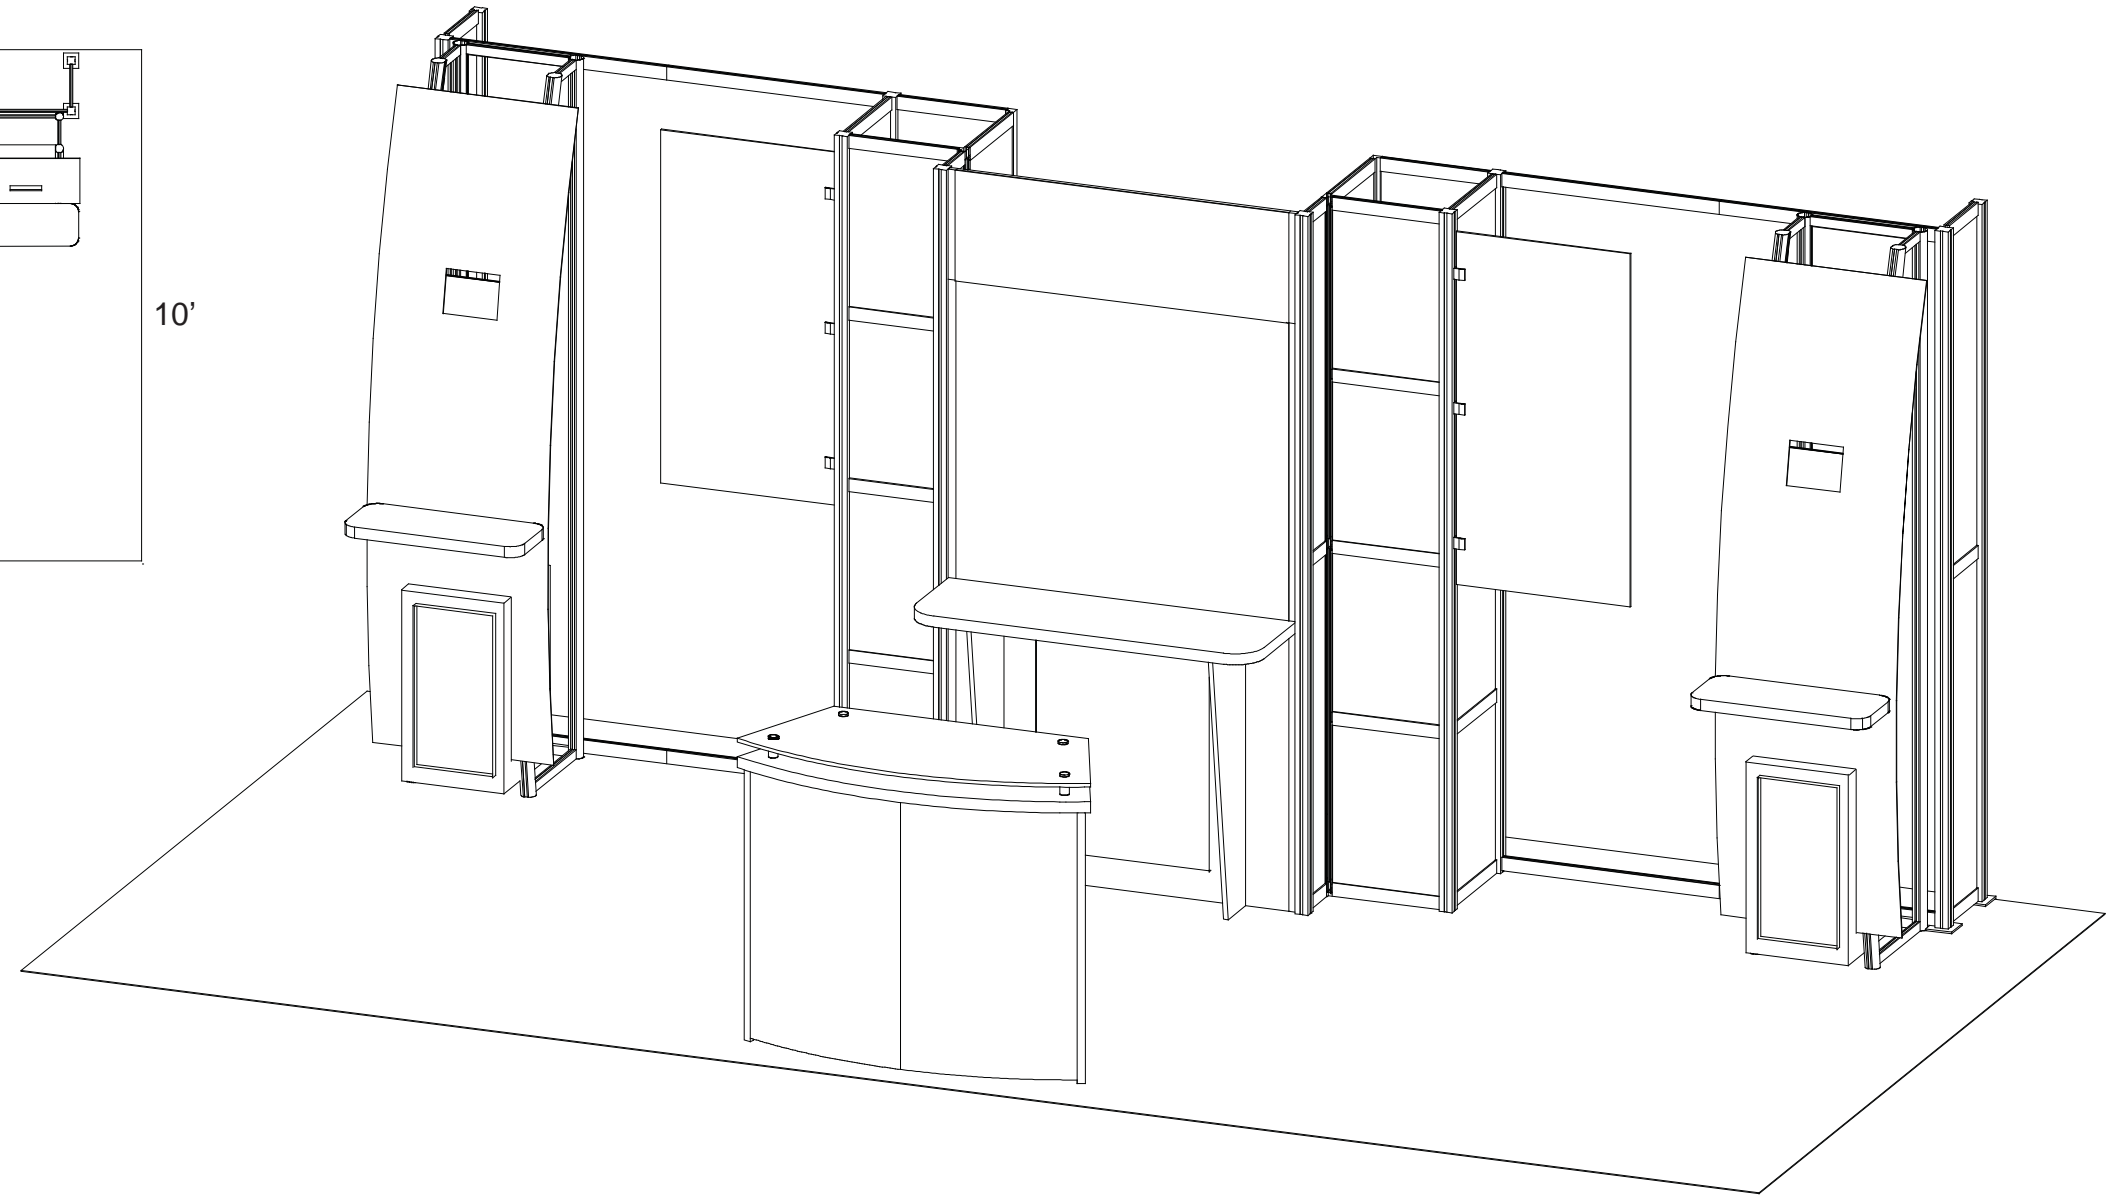


# euro It | HYBRIDS

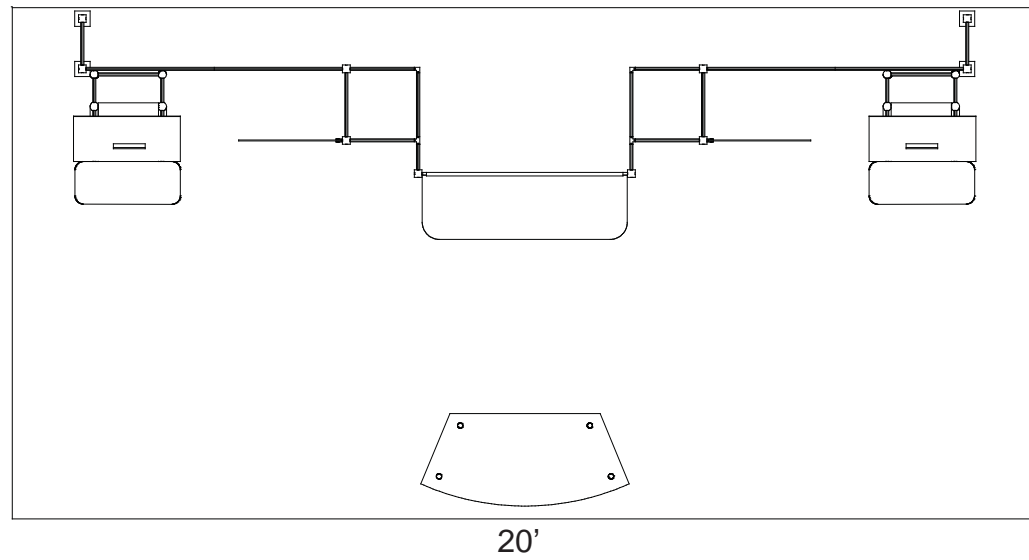

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

# euro lt | HYBRIDS

## Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

## Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


## General Setup Instructions for Extrusion System




Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

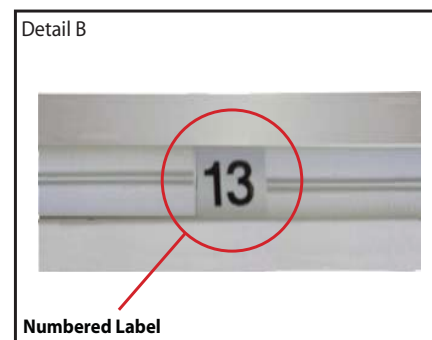


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

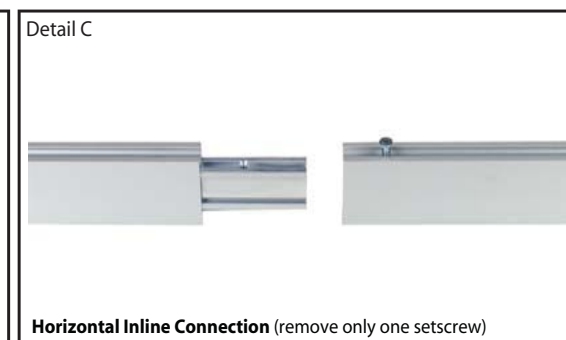

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

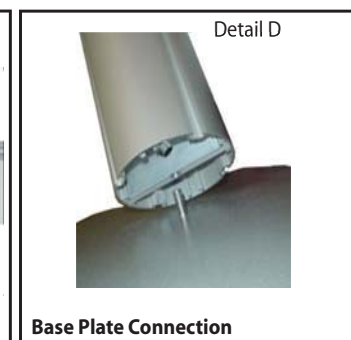


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

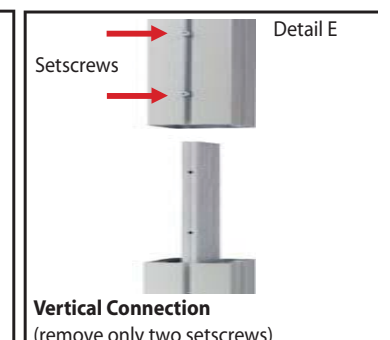


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

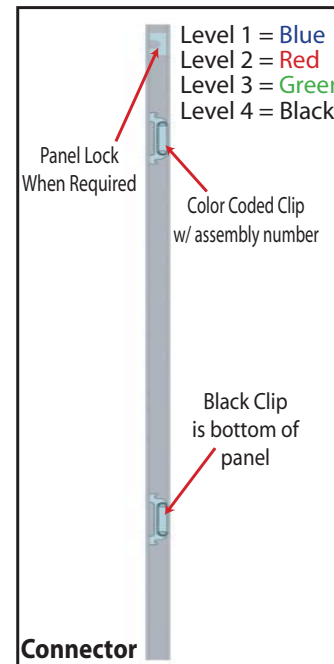


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

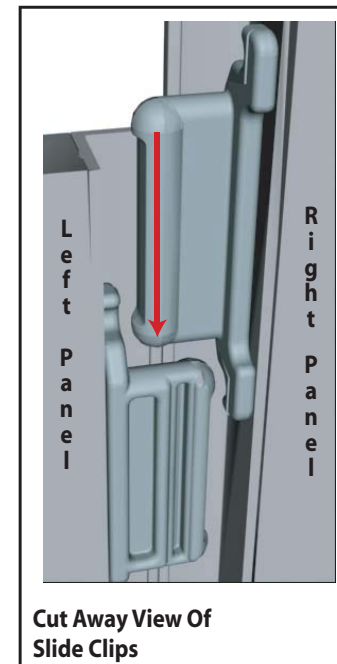

Components connect together by aligning them and sliding downward connecting clips together.

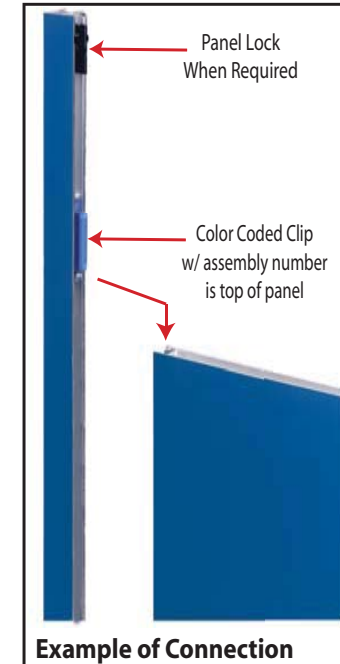

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

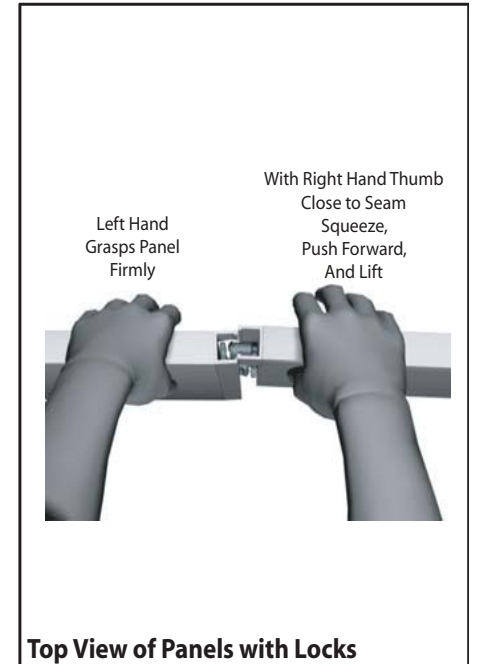

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

**Modul Extrusion Item List**


Item	Qty. per Step	Description
1	2	Base Plate
2	1	94.75" Square Vertical Extrusion
3	1	94.75" Square Vertical Extrusion
4	1	95" Square Vertical Extrusion
5	1	95" 90° Corner Extrusion
6	1	95" 3-way Connector Extrusion
7	1	95" Square Vertical Extrusion w/ Connector Attached
8	1	95" Square Vertical Extrusion w/ Connector Attached
14	3	10" w Horizontal Extrusion
15	1	60" w Horizontal Extrusion w/ Velcro Attached
16	1	60" w Horizontal Extrusion w/ Velcro Attached
17	6	15" w Horizontal Extrusion
18	3	6" w Horizontal Extrusion

**EURO LT Panel System Item List**

Level 1	
Item Number	Description
1	46" w x 38" h Door Panel
Level 2	
Item Number	Description
1	46" w x 42" h Flat Panel
Level 3	
Item Number	Description
1	46" w x 15" h Light Box Frame

**Steps:**

- 1) Attach verticals [2 and 3] to base plates [1].
- 2) Attach horizontal bars [14] between vertical extrusions, placing inserts where indicated.
- 3) Attach horizontal extrusions [15 and 16] between verticals [2 and 3].
- 4) Attach horizontal bars [17] between verticals [4, 5 and 6], placing inserts where indicated.
- 5) Attach horizontal bars [18] between verticals [6 and 7], placing inserts where indicated.
- 6) Attach panel level 1 #1, level 2 #1 and level 3 #1 between connectors on verticals [7 and 8].

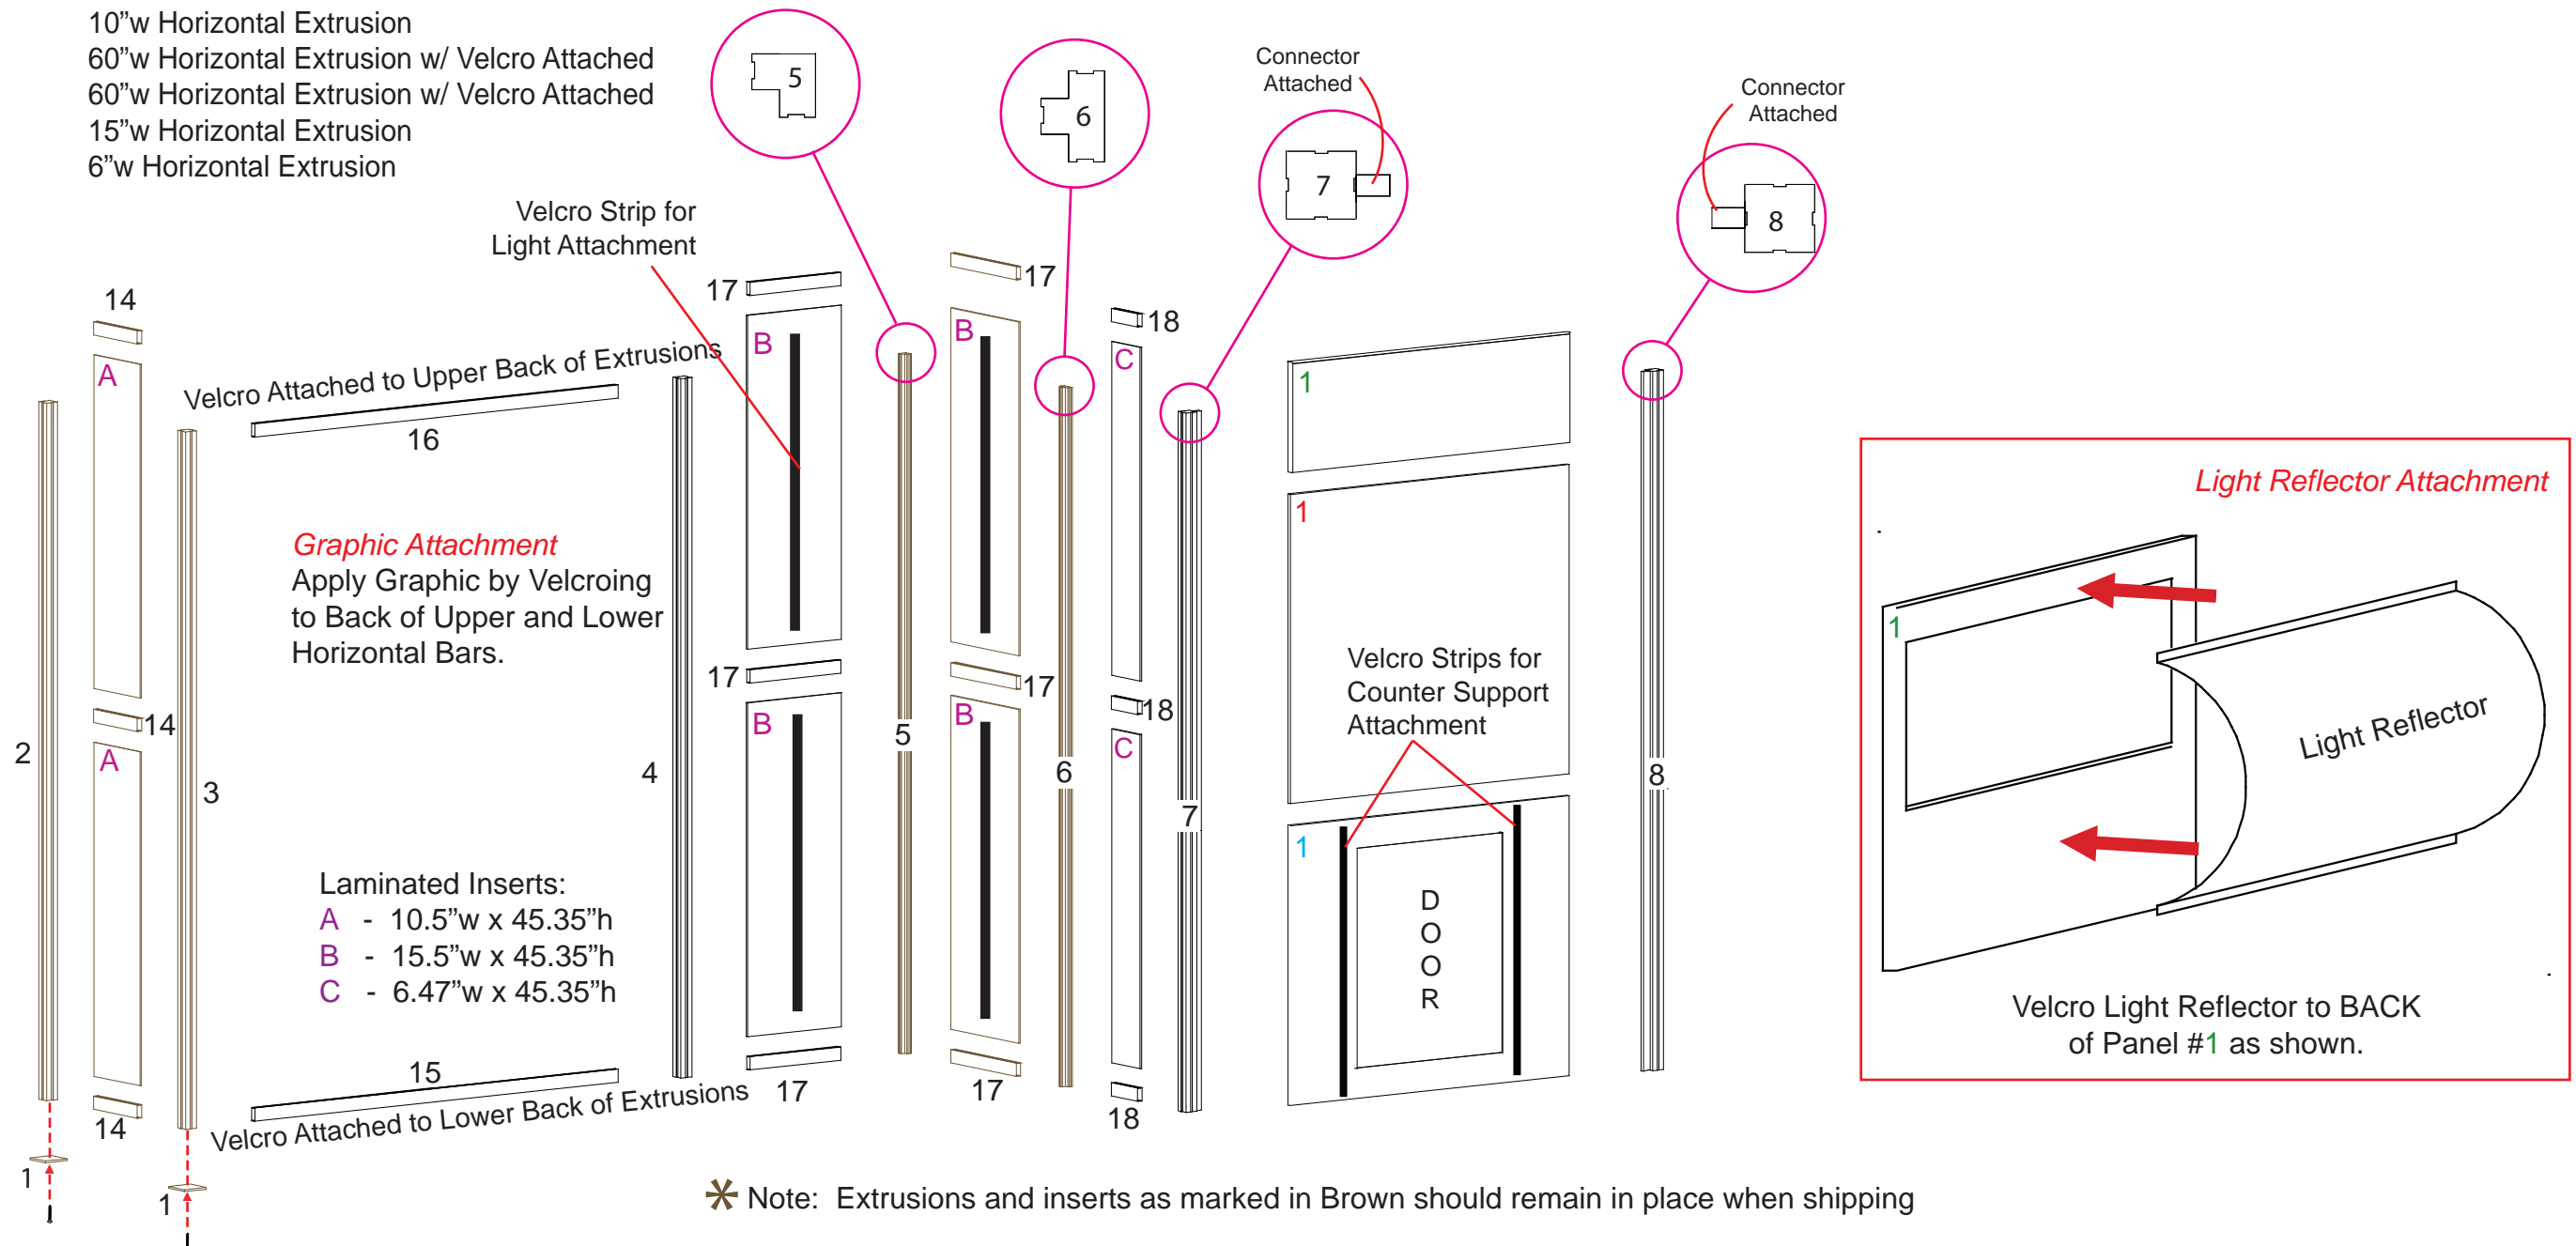

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**


866.652.2100

Modul Extrusion Item List

Item	Qty. per Step	Description
1	2	Base Plate
8	1	95" h Square Vertical Extrusion w/ Connector Attached
9	1	95" h 3-way Connector Extrusion
10	1	95" h 90° Corner Extrusion
11	1	95" h Square Vertical Extrusion
12	1	94.75" h Square Vertical Extrusion
13	1	94.75" h Square Vertical Extrusion
14	3	10" w Horizontal Extrusion
15	1	60" w Horizontal Extrusion w/ Velcro Attached
16	1	60" w Horizontal Extrusion w/ Velcro Attached
17	6	15" w Horizontal Extrusion
18	3	6" w Horizontal Extrusion

Steps:

- 1) Attach horizontal bars [18] between verticals [8 and 9], placing inserts where indicated.
- 2) Attach horizontal bars [17] between verticals [9, 10 and 11], placing inserts where indicated.
- 3) Attach verticals [12 and 13] to base plates [1].
- 4) Attach horizontal extrusions [15 and 16] between verticals [11 and 12].
- 5) Attach horizontal bars [14] between vertical extrusions [12 and 13], placing inserts where indicated.

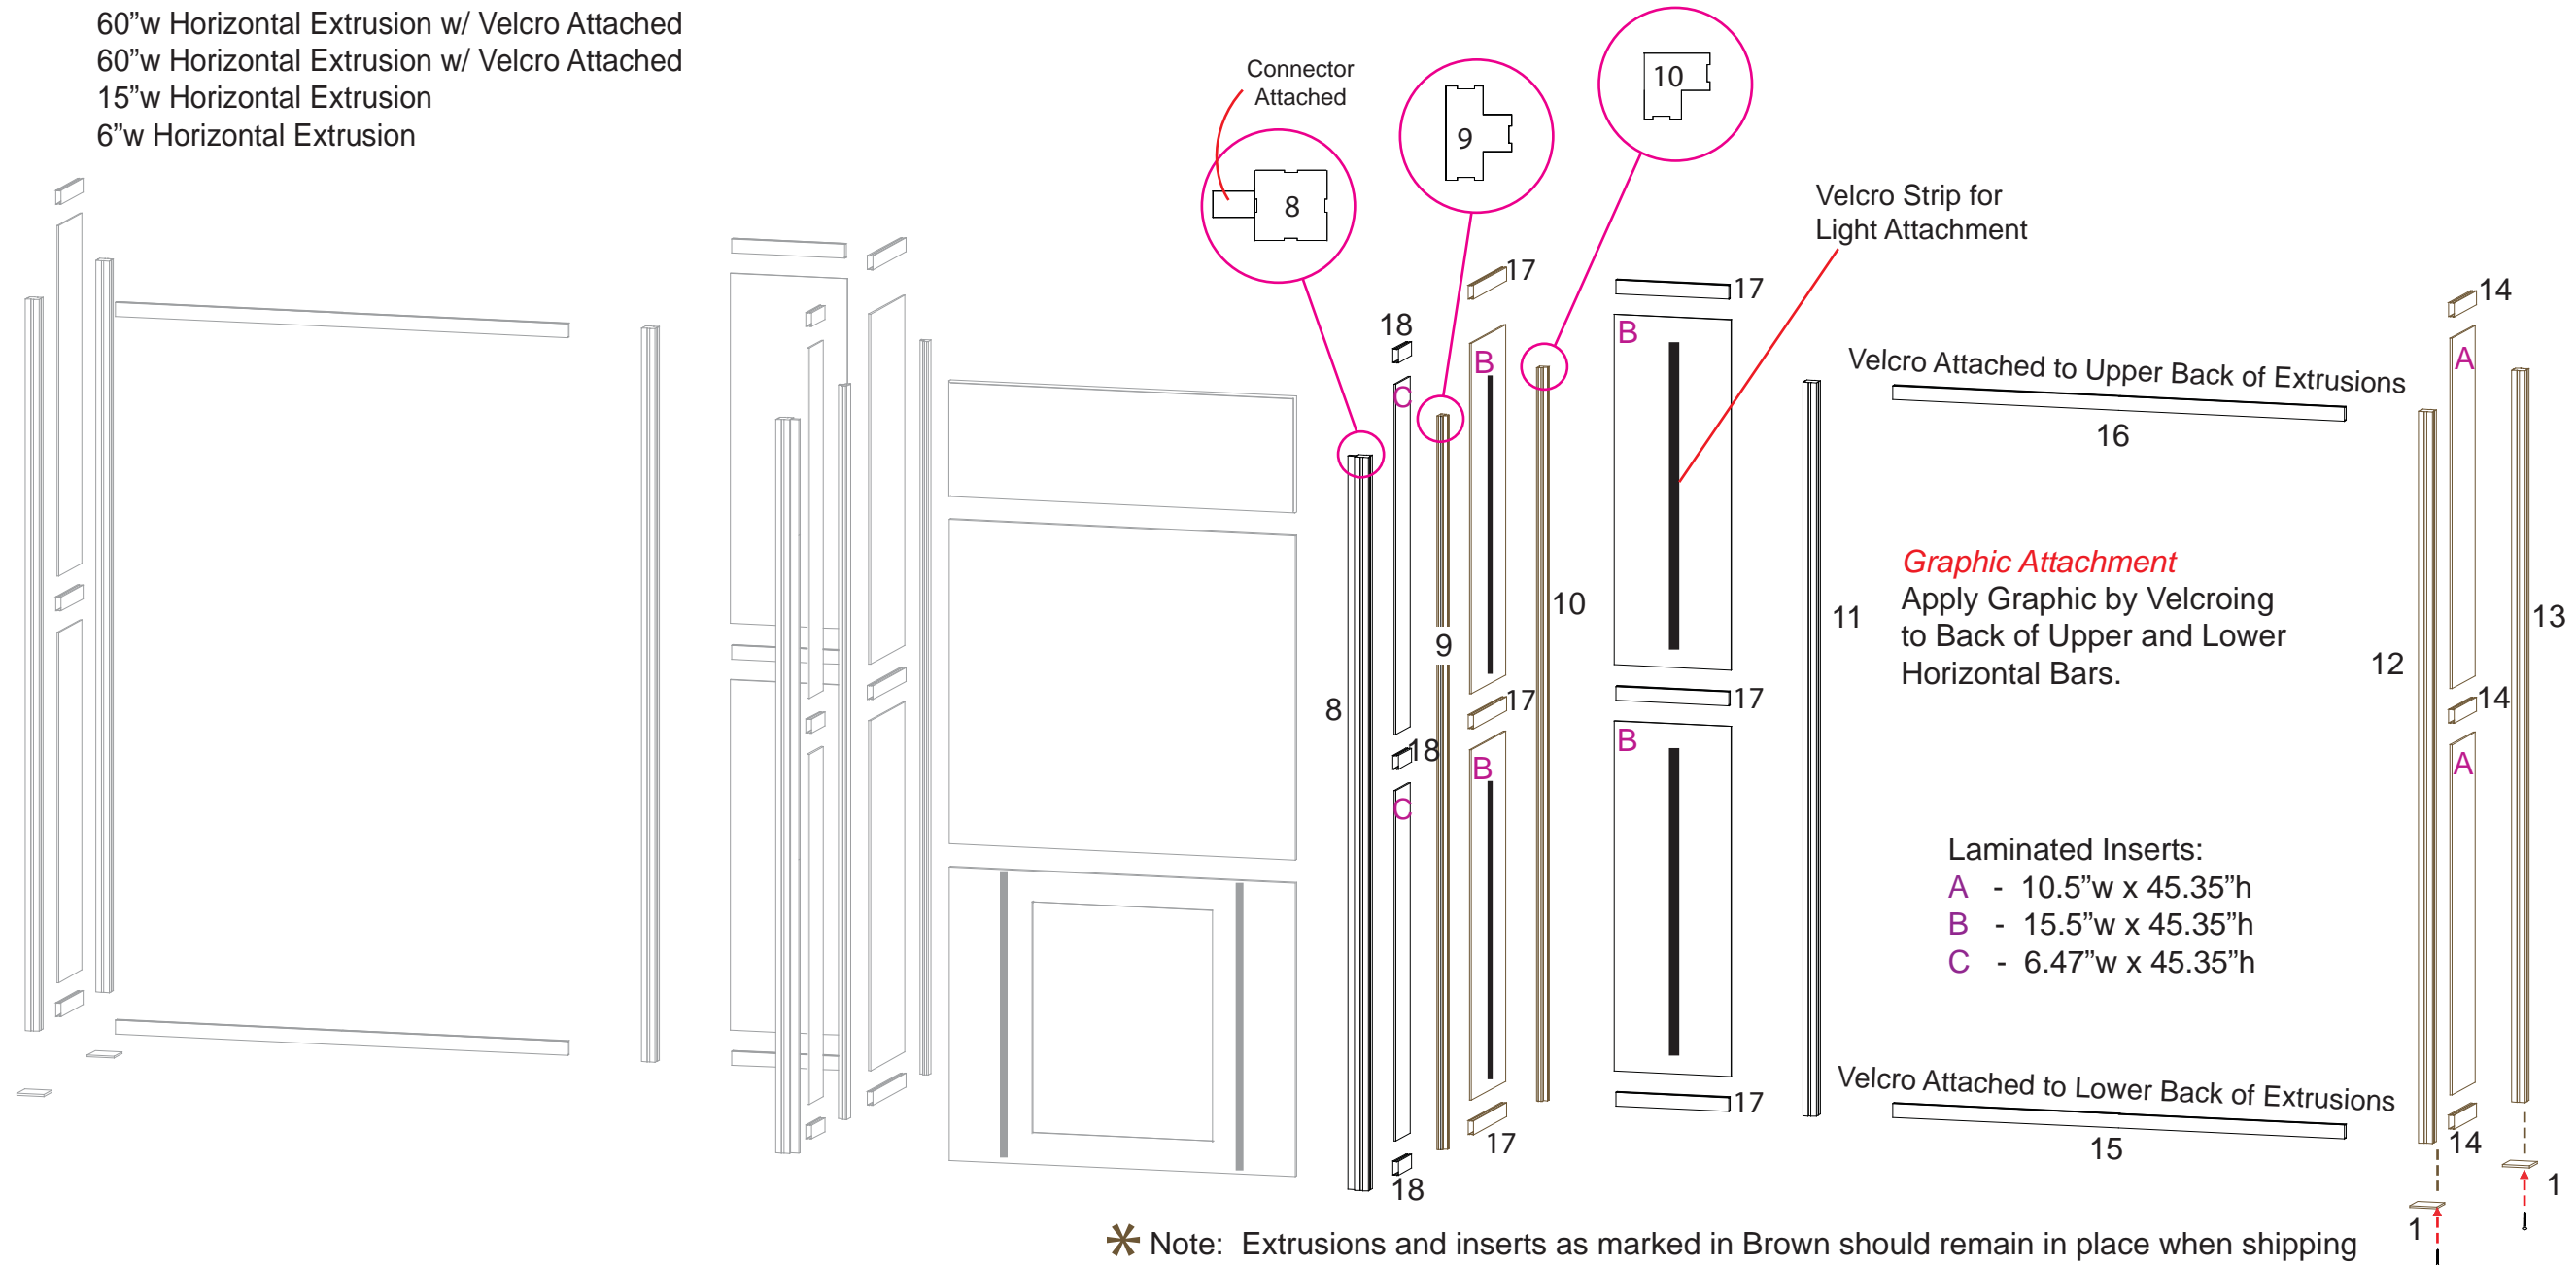

\* Note: Extrusions and inserts as marked in Brown should remain in place when shipping

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

*Modul Extrusion Item List*

Item	Qty.	Description
19	20	15"w Horizontal Extrusion
20	2	95"h Square Vertical Extrusion


*EURO LT Panel System Item List*

*Level 1*

Item Number	Description
2	Counter Support Panel
3	Counter Support Panel

Steps:

- 1) Attach horizontal extrusions [19] between vertical extrusions, placing inserts as shown in illustration.
- 2) Velcro counter support panels #2 and 3 to connector on panel #1.

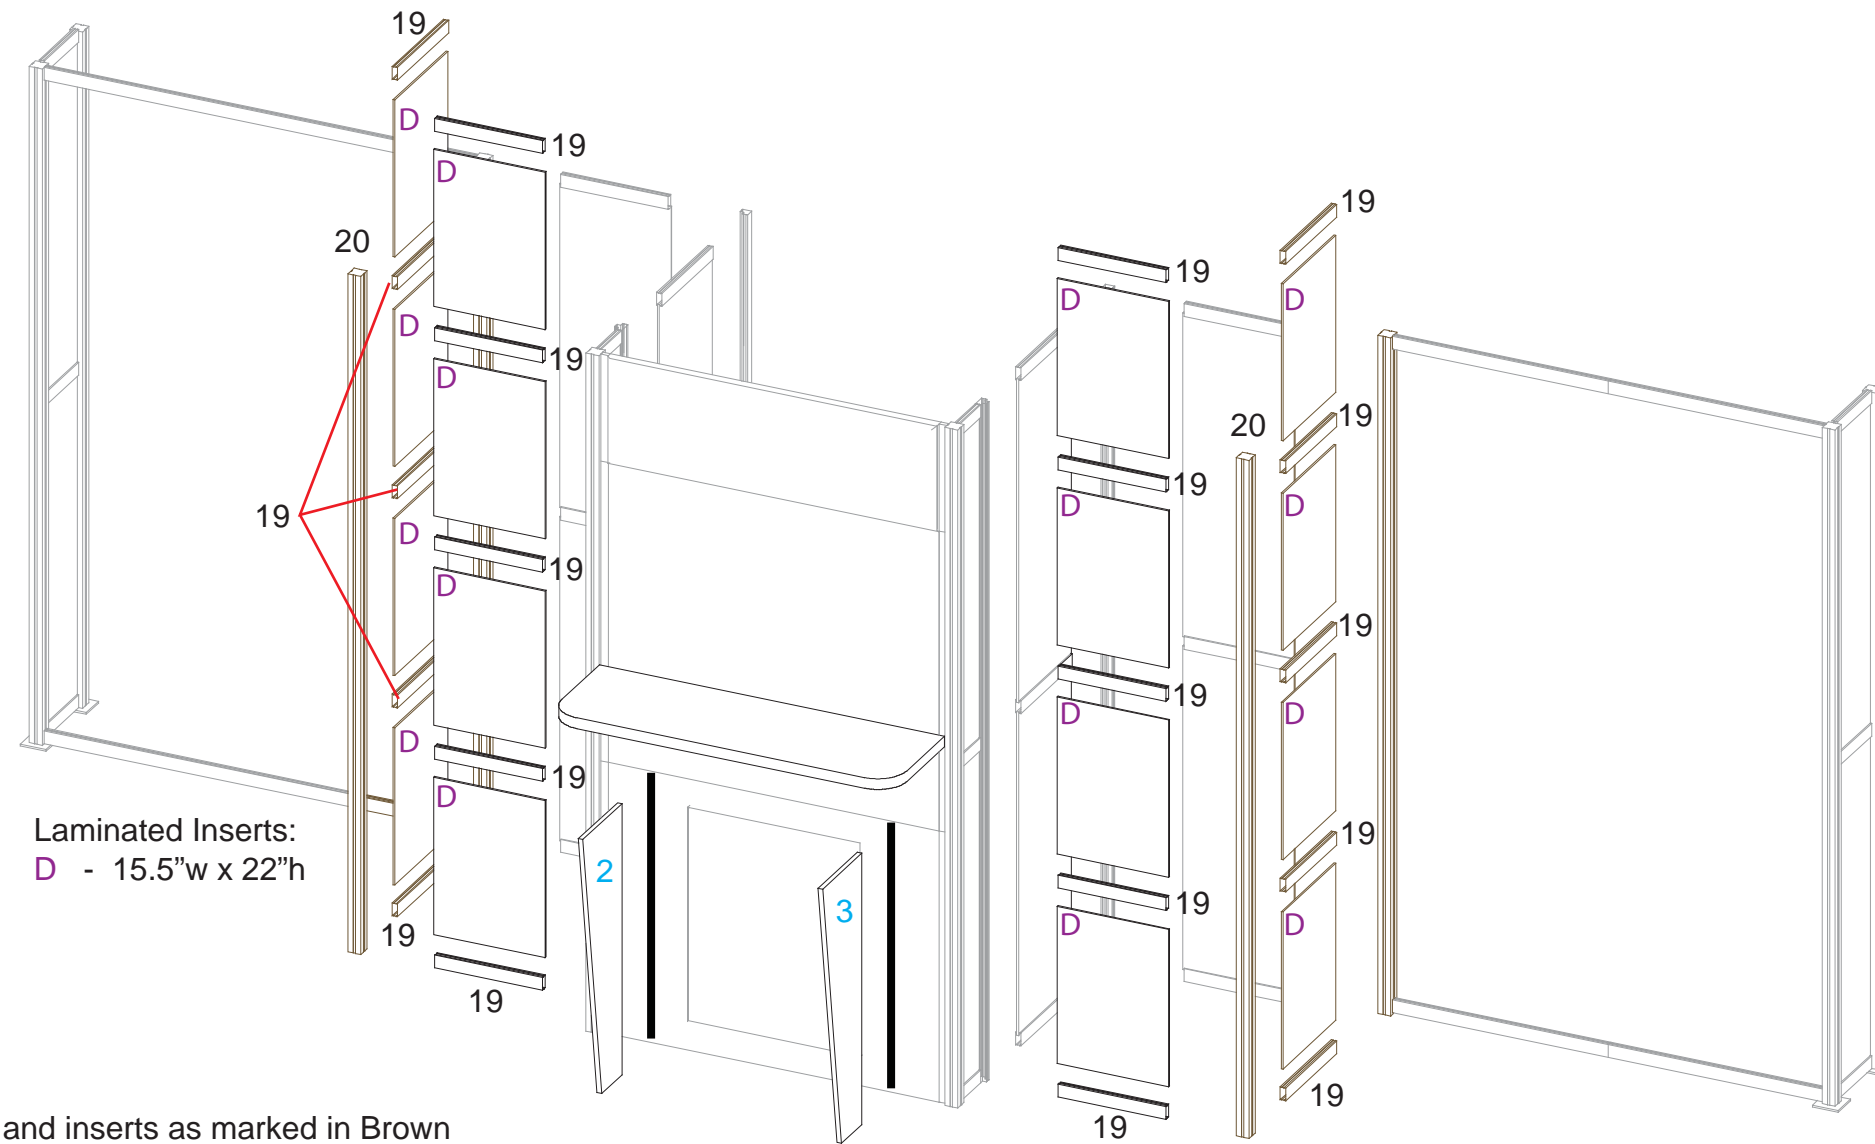

Laminated Inserts:  
D - 15.5"w x 22"h

\* Note: Extrusions and inserts as marked in Brown should remain in place when shipping

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

Steps:

- 1) Attach graphics to vertical extrusion using A10 clamps.
- 2) Attach monitor mount to panel where indicated, see Monitor Mount Attachment.

**Graphic Attachment**

Slide A10 Clamp into groove of square extrusion.



A10

When desired location is found, tighten set screw to secure.




Set-Screw

Tighten black plastic set screw to secure Wing in place.




Black Plastic Set-screw

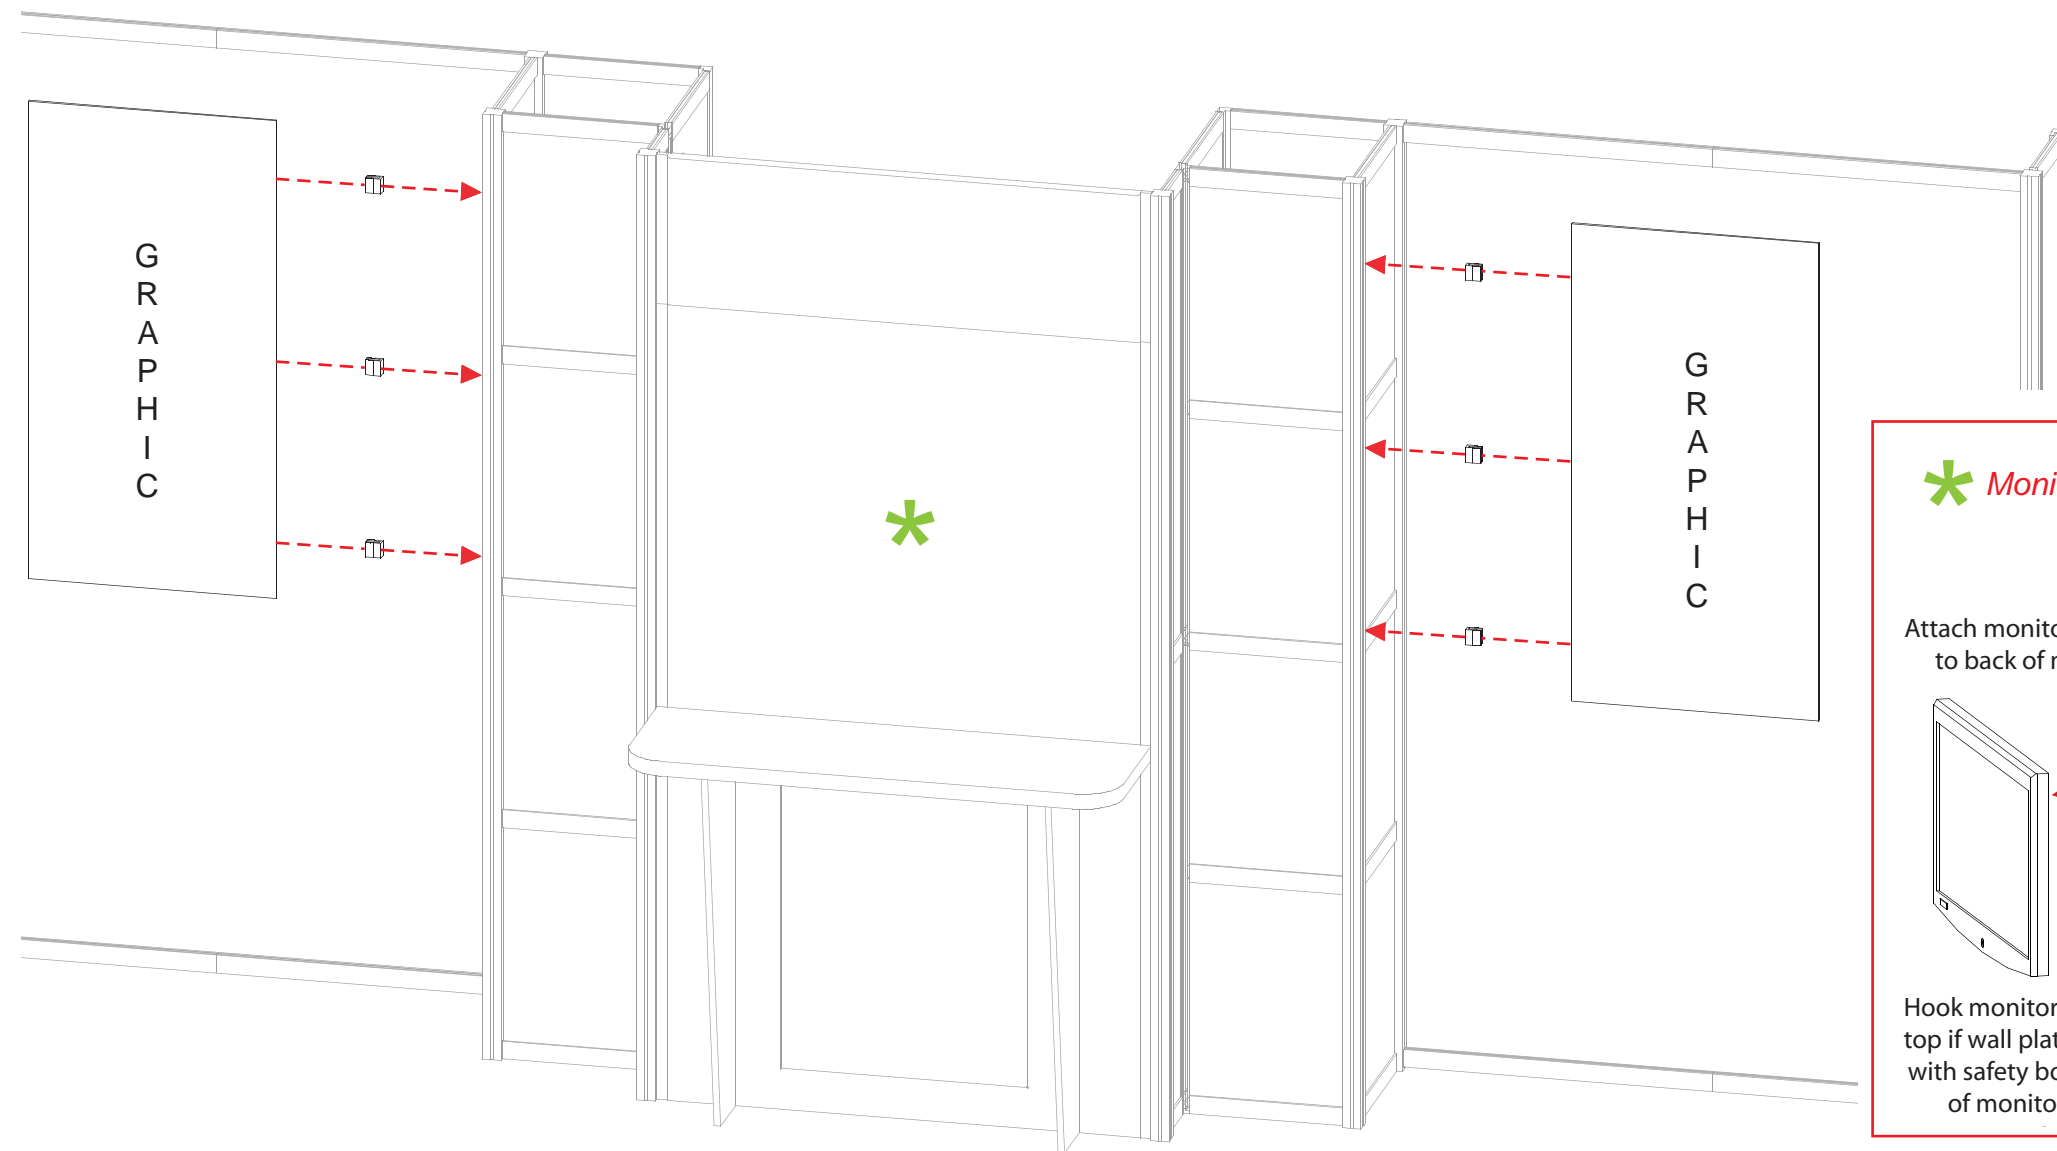


**\* Monitor Mount Attachment**

Attach monitor brackets to back of monitor.

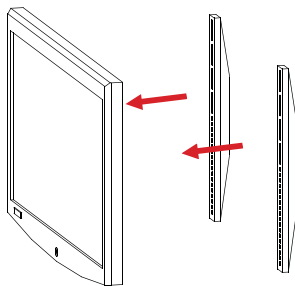

Hook monitor brackets over top if wall plate, then secure with safety bolts to bottom of monitor brackets.

Attach wall plate to vertical extrusion through panel using bolts and secure with washers and wing nuts to back.



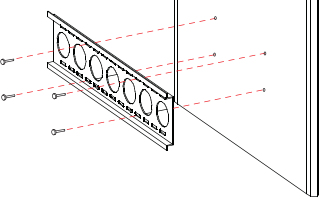


**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

866.652.2100

Item Number	Description
4	14.125" w x 38" h Panel
5	38" h Flexible Connector
6	23" w x 38" h Panel w/ Door
7	8.003" w x 38" h Panel
8	38" h Flexible Connector
9	14.125" w x 38" h Panel
10	38" h 90° Connector
11	57.5" r Curved Panel
12	57.5" r Curved Panel
13	38" h 90° Connector

- Steps:
- 1) Assemble by starting at panel #4 and continue in numerical order.
  - 2) Velcro internal shelf supports to inside of assembled base.
  - 3) Set internal shelf atop shelf supports.
  - 4) Place counter atop assembled pedestal base.
  - 5) Attach top shelf to counter using stand-offs.

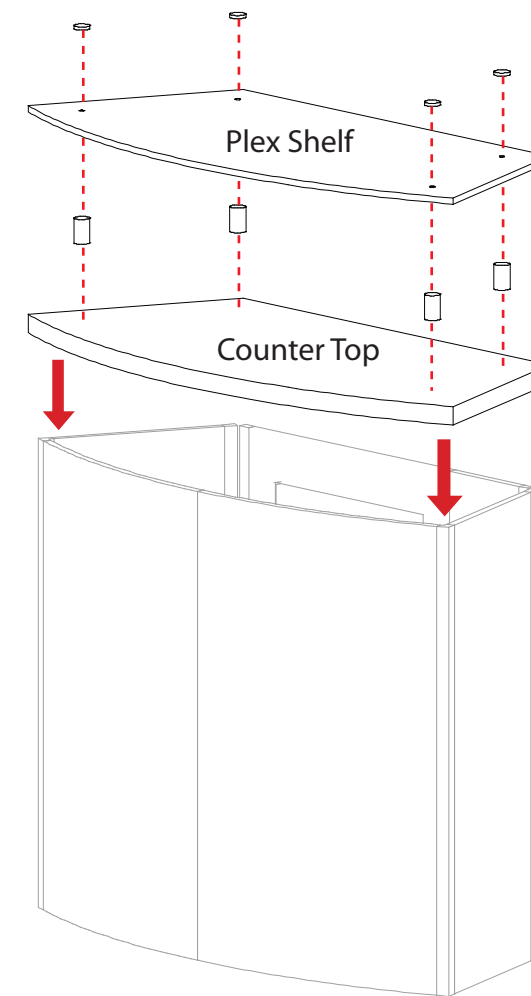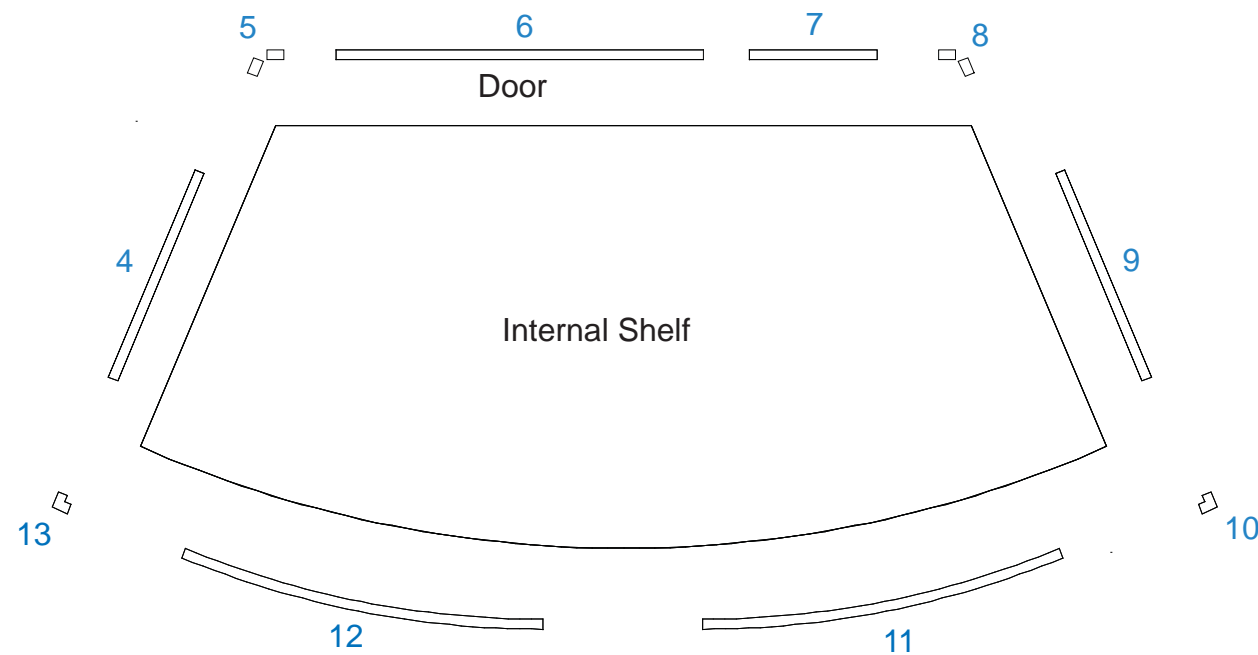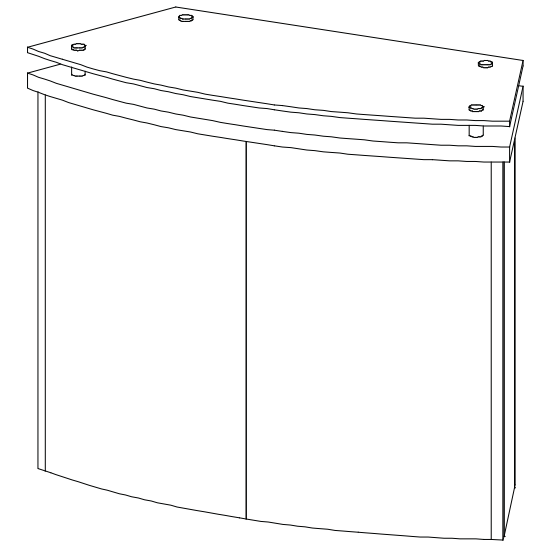



Place counter atop assembled pedestal base. Attach top shelf to counter using stand-offs.

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

Item Number	Description
21	95" h Vertical Extrusion
22	95" h Vertical Extrusion
23	14.119" w Horizontal Extrusion
24	14.119" w Horizontal Extrusion
25	14.831" w Tapered Horizontal Extrusion
26	6.099" w Tapered Horizontal Extrusion
27	Custom Curved Vertical Extrusion
28	Custom Curved Vertical Extrusion
29	Monitor Bracket Support
30	9" w Horizontal Shelf Supports


**Steps**

- 1) Connect horizontal extrusions [23 and 24] between vertical extrusions [21 and 22].
- 2) Attach horizontal extrusions [25 and 26] to top and bottoms of vertical extrusions [21 and 22] as shown.
- 3) Connect horizontal extrusion [29] between curved vertical extrusions [27 and 28].
- 4) Connect Curved Frame to horizontal extrusions [25 and 26].
- 5) Bolt box to assembled workstation frames.
- 6) Attach curved plex to workstation frames with stand-off caps.
- 7) Attach shelf supports [30], and place shelf atop supports.

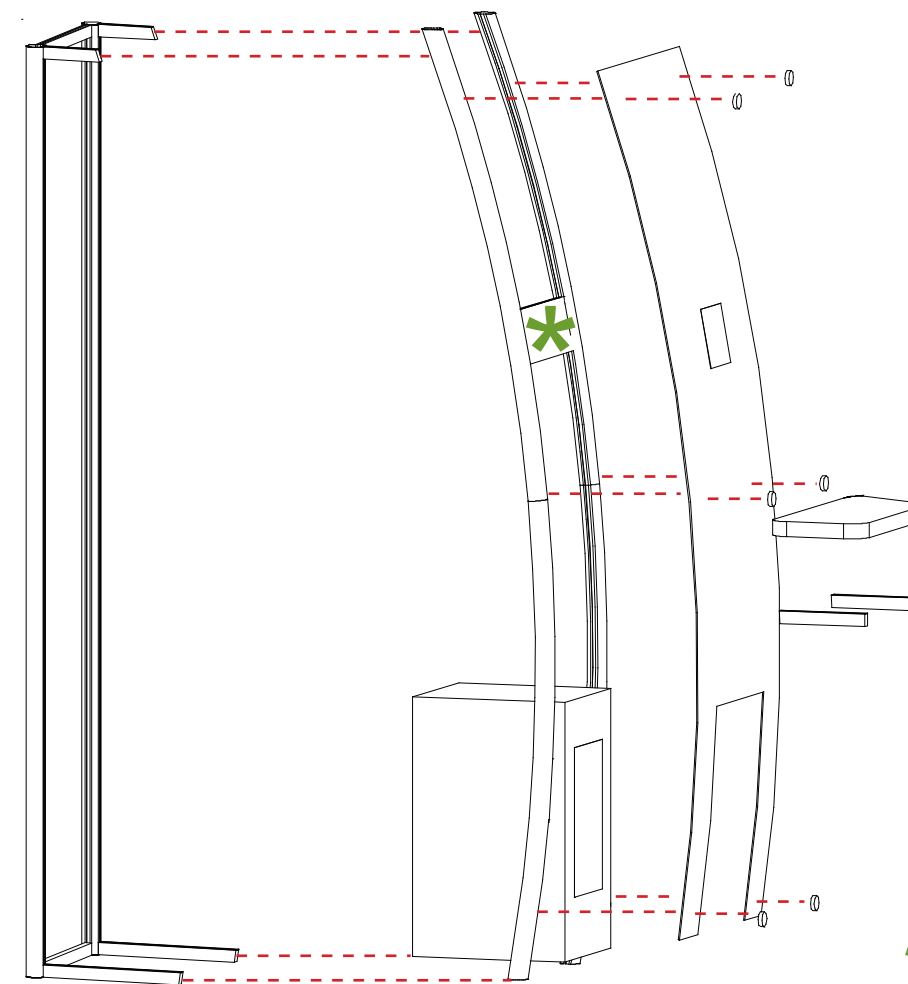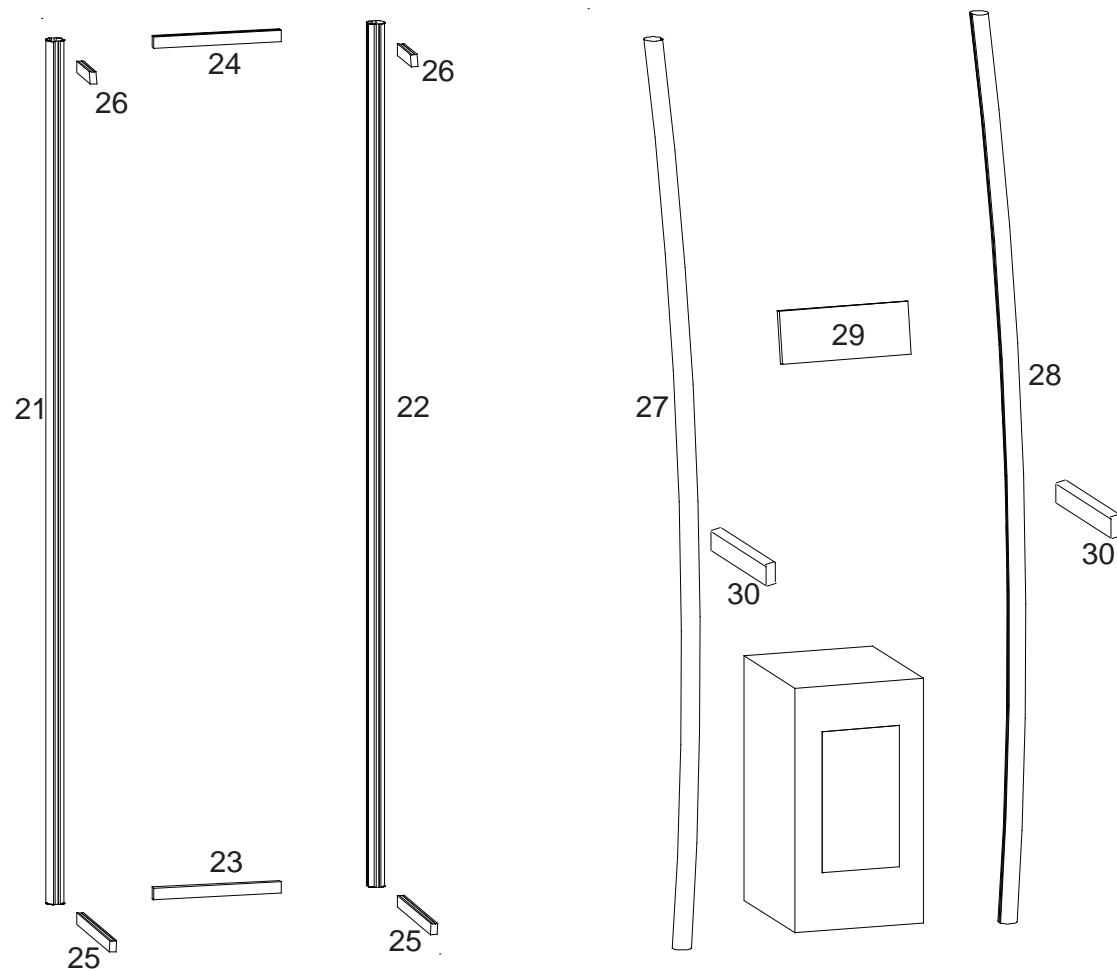

\* Indicates Monitor Mount Location

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

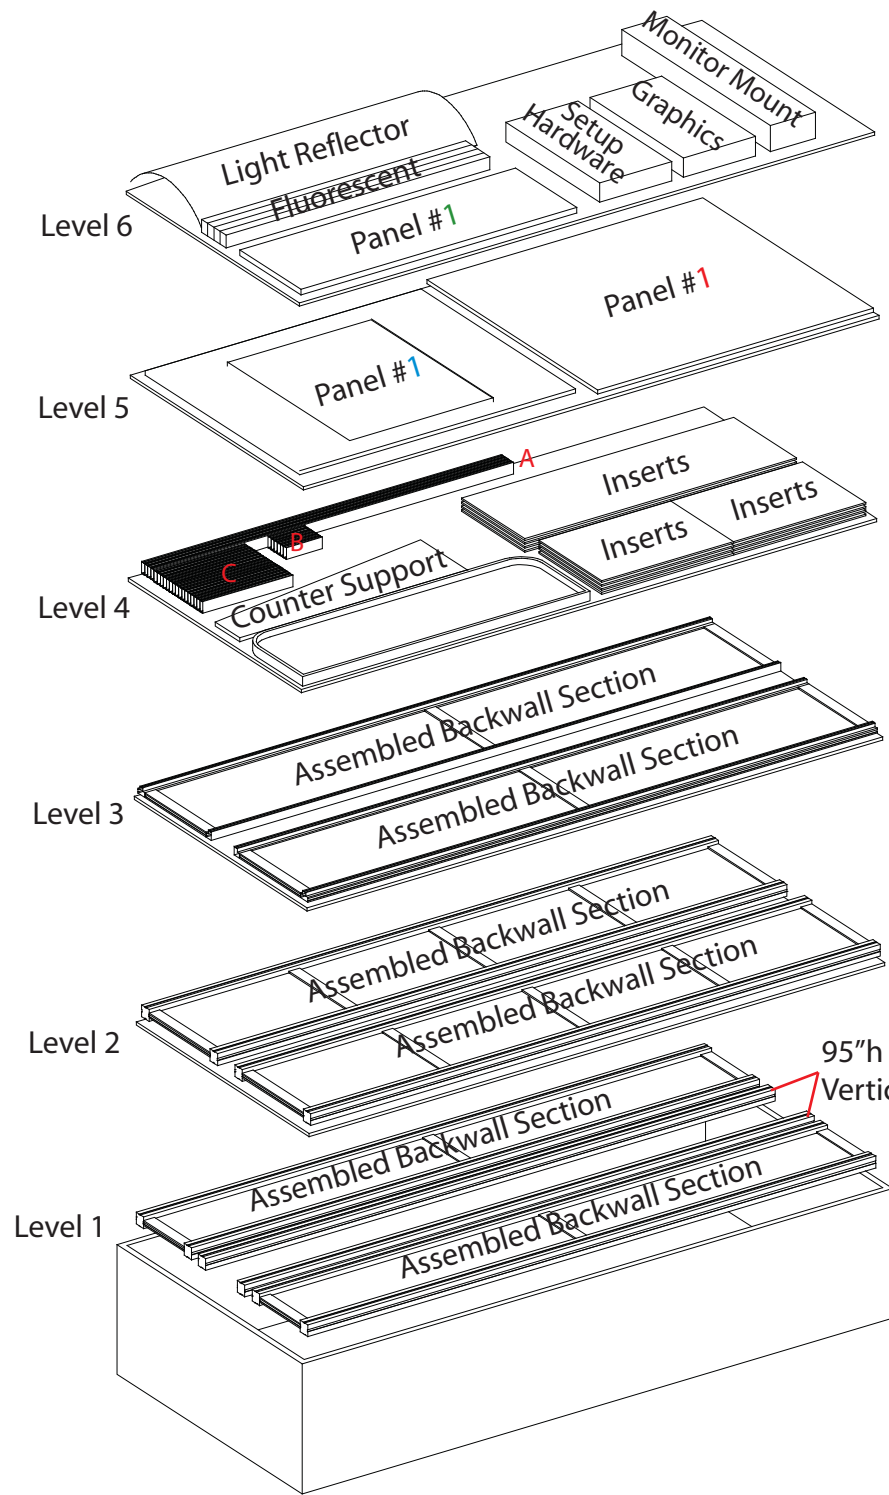

Level 4: Part List  
 A - (4) 60" Extrusion  
 B - (6) 6" Extrusion  
 C - (16) 15" Curved Extrusion



Level 5



Level 6



Level 3



Level 4




Level 1



Level 2

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

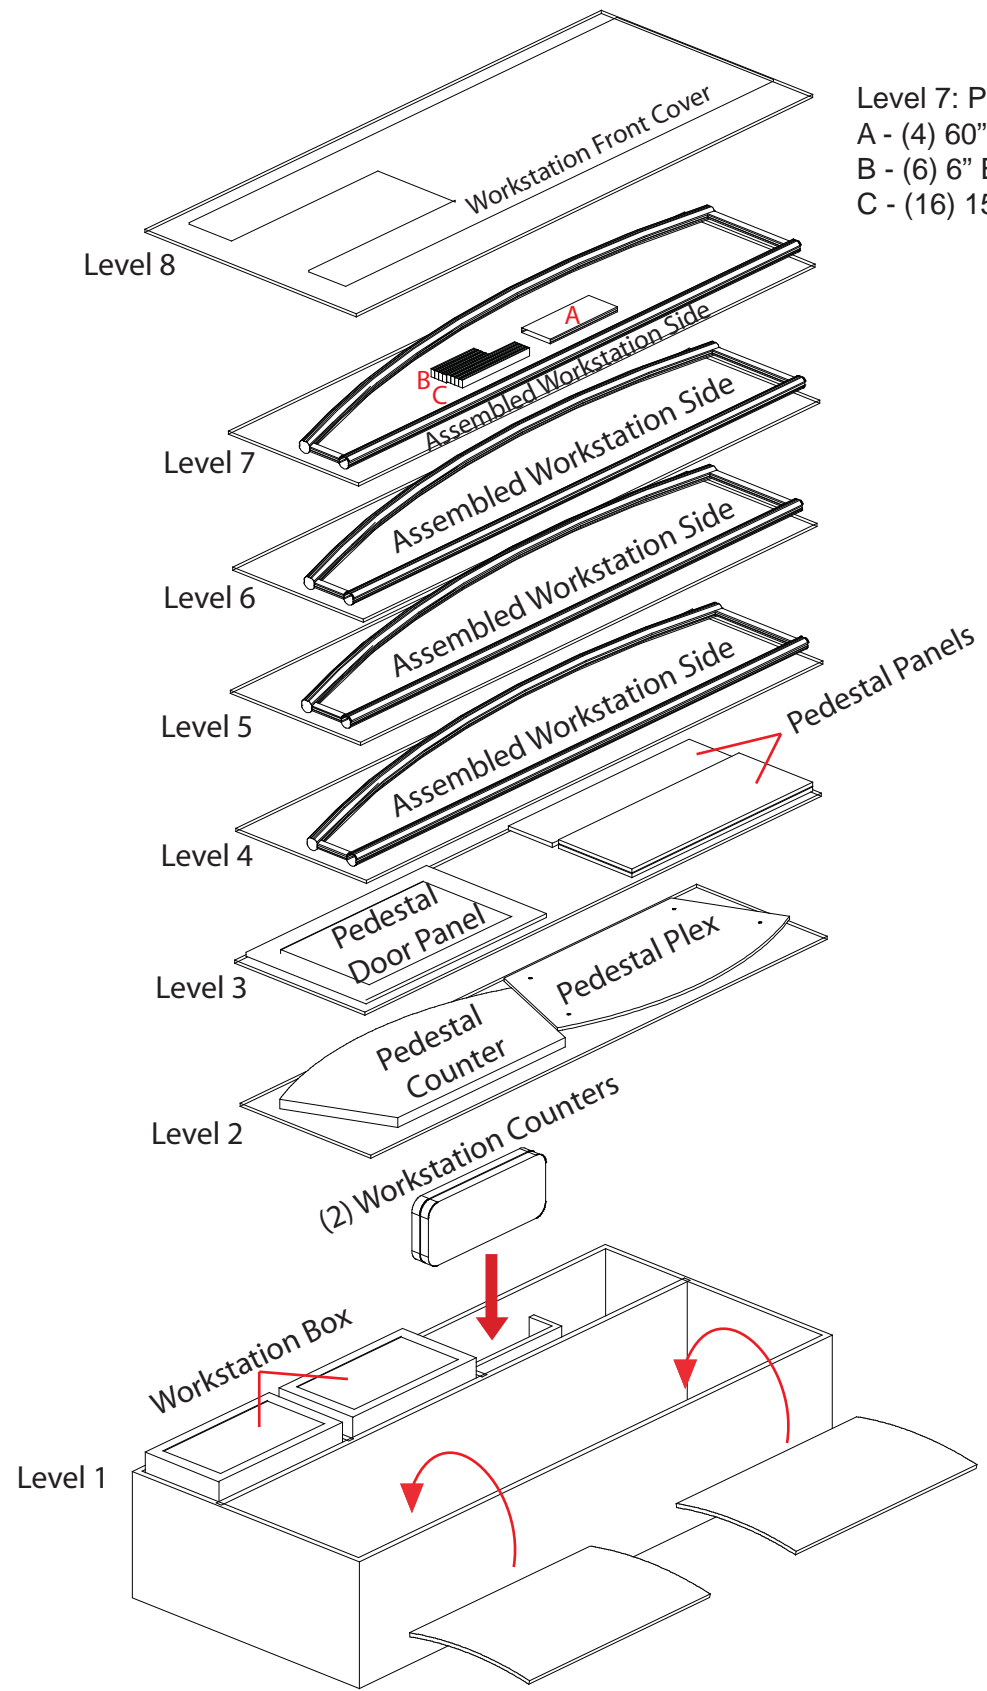

Level 7: Part List  
A - (4) 60" Extrusion  
B - (6) 6" Extrusion  
C - (16) 15" Curved Extrusion



WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING