
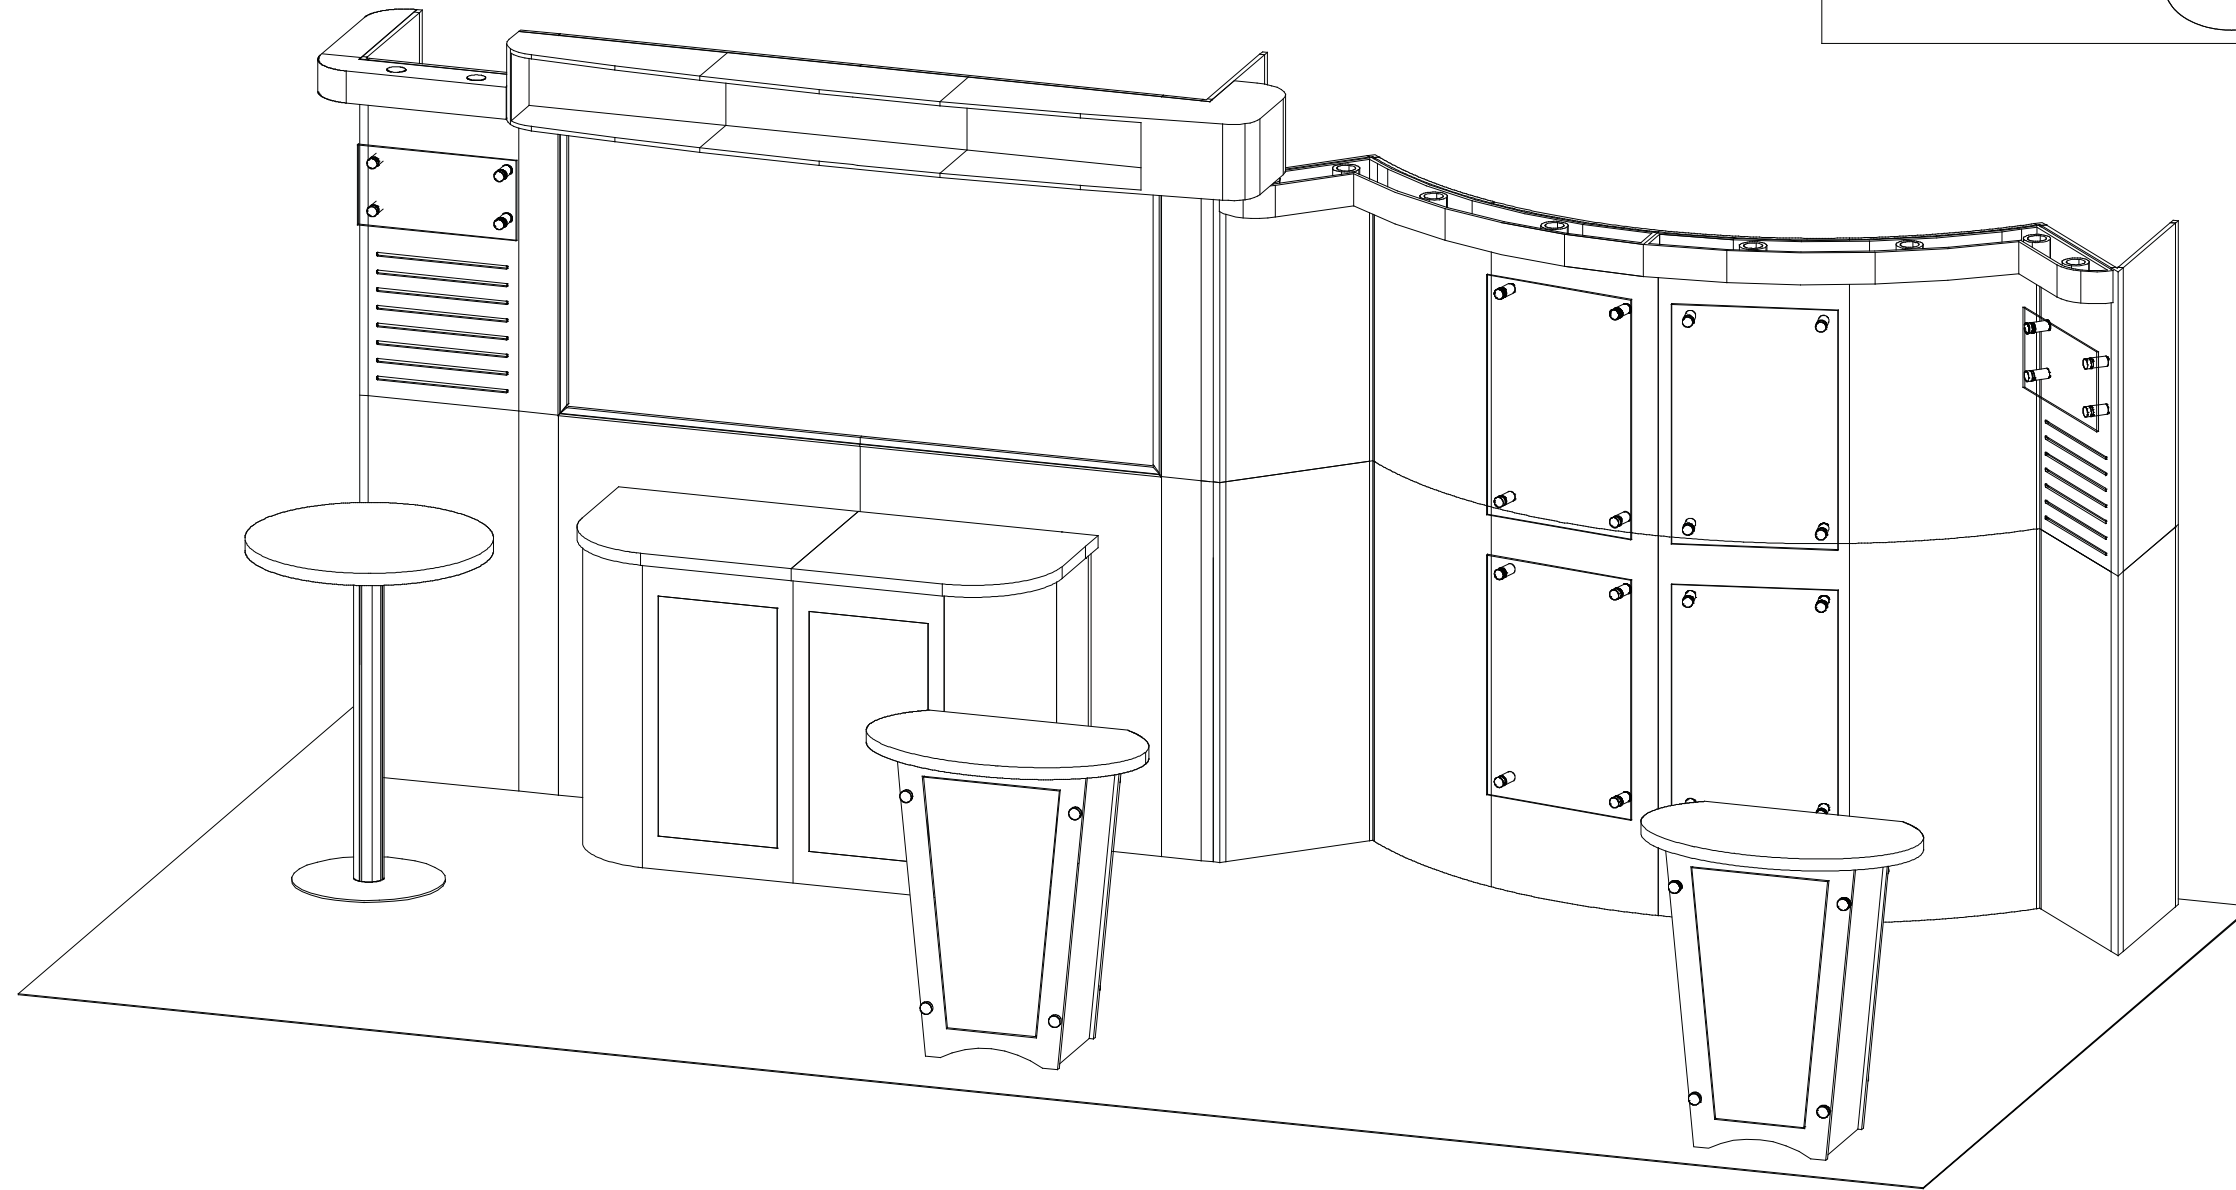


# euro It | HYBRIDS

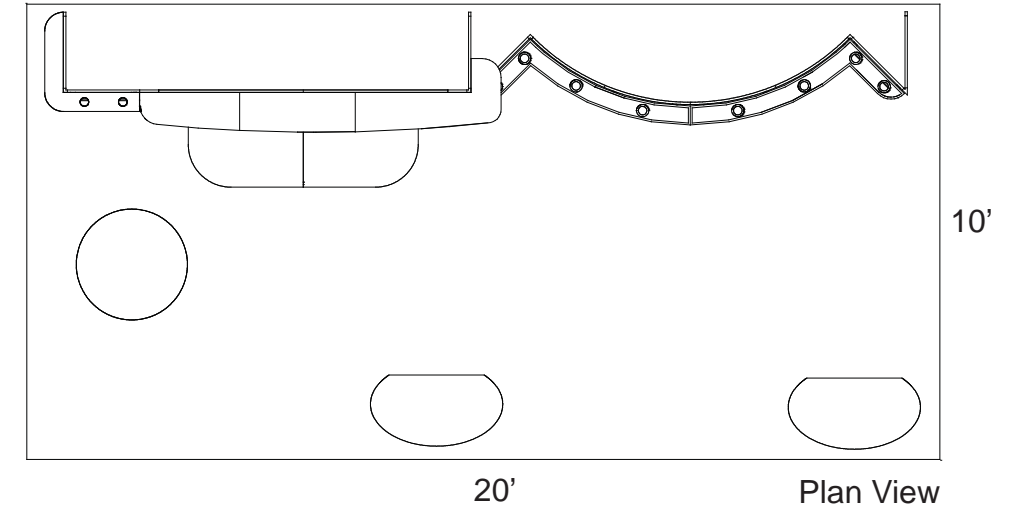

# euro lt | HYBRIDS

## Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

## Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


## General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

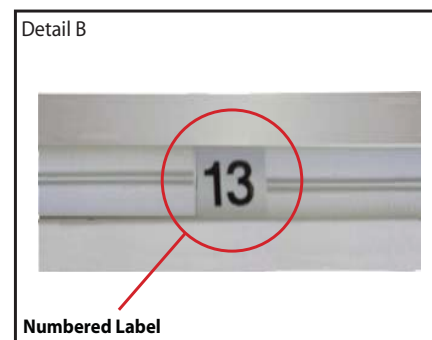


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

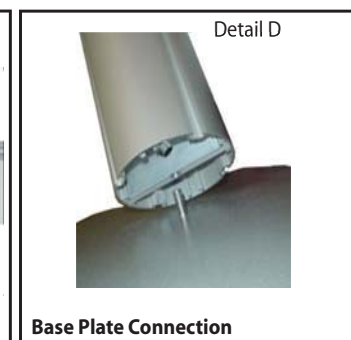


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

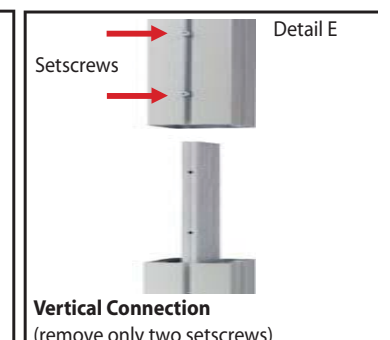


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

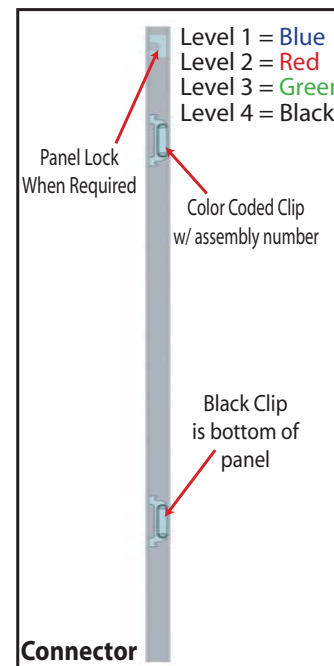


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

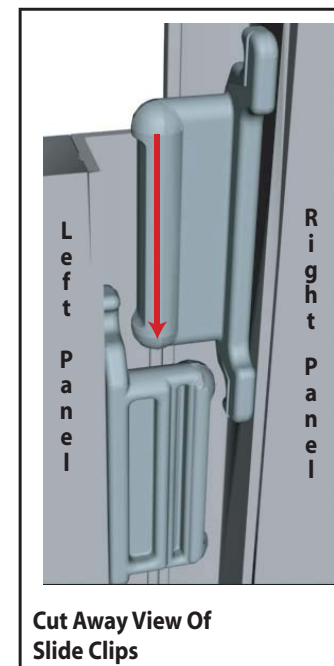

Components connect together by aligning them and sliding downward connecting clips together.

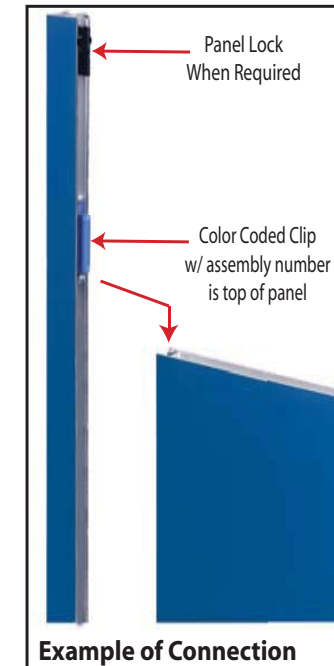

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

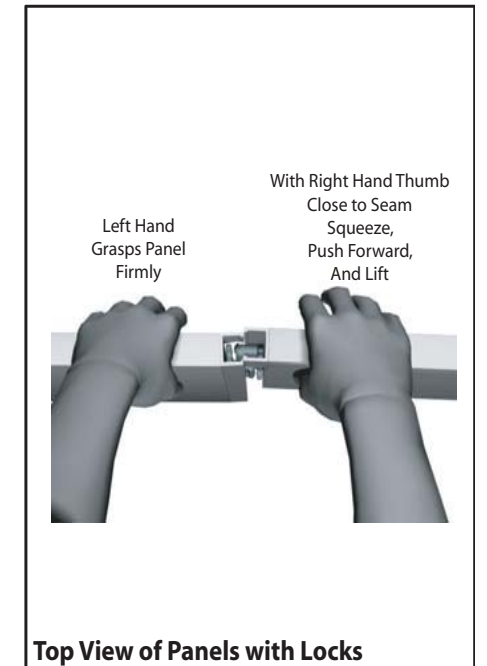

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

**Backwall Components**



Item Number	Description
1	47.5" h End Cap
2	23" w x 47.5" h Flat Panel w/ Wood Core
3	47.5" h 90° Connector
4	19" w x 47.5" h Flat Panel
5	5" w x 47.5" h Flat Panel
6	38" w x 47.5" h Flat Panel
7	38" w x 47.5" h Flat Panel
8	5" w x 47.5" h Flat Panel
9	47.5" h 3-Way Connector
10	23" w x 47.5" h Flat Panel w/ Wood Core
11	47.5" h End Cap

**Steps:**

- 1) Assemble by starting at panel #1\* and continue in numerical order.

**Counter Components**

Item Number	Description
27	11.5" w x 38" w Flat Panel
28	11.5" r x 38" h Quarter Curve Panel
29	18.995" w x 38" h Flat Panel w/ Door
30	18.995" w x 38" h Flat Panel w/ Door
31	11.5" r x 38" h Quarter Curve Panel
32	11.5" w x 38" w Flat Panel
33	38" h 90° Connector
34	28.5" w x 38" h Flat Panel
35	28.5" w x 38" h Flat Panel
36	38" h 90° Connector

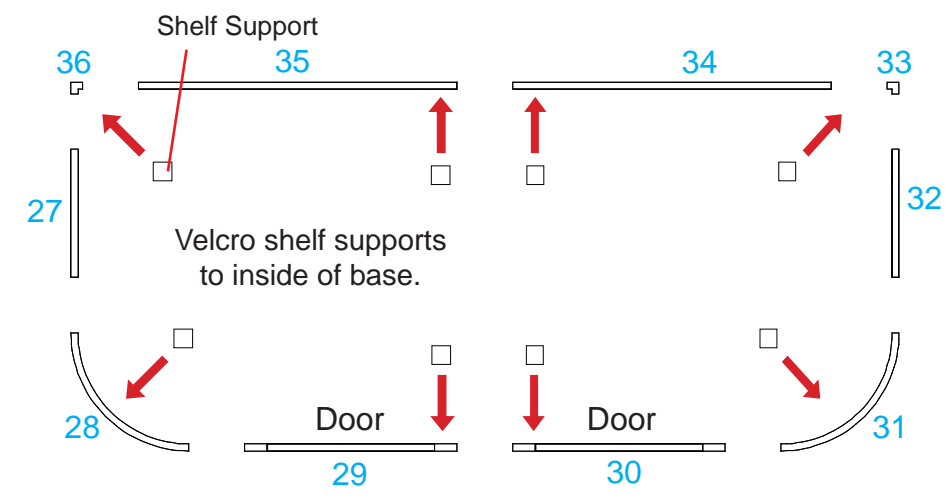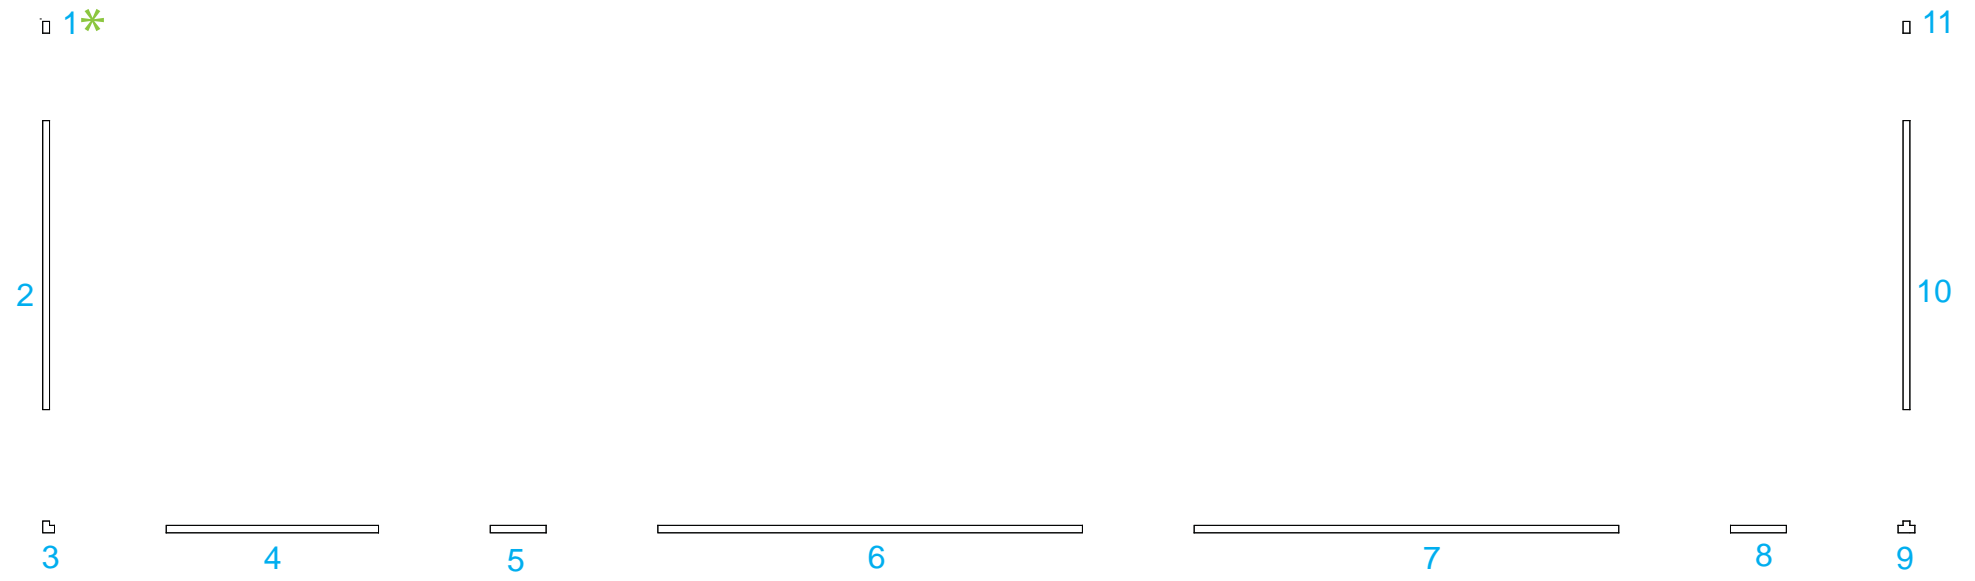


866.652.2100

Item Number	Description
12	47.5"h End Cap
13	19"w x 47.5"h Flat Panel
14	47.5"h 45° Connector
15	19"w x 47.5"h Flat Panel
16	47.5"h 90° Connector
17	57.5"r x 47.5"h Curve Panel
18	57.5"r x 47.5"h Curve Panel
19	57.5"r x 47.5"h Curve Panel
20	57.5"r x 47.5"h Curve Panel
21	47.5"h 90° Connector
22	19"w x 47.5"h Slatwall Panel
23	47.5"h 45° Connector
24	19"w x 47.5"h Flat Panel
25	47.5"h End Cap
26	47.5"h 135° Connector


Steps:

- 1) Assemble by starting at connector #26 to connector #9.
- 2) Connect panel #15 to connector #26 and continue in numerical order.

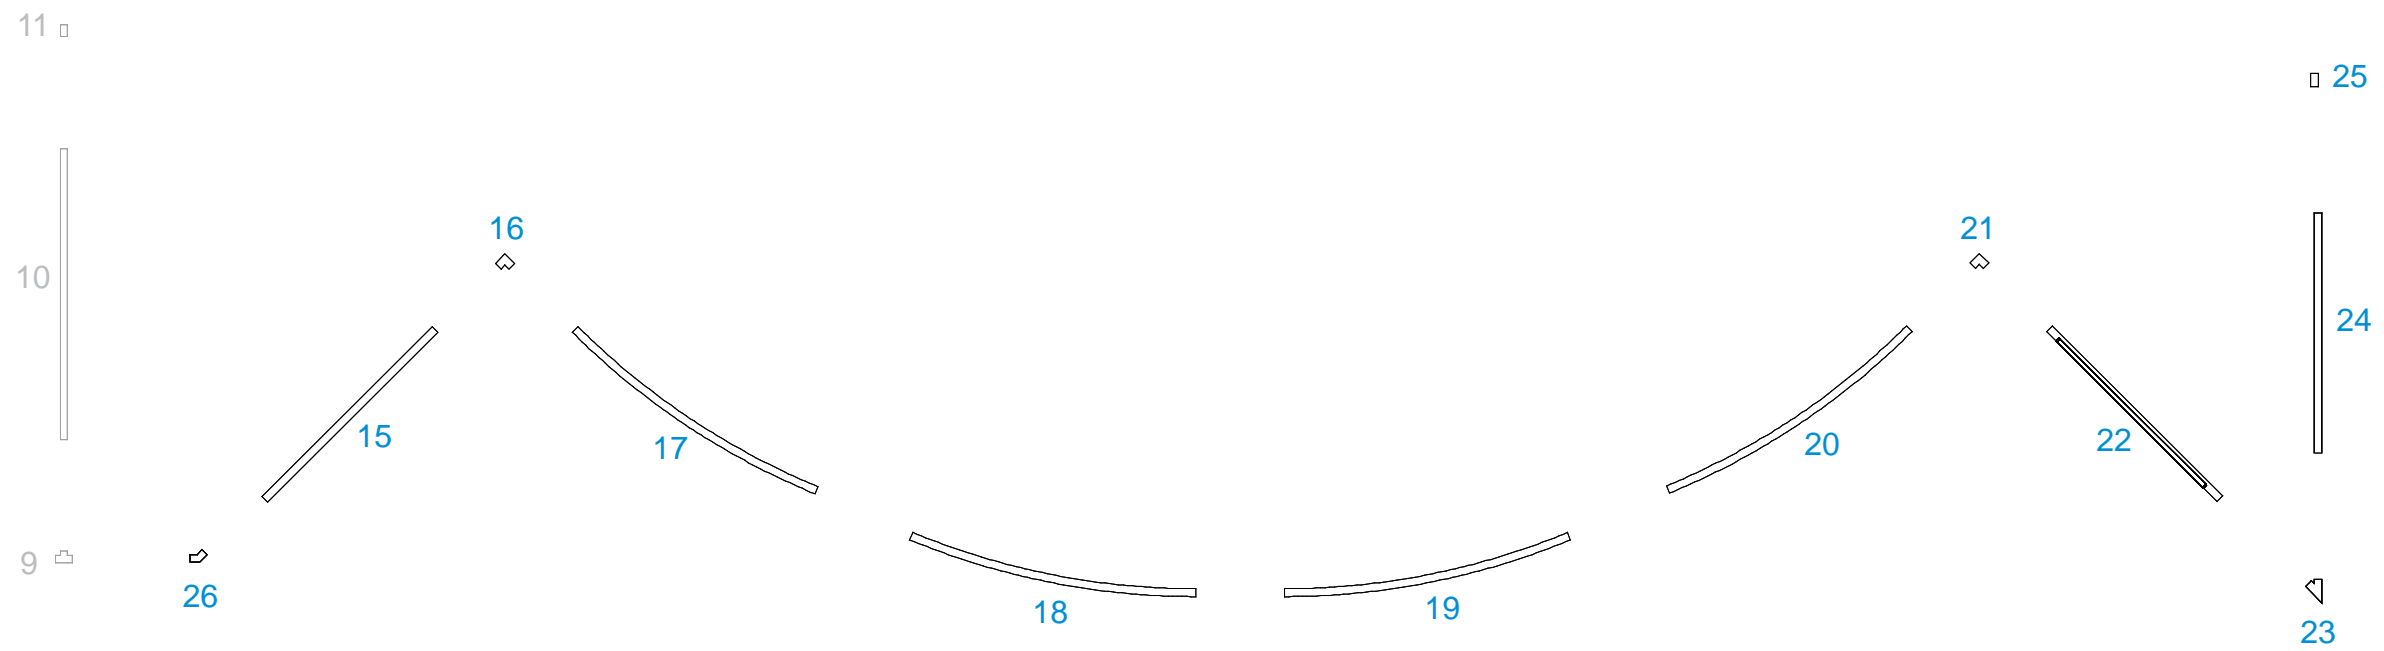

866.652.2100

Item Number	Description
1	42" h End Cap
2	23" w x 42" h Flat Panel w/ Wood Core
3	42" h 90° Connector
4	19" w x 42" h Slatwall Panel
5	5" w x 47.5" h Flat Panel
6	Light Box Frame
8	5" w x 47.5" h Flat Panel
9	47.5" h 90° Connector
10	23" w x 47.5" h Flat Panel w/ Wood Core
11	47.5" h End Cap

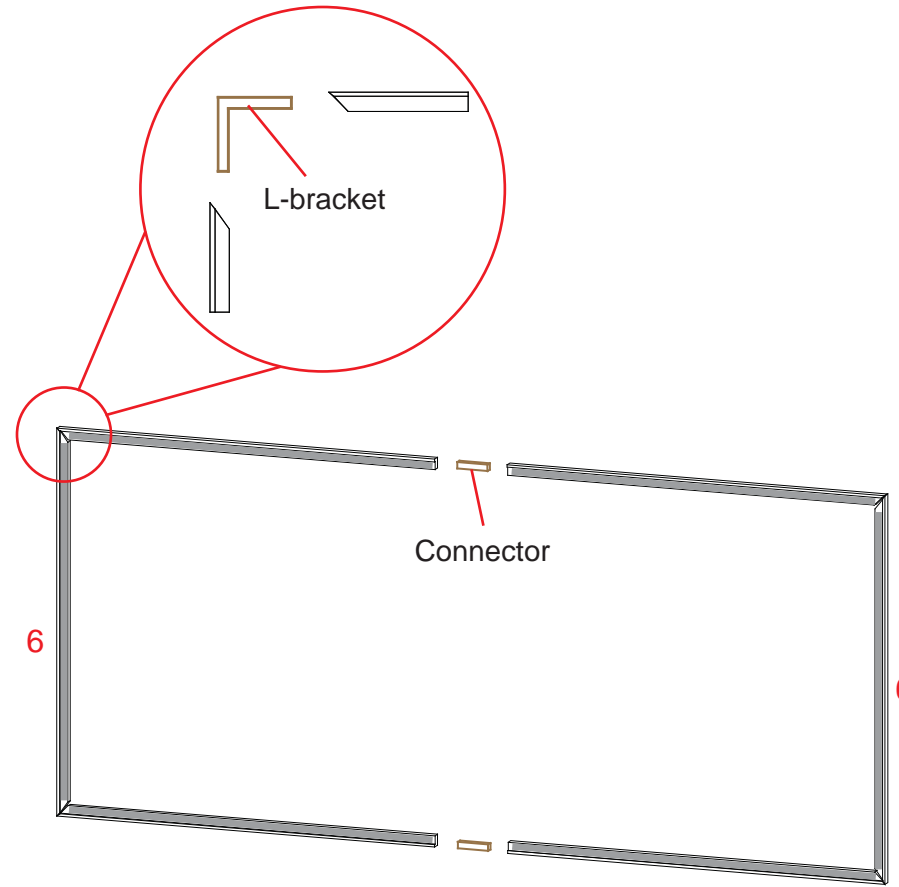


**Light Box Assembly**

- Connect assembled frame sides together using connectors and secure with thumbscrews.

**Steps:**

1) Assemble by starting at panel #1\* and continue in numerical order.

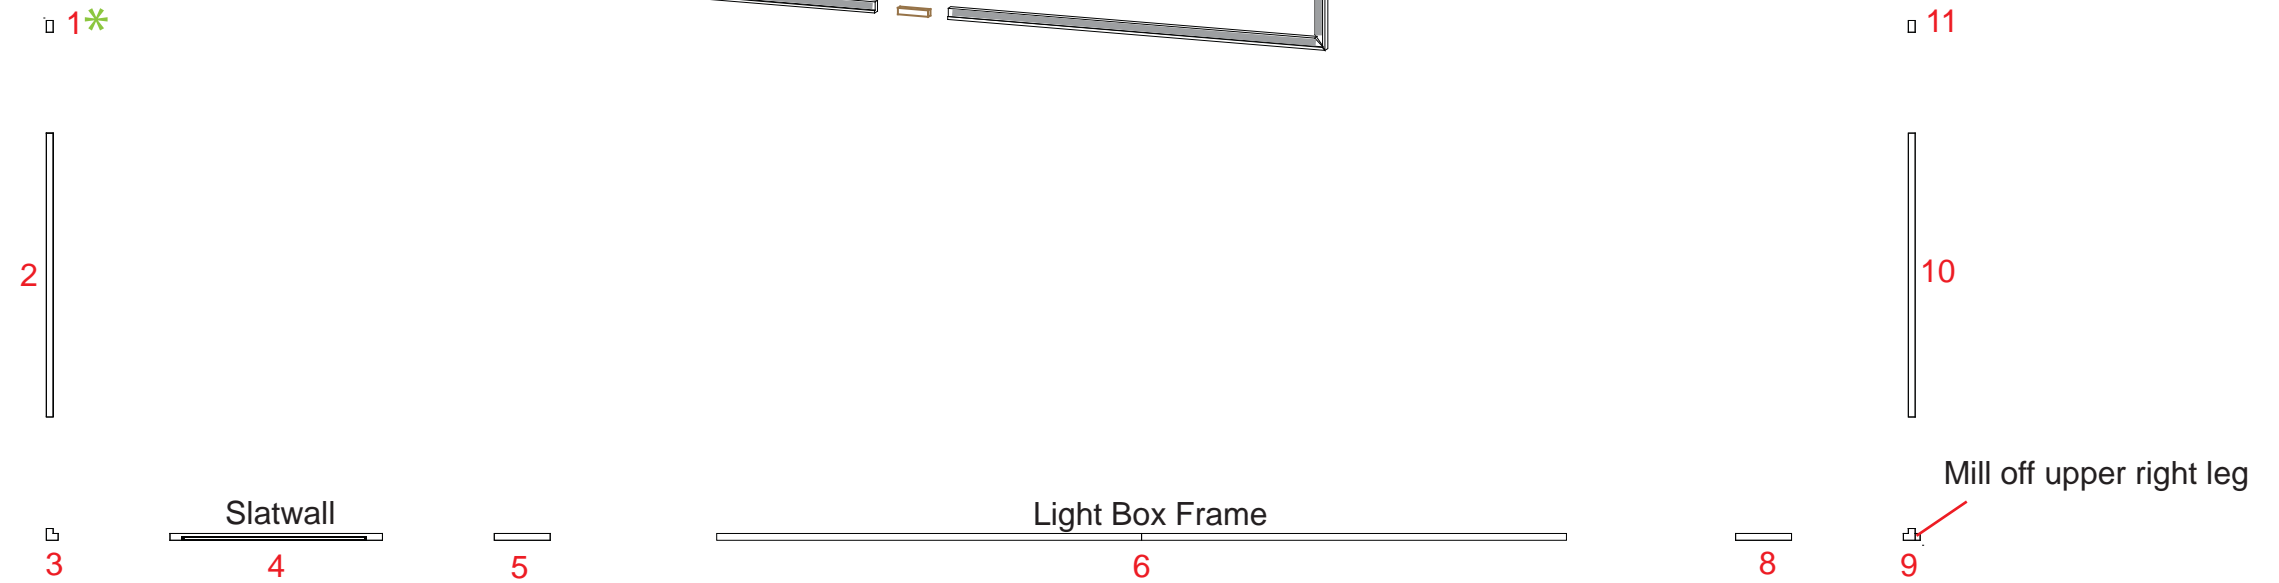


866.652.2100

Item Number	Description
12	38" h End Cap
13	19" w x 38" h Flat Panel
14	38" h 45° Connector
15	19" w x 38" h Flat Panel
16	38" h 90° Connector
17	57.5" r x 38" h Curve Panel
18	57.5" r x 38" h Curve Panel
19	57.5" r x 38" h Curve Panel
20	57.5" r x 38" h Curve Panel
21	38" h 90° Connector
22	19" w x 38" h Slatwall Panel
23	38" h 45° Connector
24	19" w x 38" h Flat Panel
25	38" h End Cap
26	47.5" h 135° Connector

Steps:



- 1) Assemble by starting at connector #26 to connector #9.
- 2) Connect panel #15 to connector #26 and continue in numerical order.

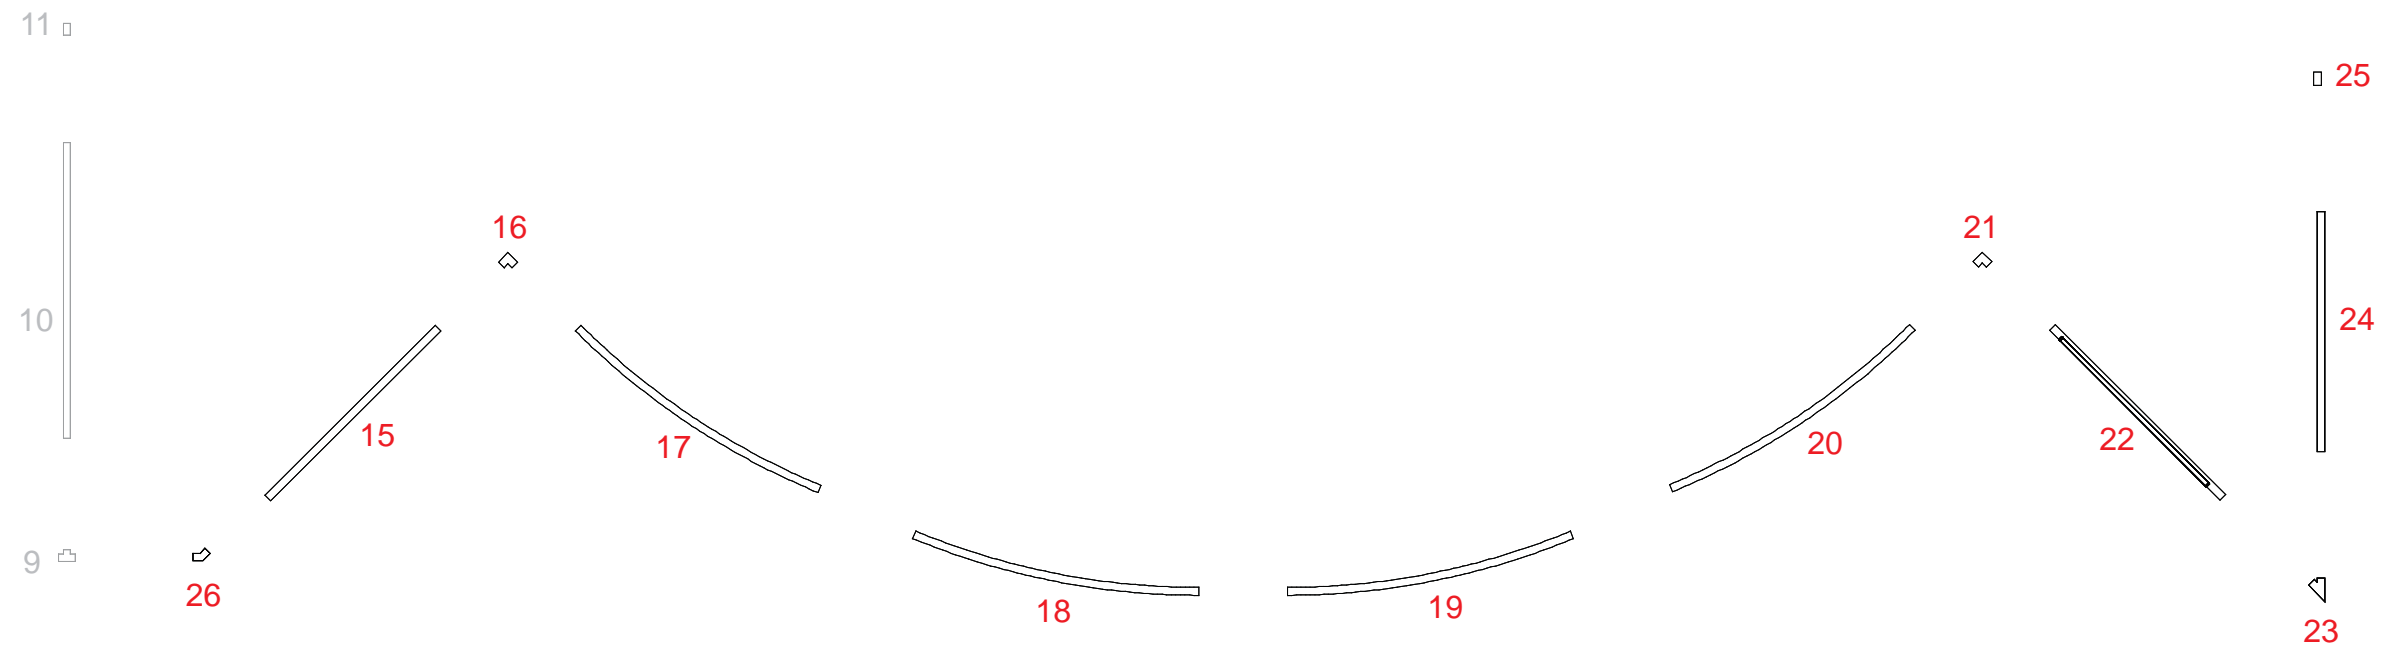




Item Number	Description
6	38" w x 47.5" h Flat Panel
7	38" w x 47.5" h Flat Panel



Steps:

- 1) Attach panels # 6 and 7 between panels # 5 and 8.
- 2) Set internal shelf atop supports, the set counter top on assembled base.
- 3) Attach graphic to assembled backwall where indicated using standoffs.
- 4) Attach light reflectors to light box frame.

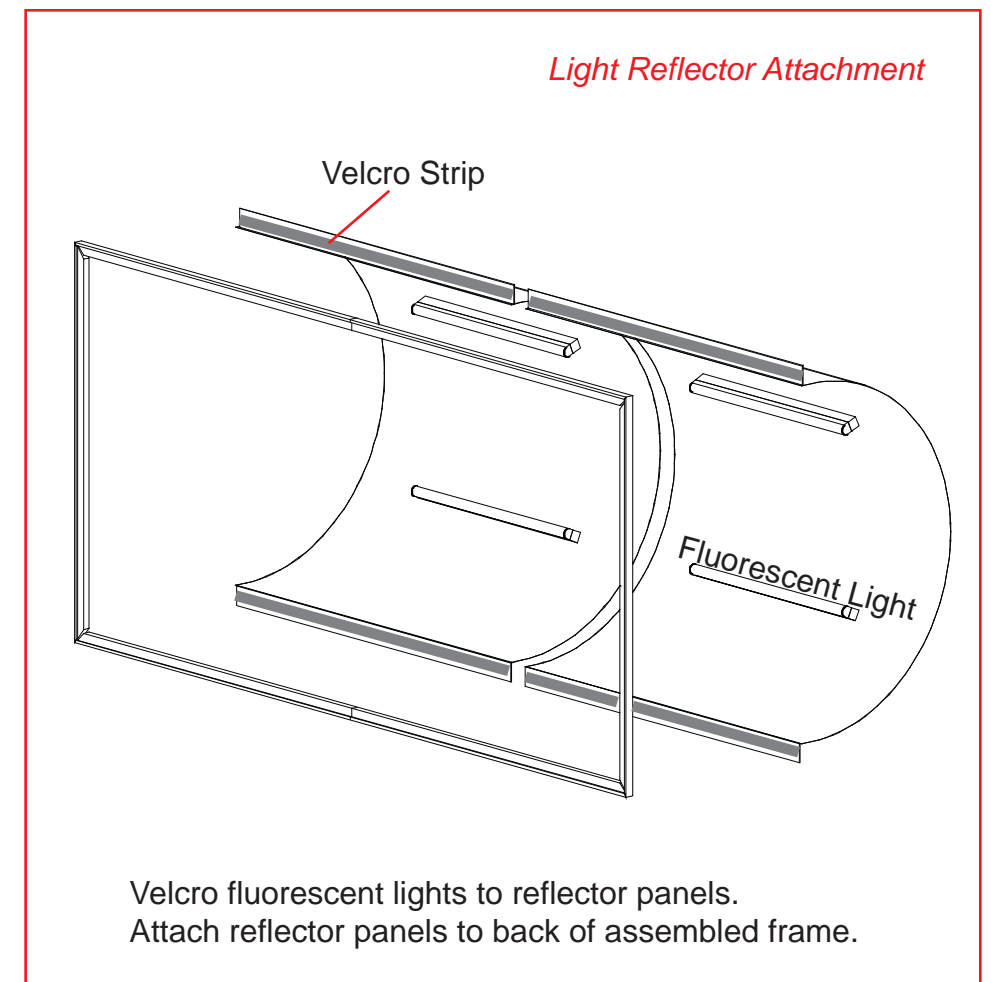
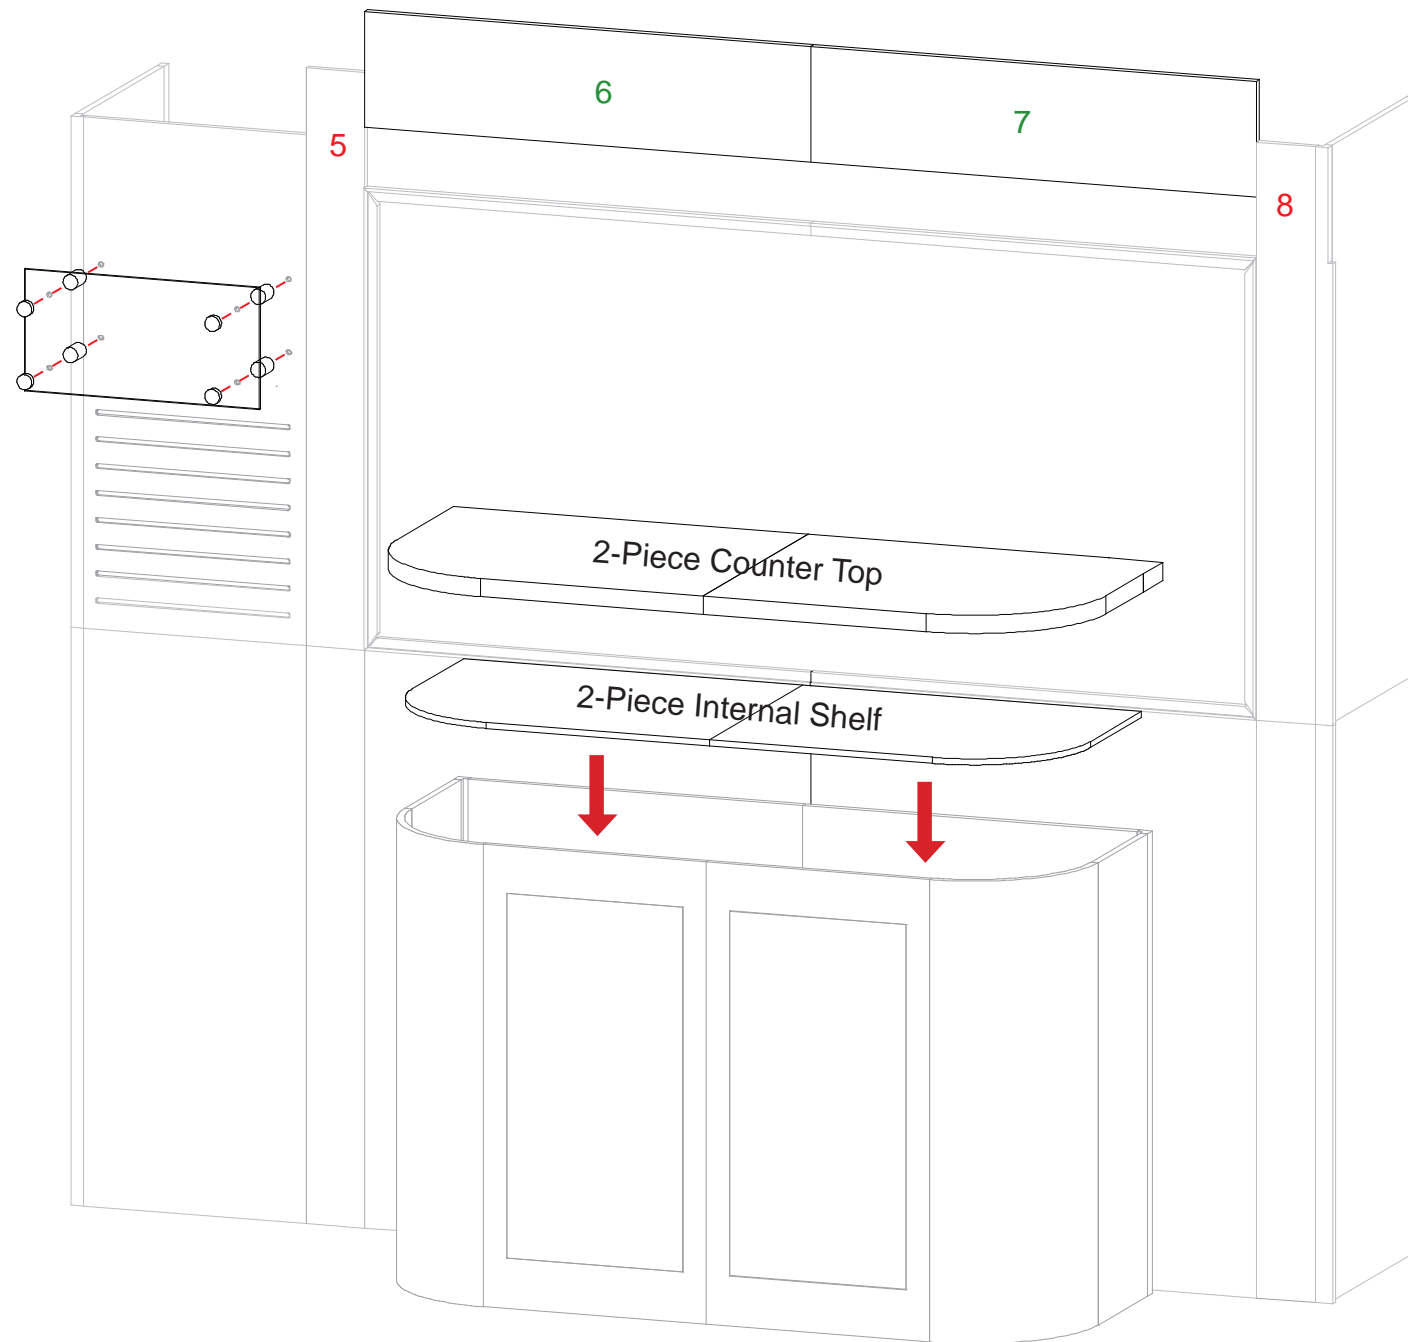


866.652.2100

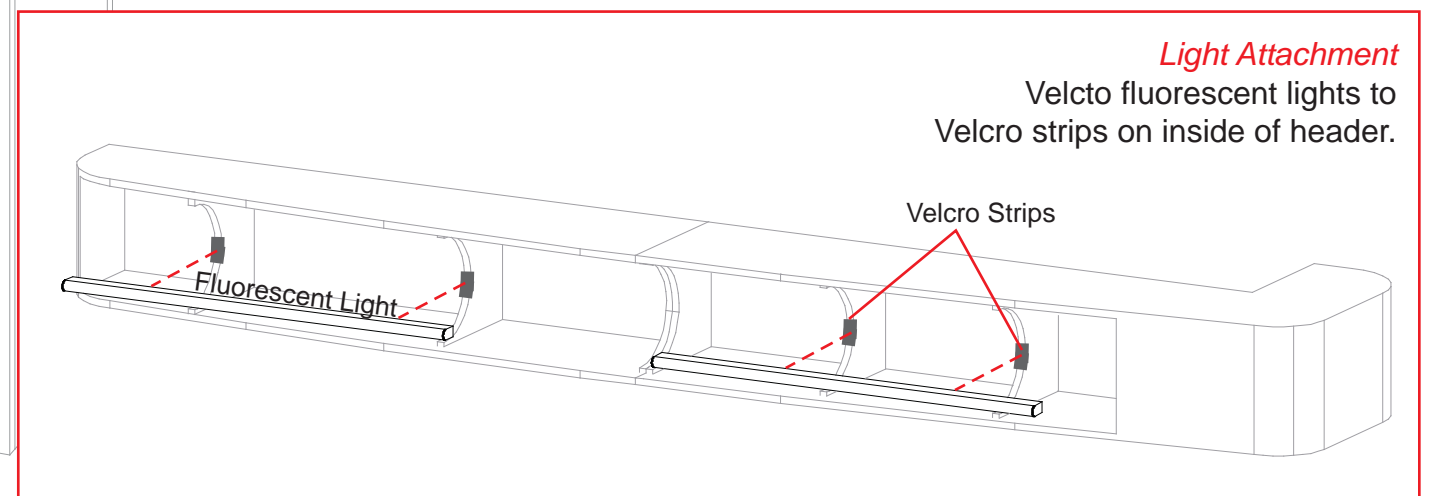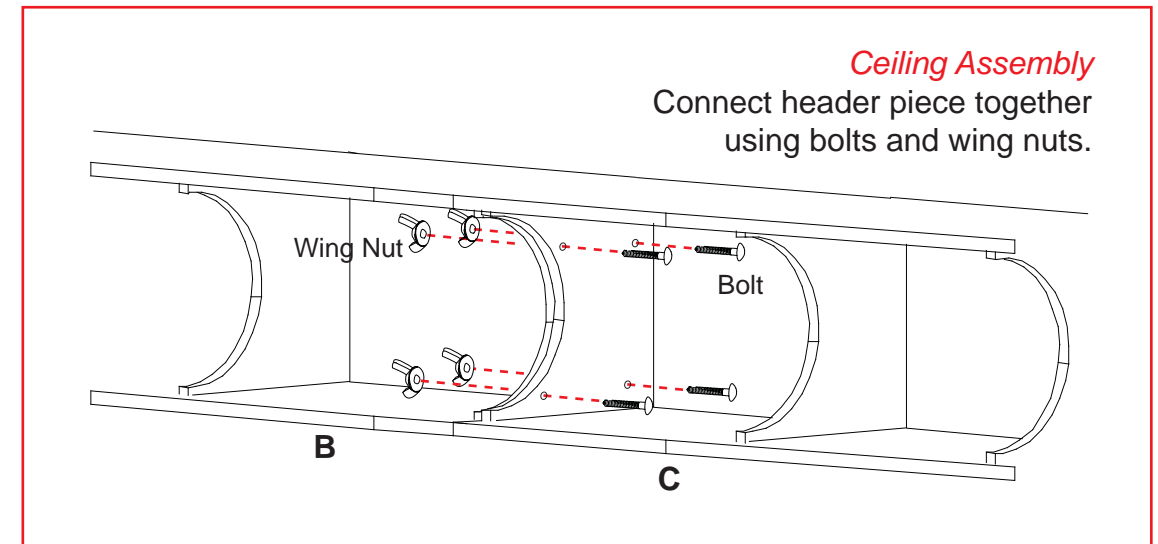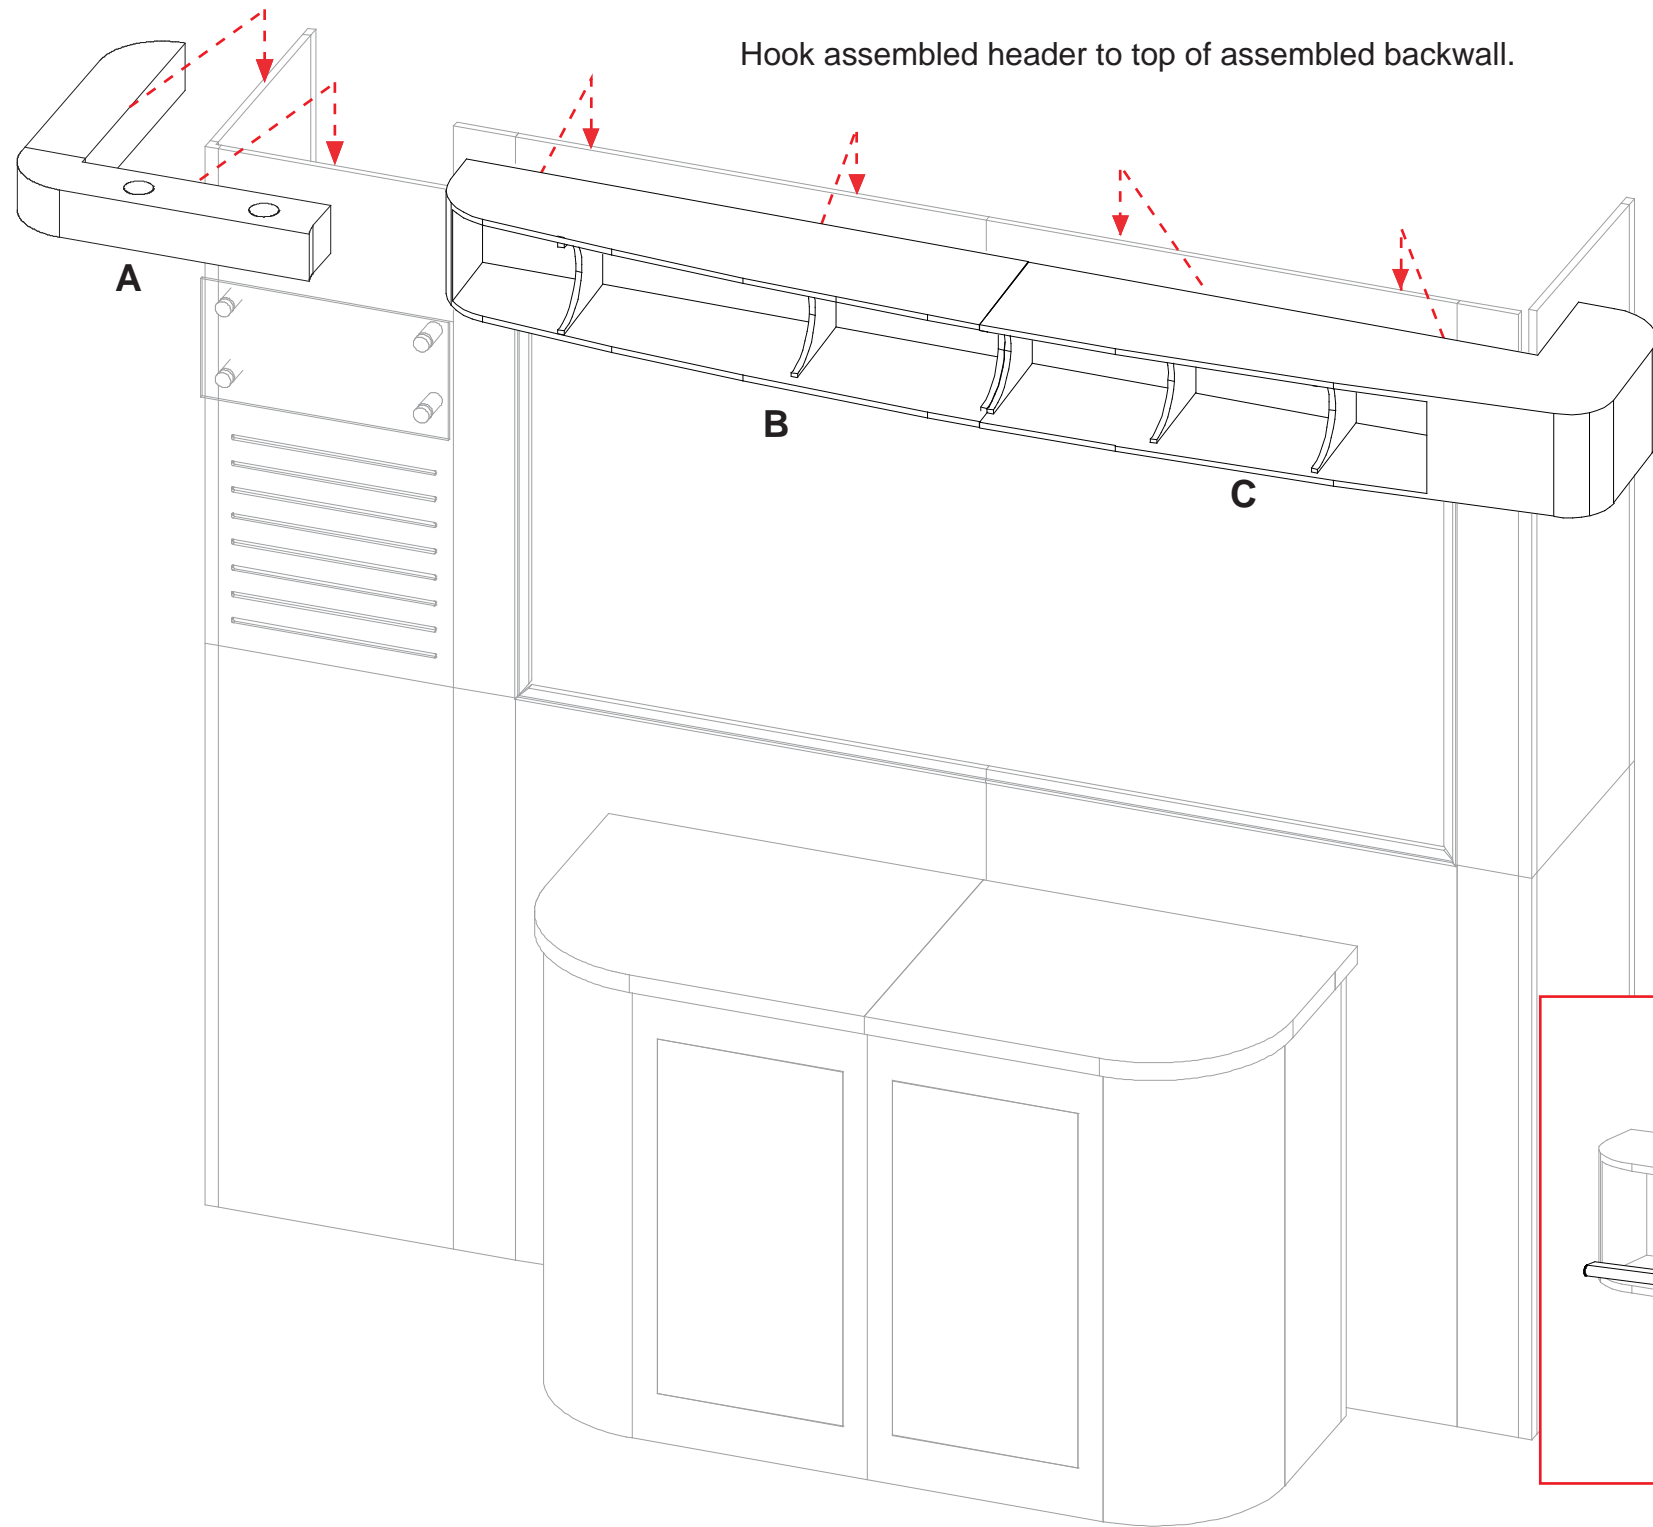

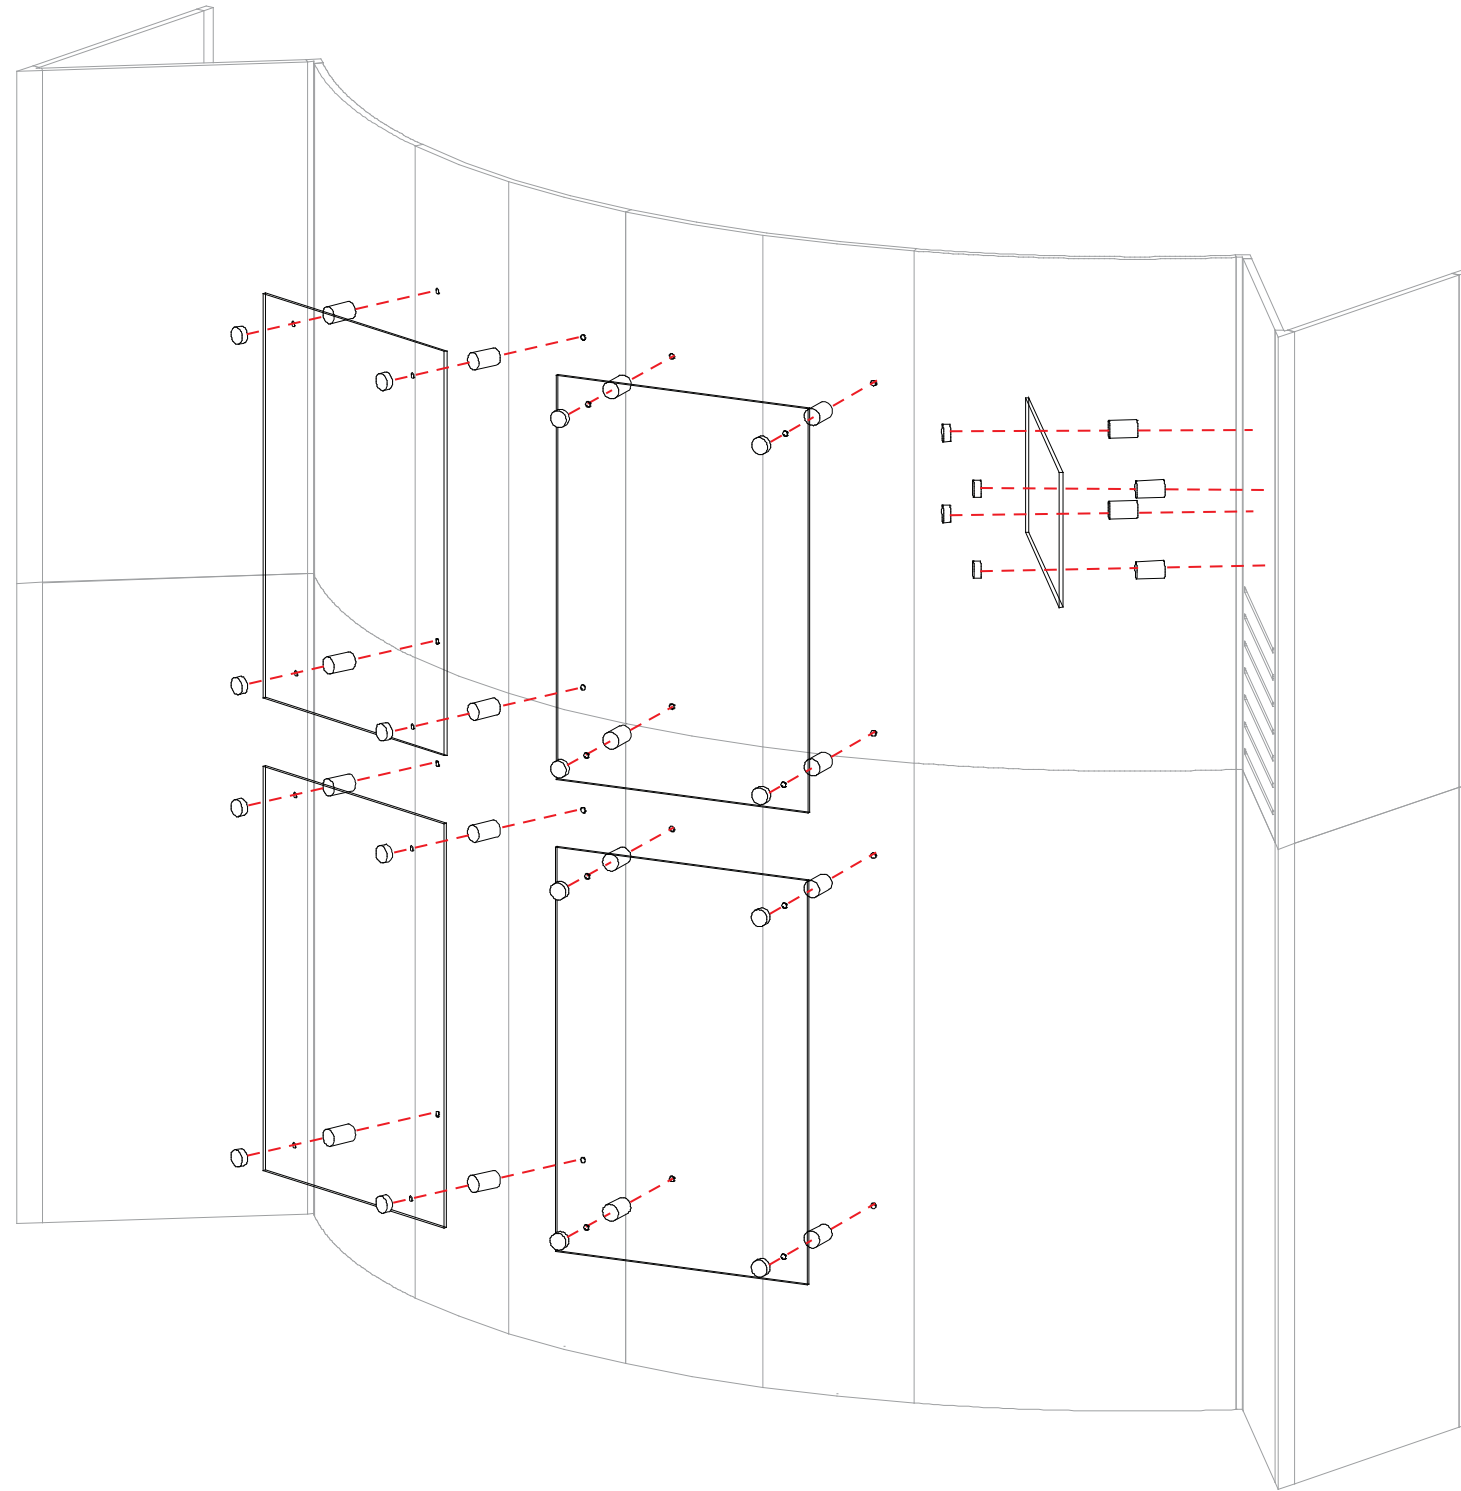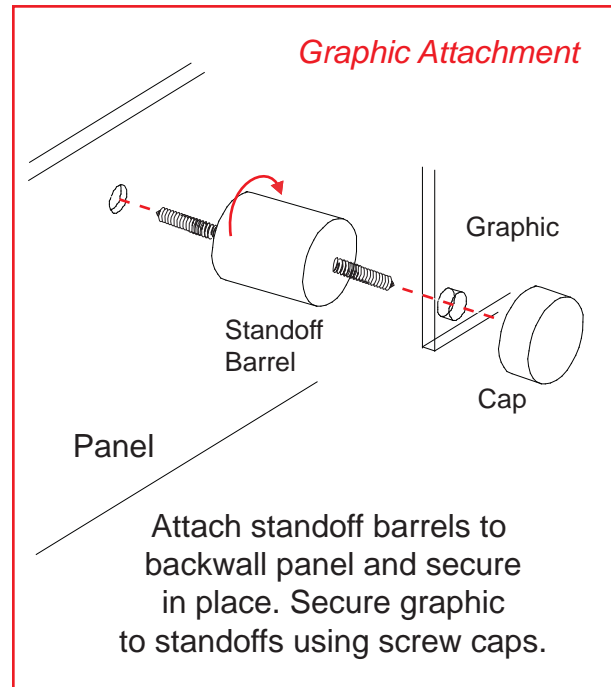


Hook assembled header with puck lights to top of assembled backwall.

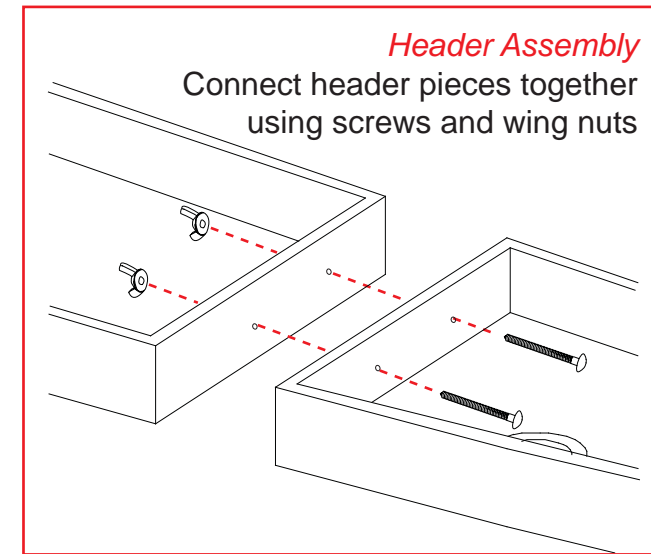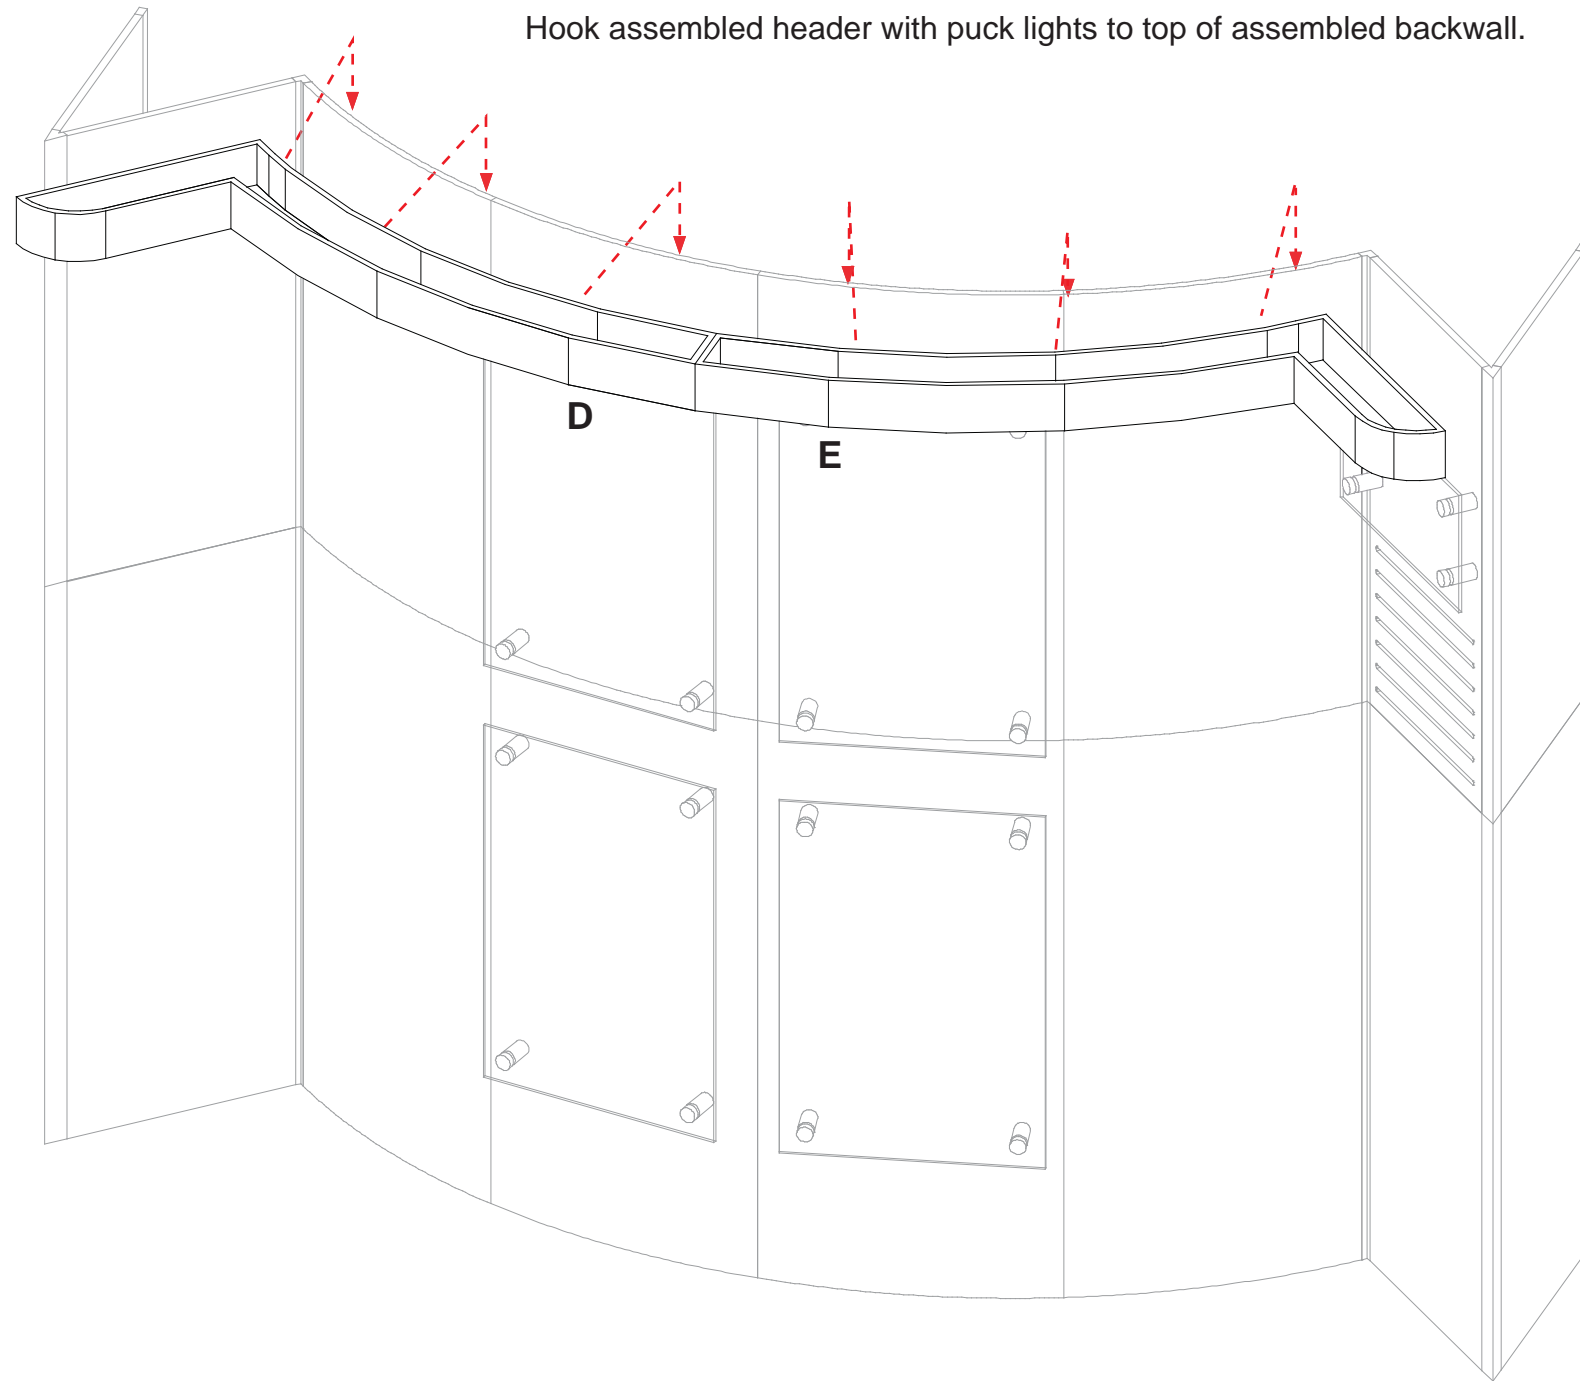



866.652.2100

Setup Instructions:

- A) Use standoff screws to secure the front panel with door and back panel of the pedestal to the side panels.
- B) After assembling front, back, and side panels, slide floor into the bottom of the pedestal. The floor will sit on pins on the inside of the side panels.
- C) After floor is in place, use velcro attachments to install shelf.

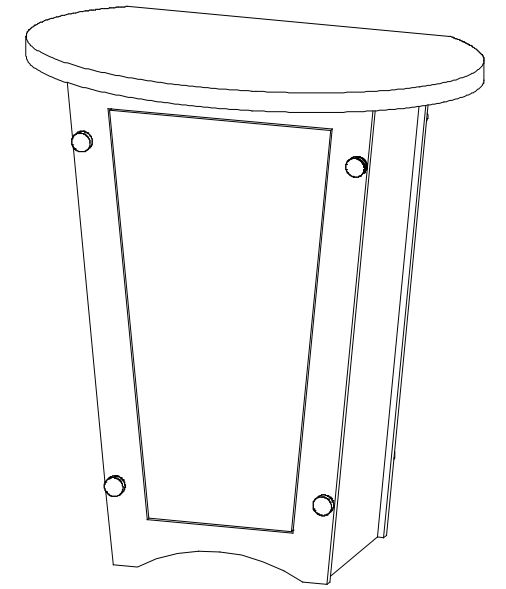



Place counter top on assembled base.

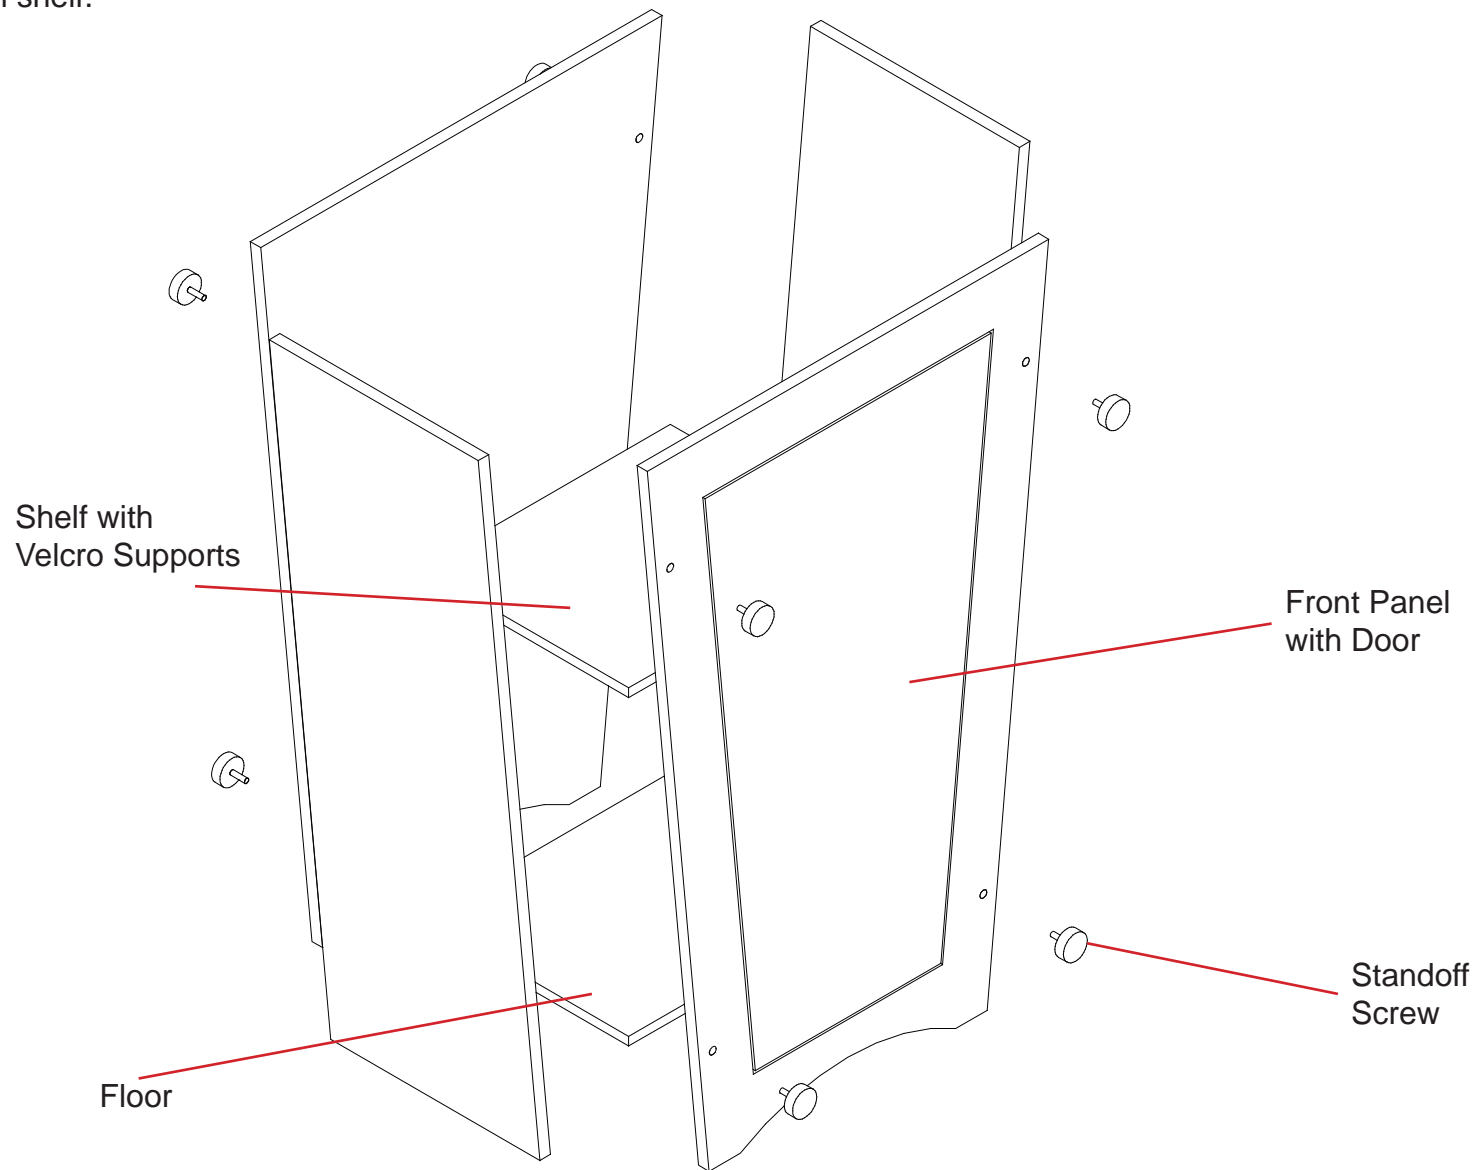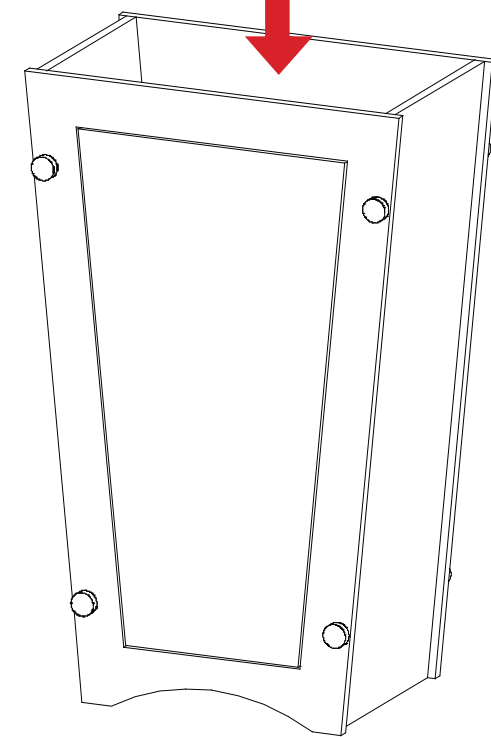


866.652.2100

Part Number	Qty	Description
1	1	Base Plate
2	1	41.25"h Round Vertical Extrusion

- Steps
- 1) Attach round vertical extrusion [2] to base plate [1].
  - 2) Screw counter top to top of round vertical extrusion.

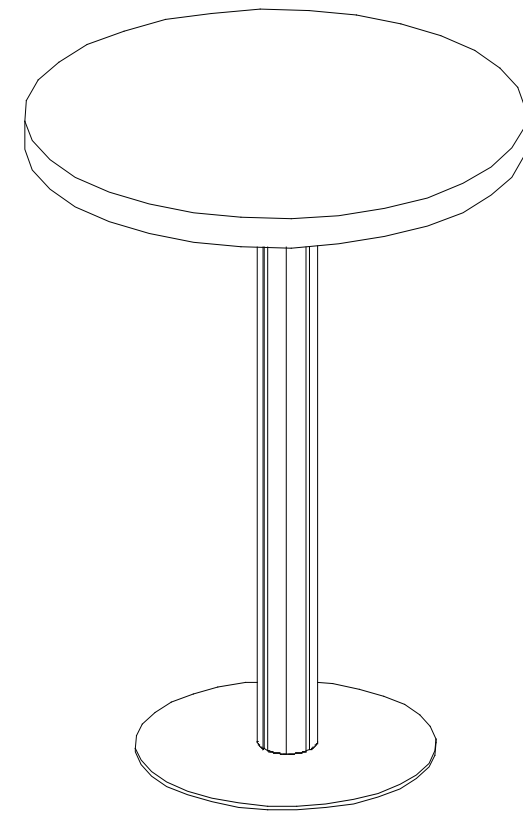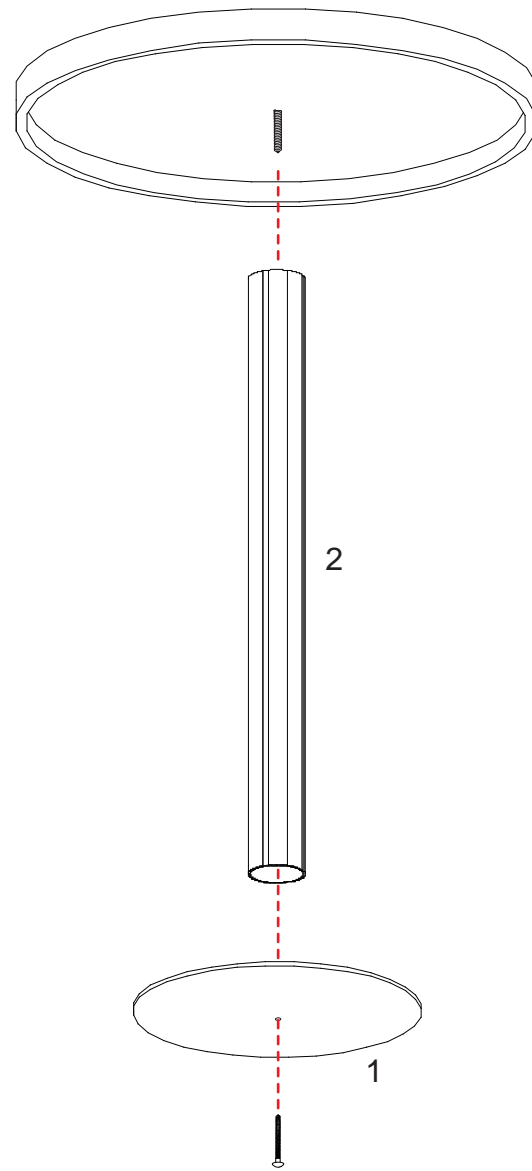


Front View of Jumbo Tub

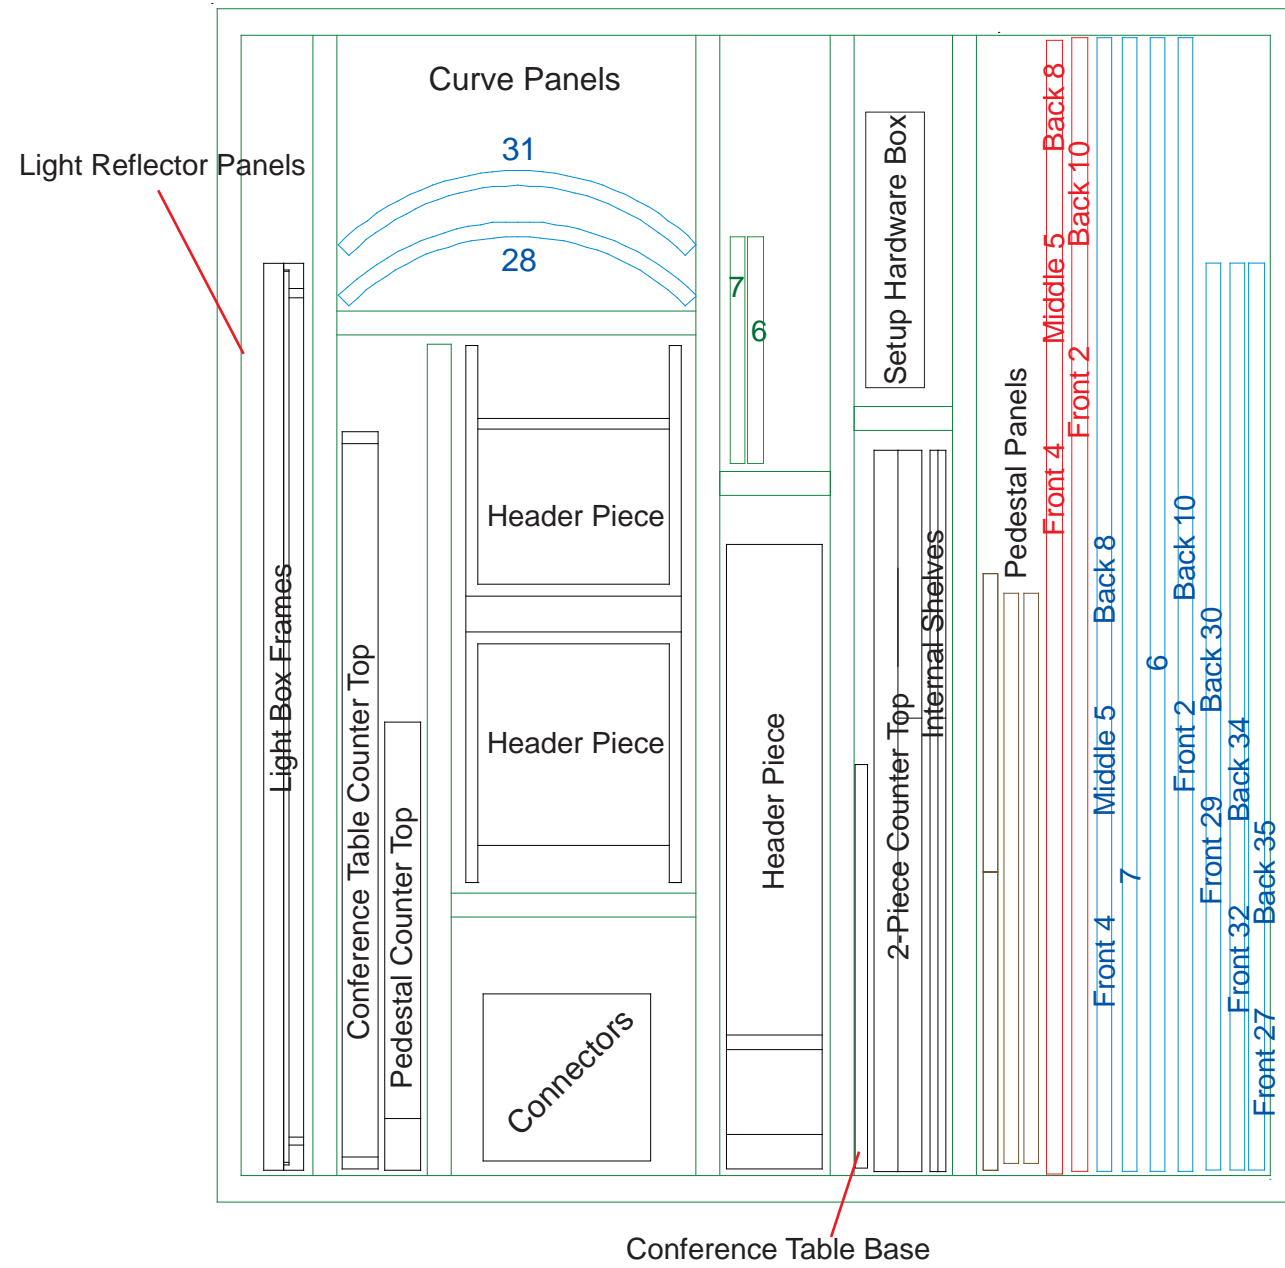

Actual Photo of Jumbo Tub

Front View of Jumbo Tub

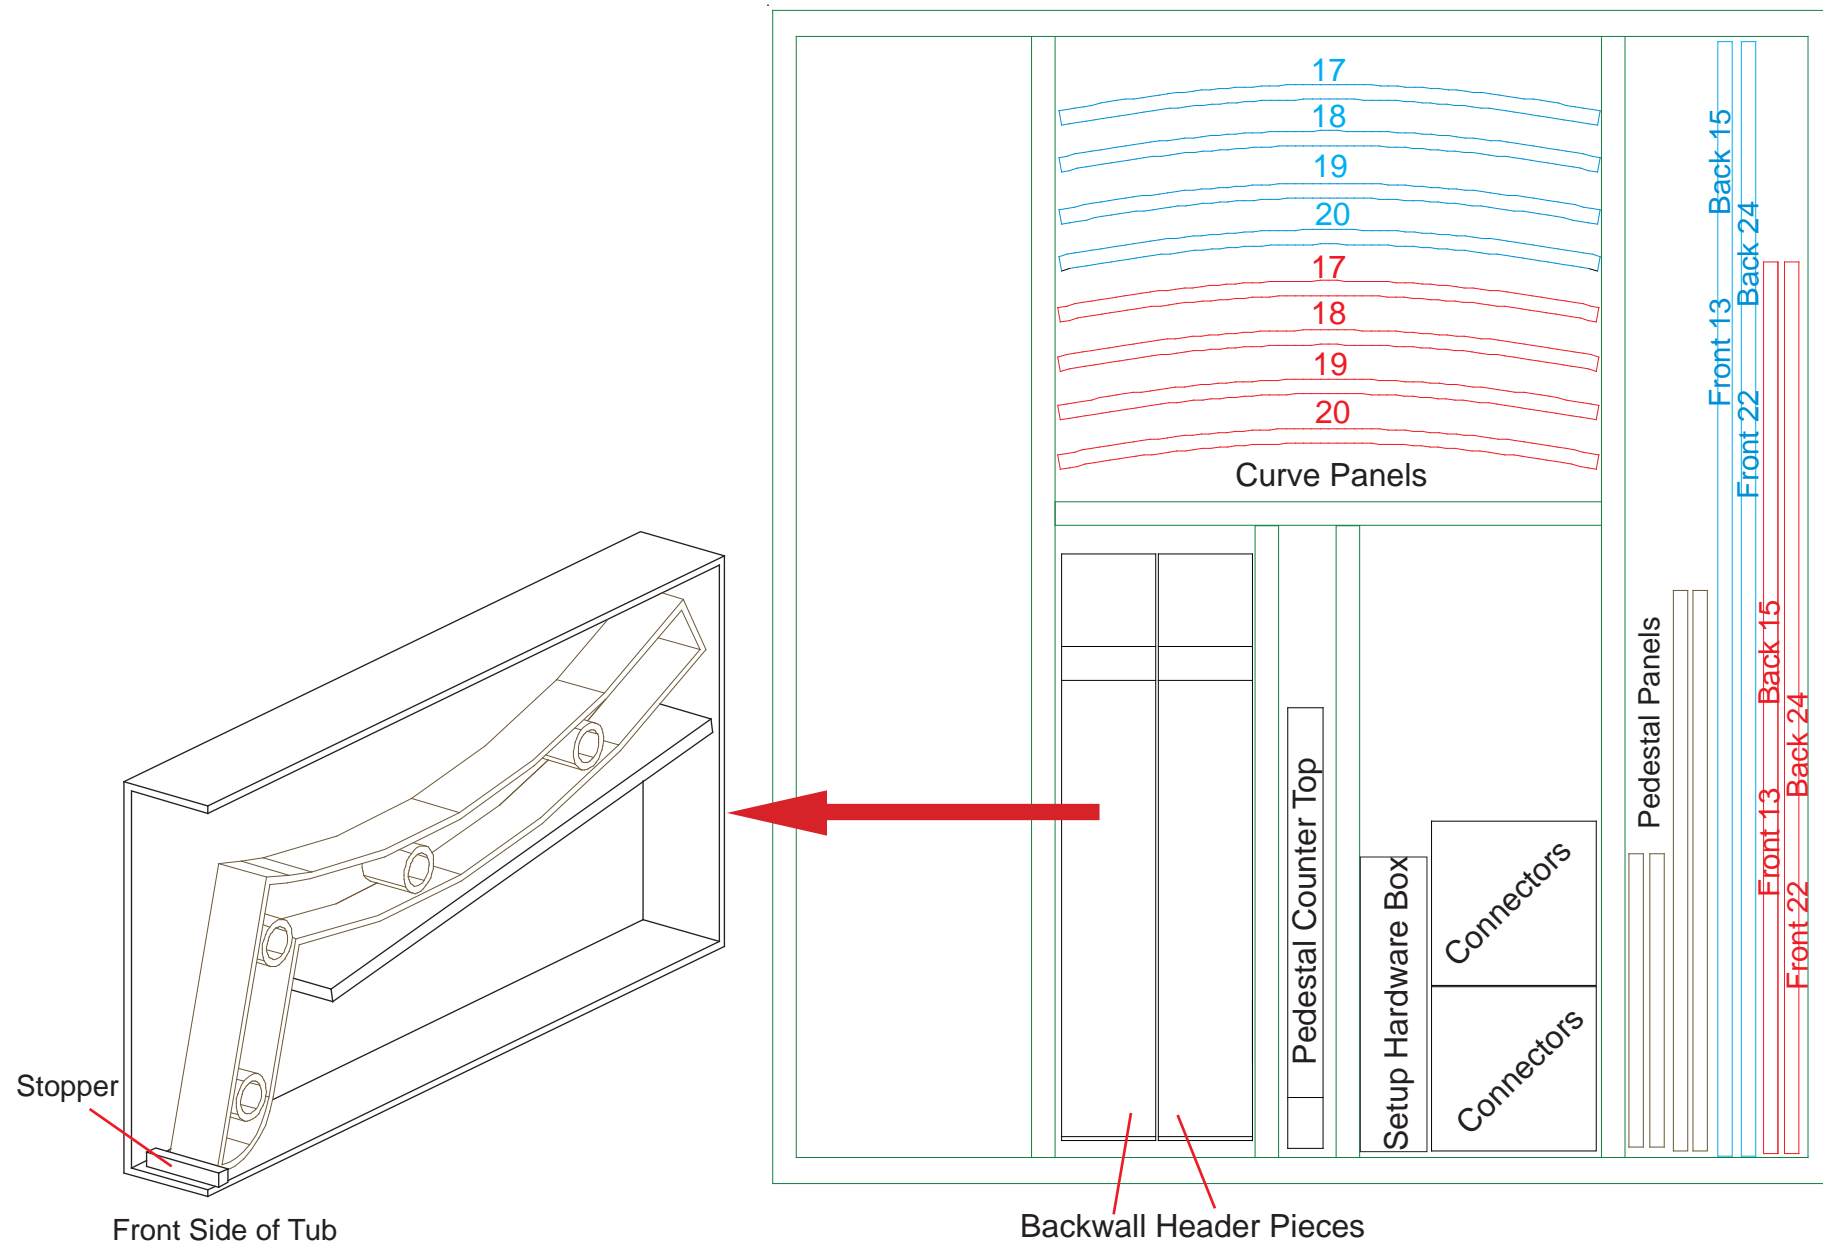

Actual Photo of Jumbo Tub