
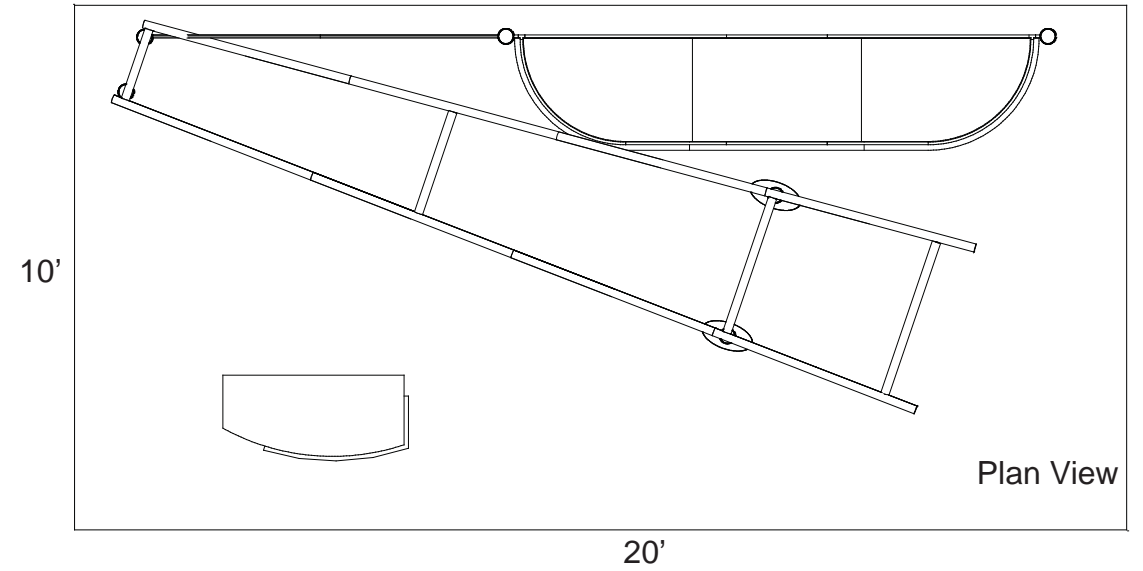


euro It | HYBRIDS

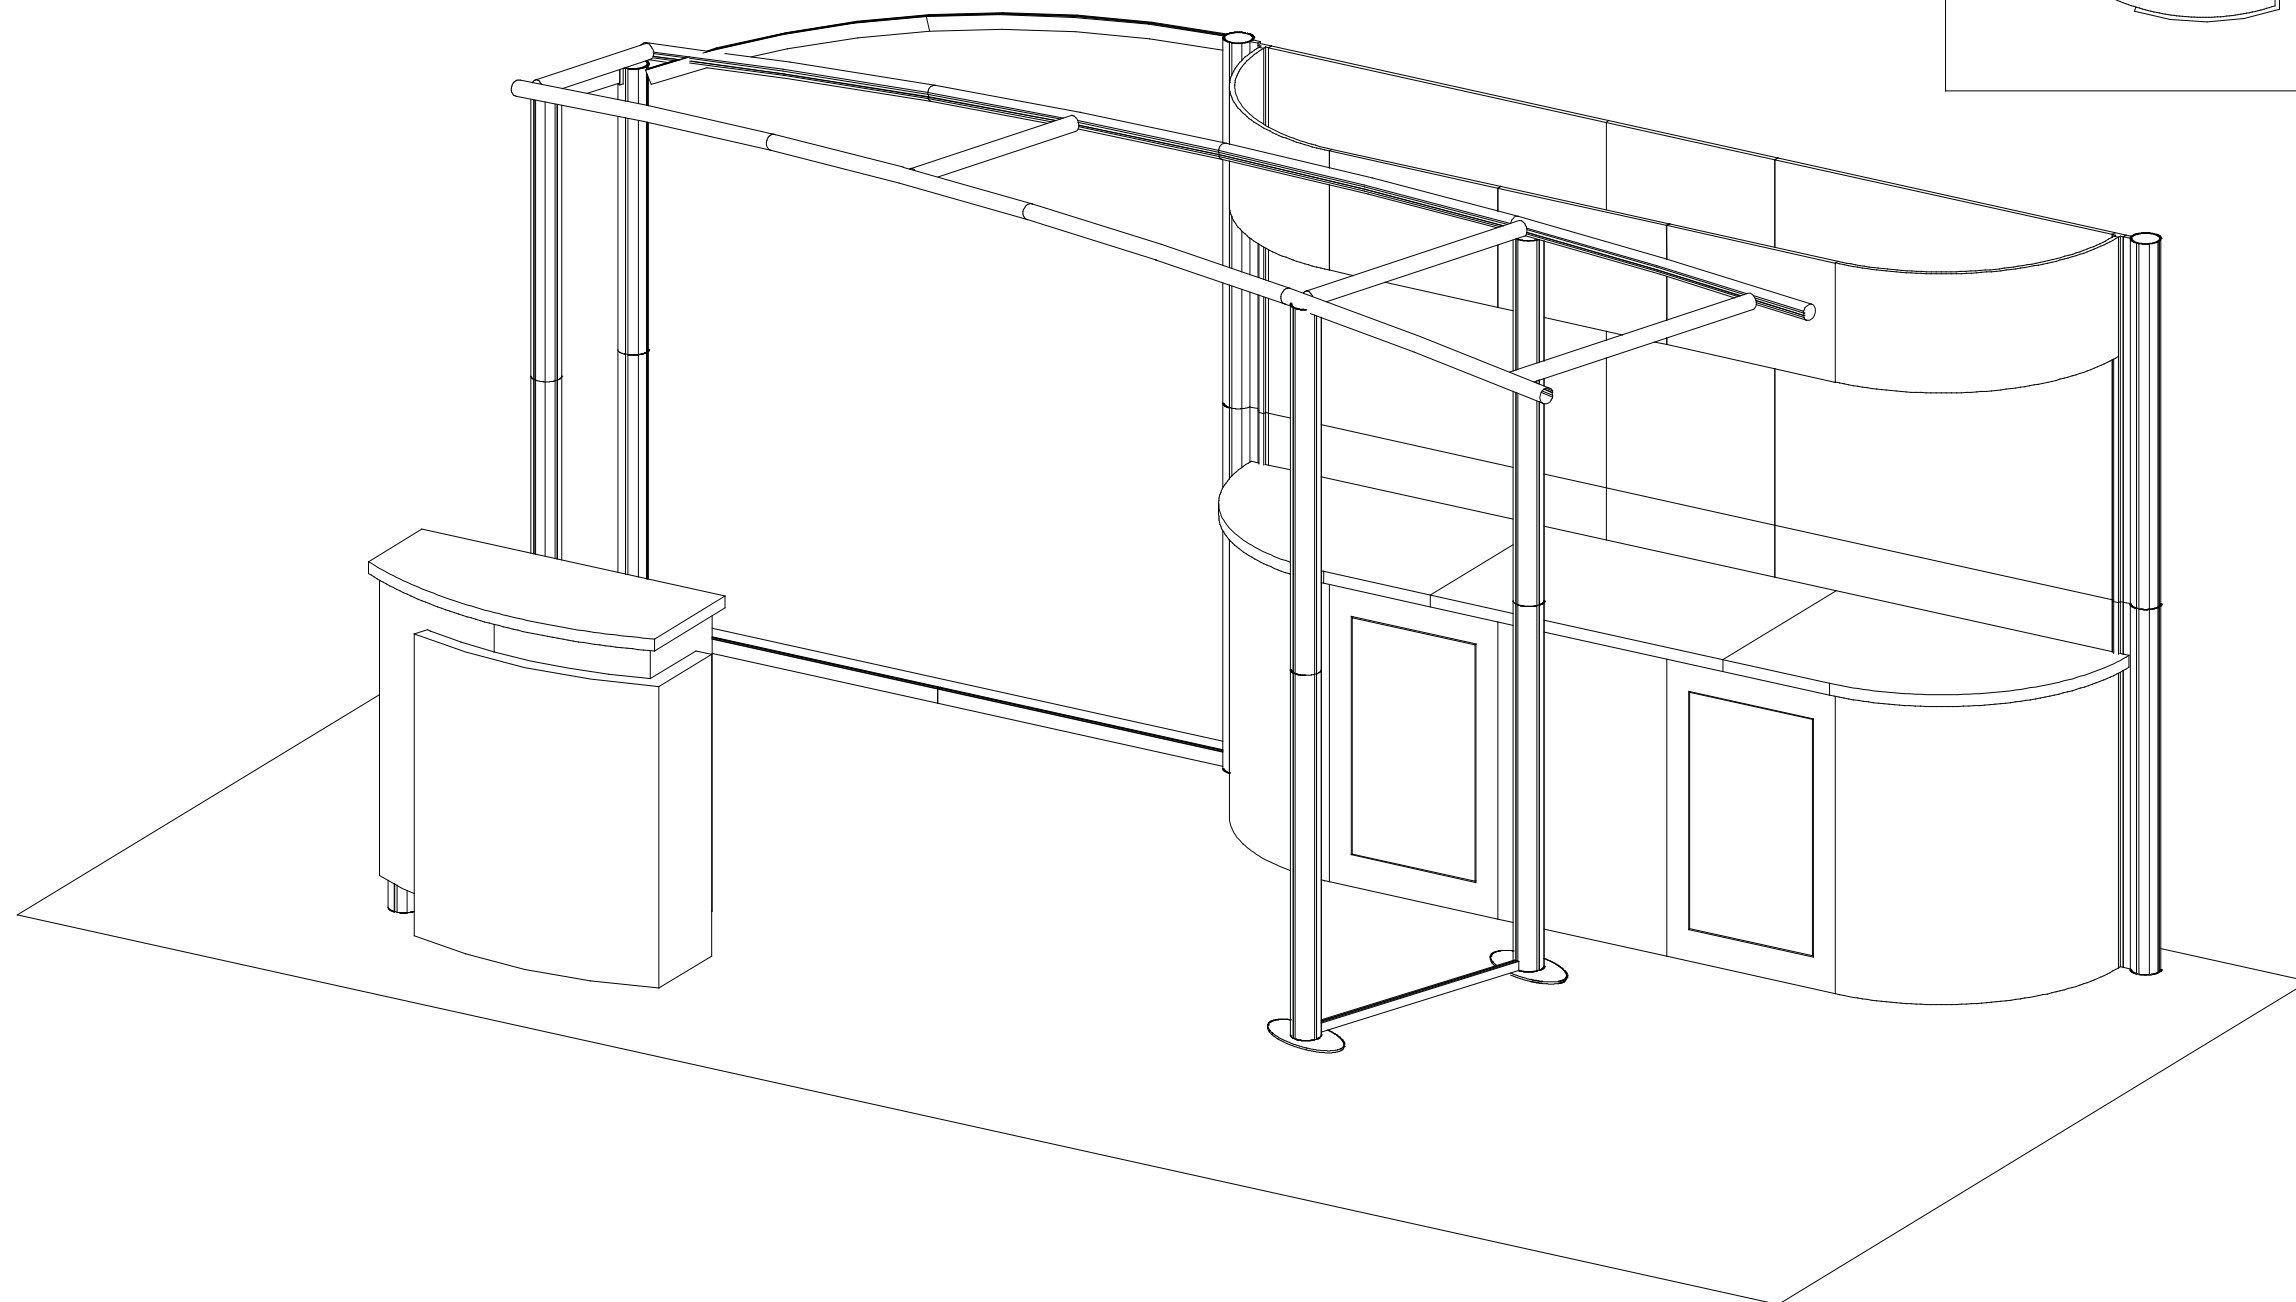

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

General Setup Instructions for Extrusion System



The Tool

Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.




Typical Connection (cont'd)

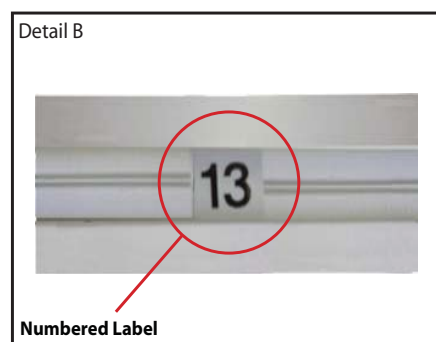


Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

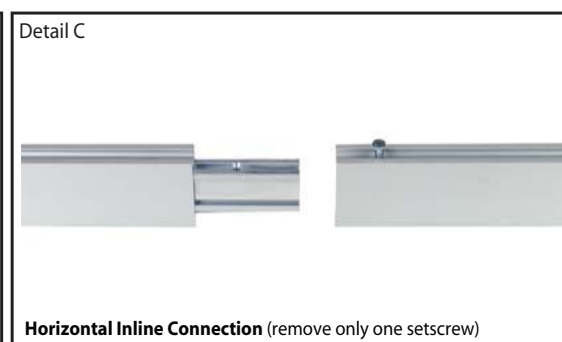


Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.



Base Plate Connection


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.



Vertical Connection (remove only two setscrews)


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

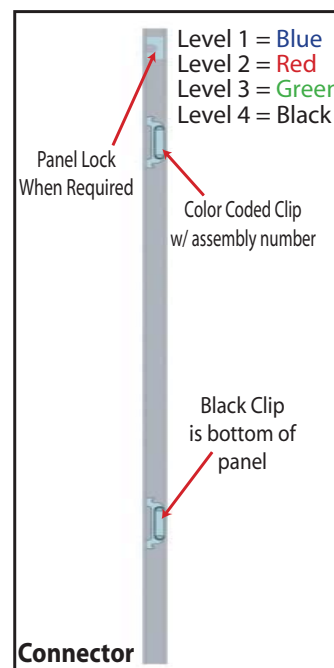


Connector

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

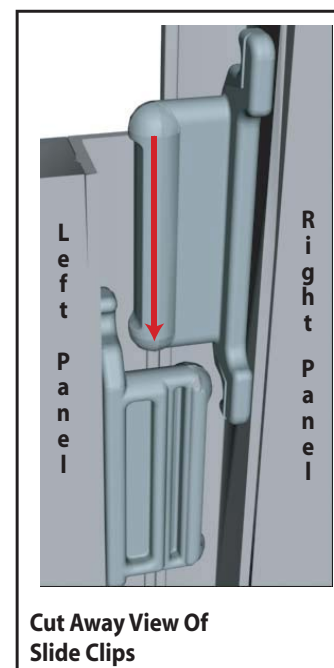


Cut Away View Of Slide Clips

Components connect together by aligning them and sliding downward connecting clips together.

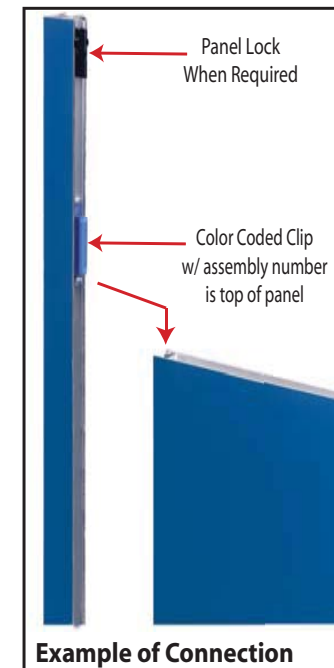

Example of Connection

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

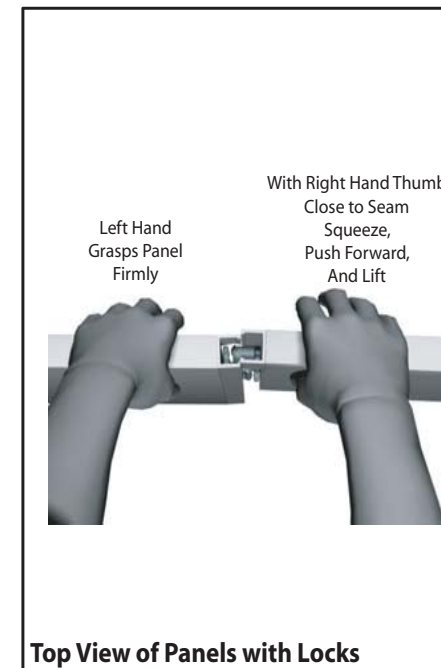

Top View of Panels with Locks




The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
1	3	Base Plate
2	1	36" h Lower Vertical Extrusion
3	1	36" h Upper Vertical Extrusion
4	1	36" h Lower Vertical Extrusion w/ Connector Attached
5	1	36" h Upper Vertical Extrusion w/ Connector Attached
6	1	46" h Lower Vertical Extrusion w/ Connector Attached
7	1	46" h Upper Vertical Extrusion w/ Connector Attached
8	2	9.16" w Horizontal Extrusion
9a/9b	1/1	39" w Horizontal Extrusion
10a/10b	1/1	41.0381" w Horizontal Extrusion

Steps:

- 1) Attach upper vertical extrusions to lower vertical extrusions [3 to 2, 4 to 5, and 7 to 6].
- 2) Attach support extrusion [1] to bottom of vertical assembly [6/7], see detail below.
- 3) Attach horizontal extrusions [8] to connectors located on vertical assemblies [2/3 and 4/5].
- 4) Connect horizontal extrusions [9a to 9b and 10a to 10b] together.
- 5) Attach horizontal assemblies [9a/9b and 10a/10b] between vertical assemblies [4/5 and 6/7].

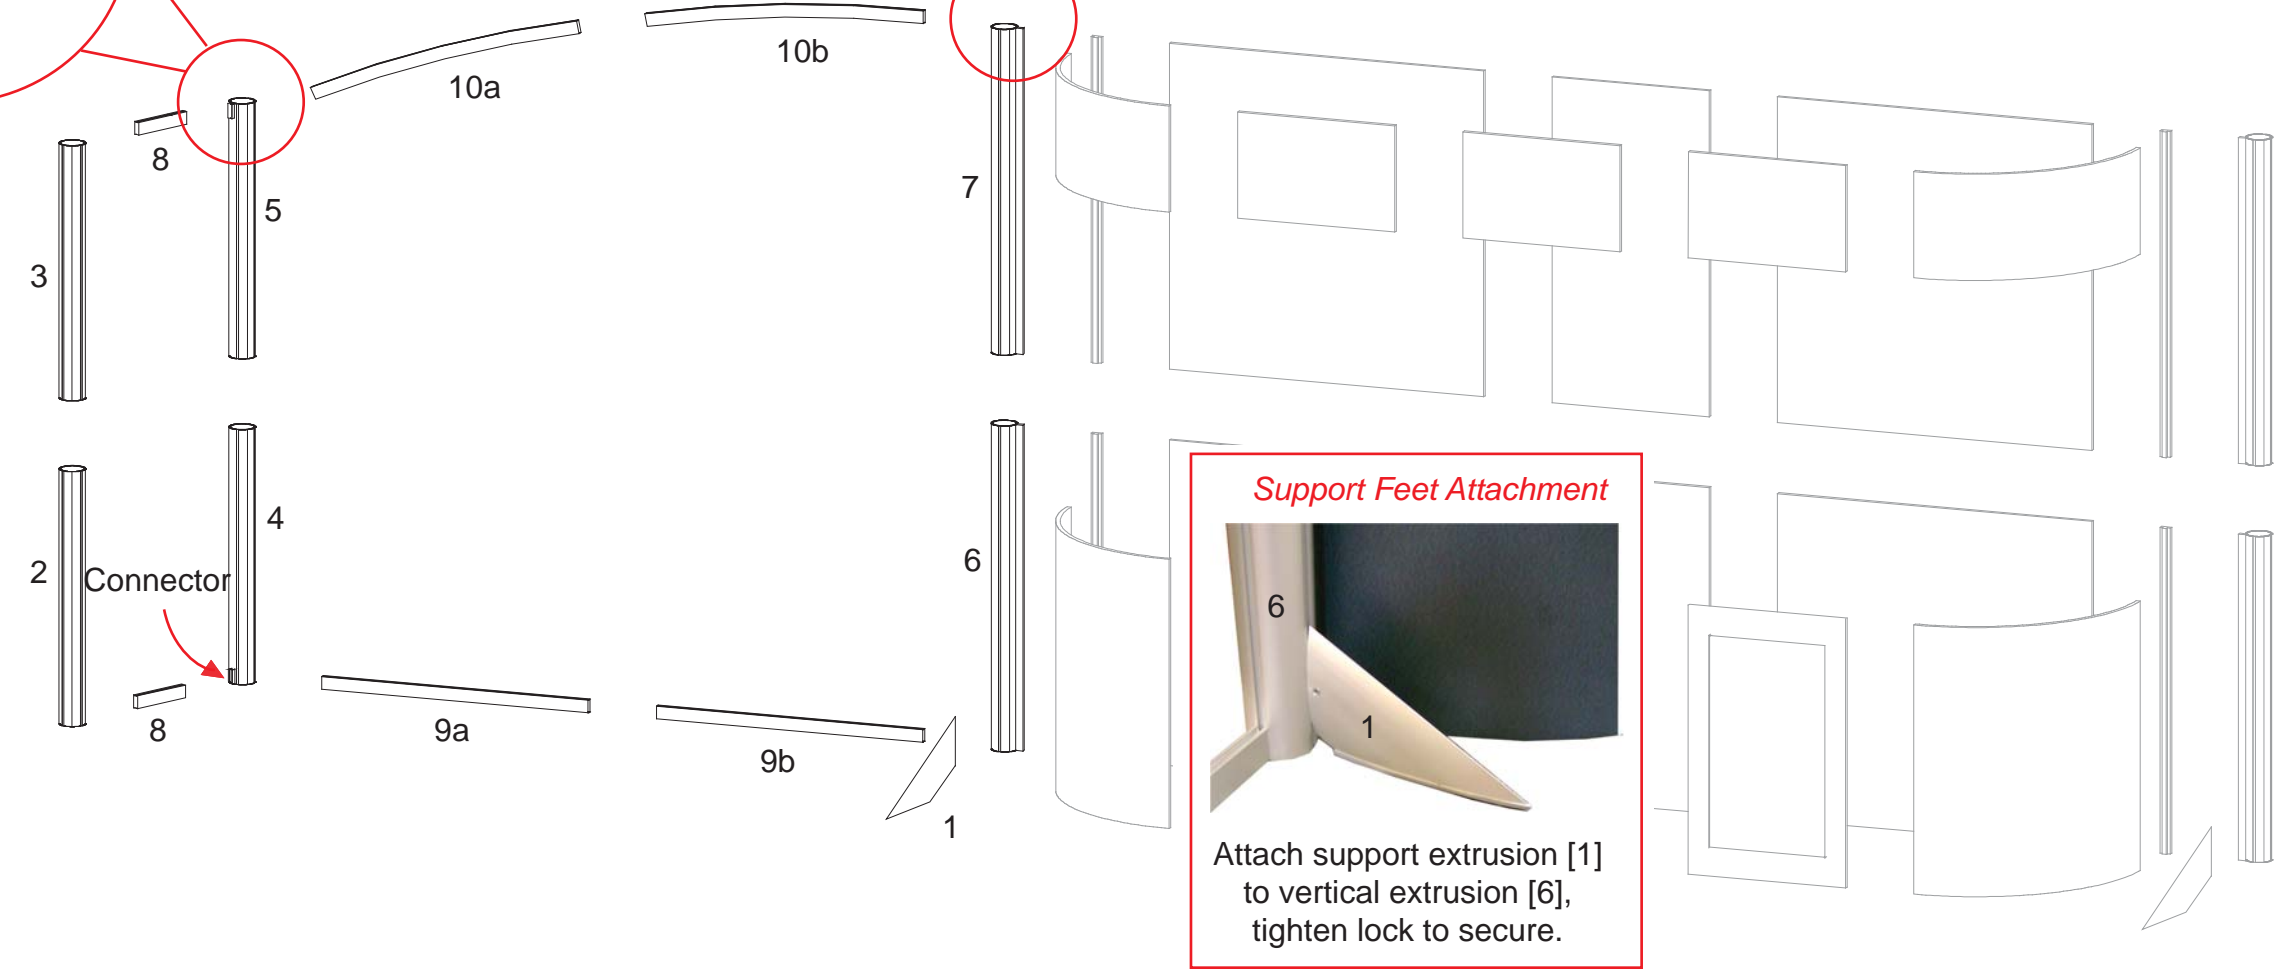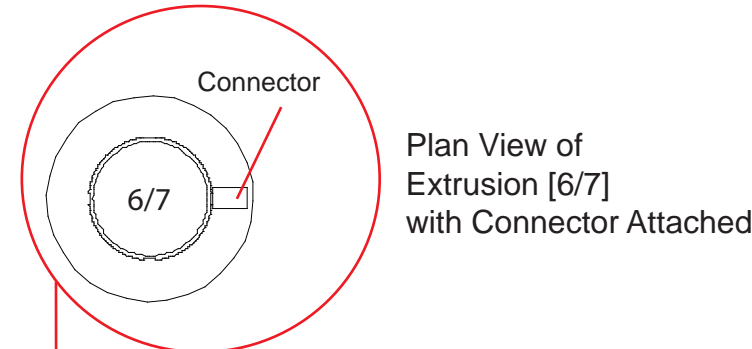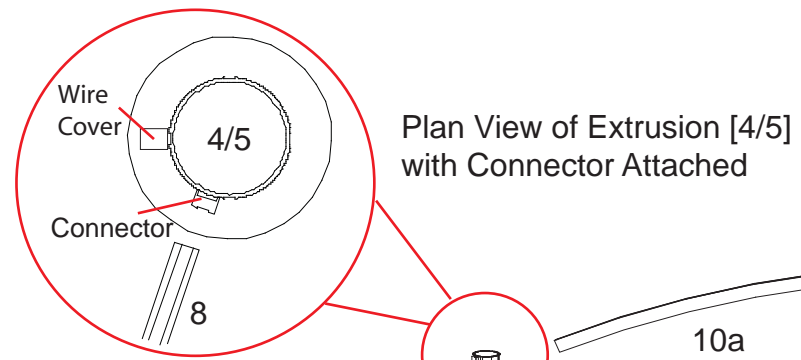

Support Feet Attachment

Attach support extrusion [1] to vertical extrusion [6], tighten lock to secure.


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Modul Extrusion Part List:

Item	Qty. per Step	Description
1	1	Base Plate
21	1	46" h Lower Vertical Extrusion w/ Connector Attached
22	1	46" h Upper Vertical Extrusion w/ Connector Attached



Euro LT Panel Part List:

Item Number	Description
11	46" h T Connector
12	46" w x 46" h Flat Panel
13	23" w x 46" h Flat Panel
14	46" w x 46" h Flat Panel
15	23" r x 38" h Curve Panel
16	23" w x 38" h Door Panel
17	23" w x 38" h Flat Panel
18	23" w x 38" h Door Panel
19	23" r x 38" h Curve Panel
20	46" h T Connector

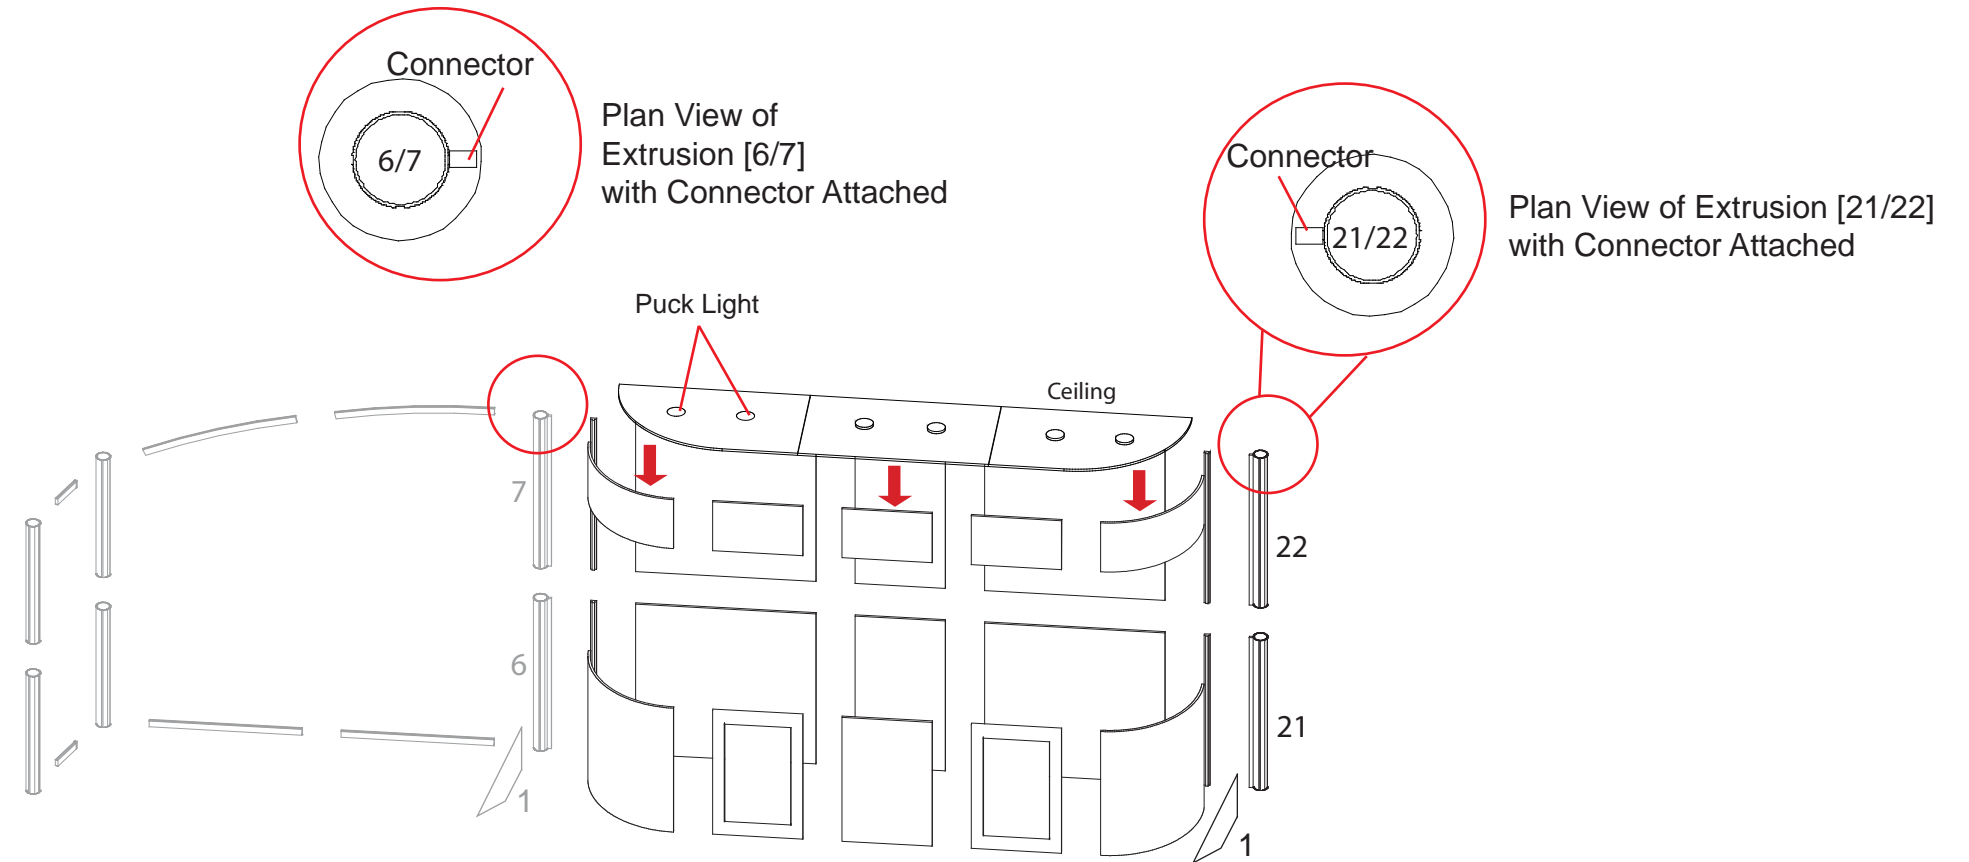

Steps:

- 1) Connect vertical extrusions [22 and 21] together, then attach support extrusion [1] to vertical assembly [21/22].
- 1) Connect curve panel #15 to connector #11 and curve panel #19 to connector #20 together, see panel special connection details.
- 2) Connect backwall panels between connectors #11 and 20.
- 3) Connect front panels between curved panels in numerical order.

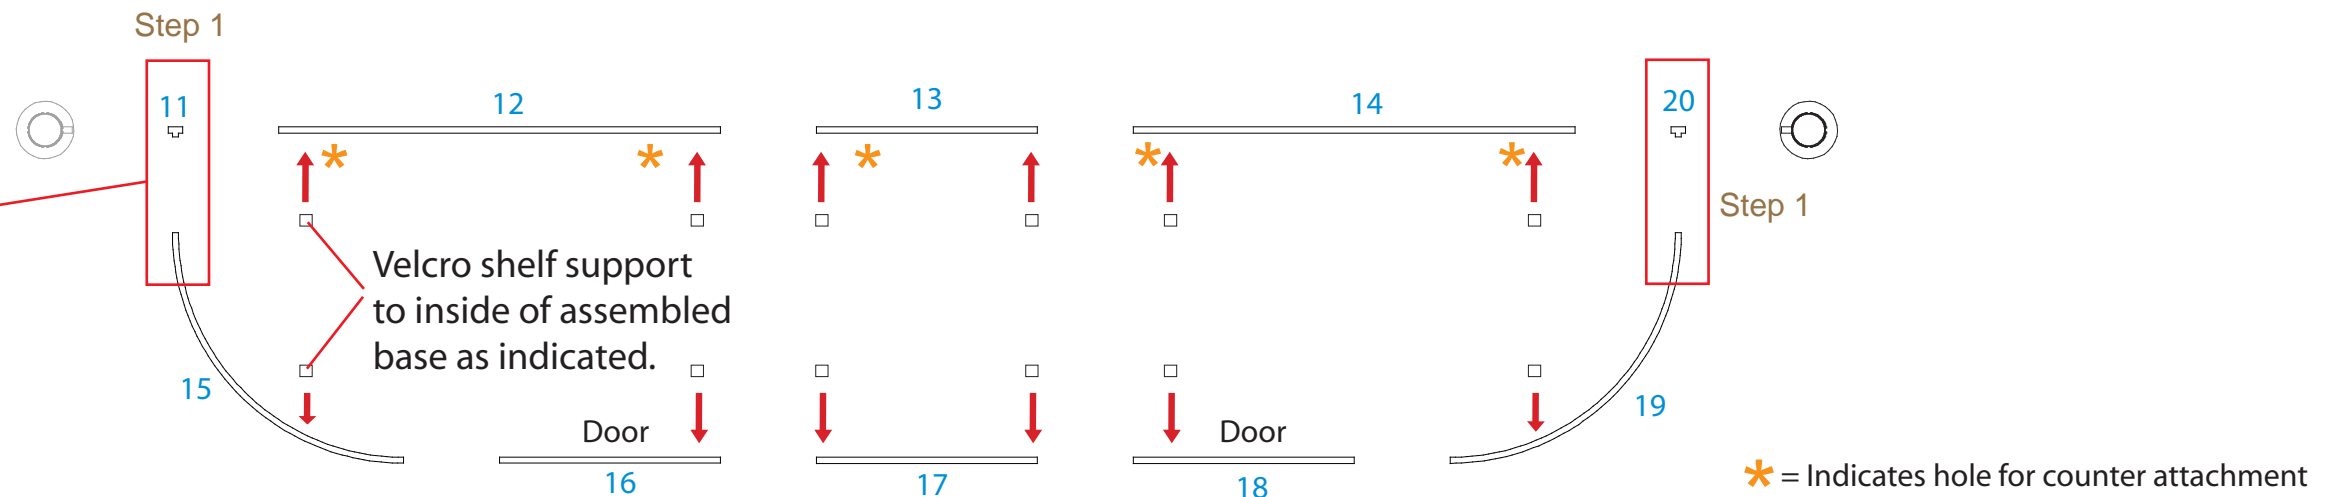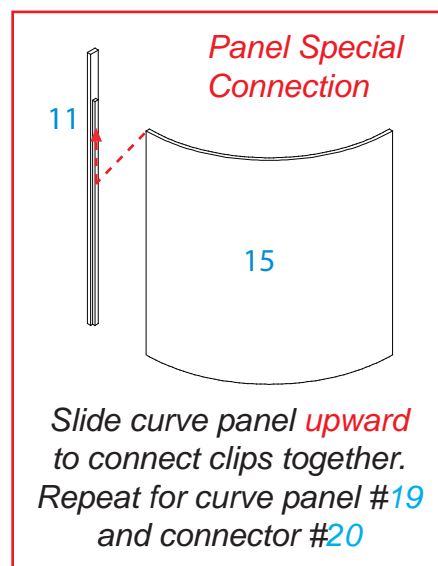

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

Modul Extrusion Part List:

Item	Qty. per Step	Description
1	1	Support Extrusion
21	1	46" h Lower Vertical Extrusion w/ Connector Attached
22	1	46" h Upper Vertical Extrusion w/ Connector Attached




Euro LT Panel Part List:

Item Number	Description
11	46" h T Connector
12	46" w x 46" h Flat Panel
13	23" w x 46" h Flat Panel
14	46" w x 46" h Flat Panel
15	23" r x 15" h Curve Panel
16	23" w x 15" h Flat Panel
17	23" w x 15" h Flat Panel
18	23" w x 15" h Flat Panel
19	23" r x 15" h Curve Panel
20	46" h T Connector

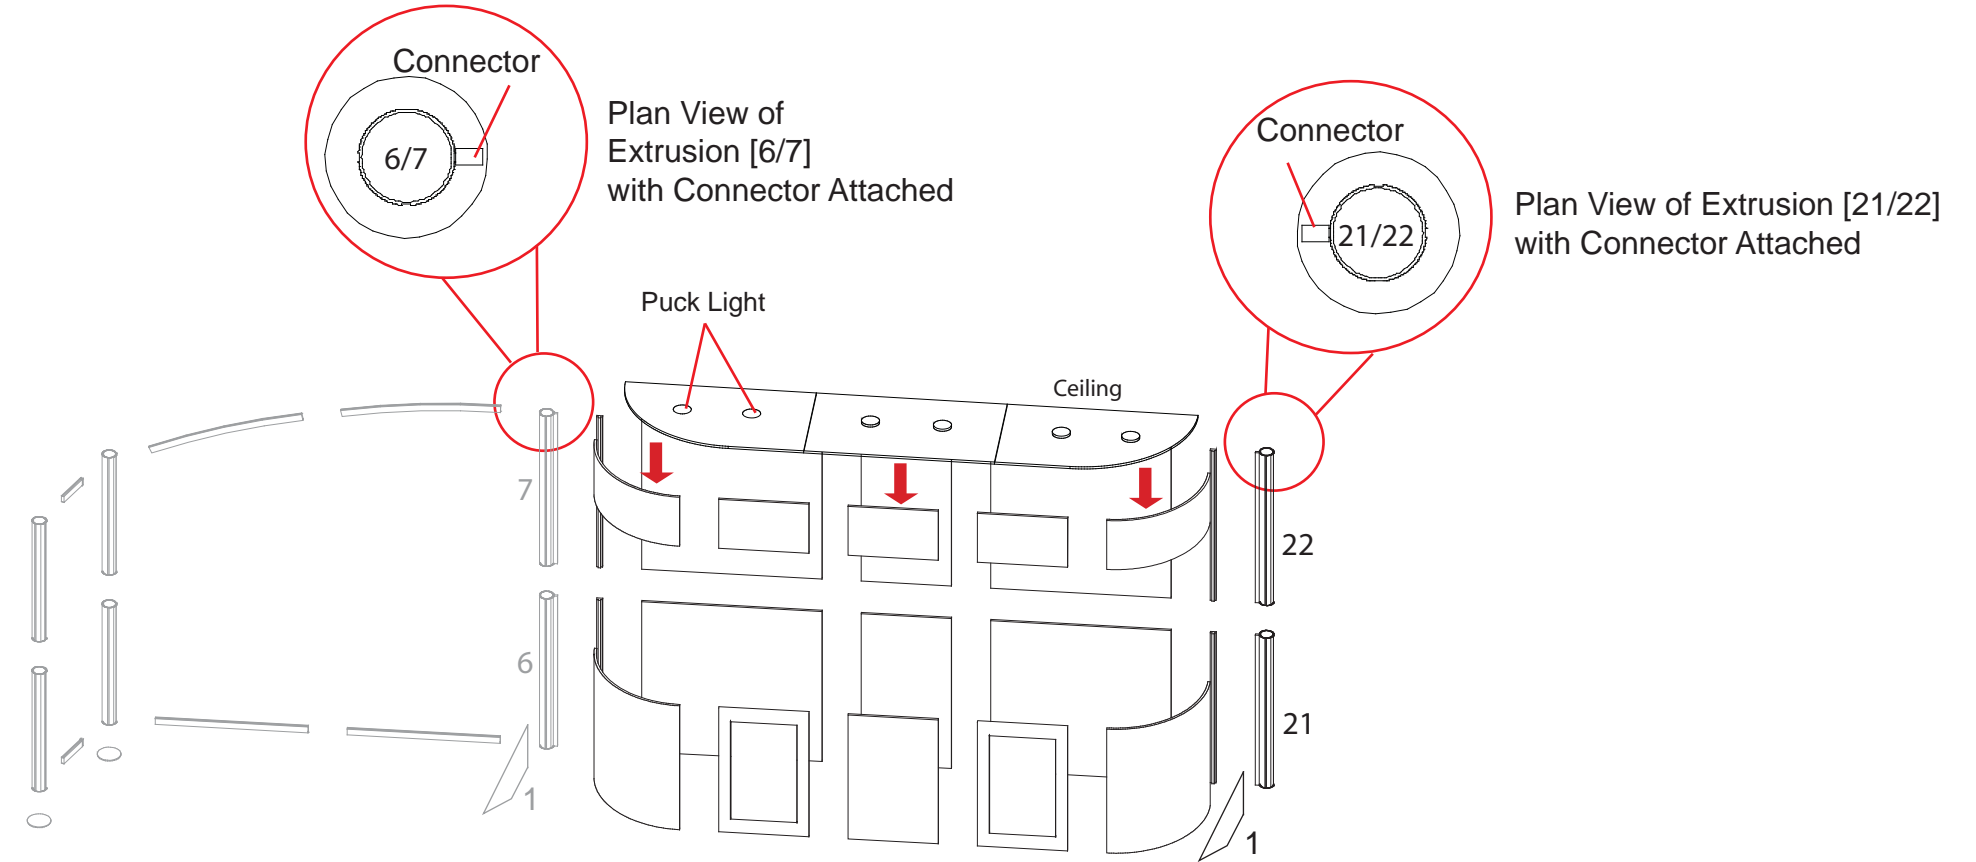

Steps:

- 1) Connect backwall panels and connectors #11-14 and 20 between vertical extrusion [7 and 22].
- 2) Connect curve panel #15 to connector #11 and curve panel #19 to connector #20.
- 3) Connector panel #16 to curve panel #15 and panel #18 to curve panel #19.
- 4) Connect panel #17 between panels #16 and 18.

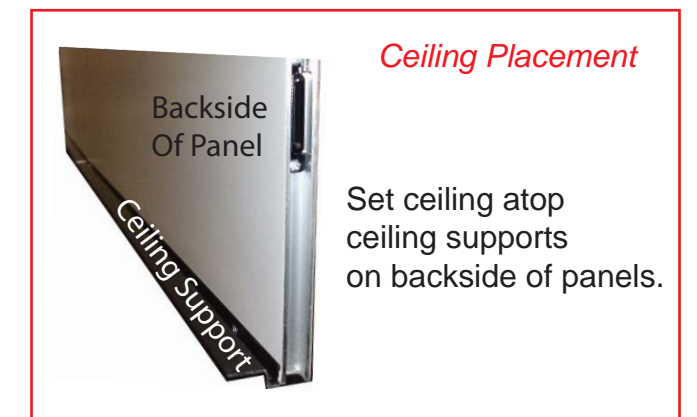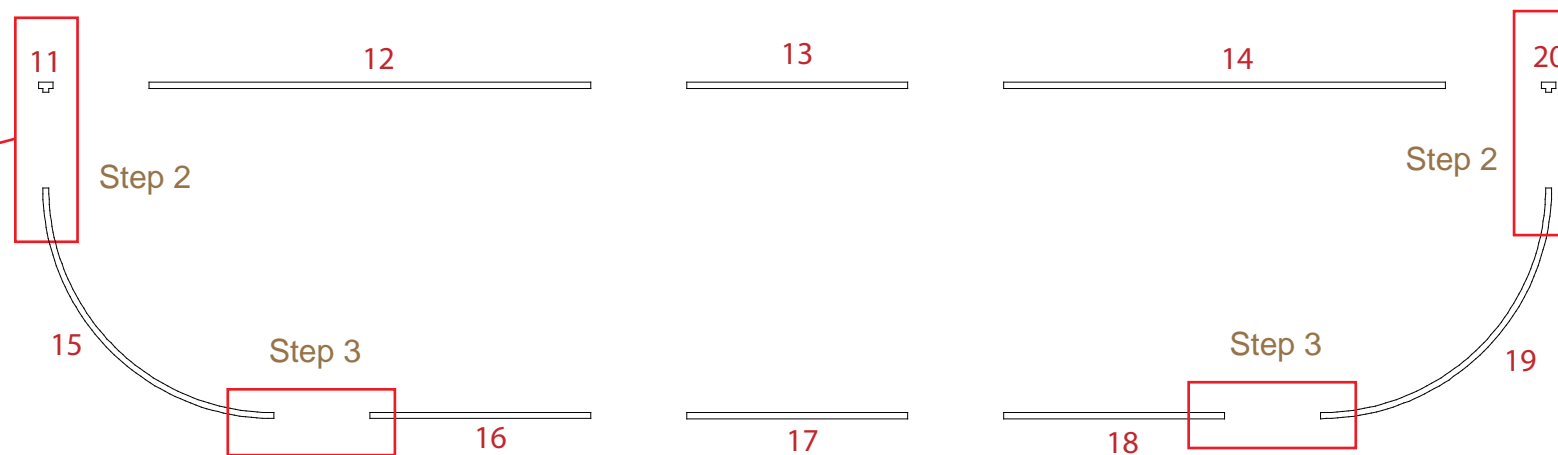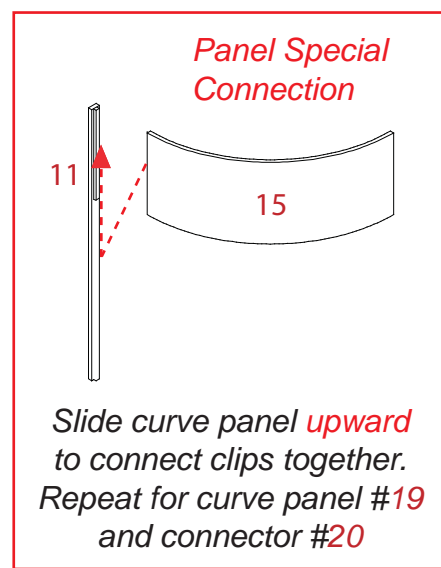


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Qty.	Description
36	2	40" w Horizontal Support Extrusion





Steps:
 1) Attach monitor mount to backwall panel using bolts and wing nuts supplies.

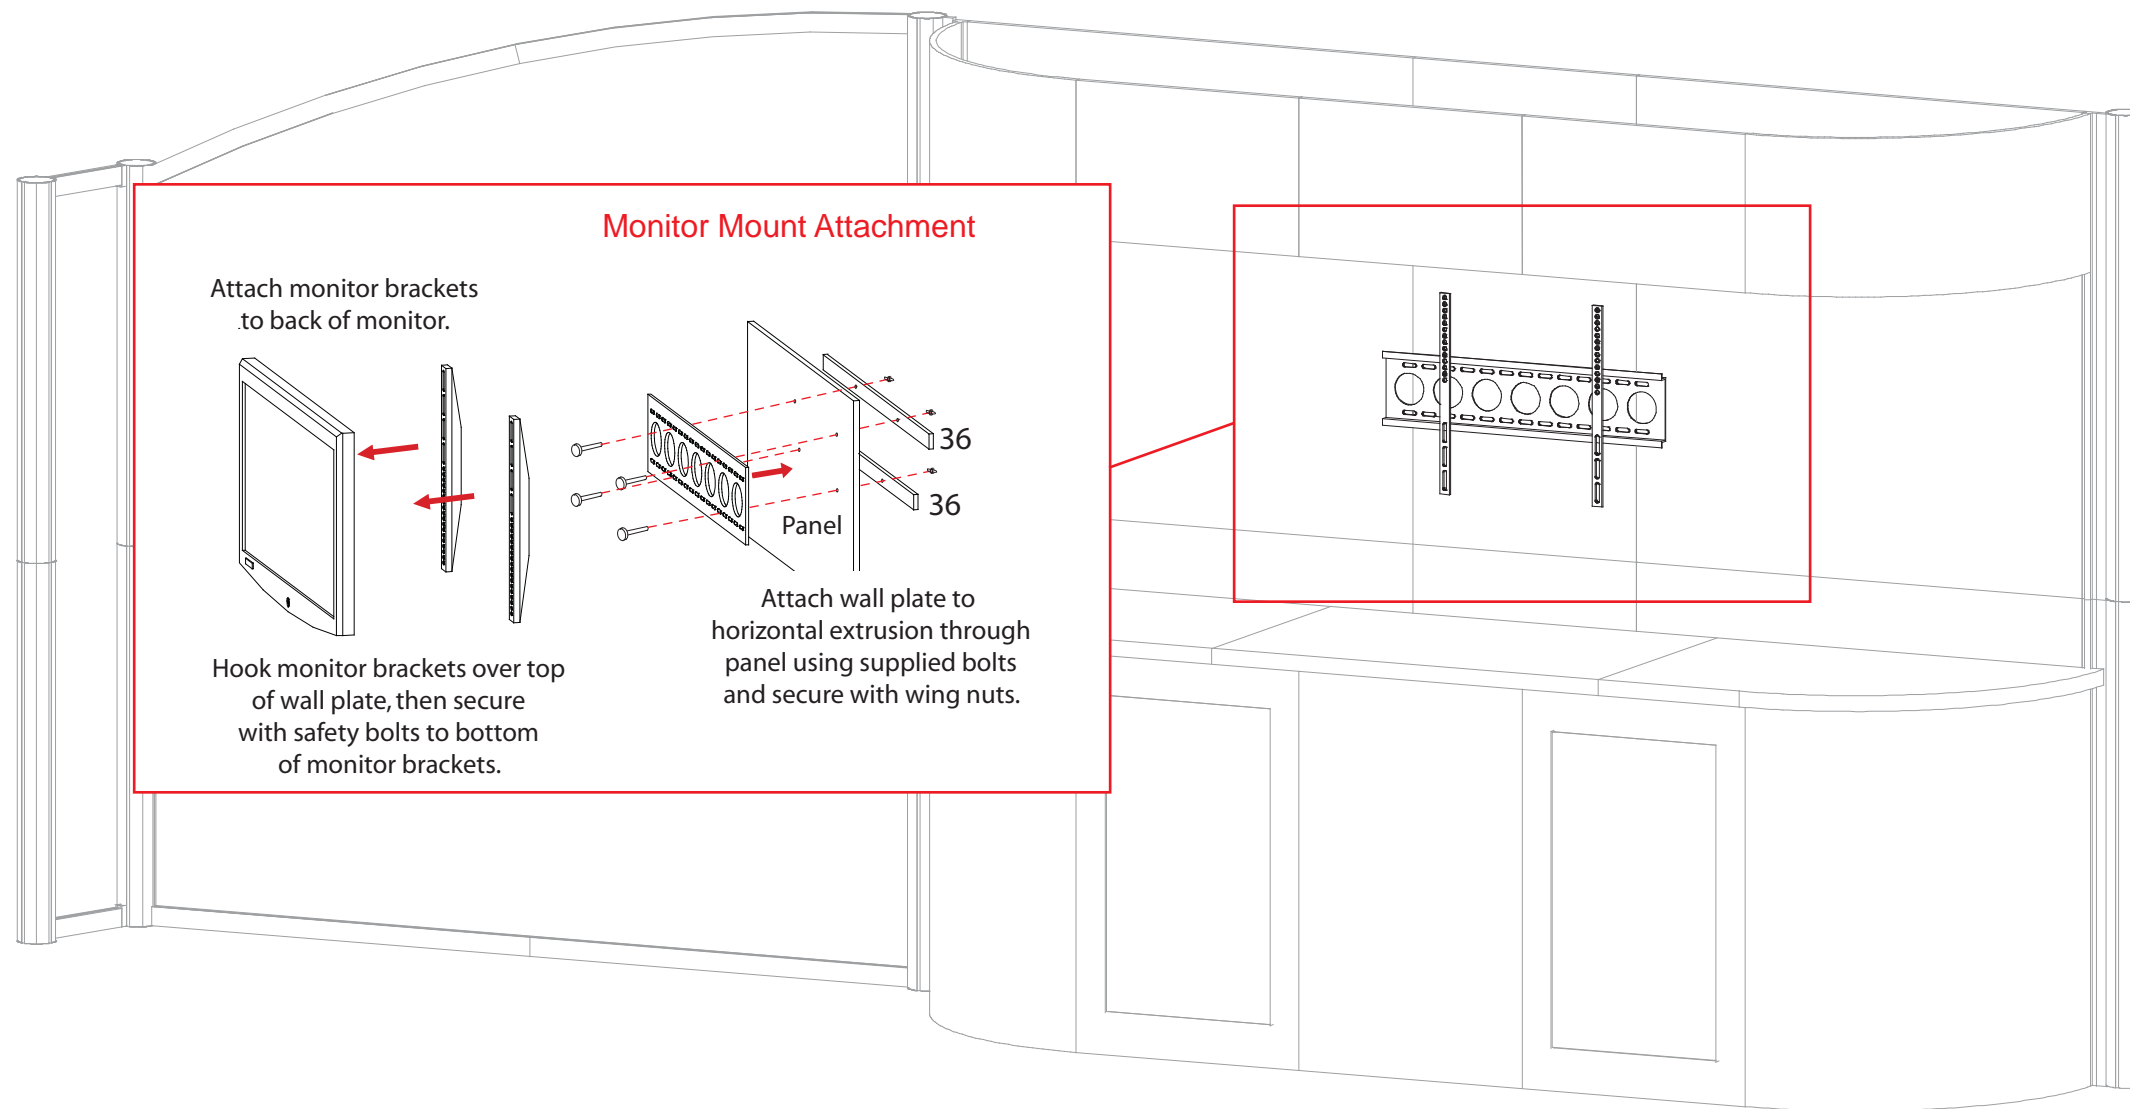

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
AB	1	49.5"w Curved Round Extrusion
BC	1	49.5"w Curved Round Extrusion
CD	1	49.5"w Curved Round Extrusion
DE	1	49.5"w Curved Round Extrusion
EF	1	49.5"w Curved Round Extrusion
GH	1	49.5"w Curved Round Extrusion
HI	1	49.5"w Curved Round Extrusion
IJ	1	49.5"w Curved Round Extrusion
JK	1	49.5"w Curved Round Extrusion
JL	1	49.5"w Curved Round Extrusion
M	1	11.5"w 4-way Extrusion
N	1	16.75"w 3-way Extrusion
O	1	24.5"w 3-way Extrusion
P	1	32.5"w 4-way Extrusion
Q	1	36.5"w 3-way Extrusion

- Steps:
- 1) Connect canopy extrusions together.
 - 2) Attach can lights to cross extrusions as indicated.
 - 3) Attach wire cover to assembled canopy for wire management.

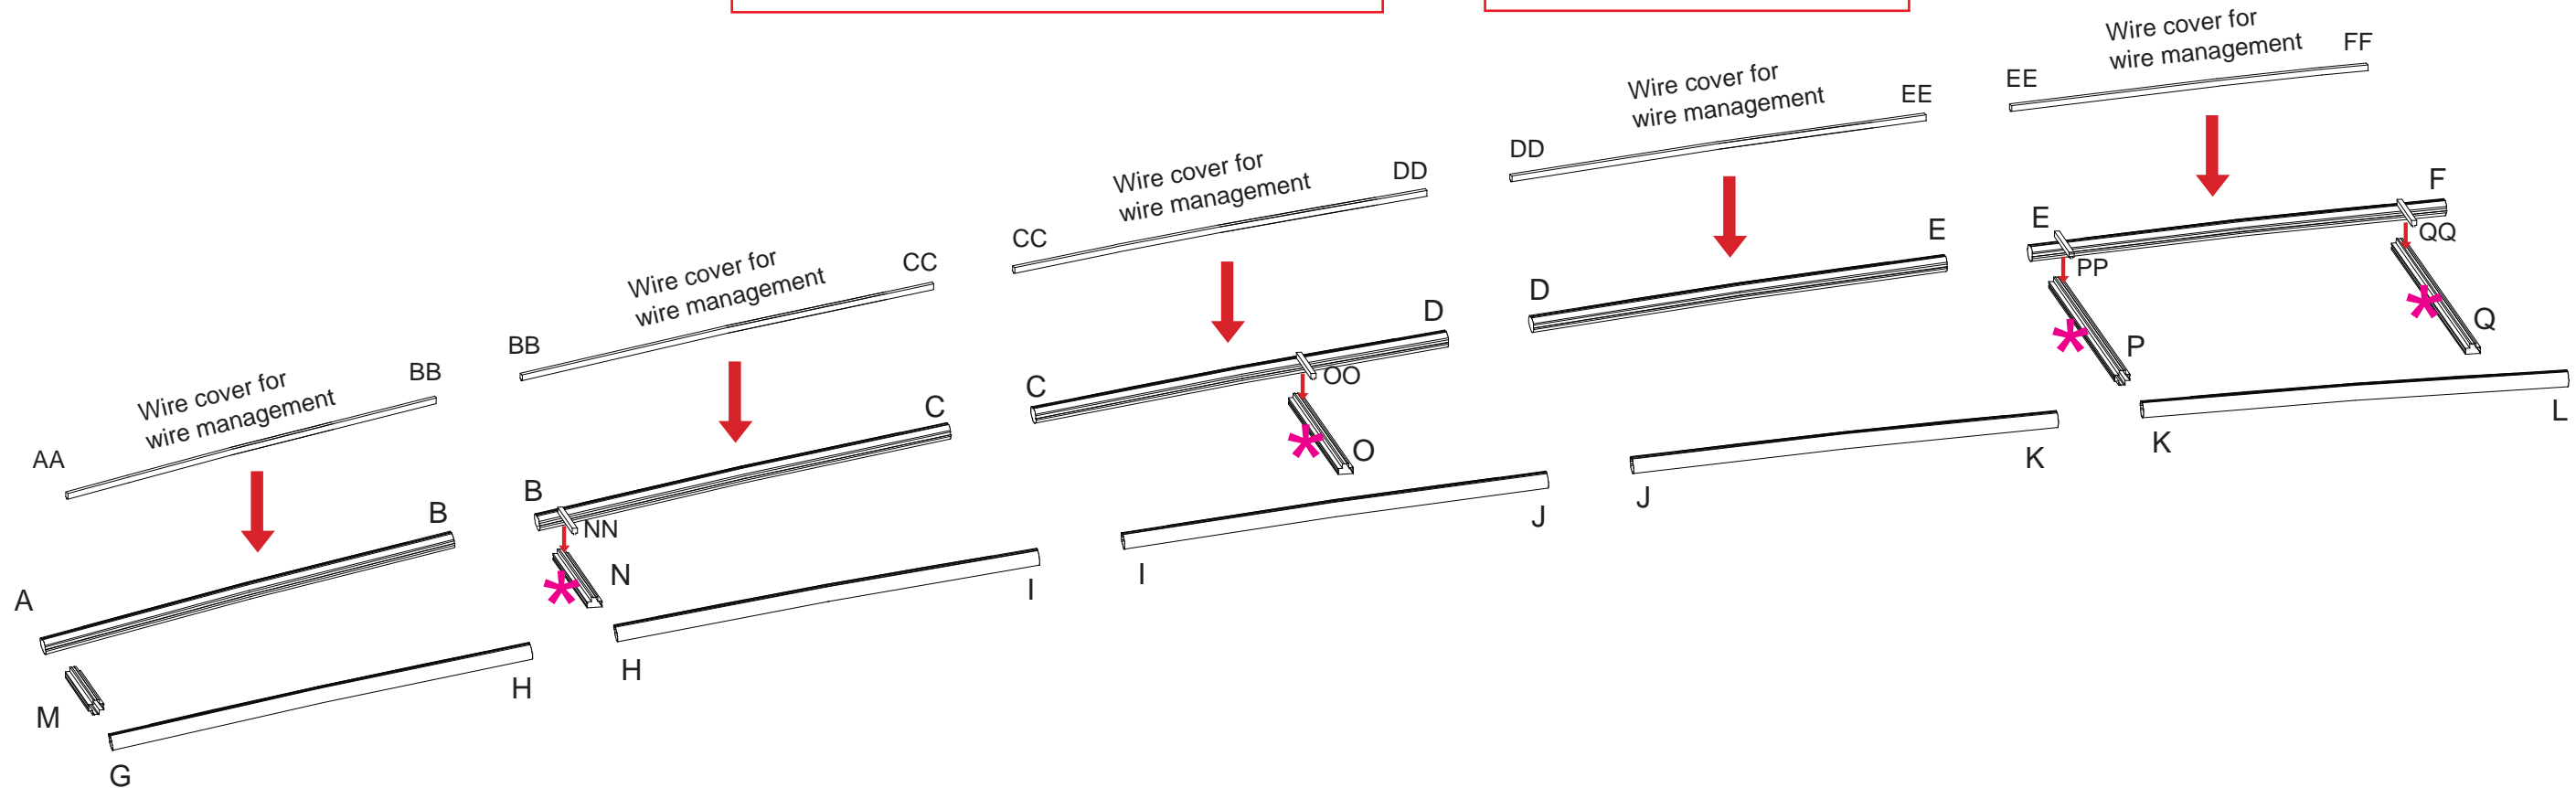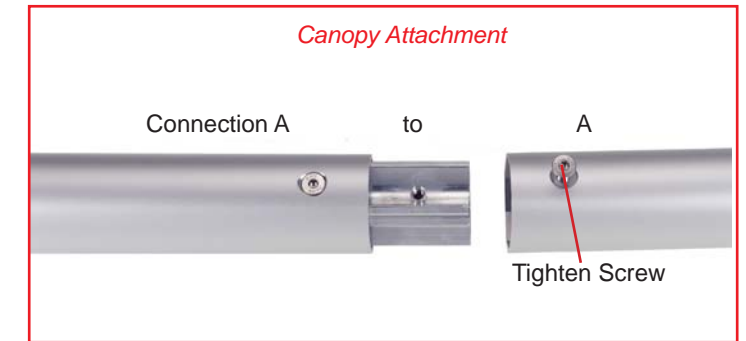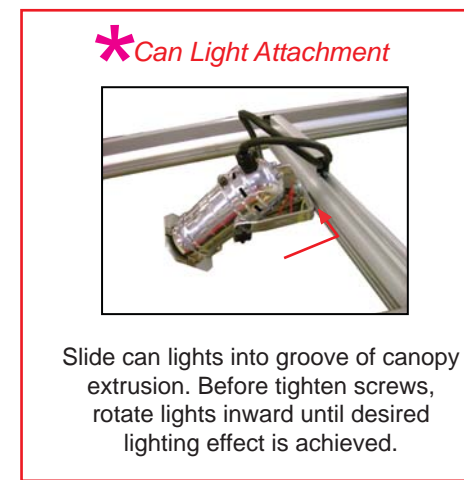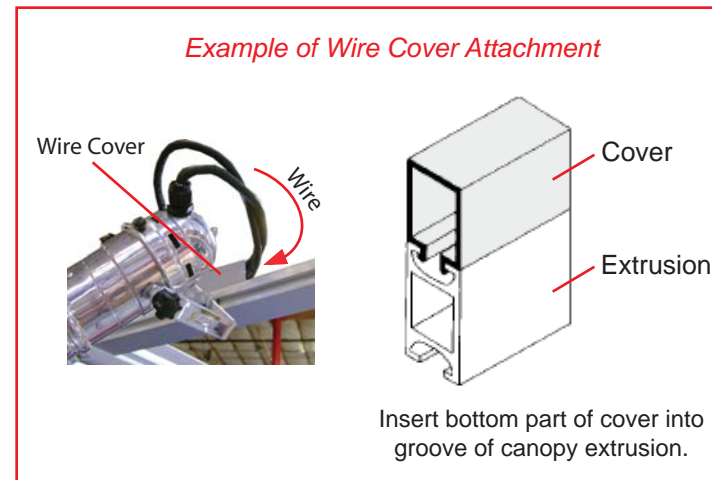




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty. per Step	Description
31	2	Oval Base Plate
32	2	46" h Lower Extrusion
33	2	46" h Upper Extrusion
34	2	30.375" w Horizontal Extrusion
35	3	3.5" h Connector

Steps:


- 1) Attach upper vertical extrusions to lower extrusions [33 to 32].
- 2) Attach vertical extrusions [32/33] to base plates [31], see detail D on General Info page
- 3) Attach horizontal extrusions [34] between vertical assemblies [32/33].
- 4) Attach connectors [35] between assembled canopy and horizontal extrusions as shown.
- 5) Attach wire covers [4a and 5a] to vertical extrusions [4 and 5] for wire management.

Plan View of Extrusion [4/5] with Connector Attached

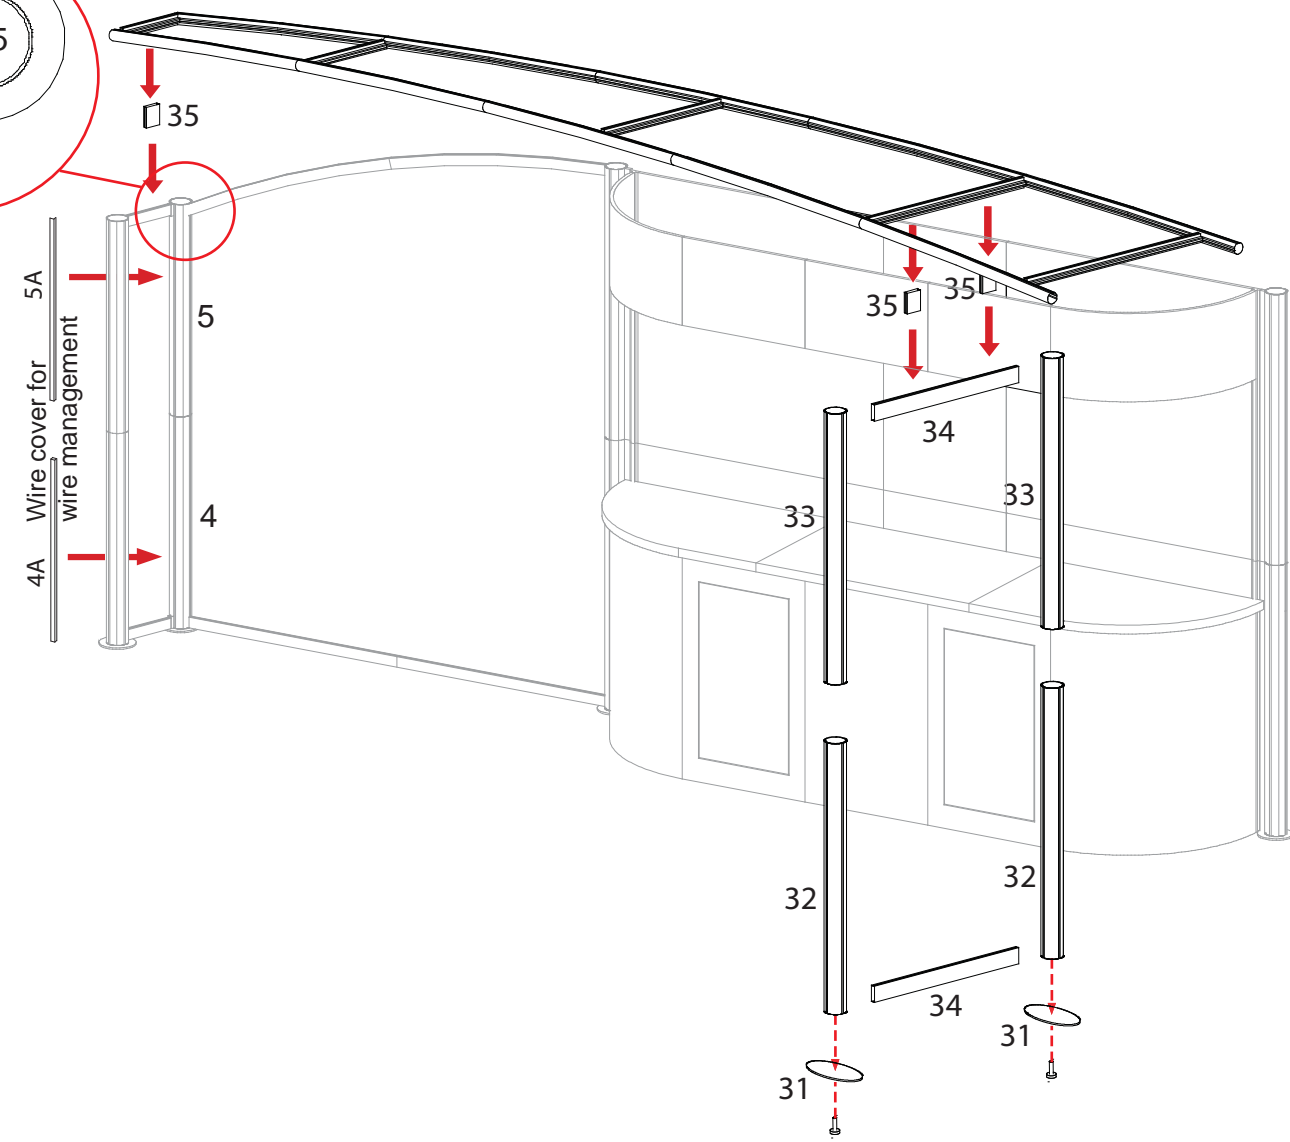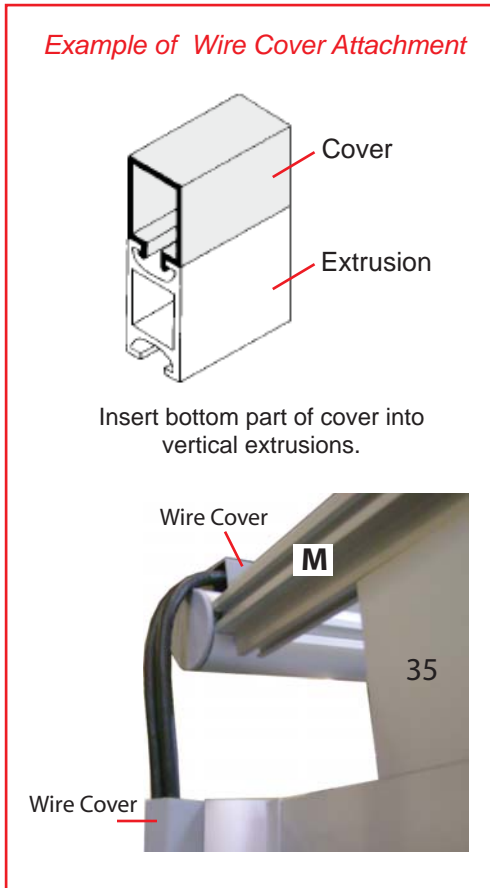


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

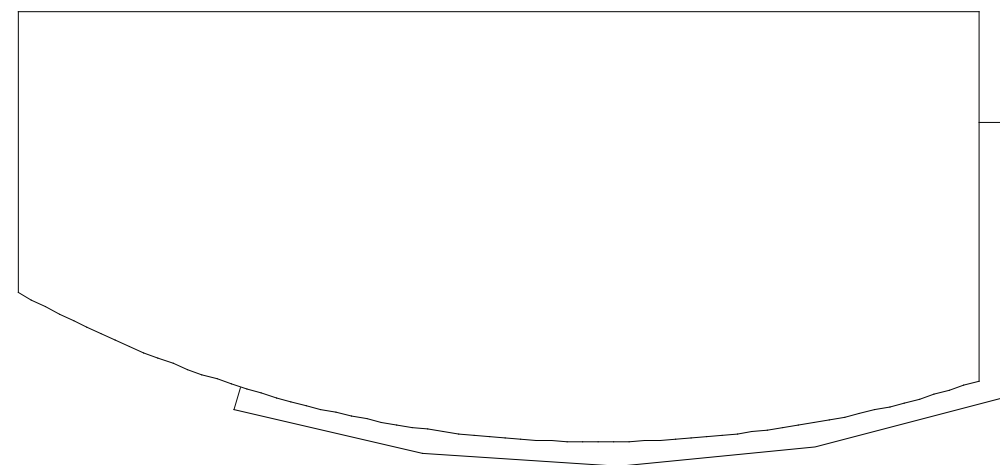

Top View

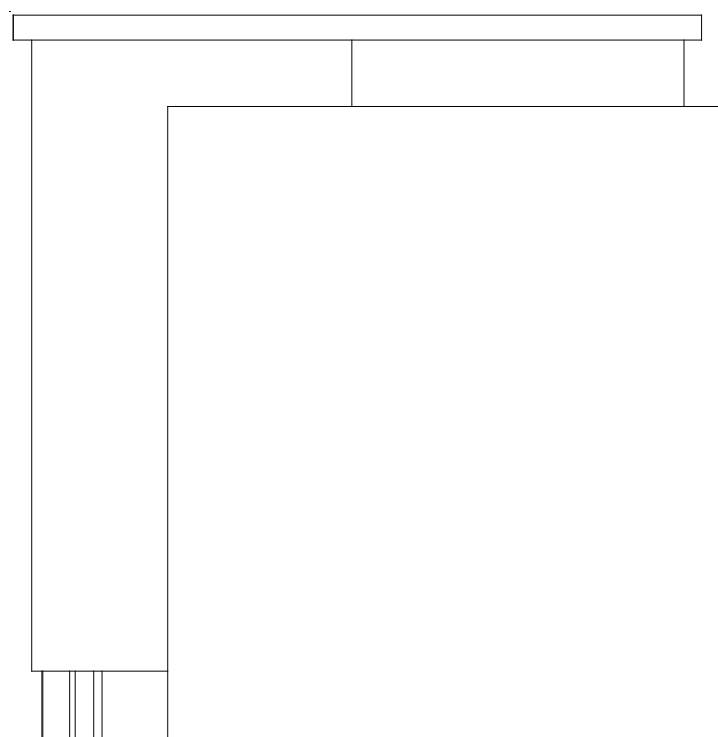

Front View

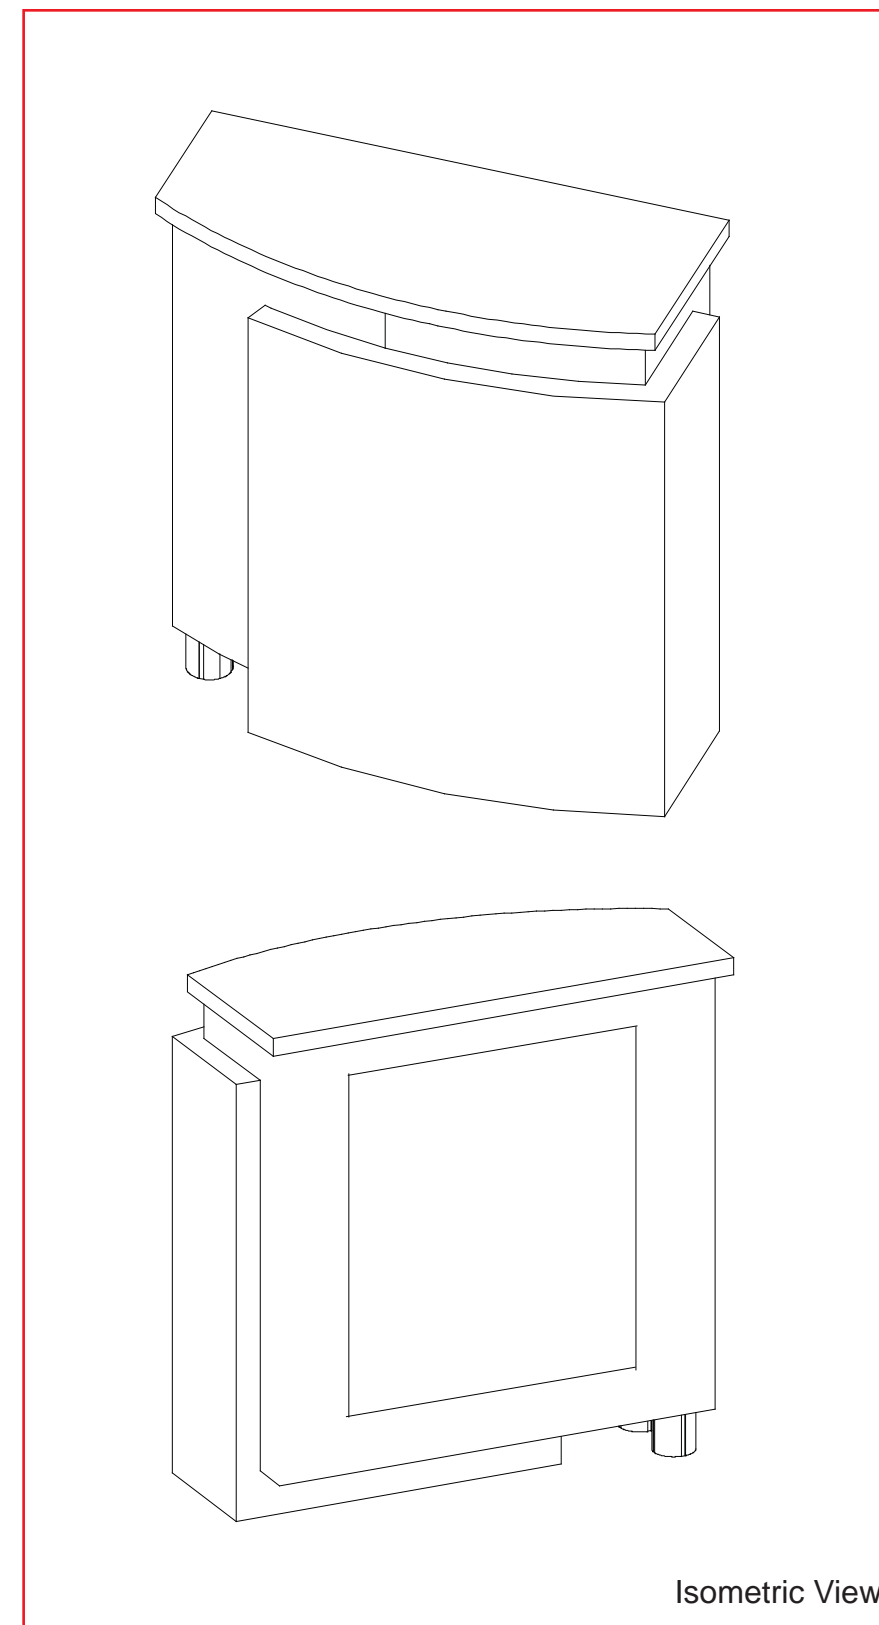

Isometric View

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING