

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

visionary™ DESIGNS

Using Your Setup Instructions

The Visionary Designs Setup Instructions are created specifically for your configuration. They are laid out sequentially, including an exploded view of the entire display, and then a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is **VERY IMPORTANT**.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts or countertops, use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



The Tool

Most Visionary Designs exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Detail A

Typical Connection



Typical Connection (cont'd)

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

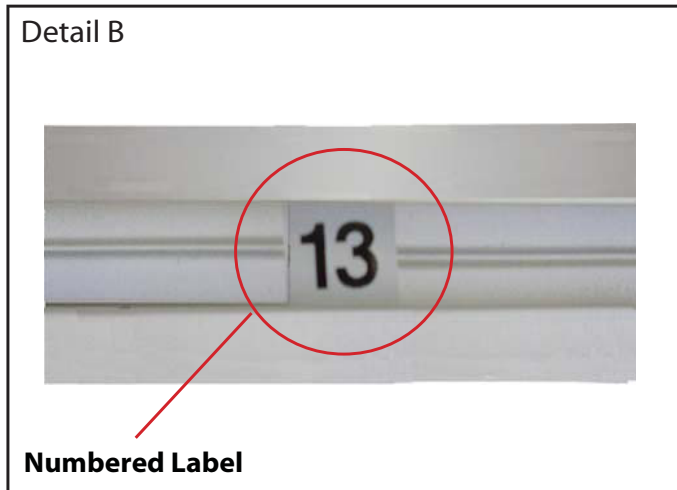

Detail B

Numbered Label


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With Visionary Designs the labels contain Black numbers unless otherwise specified.



Detail C

Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

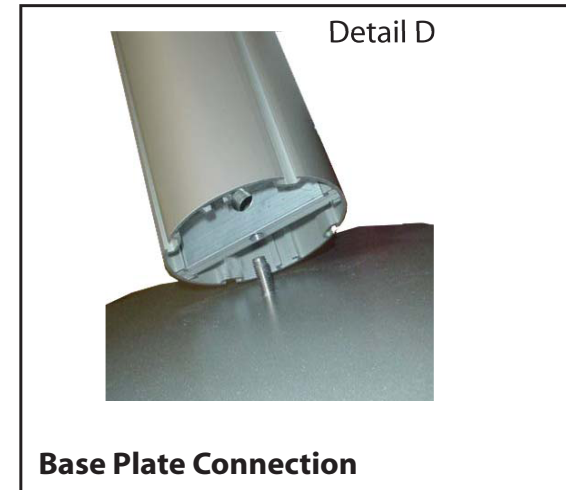

Detail D

Base Plate Connection

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.



Detail E

Vertical Connection
(remove only two setscrews)

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Qty.	Description
1	4	84" h Vertical Extrusion
2	4	84" h Vertical Extrusion
3	2	84" h Vertical Extrusion
3a	2	Gusset Plate
4	8	18" w Horizontal Extrusion
5	4	24" Horizontal Extrusion
6	4	24" Horizontal Extrusion
7	4	70" Horizontal Extrusion
8	2	70" Horizontal Extrusion
9	2	24" Horizontal Extrusion
10	3	9" Horizontal Extrusion
11	3	9" Horizontal Extrusion

Steps:

- 1) Connect horizontal bars between vertical extrusions as shown.
See illustration and notes for extrusion orientation
- 2) Attach gusset plates [3a] to verticals [3] as shown.
- 3) Apply backwall graphics to horizontal bars where indicated in BLUE.
- 4) Attach lights to horizontal bars [7].
- 5) Attach shelf support extrusions [10 and 11] to verticals [3].



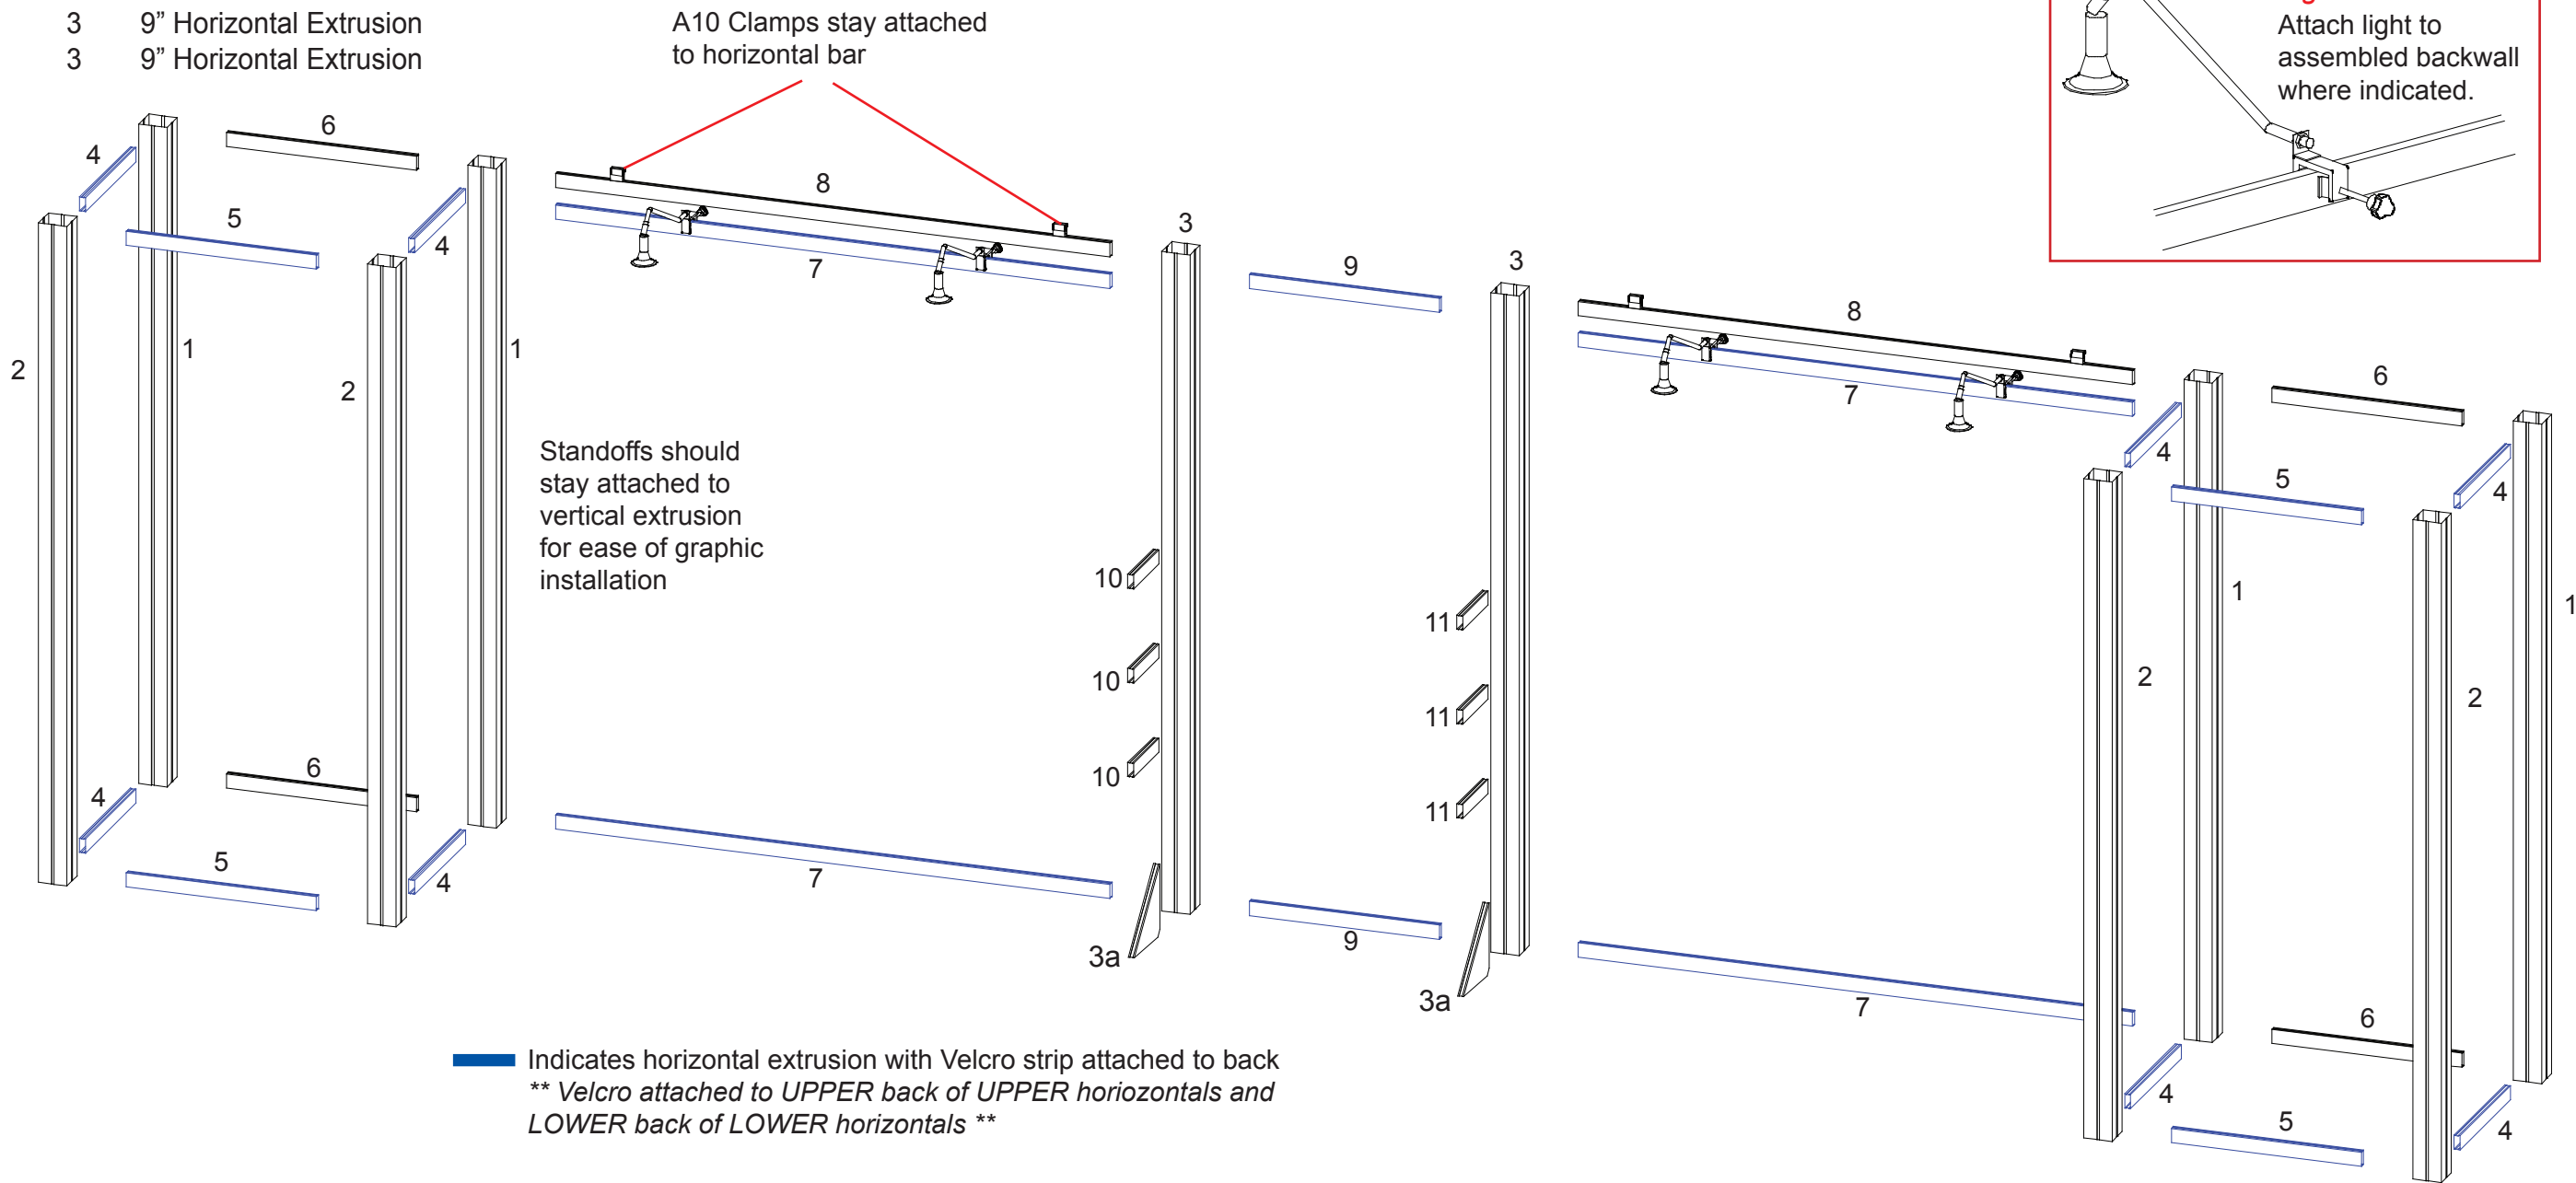


— Indicates horizontal extrusion with Velcro strip attached to back
 ** Velcro attached to UPPER back of UPPER horizontal and LOWER back of LOWER horizontal **

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Steps:

- 1) Clamp headers to top of assembled backwall using A10 clamps.
- 2) Attach graphic panels to backwall where indicated using standoffs.
- 3) Place shelves atop support bars.

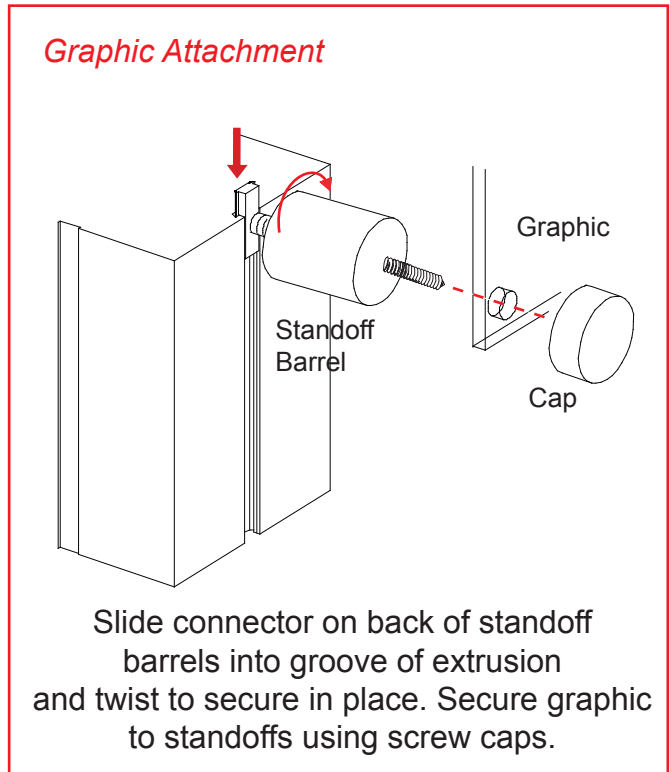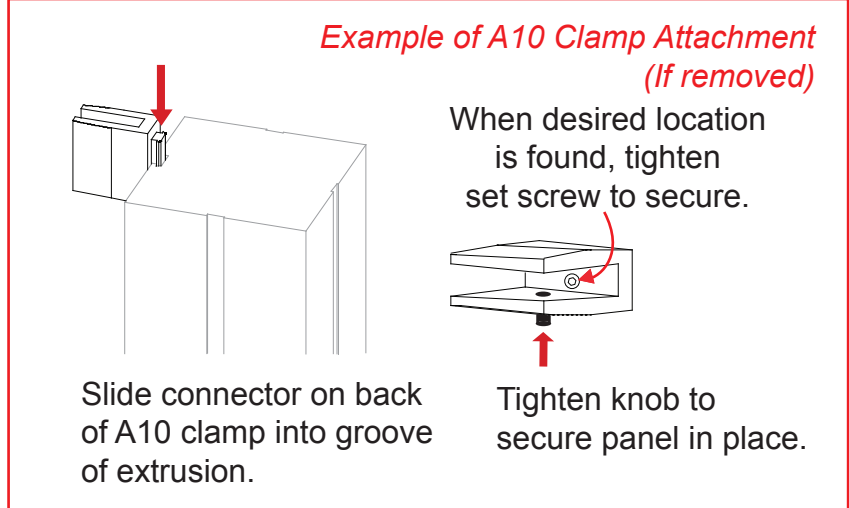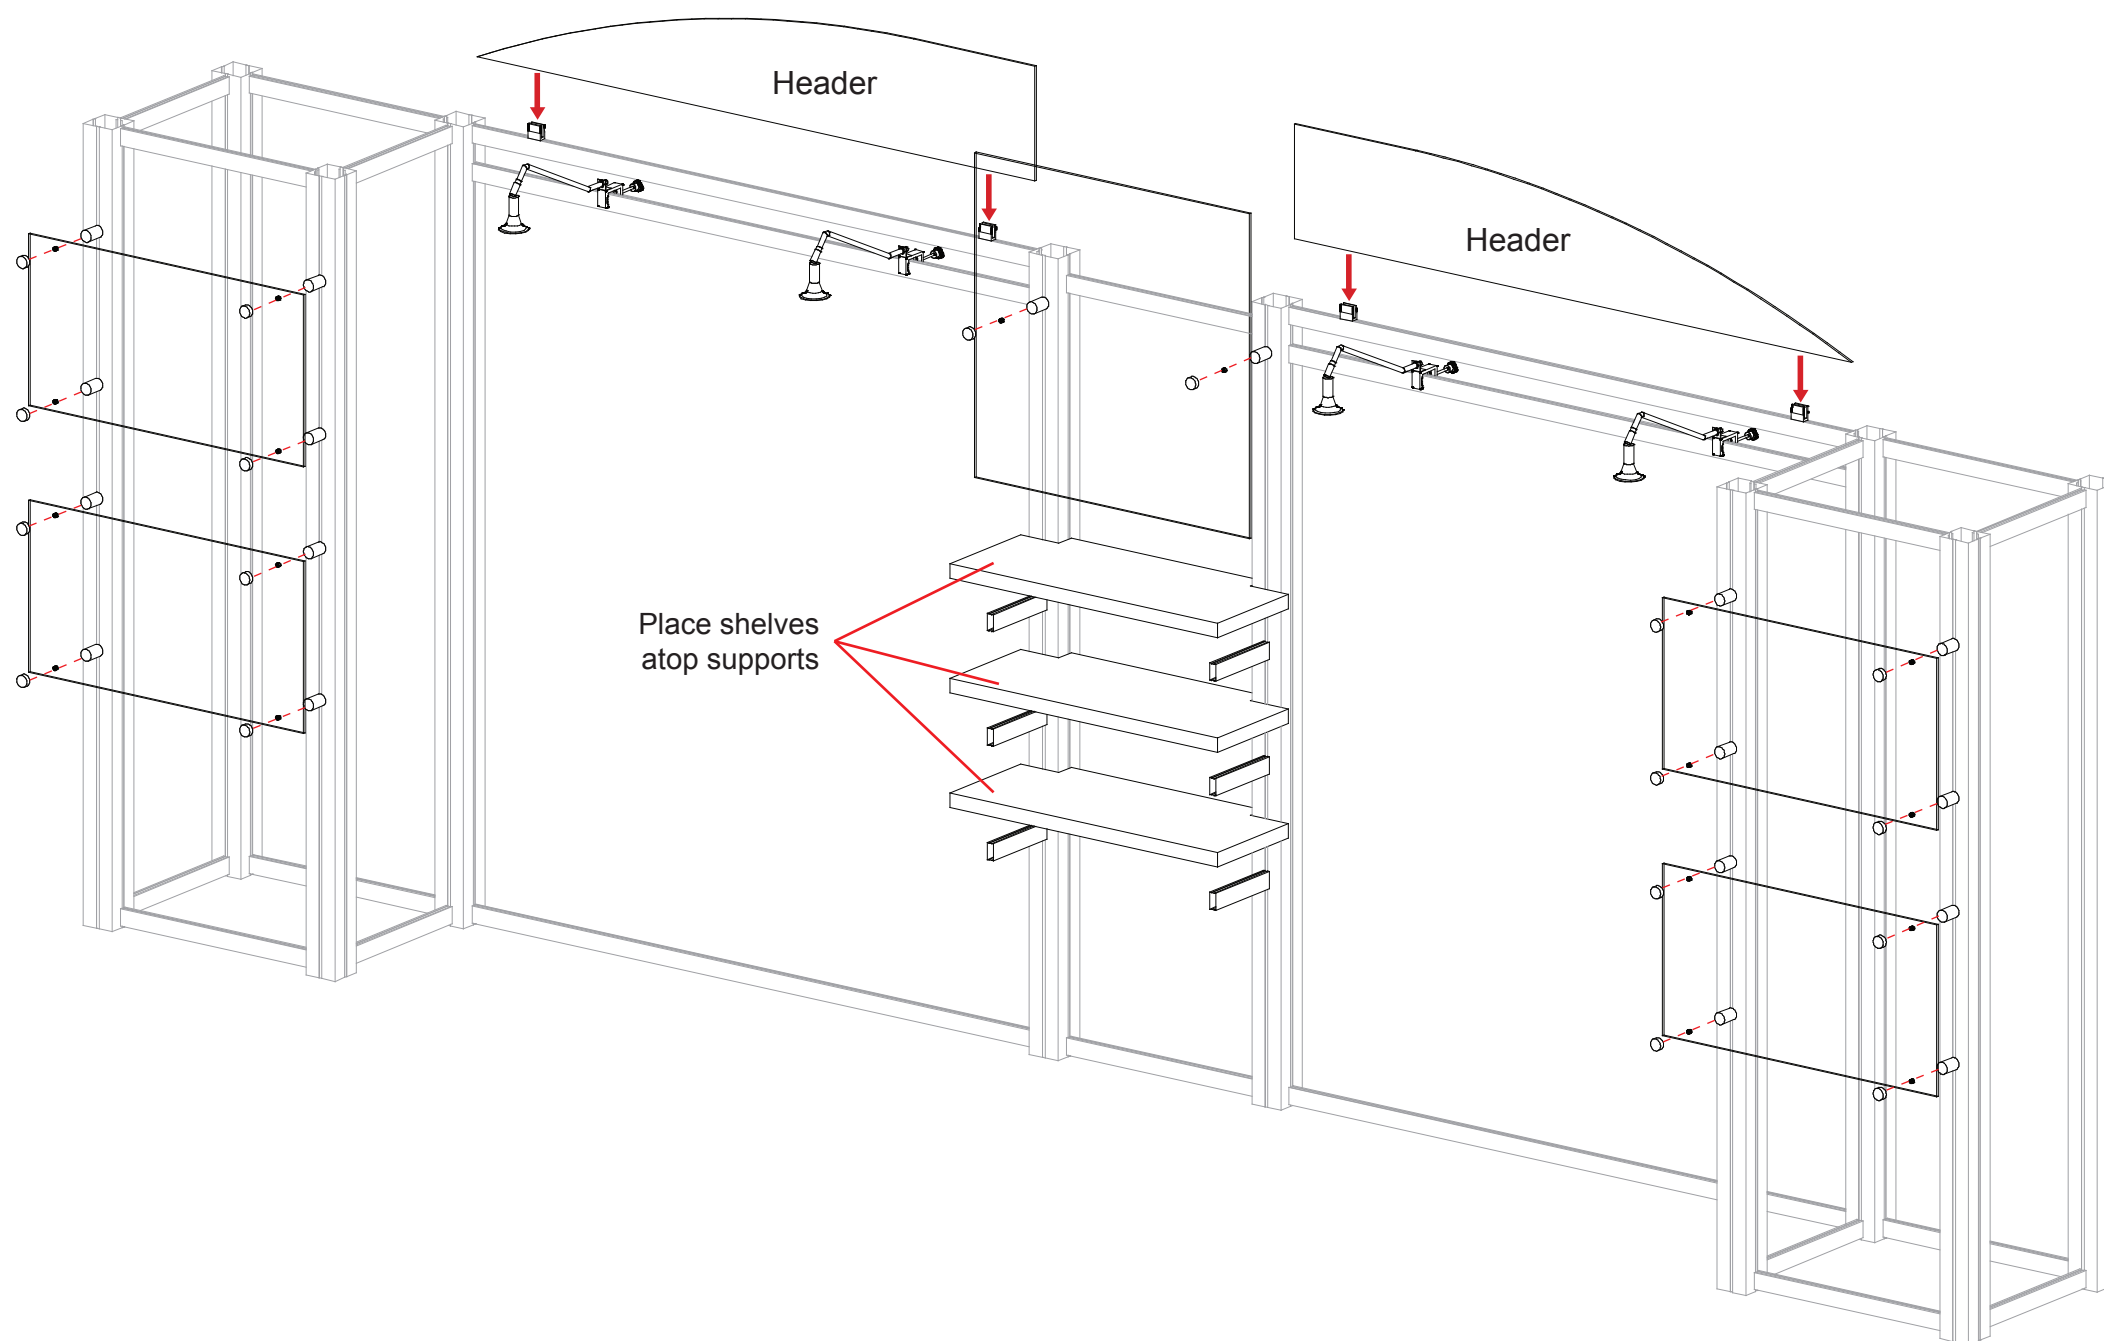




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100



Item	Qty.	Description
12	4	23.858" Curved Horizontal Extrusion

Steps:

- 1) Connect counter base walls together by connecting horizontal extrusions between walls and placing infills between horizontals.
- 2) Place counter top atop assembled base.
- 3) Attach rectangular frosted plex to assembled base using standoff barrels and caps as shown.
- 4) Attach curve Plex shelf to top of assembled base where indicated.

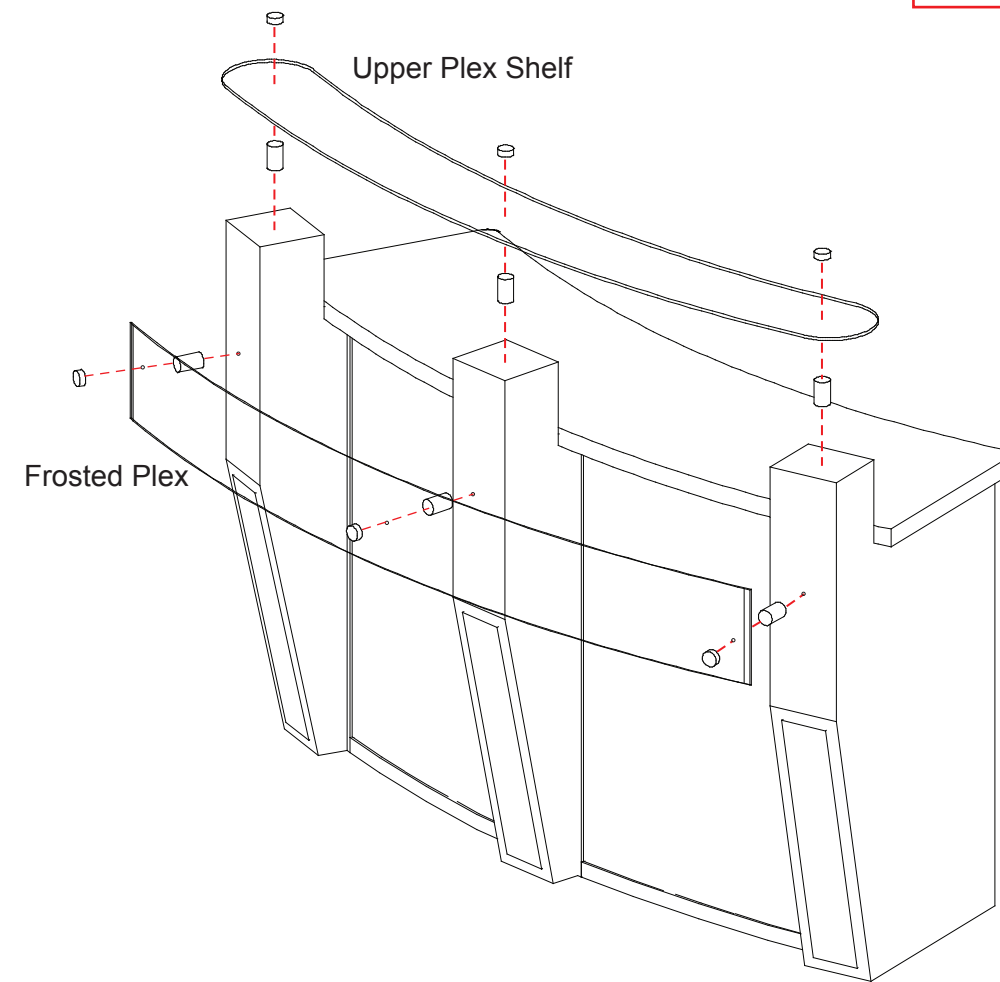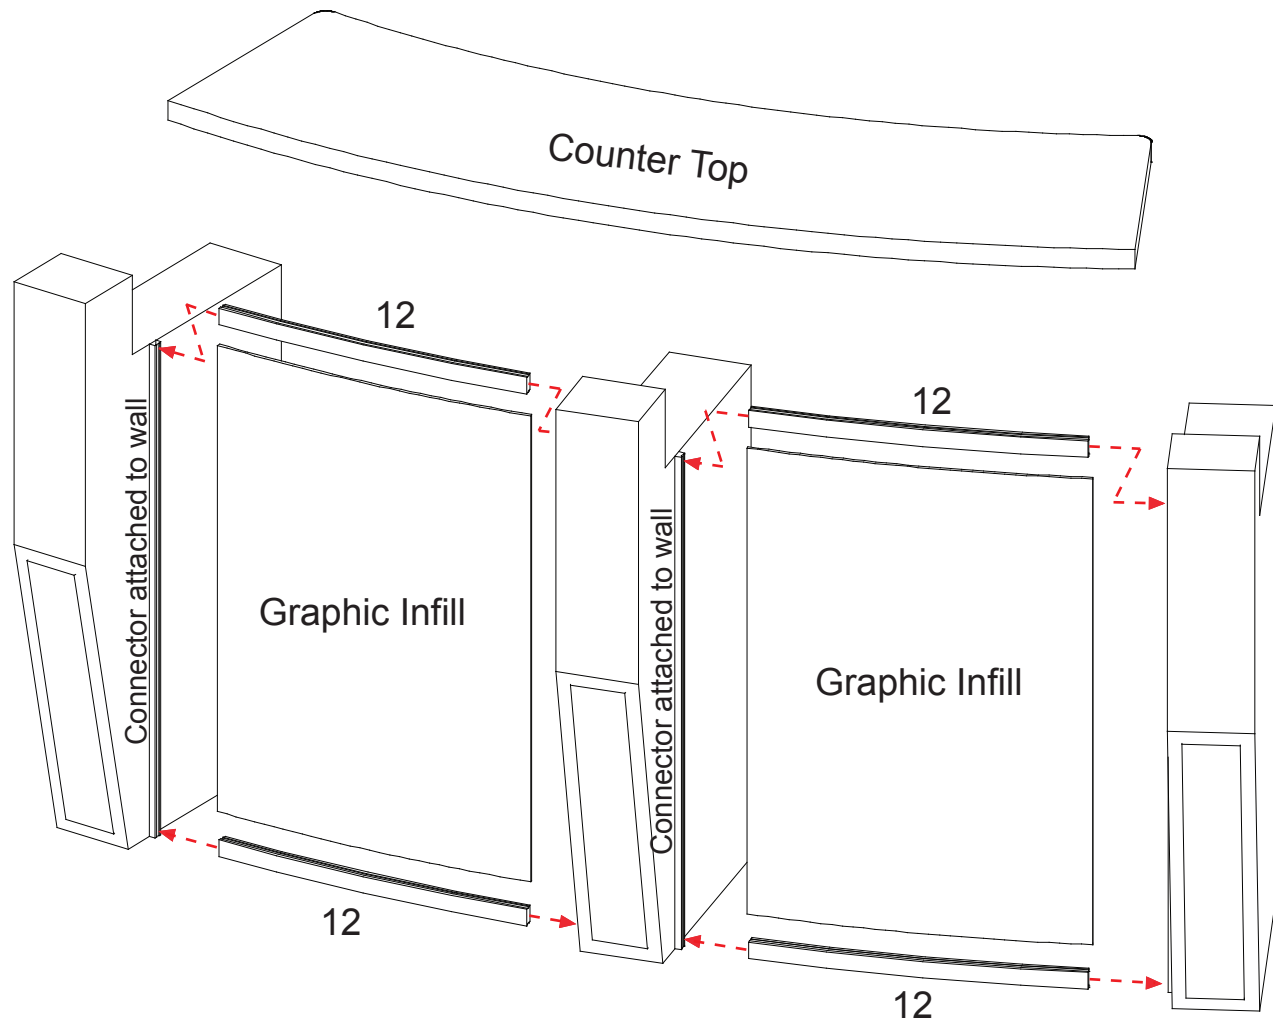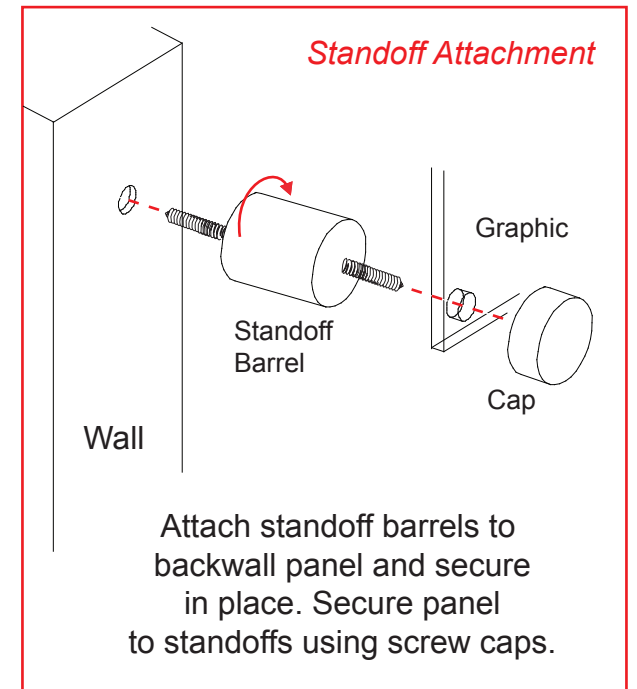


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

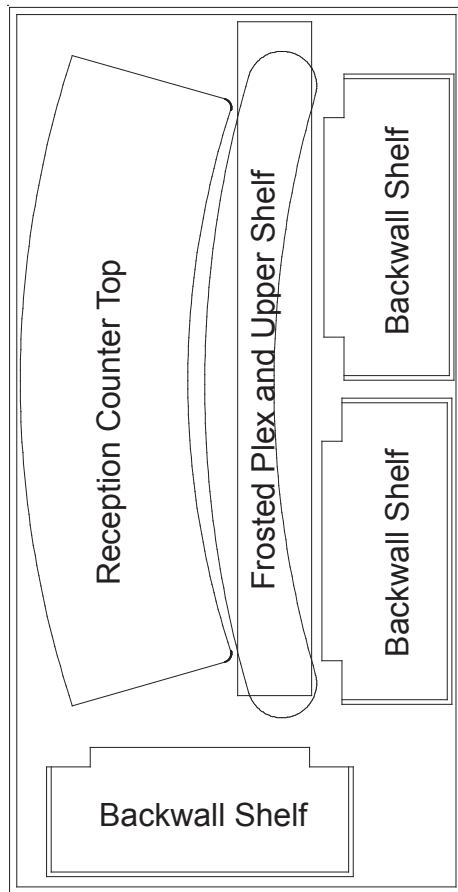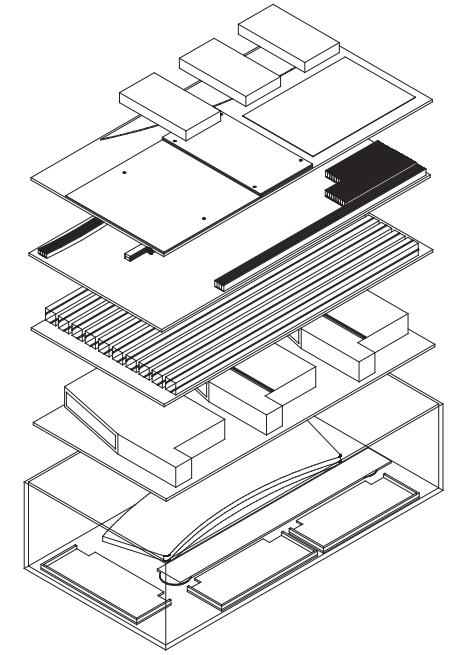


Level 1 (Bottom of Crate)

Reception Counter Base Walls

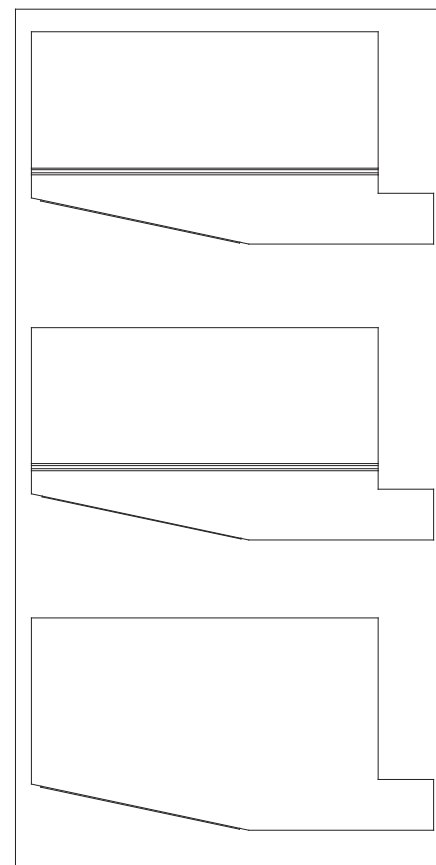


Level 2


Vertical Extrusions

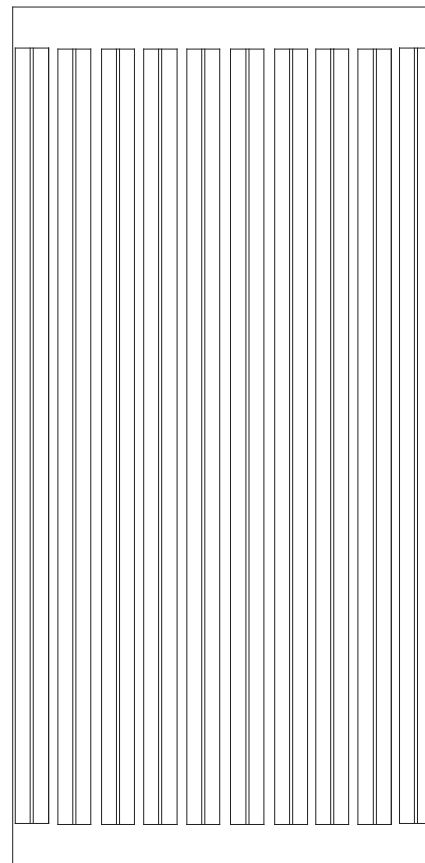

Level 3

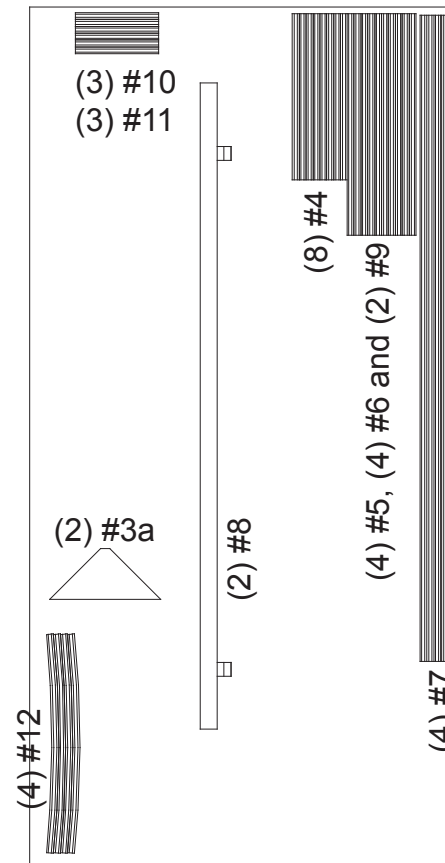

Level 4

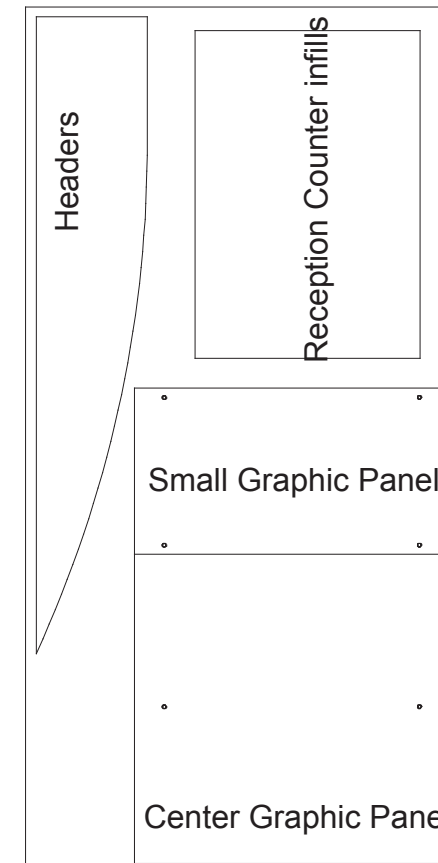

Level 5

- Graphics
- Lights
- Setup Hardware

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING