
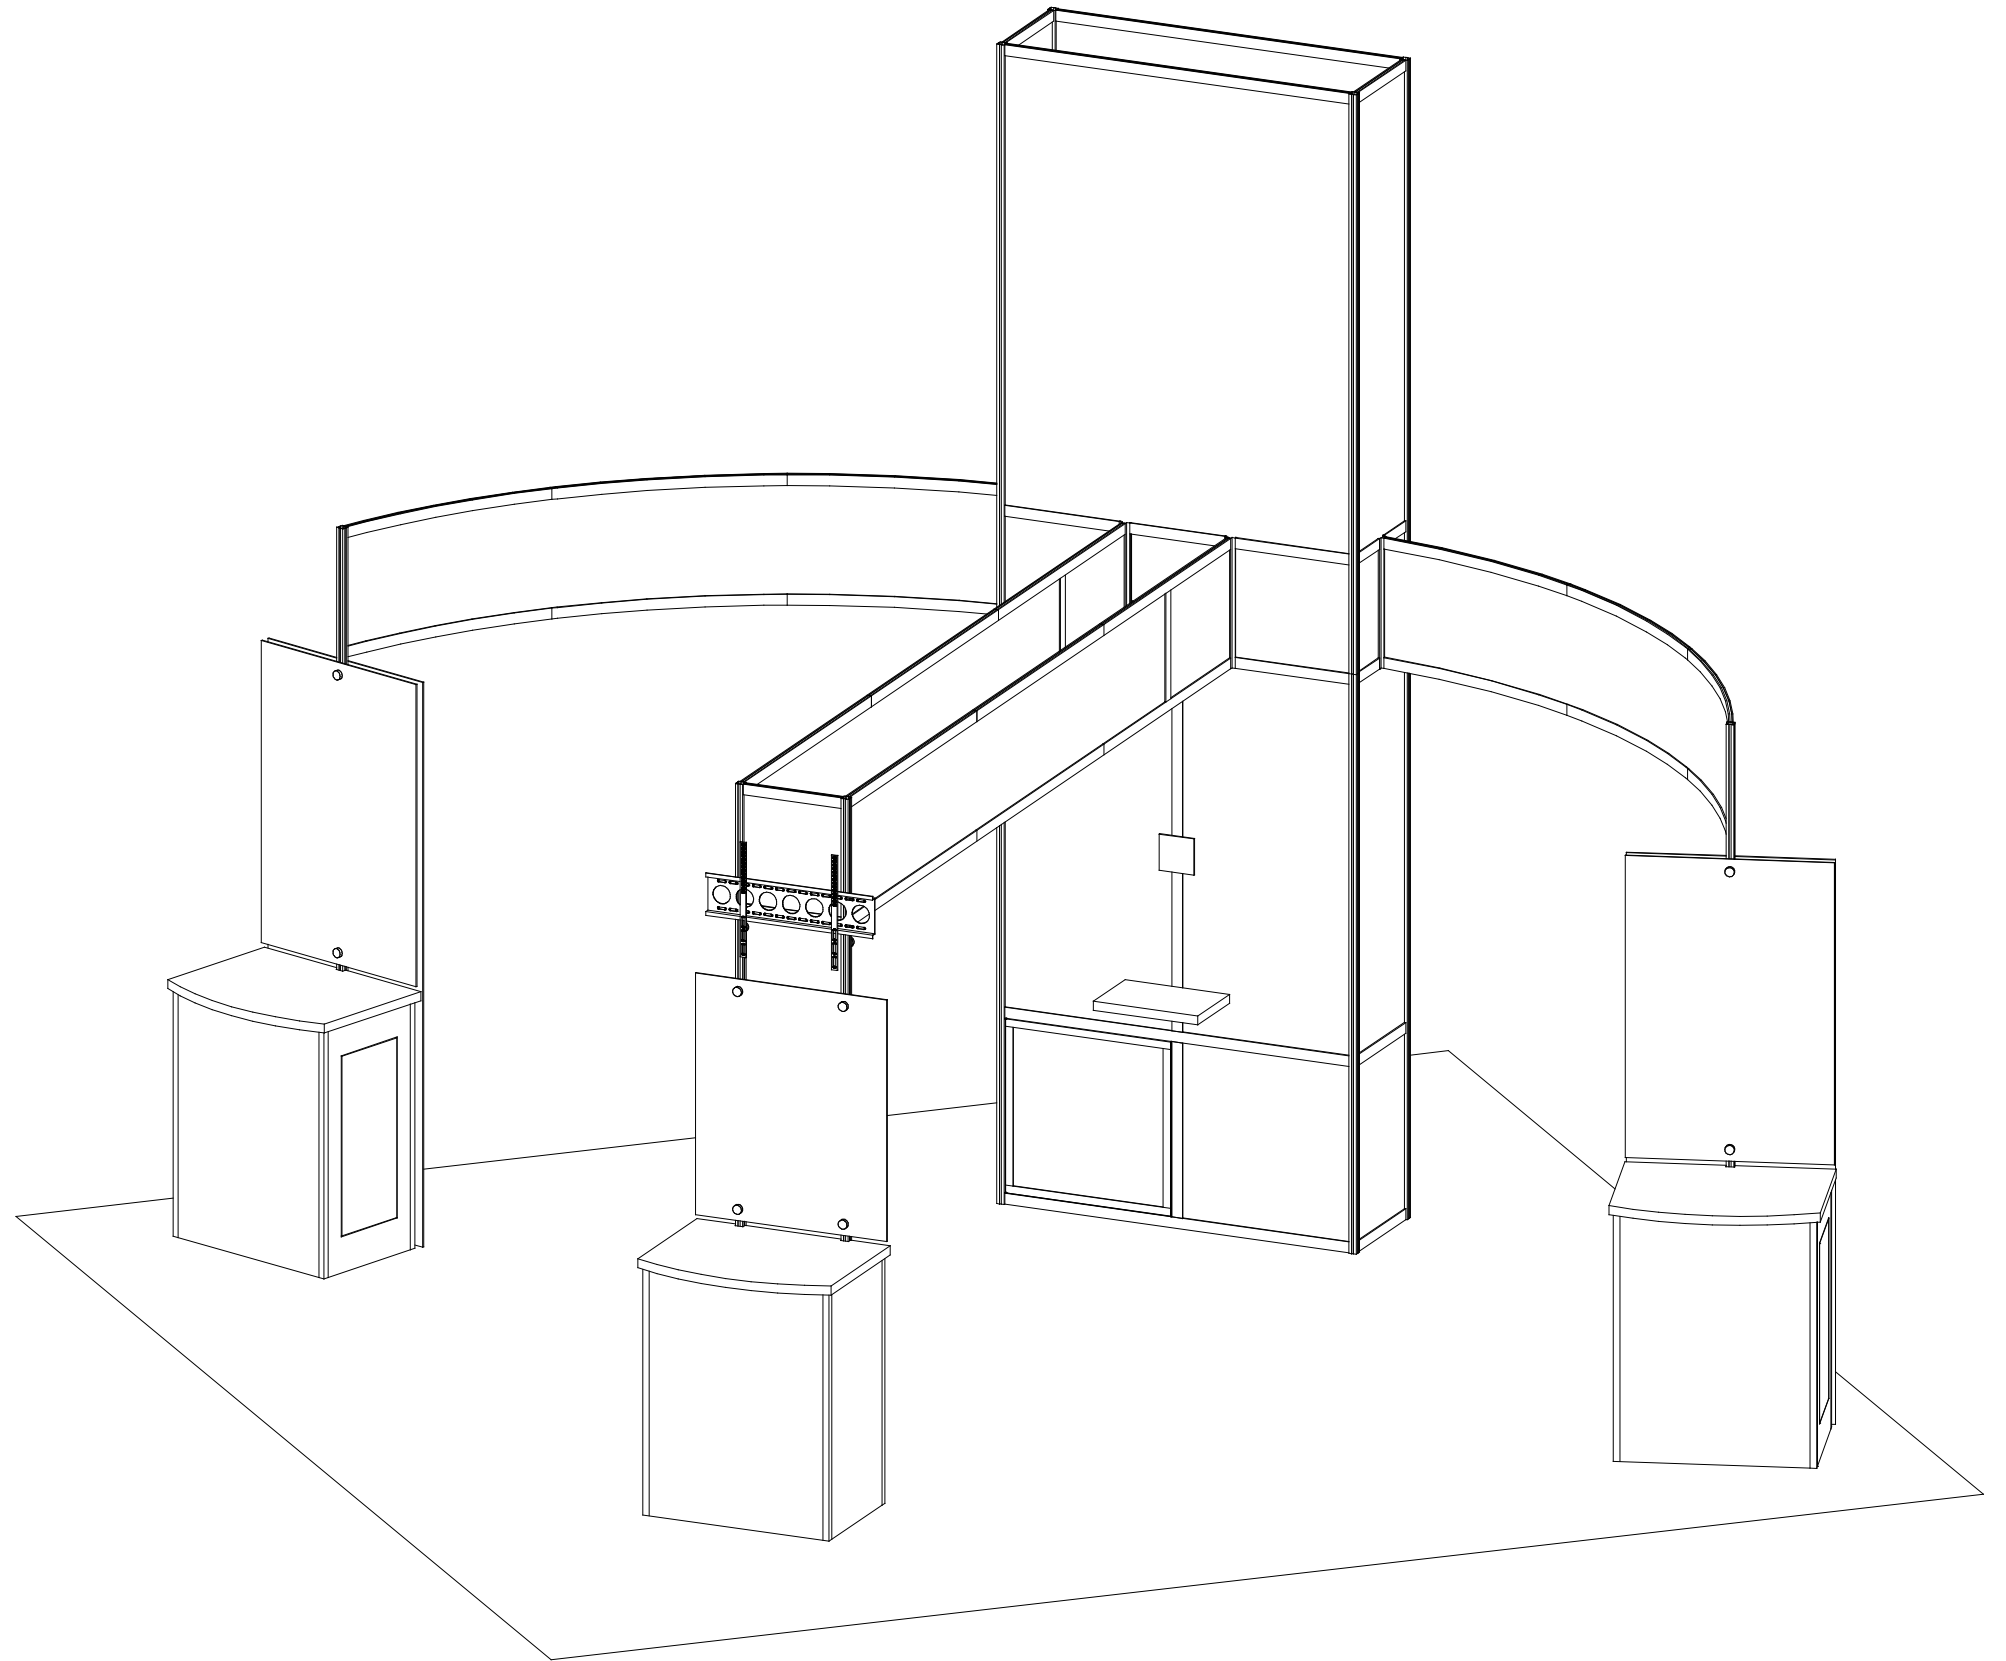


euro It | *HYBRIDS*

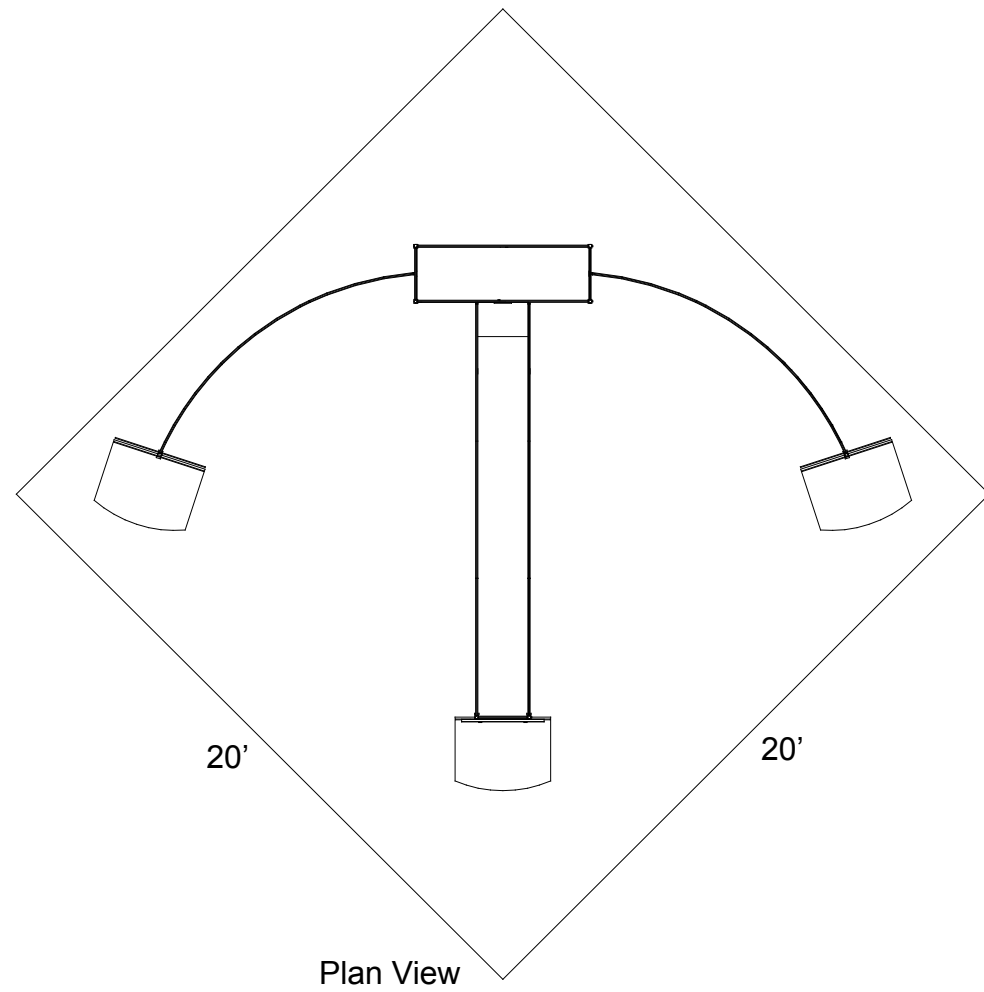

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

General Setup Instructions for Extrusion System



The Tool

Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.



Typical Connection (cont'd)

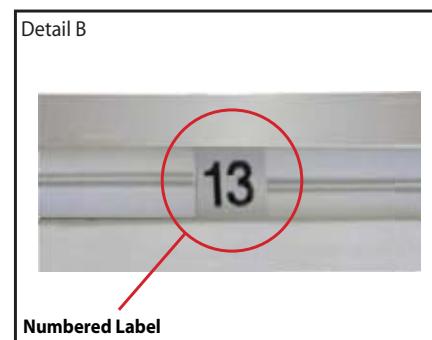


Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.




Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

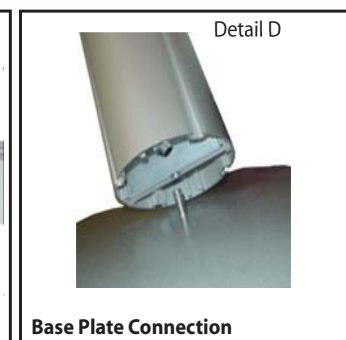

Base Plate Connection


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

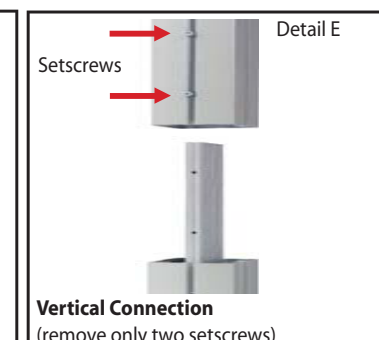

Vertical Connection (remove only two setscrews)


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

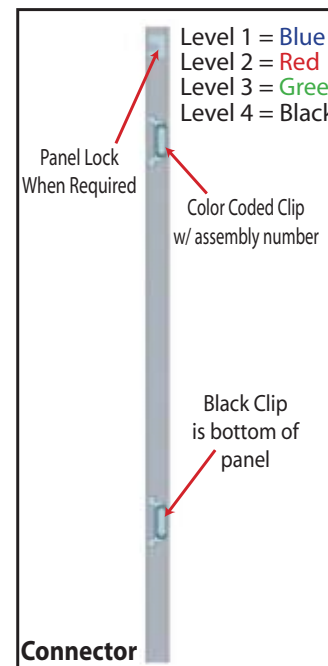


Connector

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

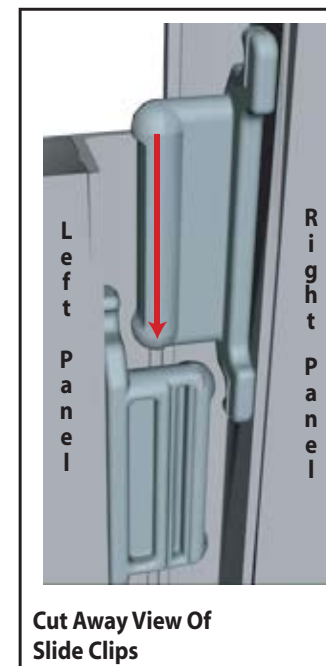


Cut Away View Of Slide Clips

Components connect together by aligning them and sliding downward connecting clips together.

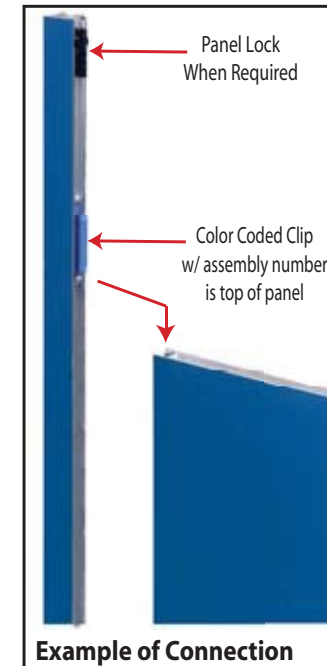

Example of Connection

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

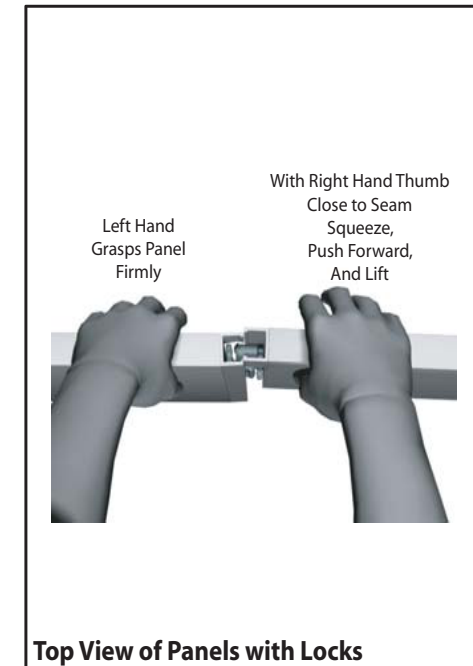

Top View of Panels with Locks

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Part Number	Qty	Description
1	2	64"h Lower Vertical Extrusion
1A	2	64"h Lower Vertical Extrusion w/ Door Stopper
2/2A	4/4	64"h Upper Vertical Extrusion
3	8	59.5"w Horizontal Extrusion
4	6	18"w Horizontal Extrusion
5	2	29.044"h Vertical Extrusion w/ Hinges
6	8	8.104"w Horizontal Extrusion
7	2	21.582"h T Connector
8	1	61.75"h Vertical Extrusion
9	4	19.75"w Horizontal Extrusion
10	2	16.417"w Horizontal Extrusion

Steps

- 1) Attach upper vertical extrusions [2 to 2A and to 1] as shown.
- 2) Assemble lower section of tower by connecting horizontal extrusions between vertical assemblies, attaching vertical extrusion [5] between horizontal bars [3] and placing infills where indicated.
- 3) Attach door to door hinges.
- 4) Assemble sections shown in illustration.
- 5) Connect remaining horizontal extrusions and assembled sections and place infills where indicated.

Assemble this section before placing between vertical extrusions.

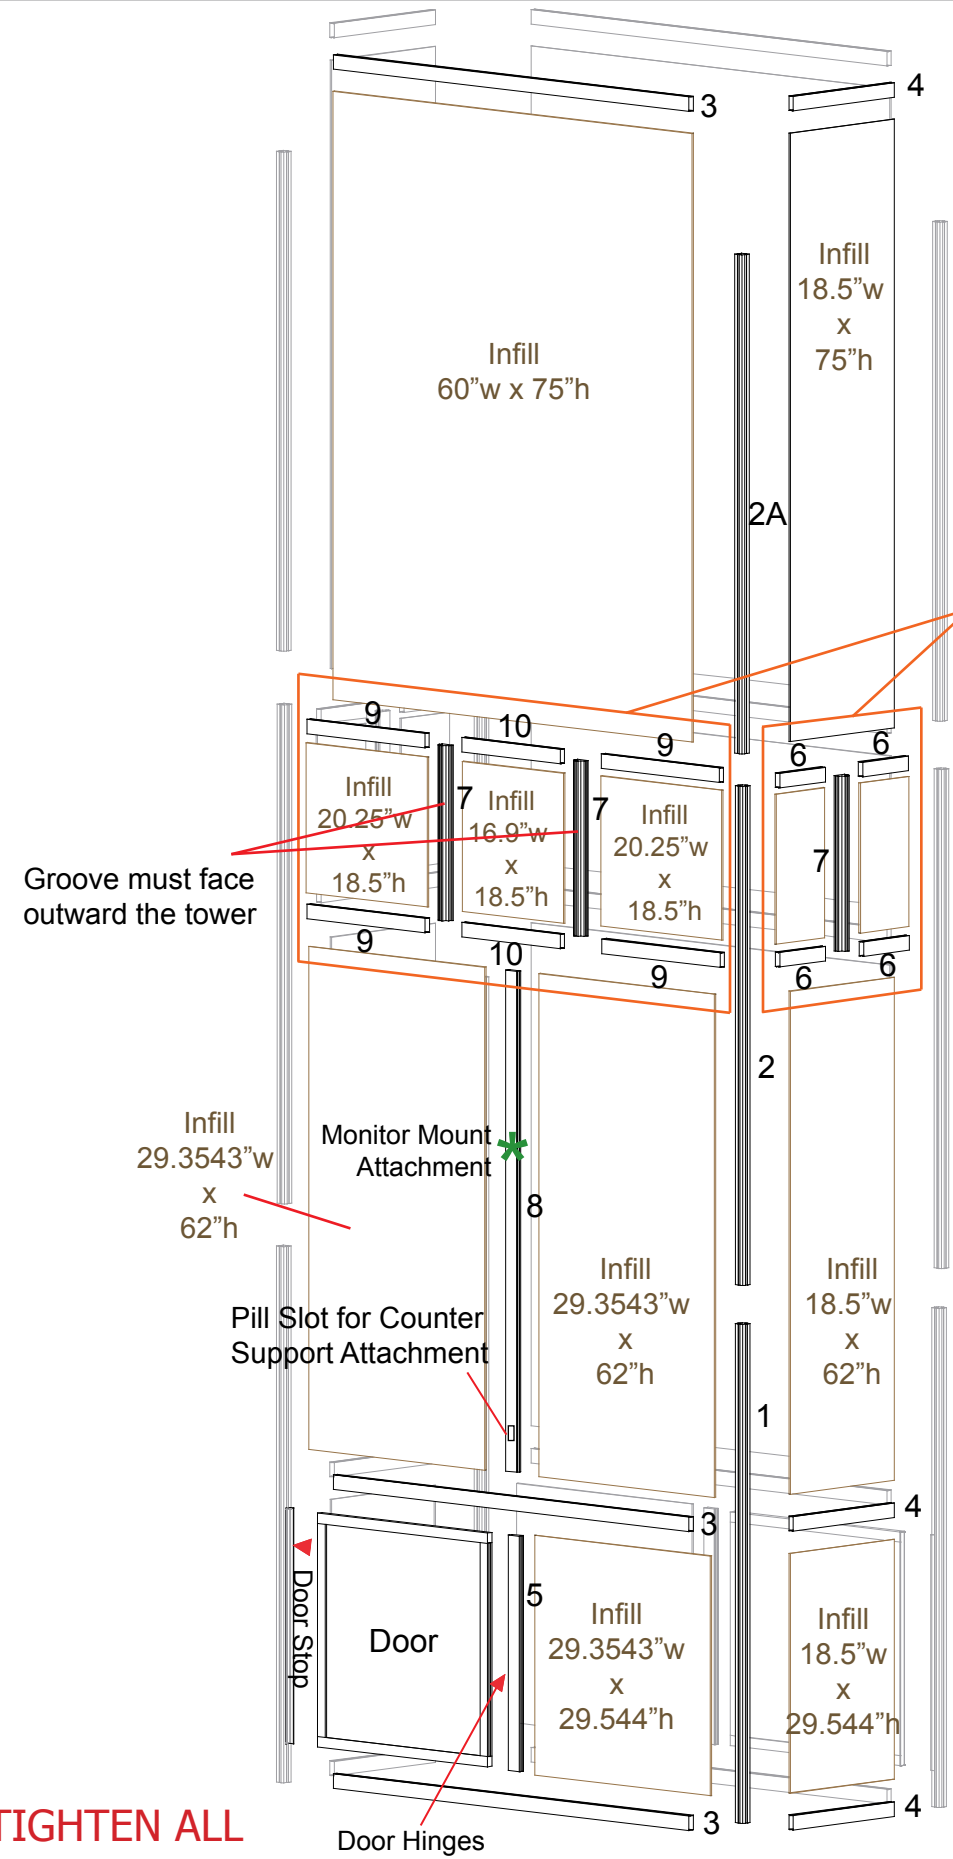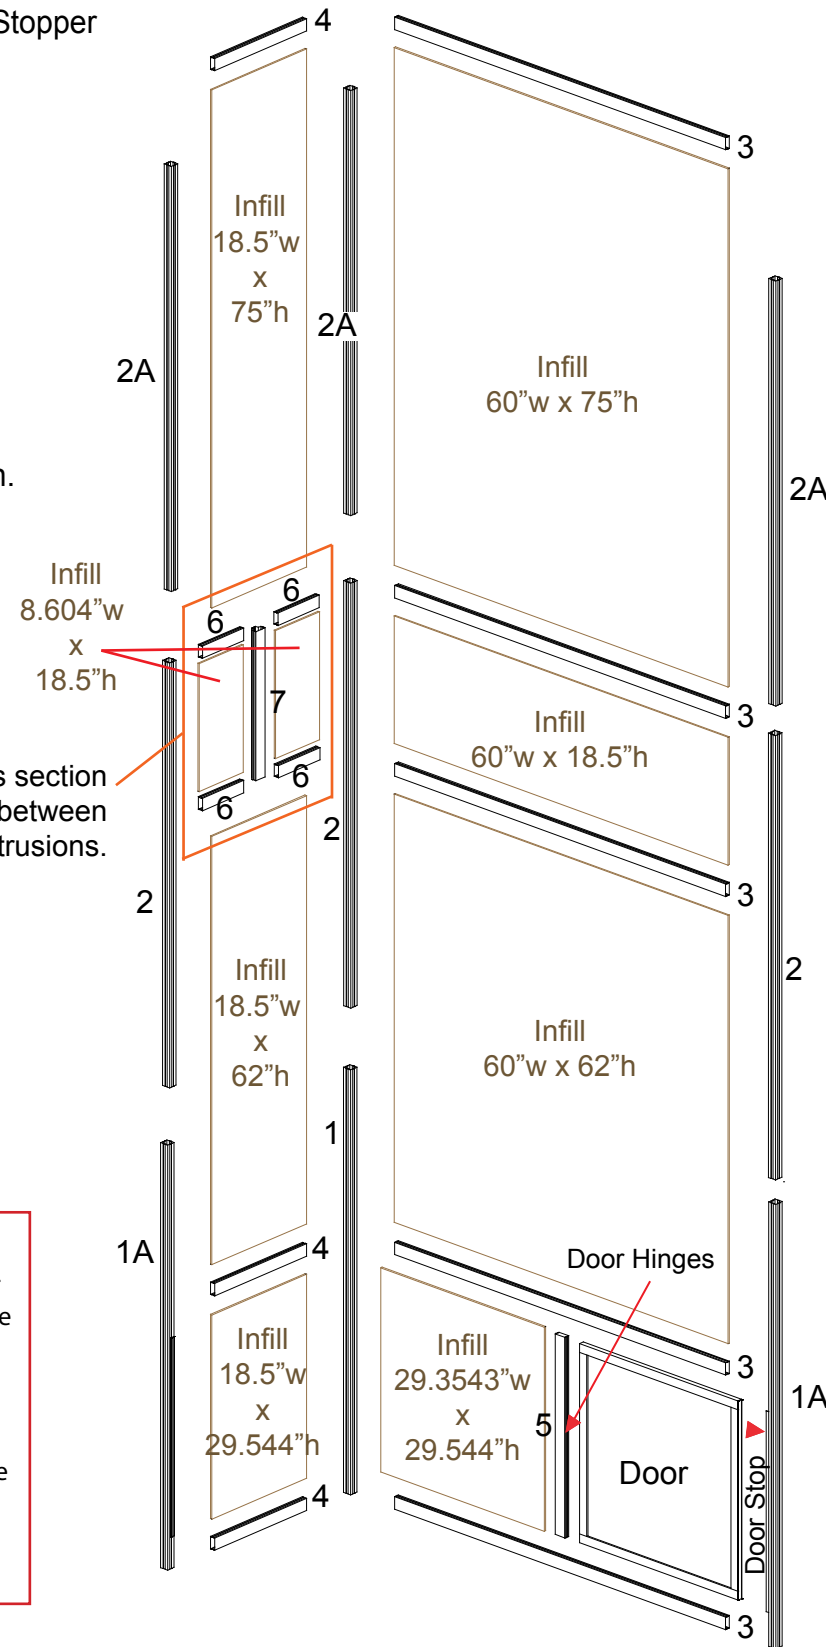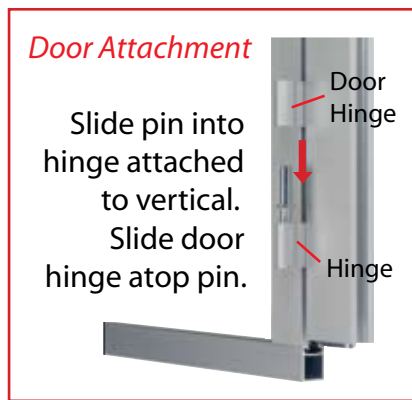

Groove must face outward the tower

Assemble this section before placing between vertical extrusions.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	19"w x 42"h Flat Panel w/ Door
2	42"h 90° Connector
3	30"w x 42"h Flat Panel
4	42"h 90° Connector
5	19"w x 42"h Flat Panel
6	42"h 90° Connector
7	30"w x 42"h Flat Panel
8	42"h 90° Connector




Part Number	Qty	Description
11	2	57.8545"h Lower Vertical Extrusion
12	2	57.8545"h Upper Vertical Extrusion
13	2	16.949"w Horizontal Extrusion

Steps:

- 1) Assemble pedestal base by connecting panels and connectors together.
Note: Assemble panel 3 *AFTER* attaching vertical extrusions [11] to panel 7.

Steps (Cont'd):

- 2) Attach vertical extrusions [11] to panel 7, see detail below.
- 3) Attach upper vertical extrusions [12] atop extrusions [11].
- 4) Attach horizontal extrusions [13] between vertical extrusions [12], placing infill between horizontal bars.


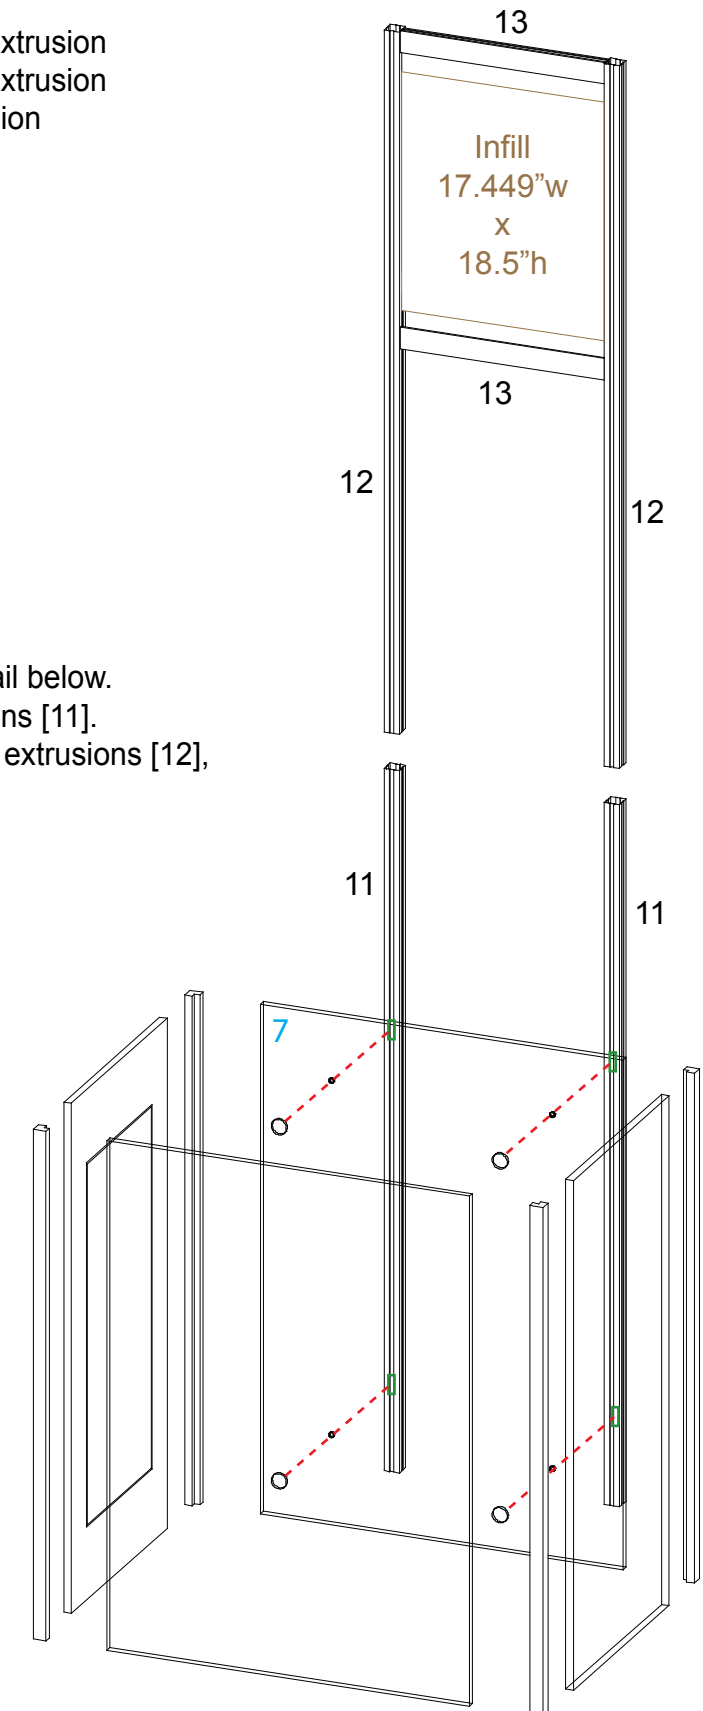
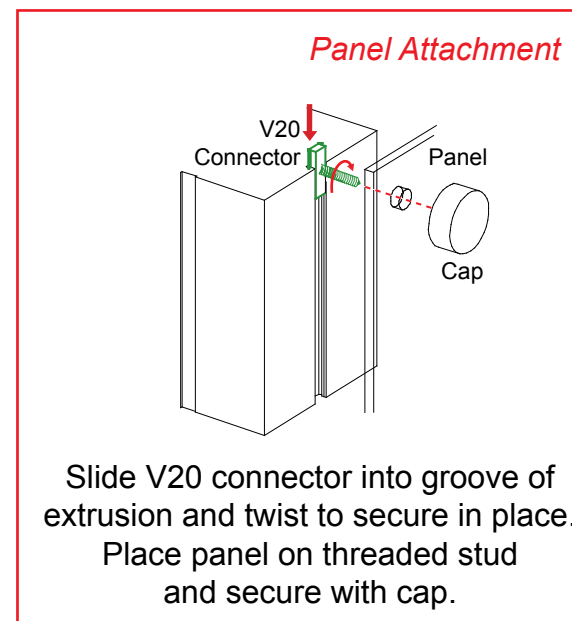
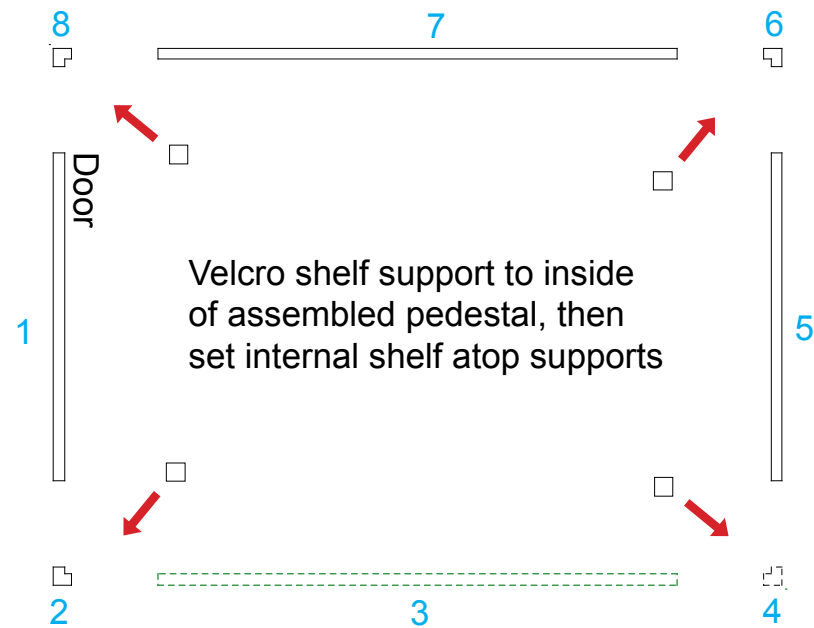


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Part Number	Qty	Description
14a	4	48" w Horizontal Extrusion
14b	4	48" w Horizontal Extrusion
14c	4	48" w Horizontal Extrusion
15	2	18" h Vertical Extrusion

Steps:

- 1) Assemble header sections as shown.
- 2) Attach assembled header sections between tower and assembled workstation as show.
- 3) Attach monitor mounts to tower and workstation, see monitor mount attachment details.

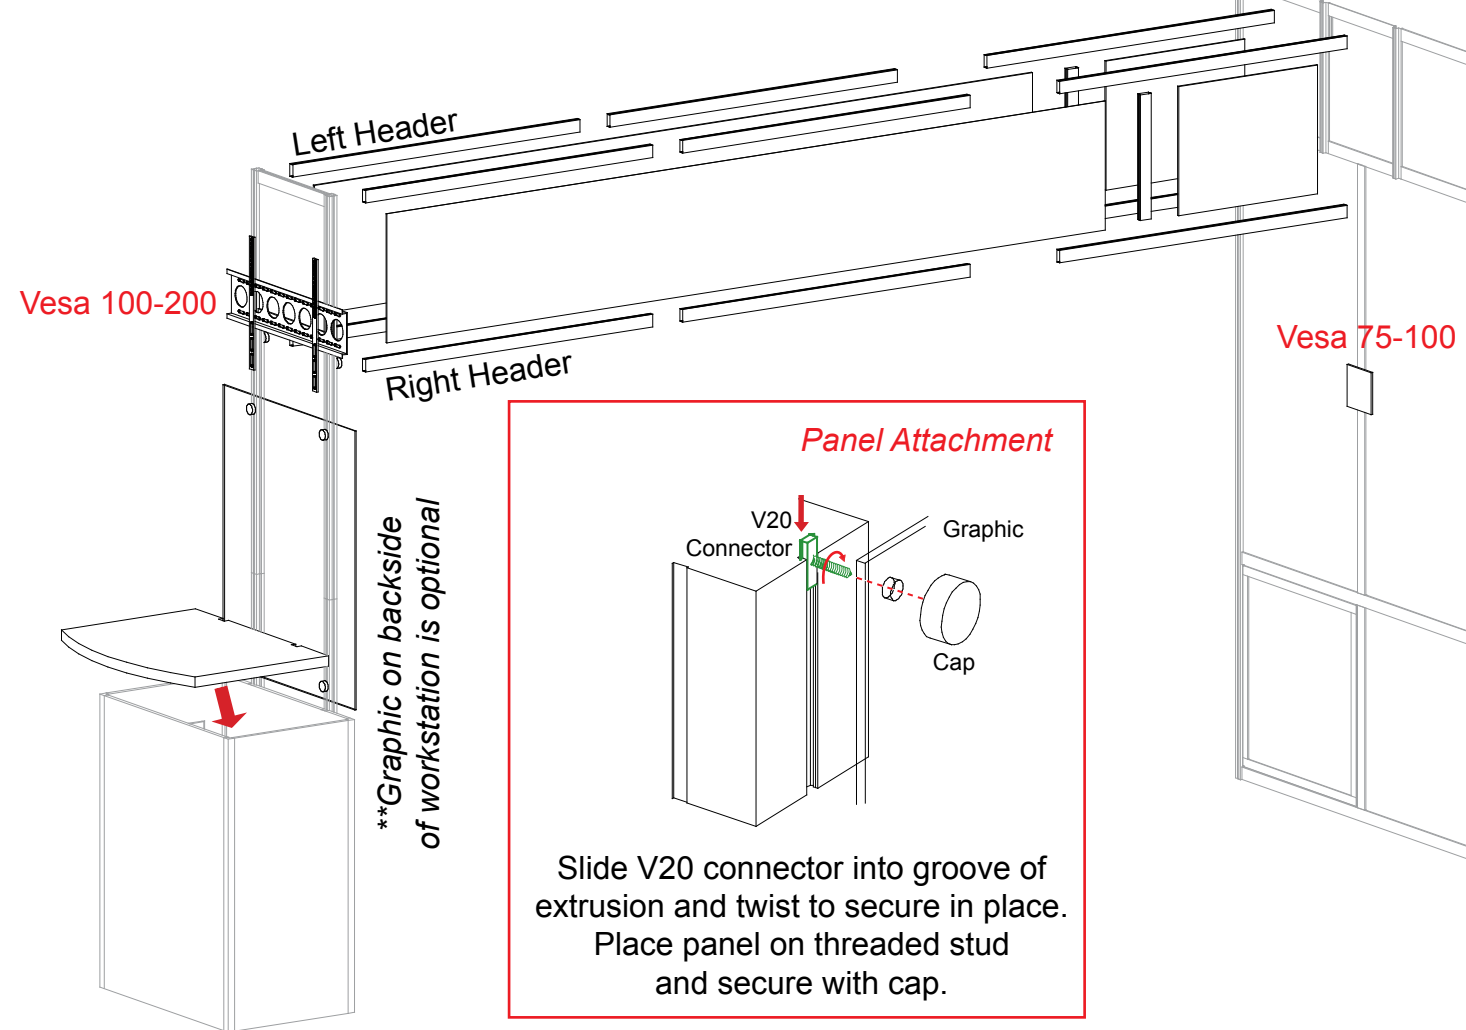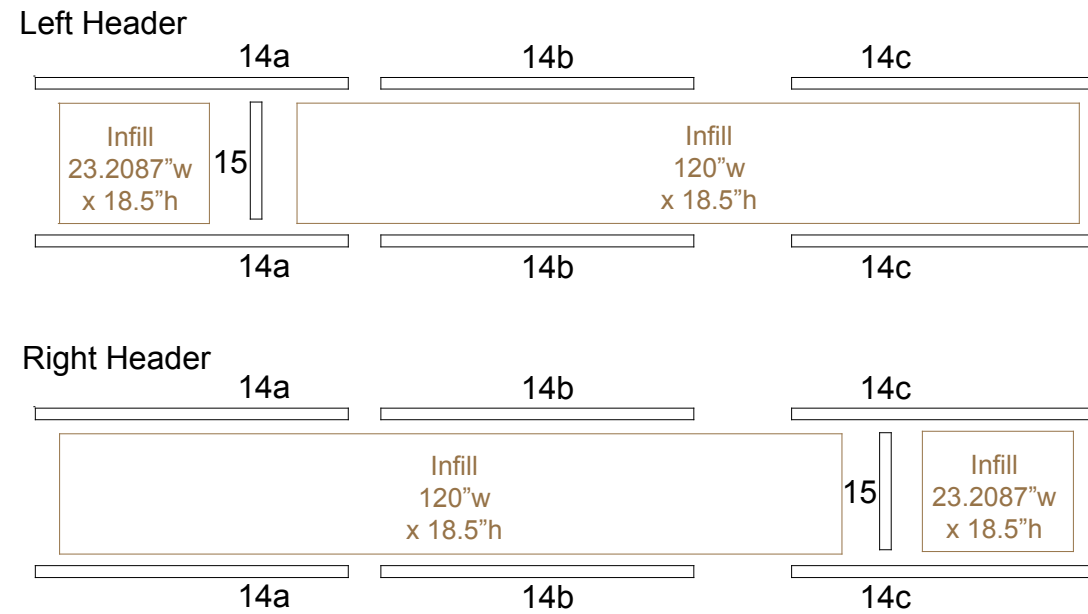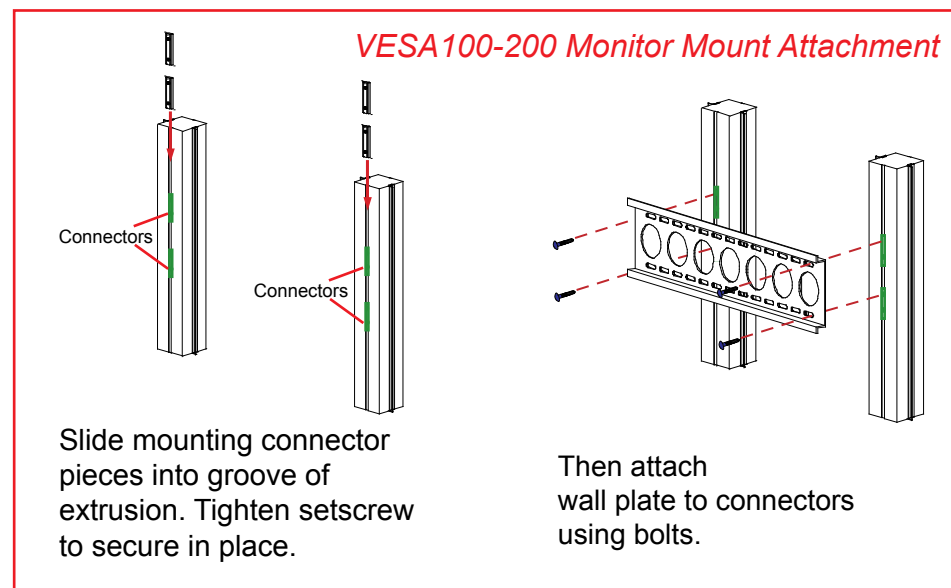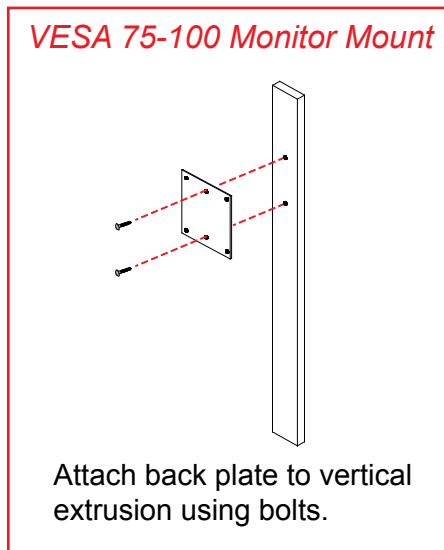

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
9	19"w x 42"h Flat Panel w/ Door
10	42"h 90° Connector
11	30"w x 42"h Flat Panel
12	42"h 90° Connector
13	19"w x 42"h Flat Panel
14	42"h 90° Connector
15	30"w x 42"h Flat Panel
16	42"h 90° Connector




Part Number	Qty	Description
16	1	57.8545"h Lower Vertical Extrusion
17	1	57.8545"h Upper Vertical Extrusion

Steps:

- 1) Assemble pedestal base by connecting panels and connectors together.
Note: Assemble panel 11 AFTER attaching vertical extrusions [16] to panel 15.

Steps (Cont'd):

- 2) Attach vertical extrusions [16] to panel 15, see detail below.
- 3) Attach upper vertical extrusions [17] atop extrusions [16].

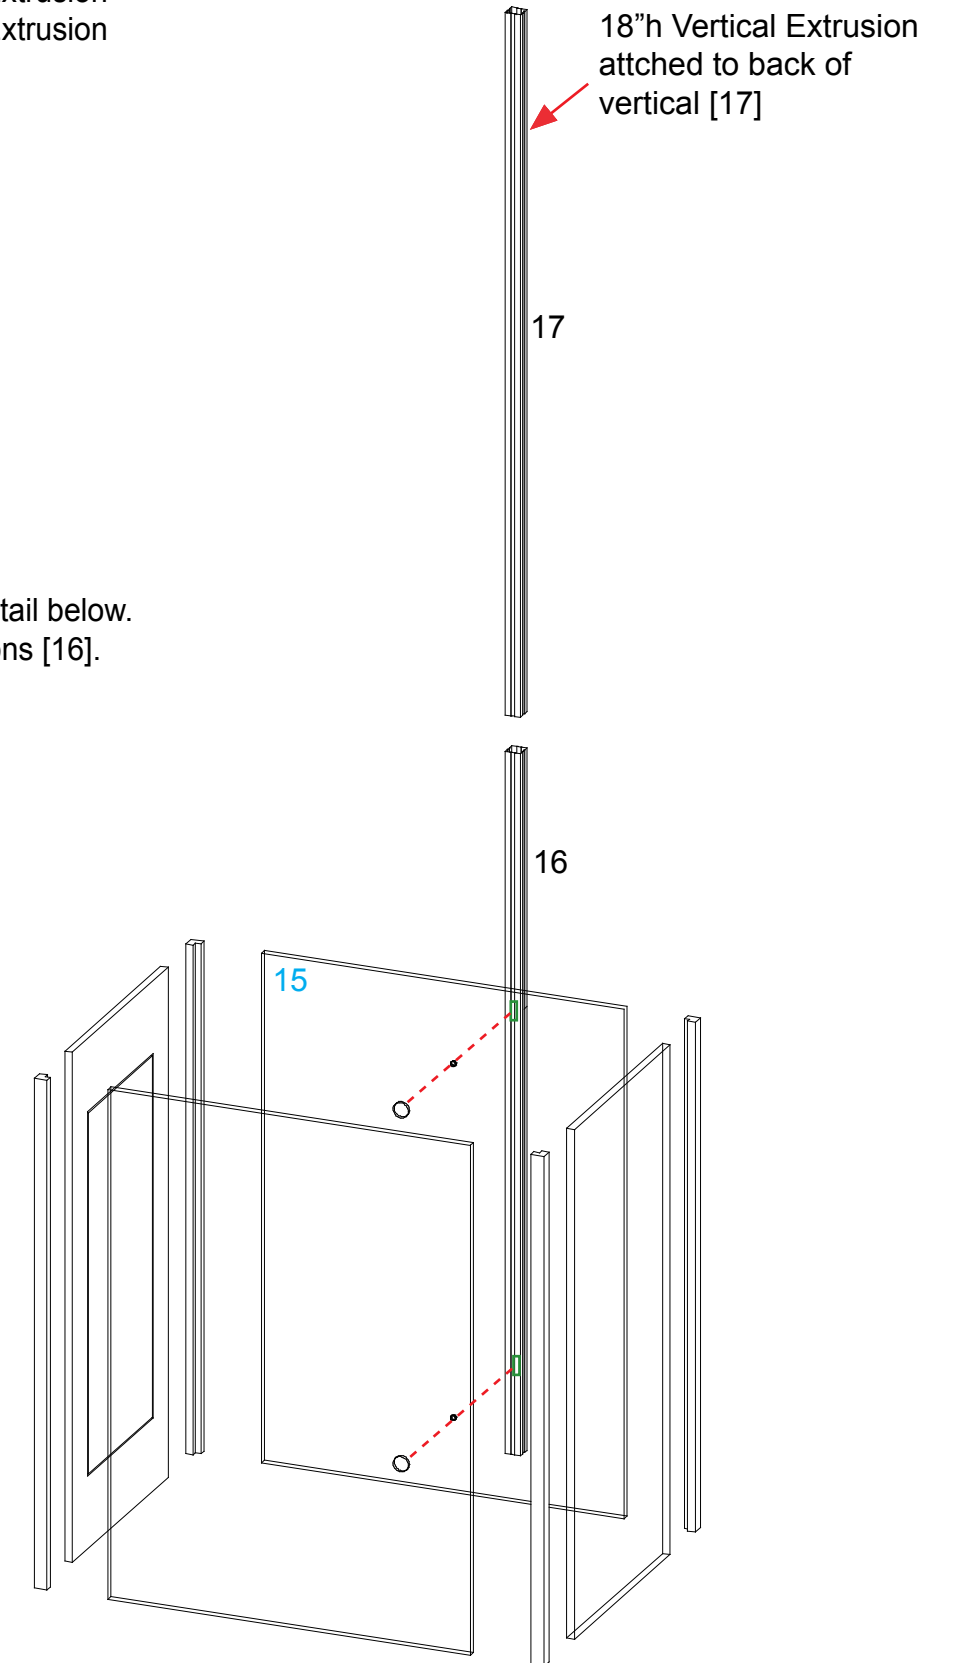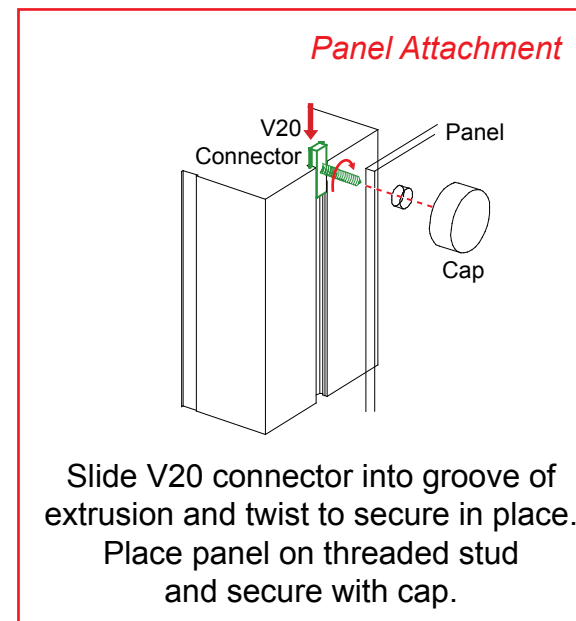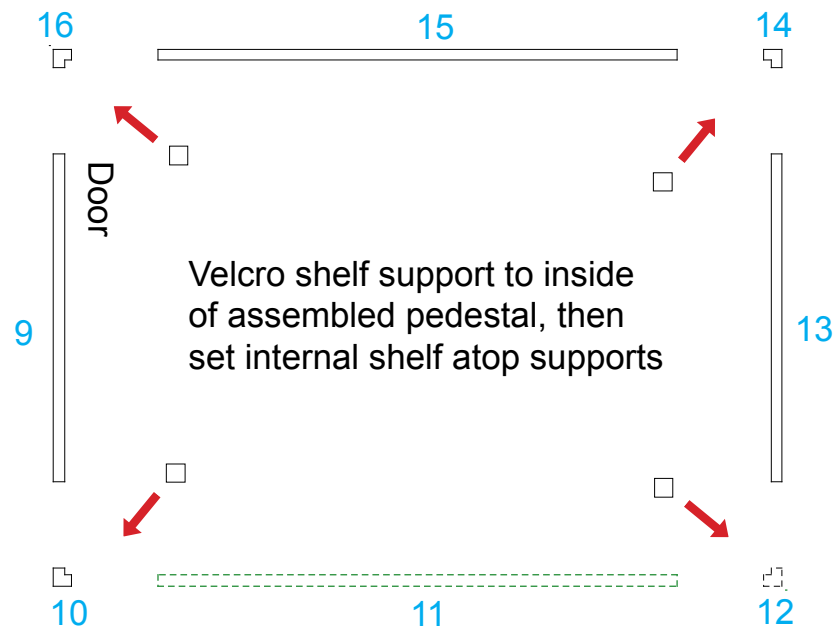

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100




Item Number	Description	Part Number	Qty	Description
17	19" w x 42" h Flat Panel	16	1	57.8545" h Lower Vertical Extrusion
18	42" h 90° Connector	17	1	57.8545" h Upper Vertical Extrusion
19	30" w x 42" h Flat Panel			
20	42" h 90° Connector			
21	19" w x 42" h Flat Panel w/ Door			
22	42" h 90° Connector			
23	30" w x 42" h Flat Panel			
24	42" h 90° Connector			

Steps:

- 1) Assemble pedestal base by connecting panels and connectors together.
Note: Assemble panel 19 AFTER attaching vertical extrusions [16] to panel 23.

Steps (Cont'd):

- 2) Attach vertical extrusions [16] to panel 23, see detail below.
- 3) Attach upper vertical extrusions [17] atop extrusions [16].


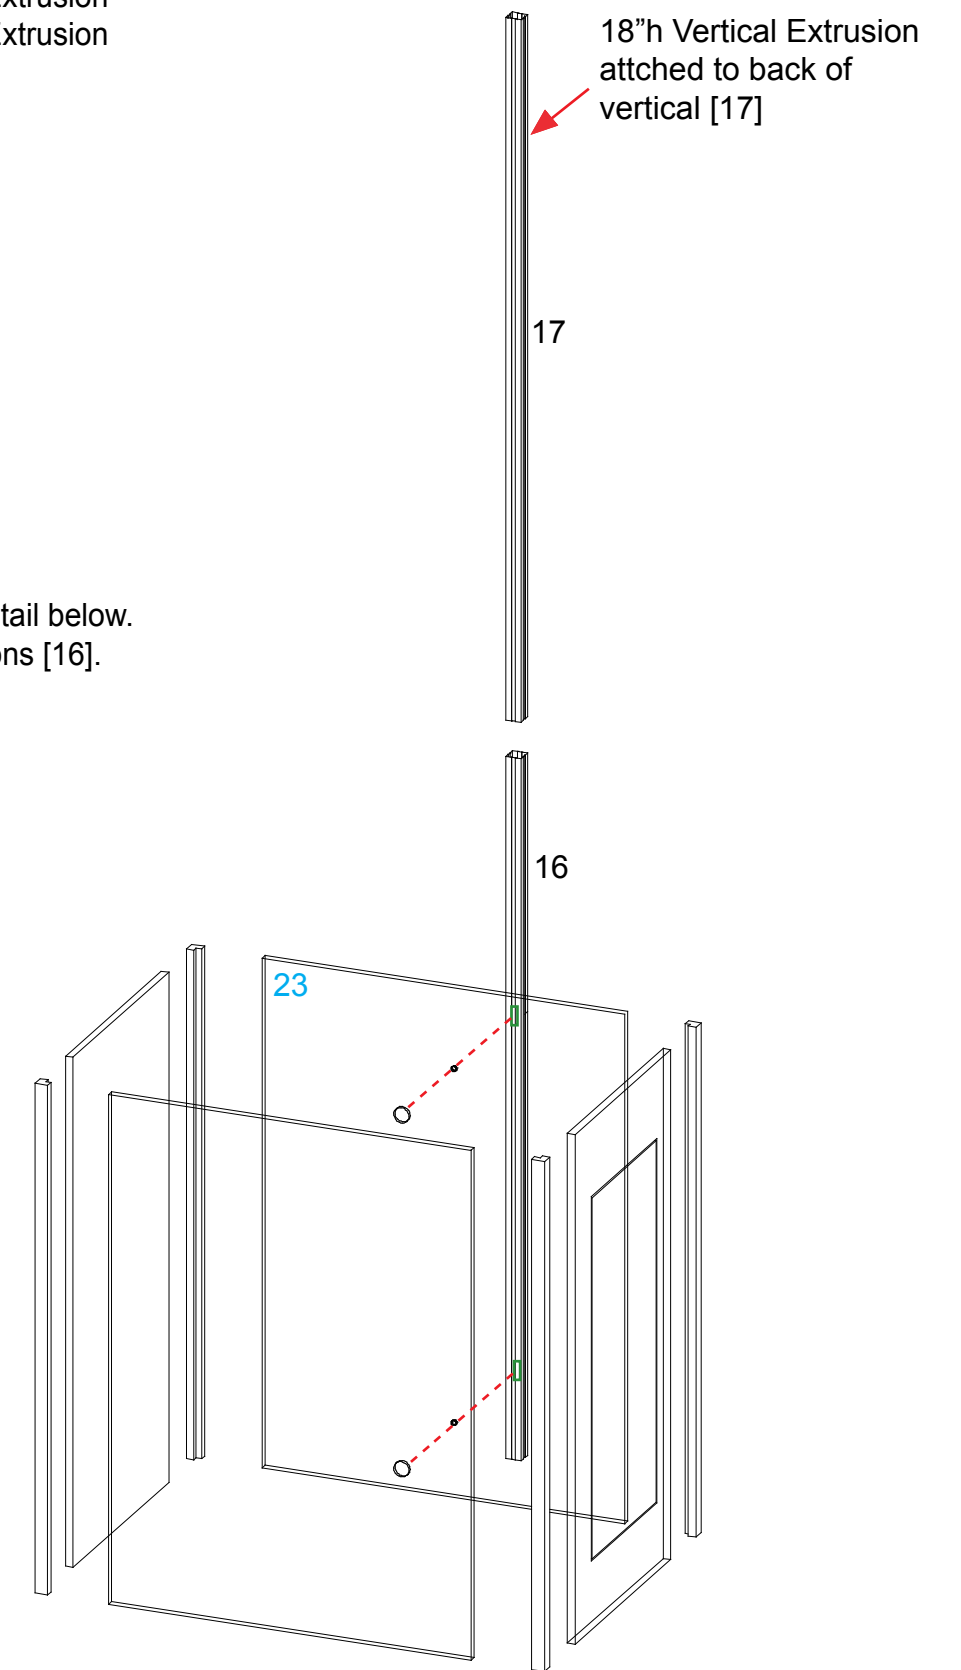
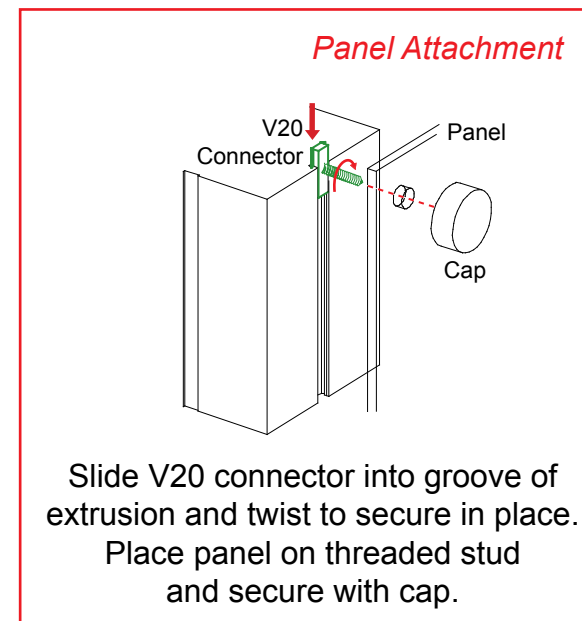
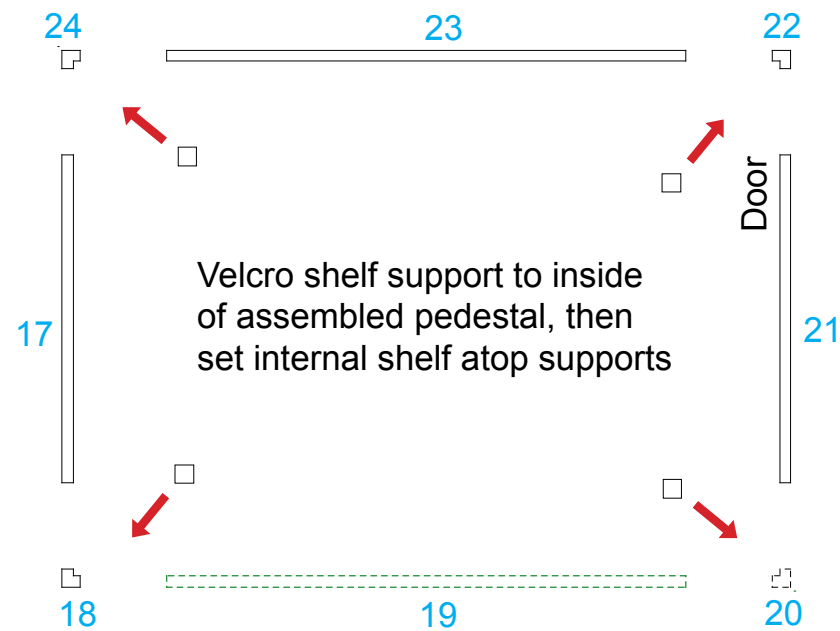


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Part Number	Qty	Description
18a	4	38.0899" w Horizontal Extrusion
18b	4	38.0899" w Horizontal Extrusion
18c	4	38.0899" w Horizontal Extrusion
19	1	8" w Horizontal Extrusion
20	1	14" w Horizontal Extrusion

Steps:

- 1) Assemble header pieces together.
- 2) Attach assembled curve assemblies between workstations and center tower, placing infills between horizontal bars.
- 3) Attach horizontal bar [19] to pill slot on back of extrusion [20].
- 4) Attach counter support to center tower, then set counter atop support.

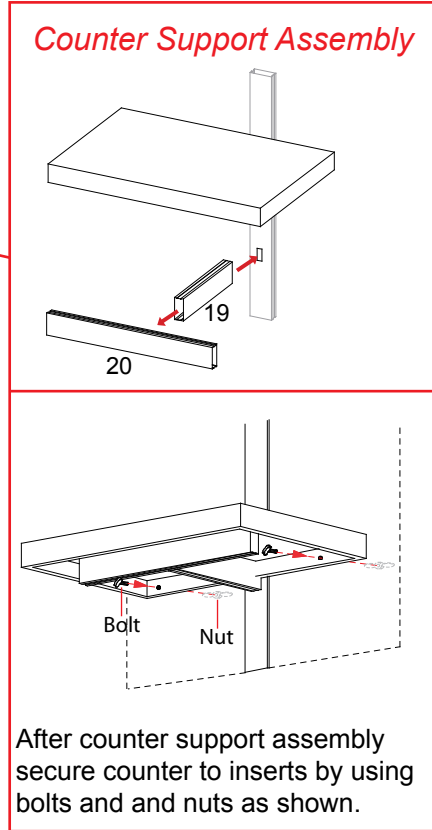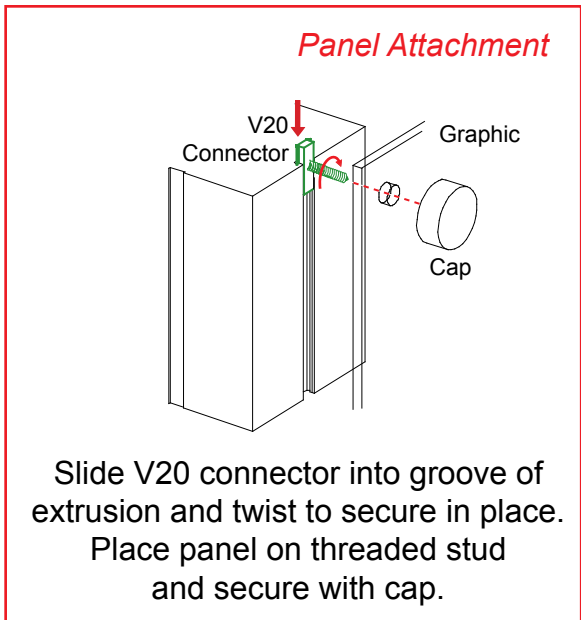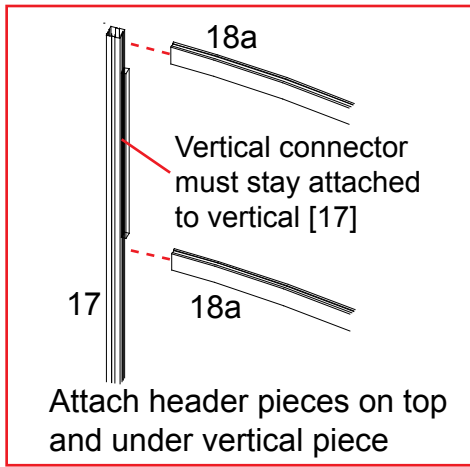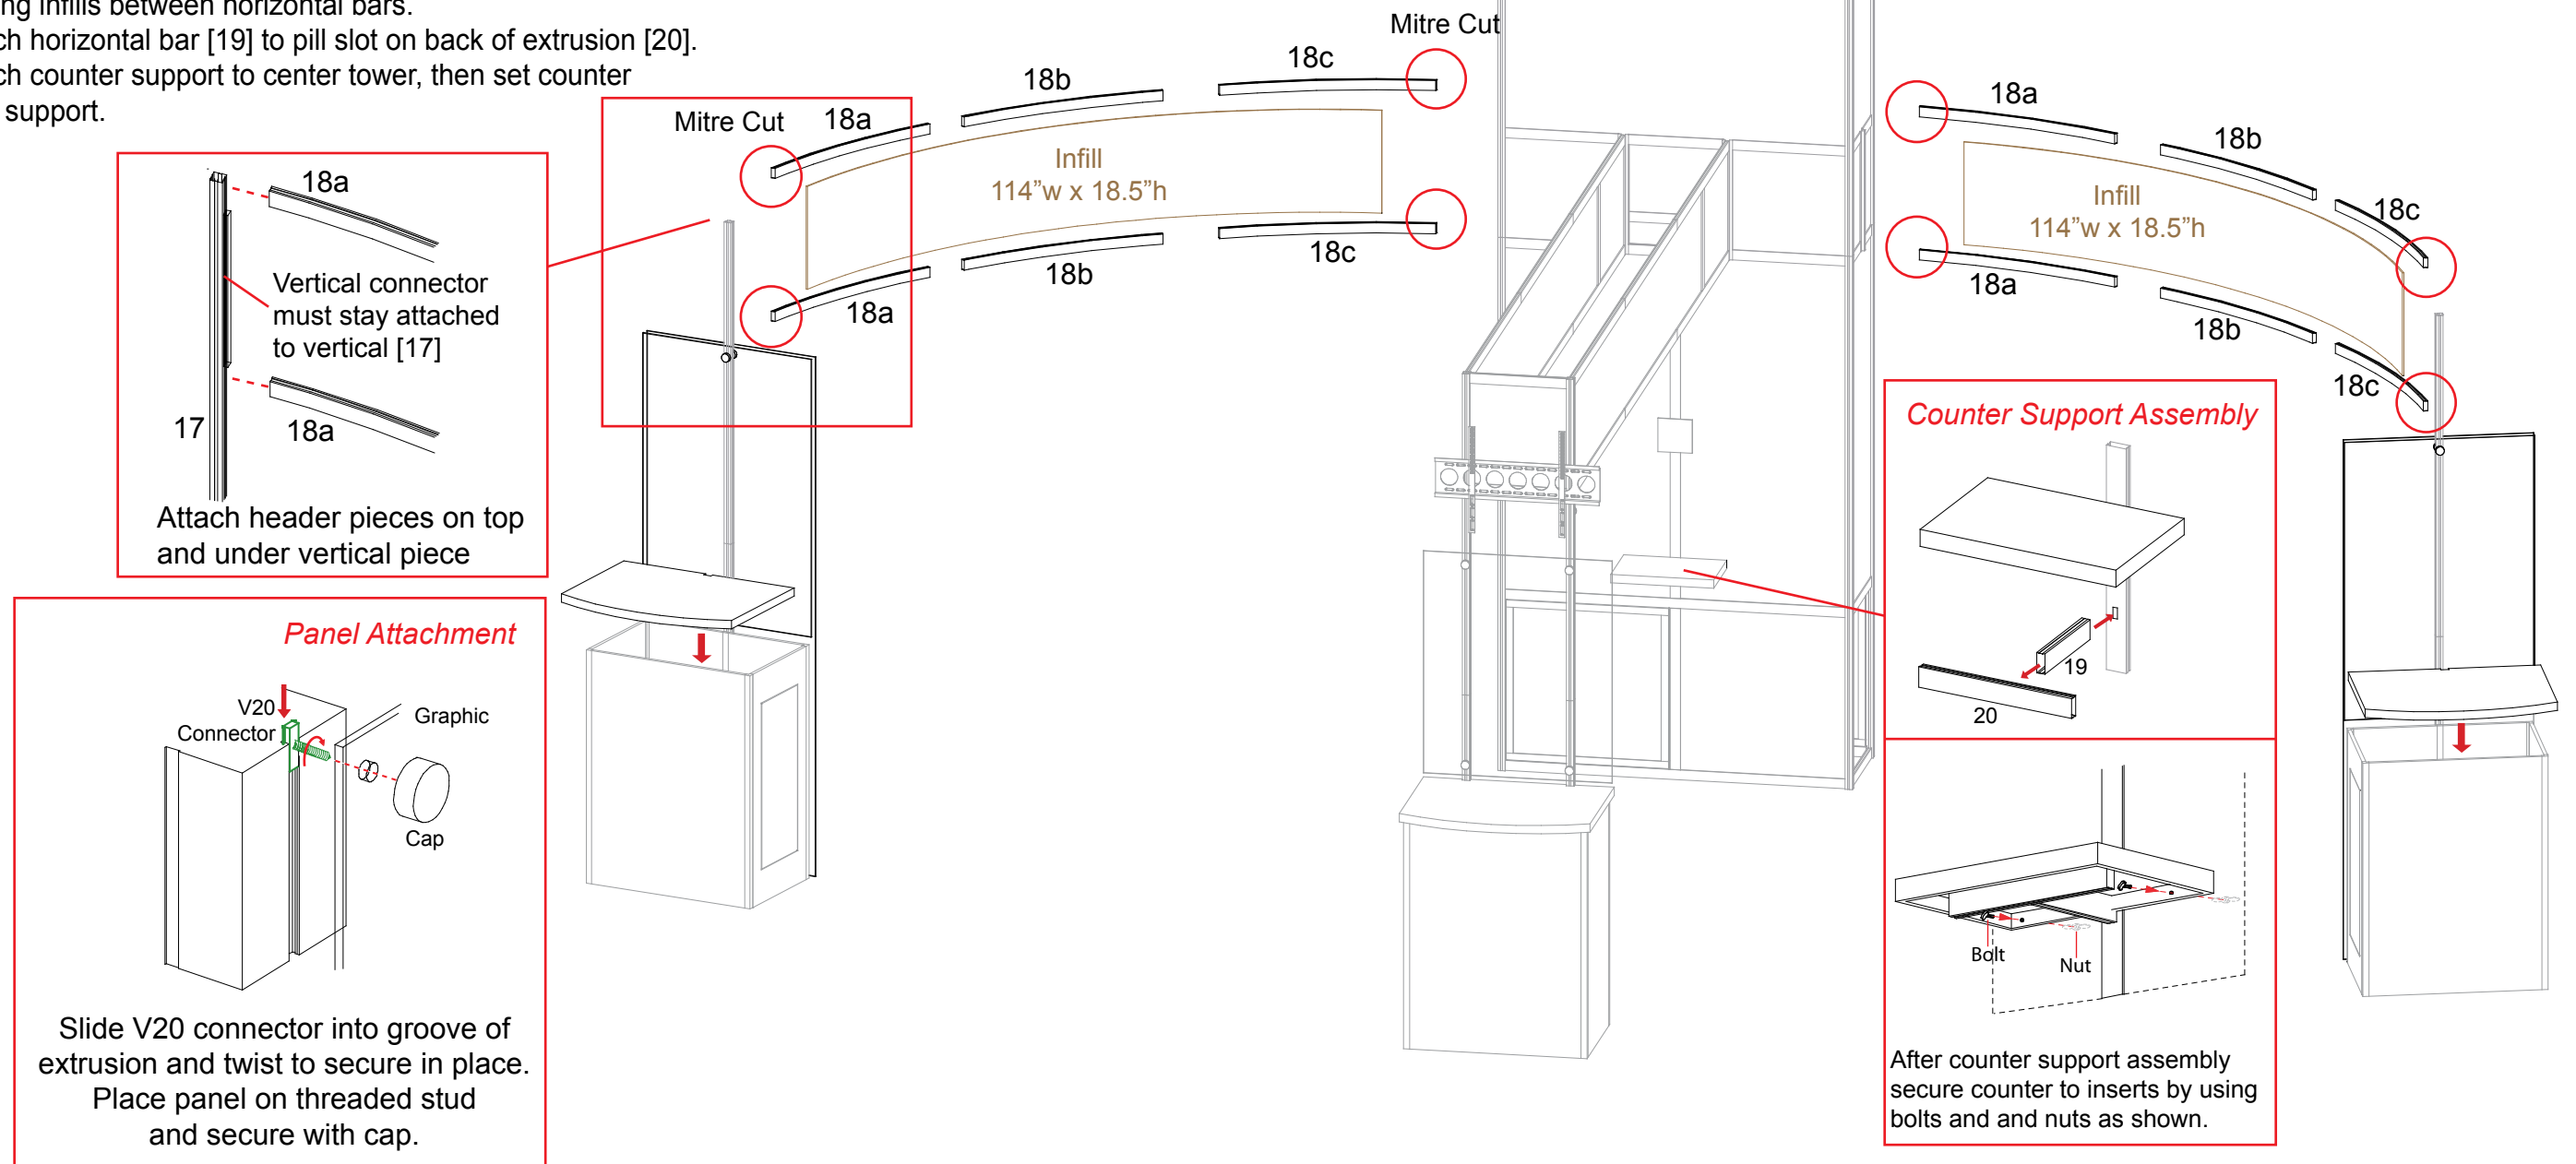

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING



Level 1




Level 2




Level 3




Level 4

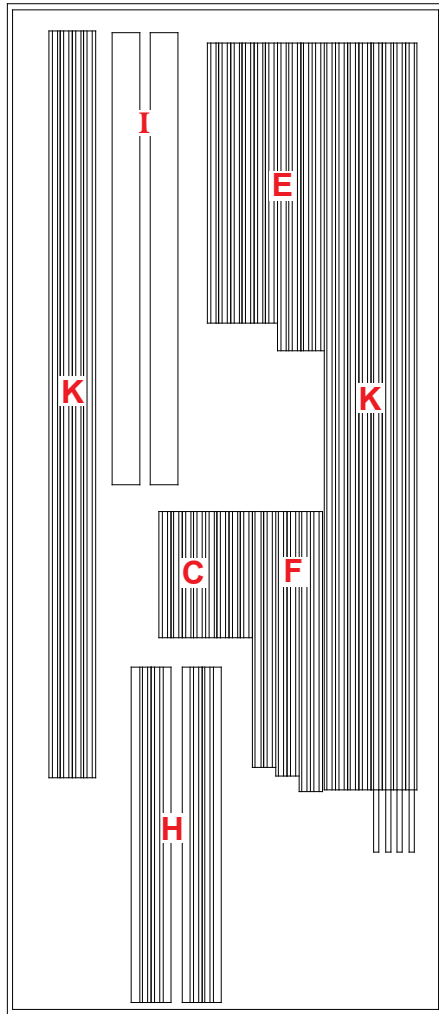


Level 1

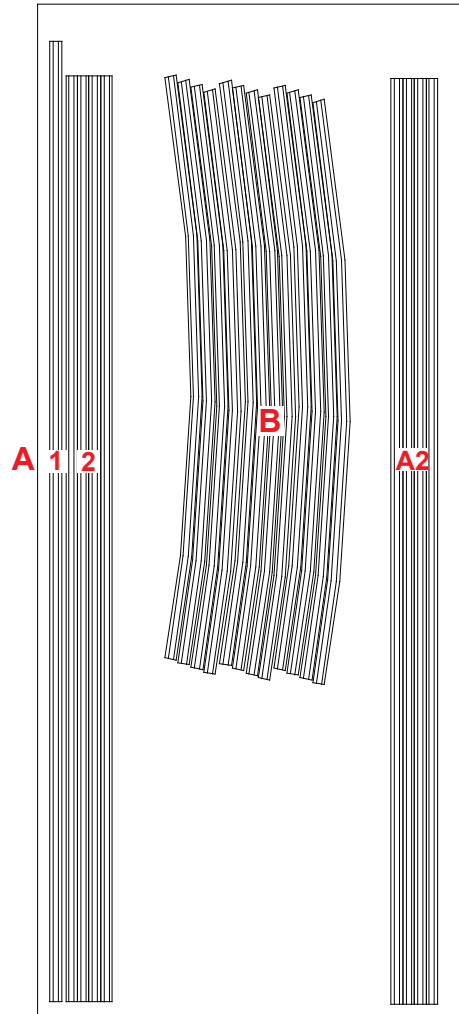

Level 2

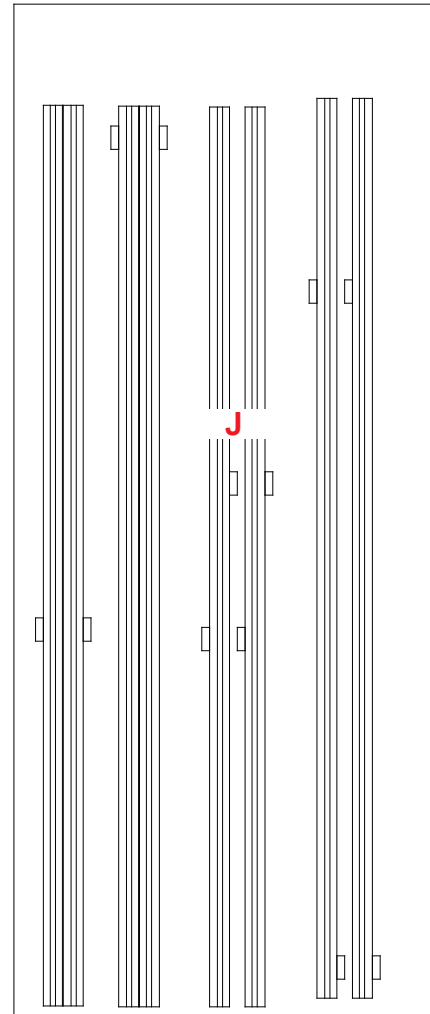

Level 3

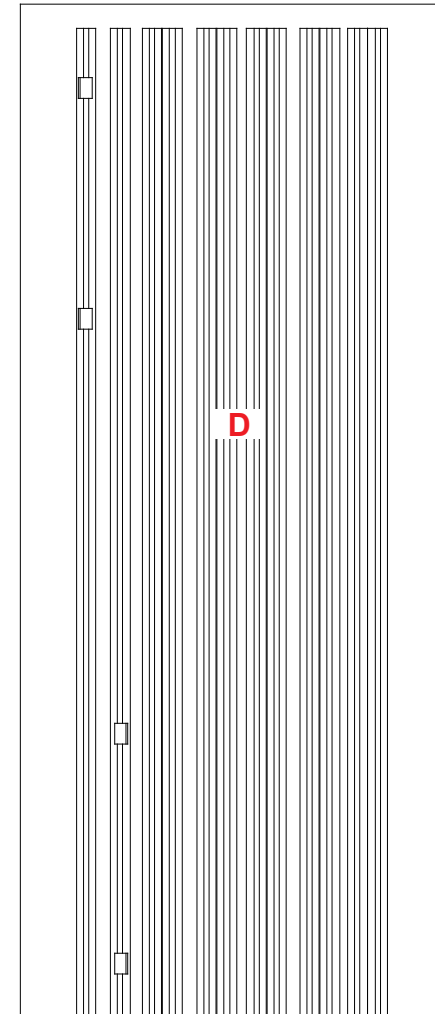

Level 4

- Part List
- A1 - Extrusion #8
 - A2 - Extrusions #3
 - B - Assmled curve bars #18a/18b/18c
 - C - Extrusions #6
 - D - Extrusions #1 and 2
 - E - Extrusions #4 and 9
 - F - Extrusions #10, 13 and 15
 - G - Counter support
 - H - T connectors #7
 - I - Extrusions #5
 - J - Extrusions #11/12 and 16/17
 - K - Header bars #14a-14b-14c

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING