

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro It | HYBRIDS

Using Your Setup Instructions


The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Panel System

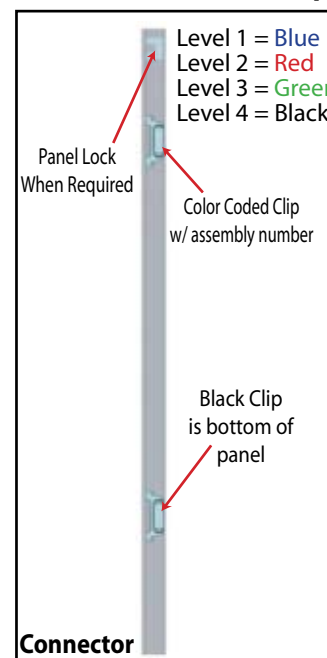


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish the level. The color coded clip also contains the numbered label.

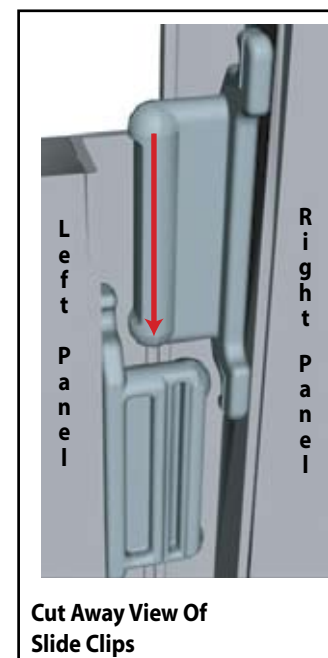

Components connect together by aligning them and sliding downward connecting clips together.

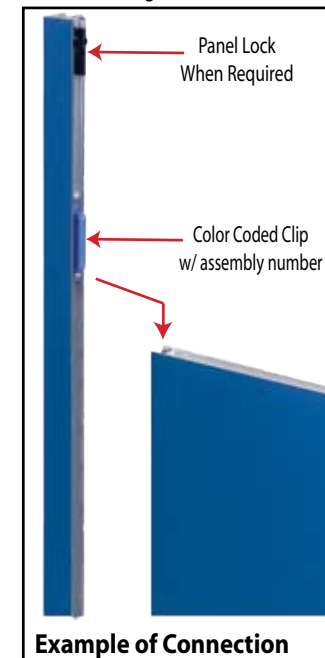

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

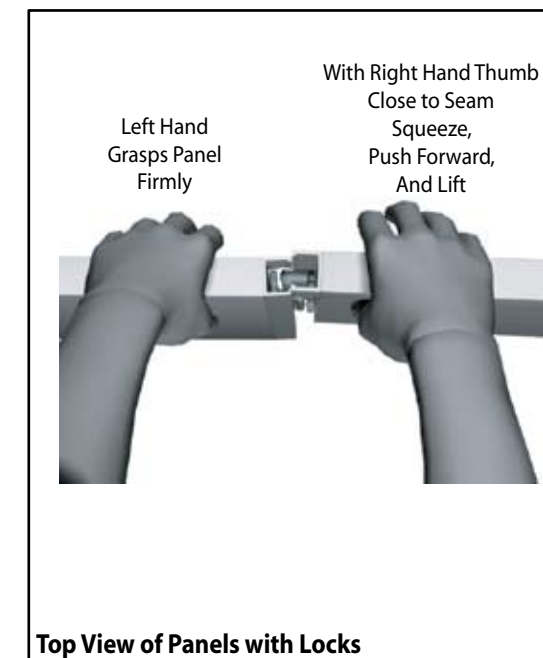


The first level of components contains panel locks that are located at the top of the panel for extra stability and a seamless connection. When disassembling panels, twist top connection slightly and lift right panel upward.


General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.

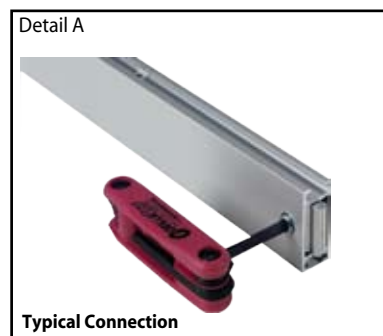


Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

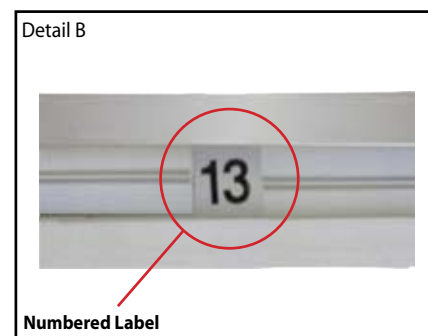


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible).



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.



Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.


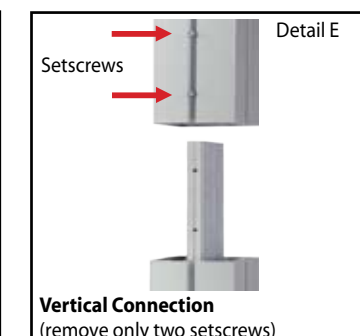


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

| Item | Qty. | Description |
|------|------|-----------------------------|
| 1 | 2 | Base Plate |
| 2 | 1 | 87.75"h Vertical Extrusion |
| 3 | 1 | 88"h Vertical Extrusion |
| 4 | 1 | 88"h Vertical Extrusion |
| 5 | 1 | 88"h Vertical Extrusion |
| 6 | 1 | 88"h Vertical Extrusion |
| 7 | 1 | 87.75"h Vertical Extrusion |
| 8 | 6 | 51.2295"w Curved Horizontal |
| 9 | 6 | 18.4622"w Curved Horizontal |
| 10 | 2 | 18.4622"w Curved Horizontal |

SEG Graphic Installation



It is important to first insert graphic into each alternate corner then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

Step 1
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.


Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.

Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.

To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.

Steps:

- 1) Attach verticals [2 and 7] to base plates.
- 2) Attach horizontal extrusions [8, 9 and 10] between verticals, placing infills where indicated.
- 3) Apply SEG graphics to assembled frames.

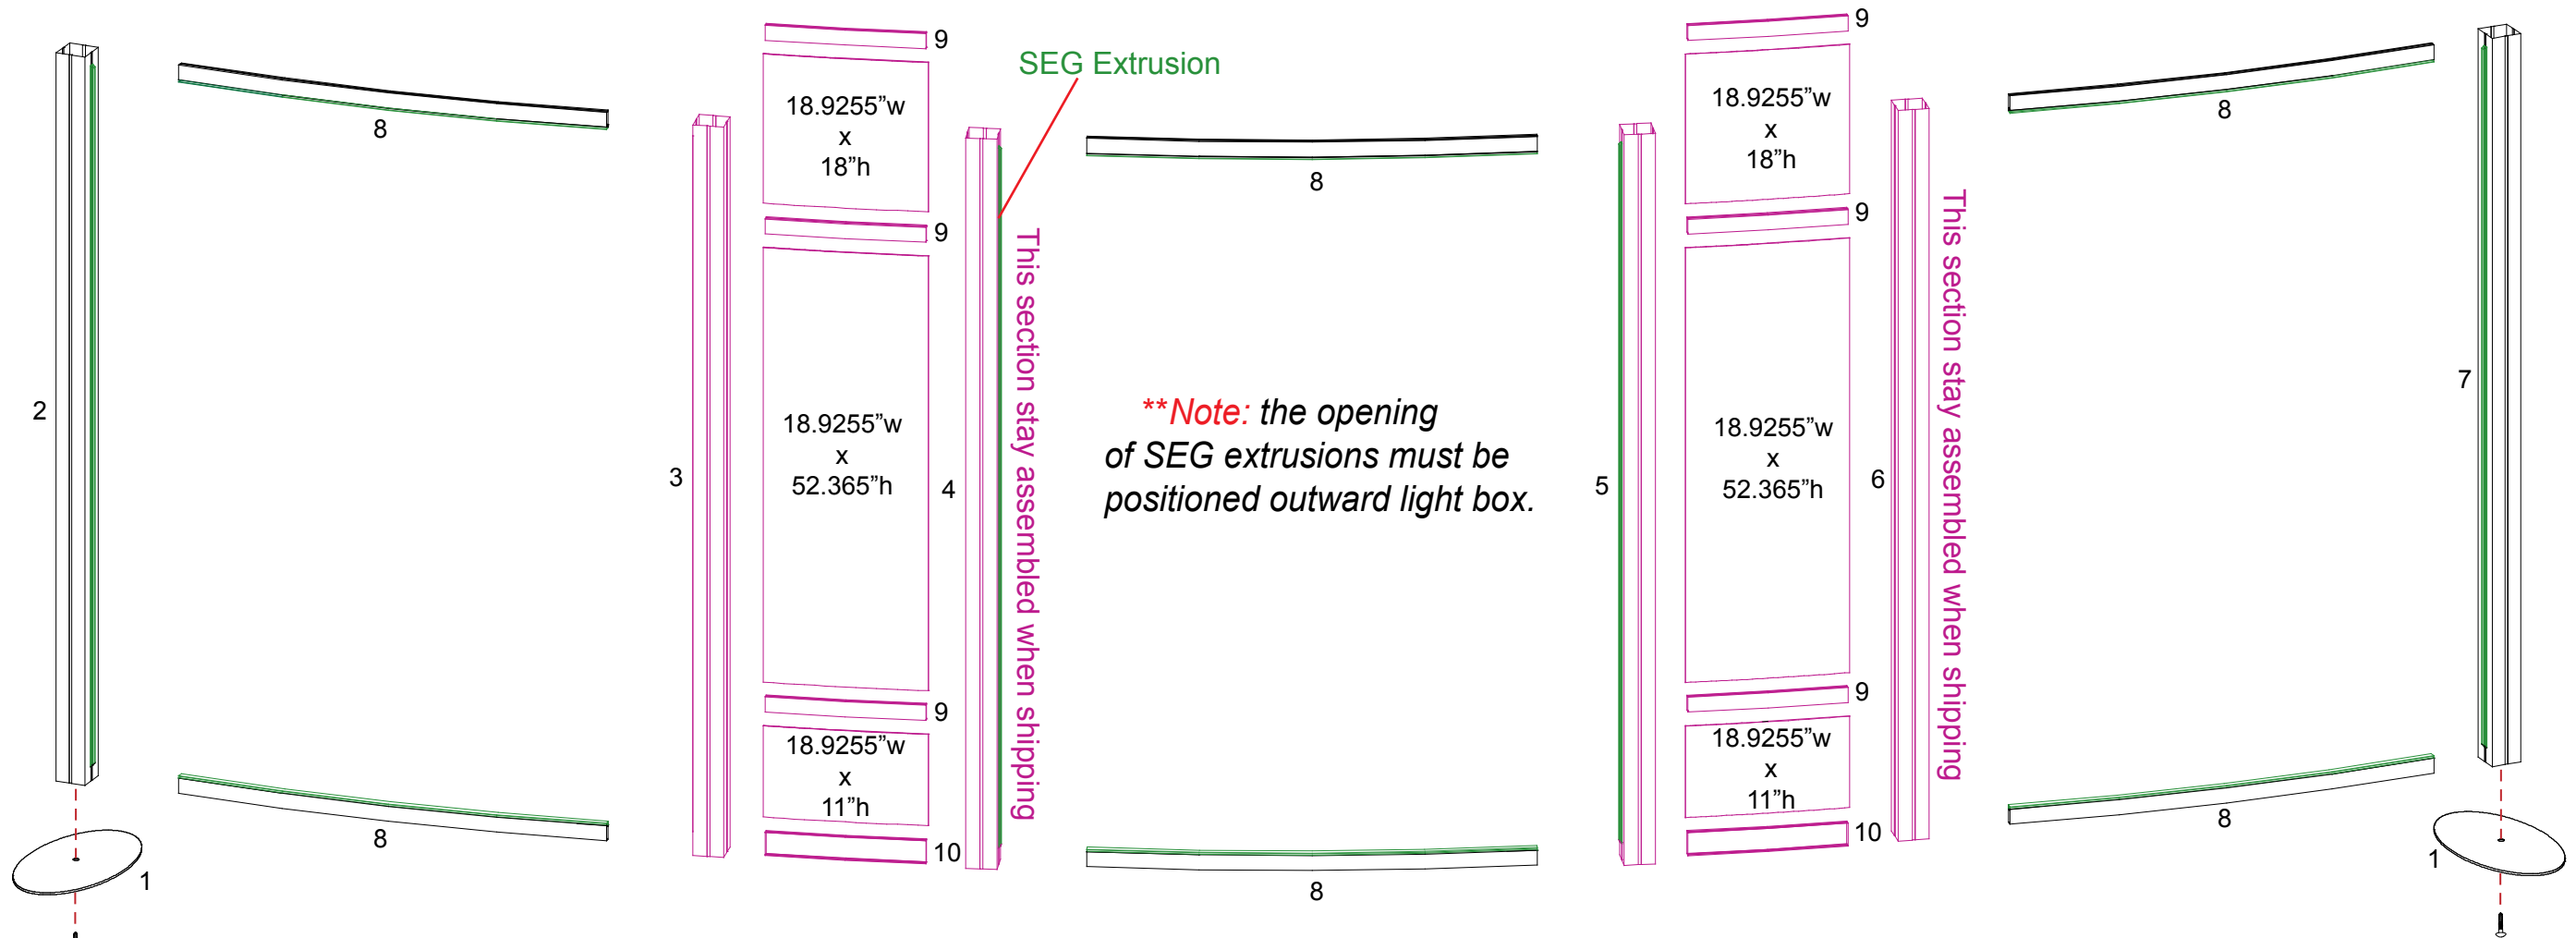

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Pedestal Base Components

| Item | Qty. | Description |
|------|------|----------------------------|
| 1 | 2 | 38" h Curved Panel w/ Door |
| 2 | 2 | 38" h 90° Connector |
| 3 | 2 | 38" h Curved Panel |
| 4 | 2 | 38" h 90° Connector |


Tower Structure Components

| Item | Qty. | Description |
|------|------|--------------------------------|
| 11 | 8 | 96" h Vertical Extrusion |
| 12 | 8 | 20.835" w Horizontal Extrusion |
| 13 | 2 | 36" h Vertical Extrusion |
| 14 | 4 | 48" w Horizontal Extrusion |



Steps:

- 1) Attach horizontal extrusions between vertical extrusions, placing infills where indicated.
- 2) Assembled pedestal base as shown below.
- 3) Place counter top on Assembled base.
- 4) Repeat steps for additional tower.

Velcro shelf supports to inside of pedestal base

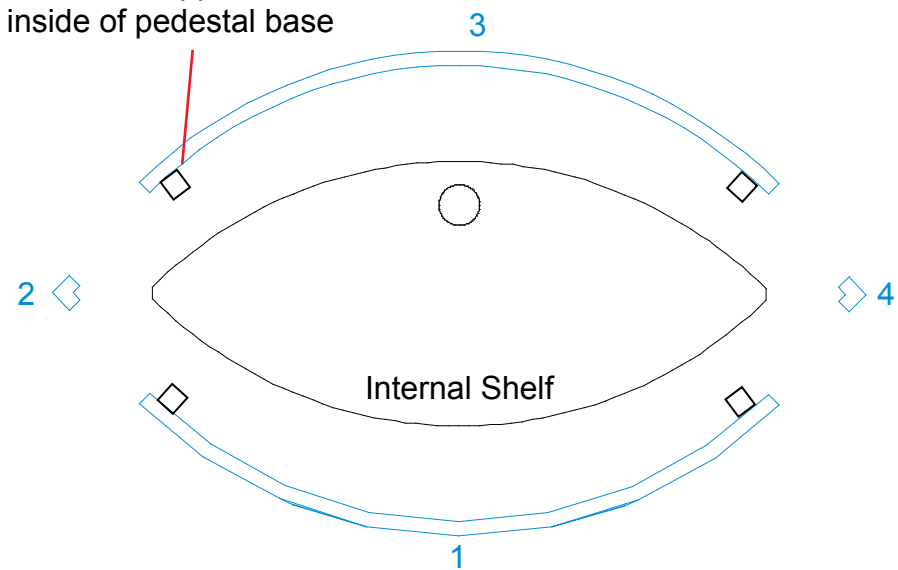

Top View of Pedestal Base

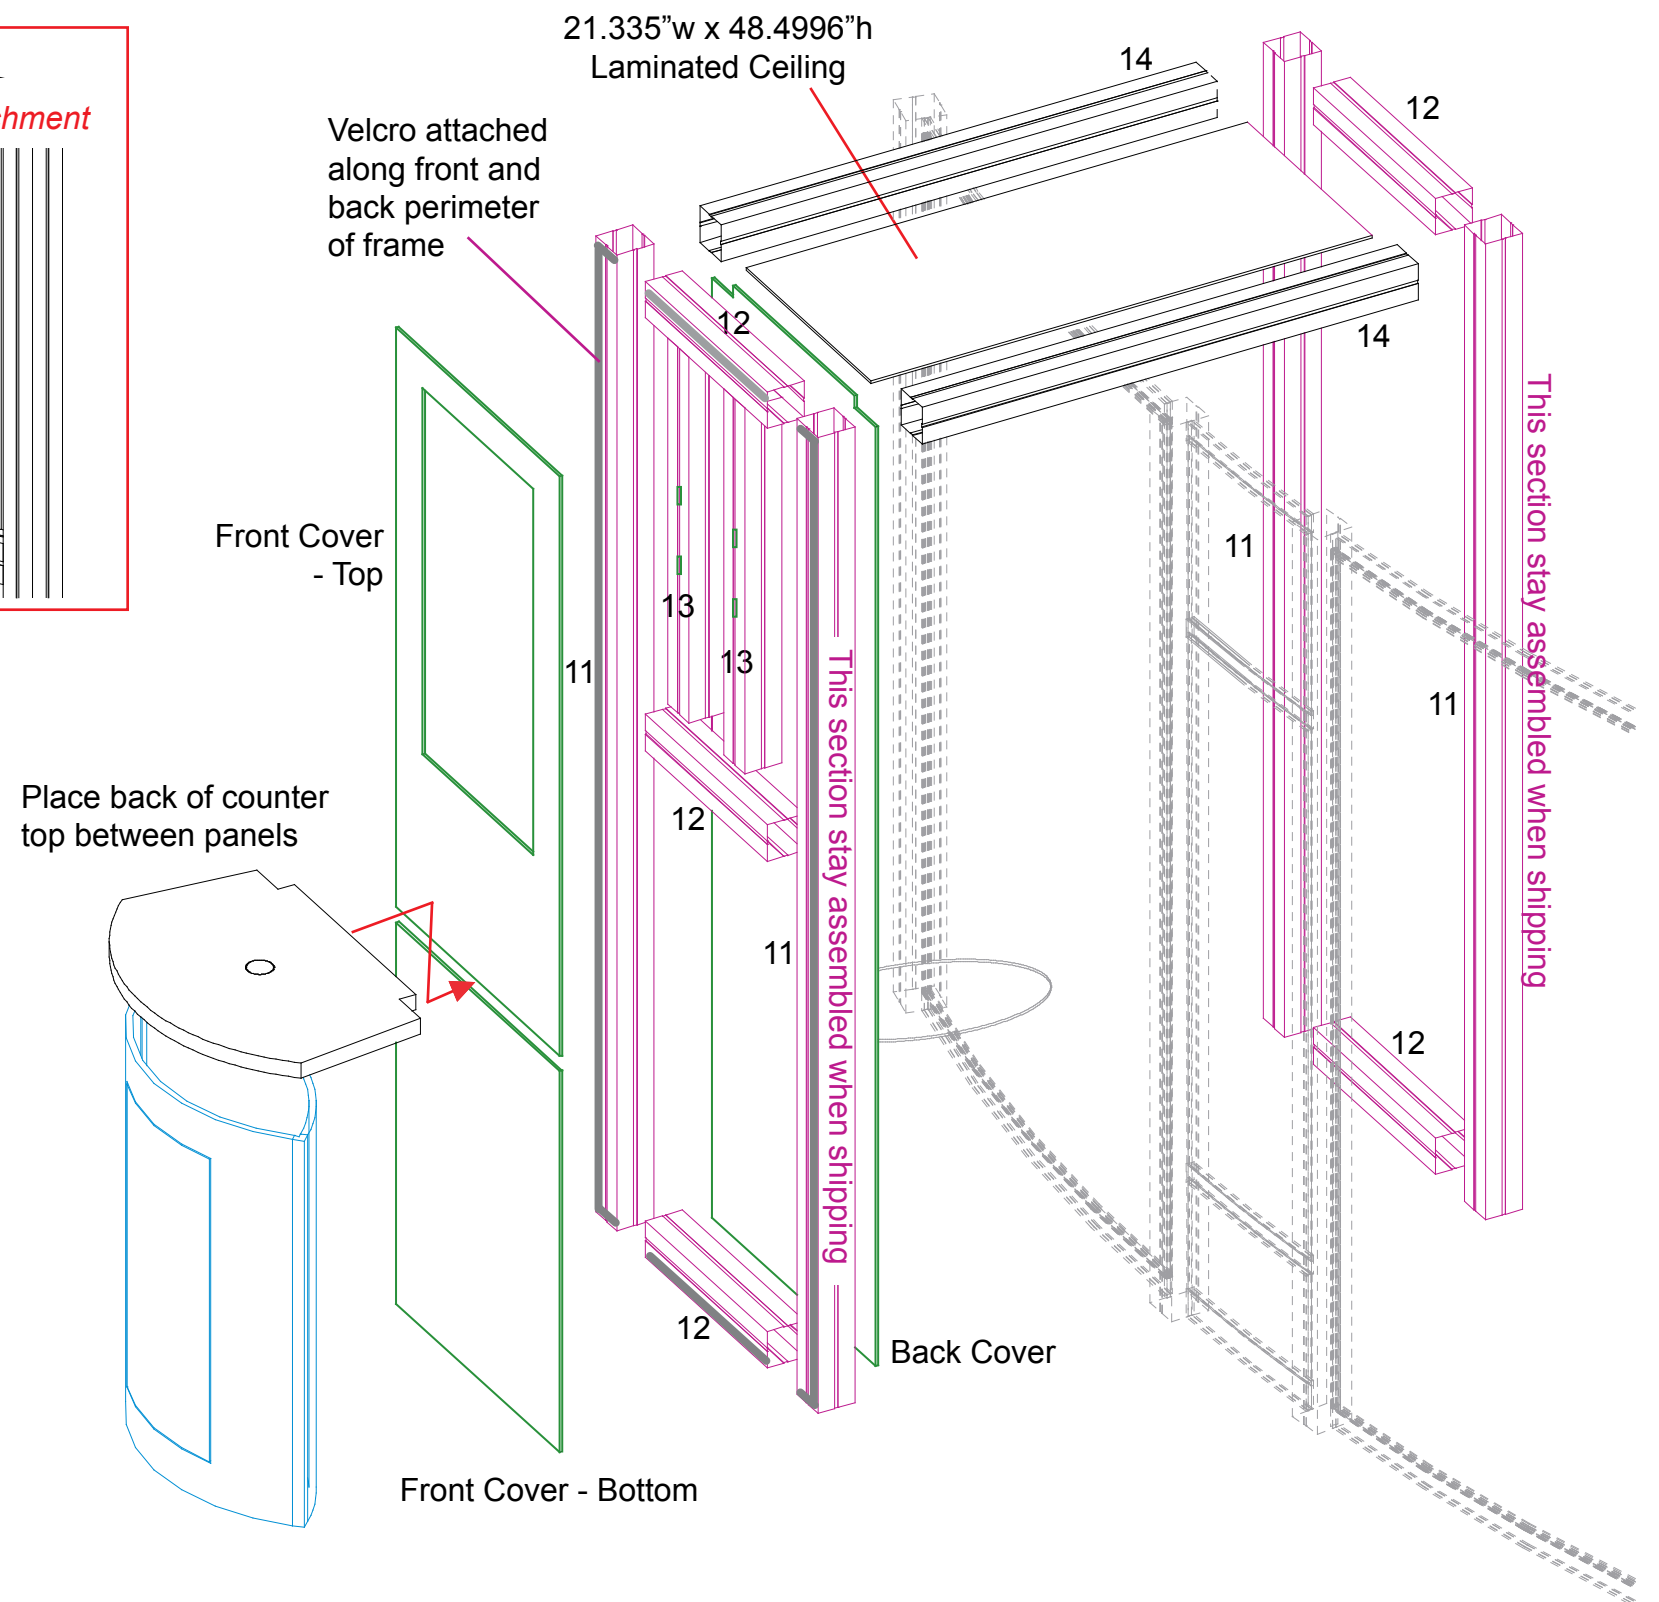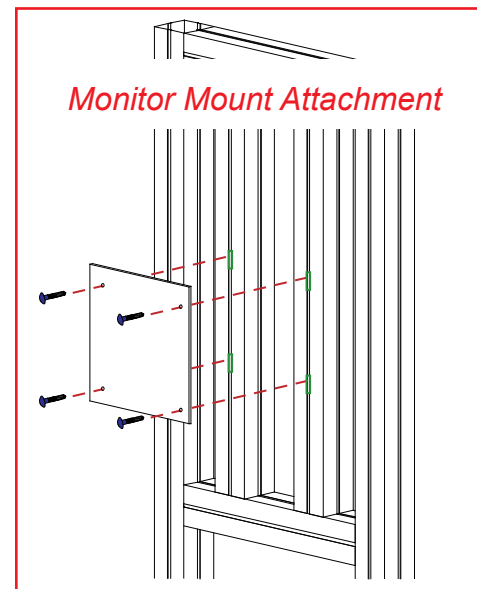

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

| Item | Qty. | Description |
|------|------|------------------------------------|
| 15 | 1 | Base Plate |
| 16 | 1 | 60" h Upper Vertical Extrusion |
| 17 | 1 | 37.461" h Right Vertical Extrusion |
| 18 | 1 | 37.461" h Left Vertical Extrusion |
| 19 | 1 | 15.674" w Horizontal Extrusion |

Steps:

- 1) Attach vertical extrusions [16, 17 and 18] to base plate [1], see detail D on General Info page for base plate attachment.
- 2) Slide insert between vertical extrusions [17 and 18], then attach horizontal extrusion [19] between vertical extrusions [17 and 18] atop insert.
- 4) Attach shelves in place.
- 5) Set counter atop assembled base and secure to vertical extrusion [16] using thumbscrews.
- 6) Attach literature racks to assembled kiosk, see Literature Rack Attachment detail.
- 7) Attach monitor mount to vertical extrusion [16], see Monitor Mount Attachment detail.

Note: A10 Clamps should remain attached to verticals as shown.

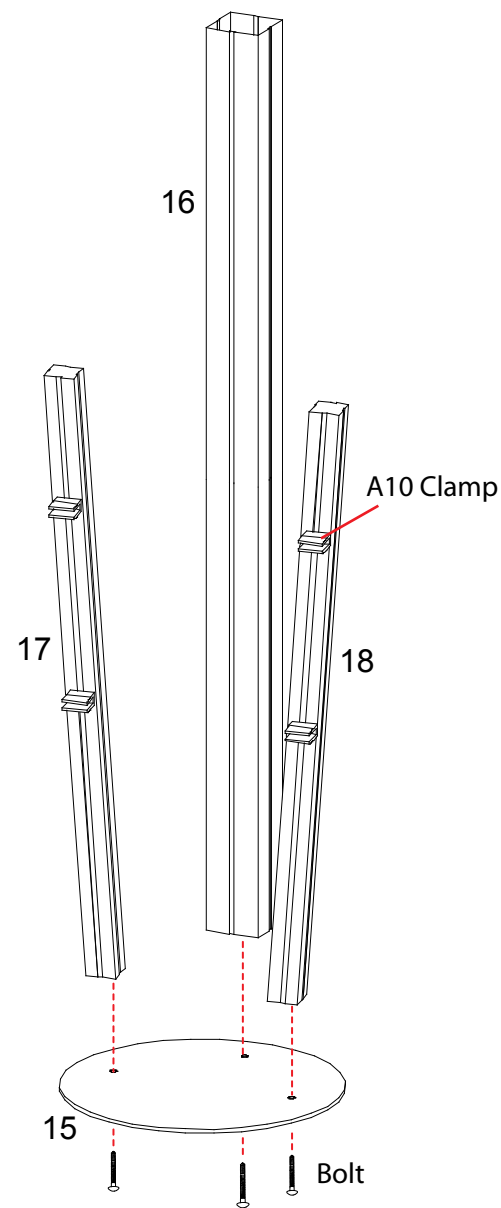


A10 Clamp Attachment

Rotate Clamp to Desired Angle

Slide connector on back of A10 clamp into groove of extrusion.

When desired location is found, tighten set screw to secure.

Tighten black plastic set screw to secure shelf in place.

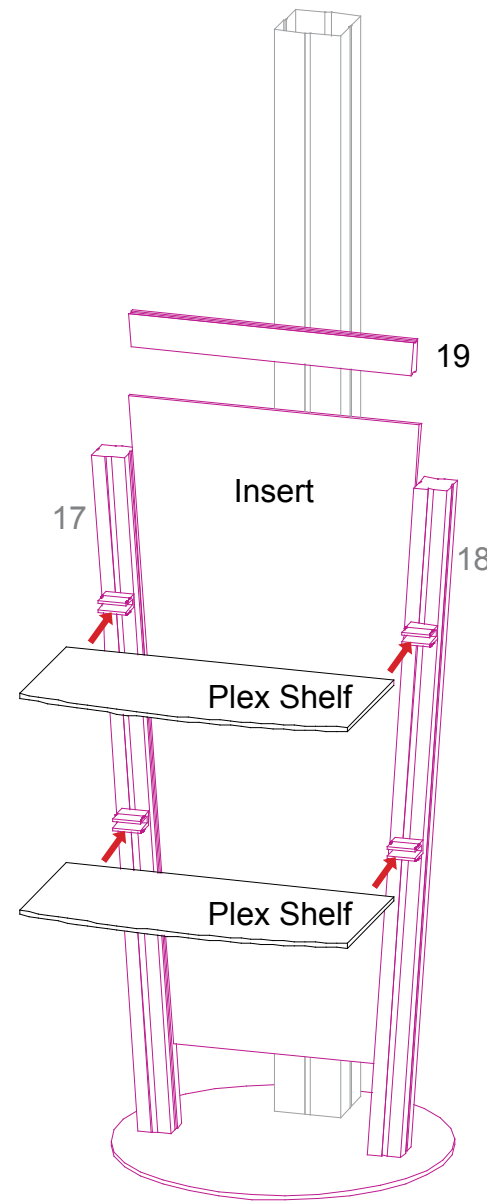

This red section stay assembly when shipping

Monitor Mount Attachment

Attach monitor mount to vertical extrusions after assembly.

Slide Mount into Groove of Vertical Extrusion.


Tighten Setscrew

Attach top Plate and tighten screws



Literature Rack Attachment

Tighten Lock to Secure

Attach connector piece to rack as shown. Then connect assembled literature rack to vertical extrusion.

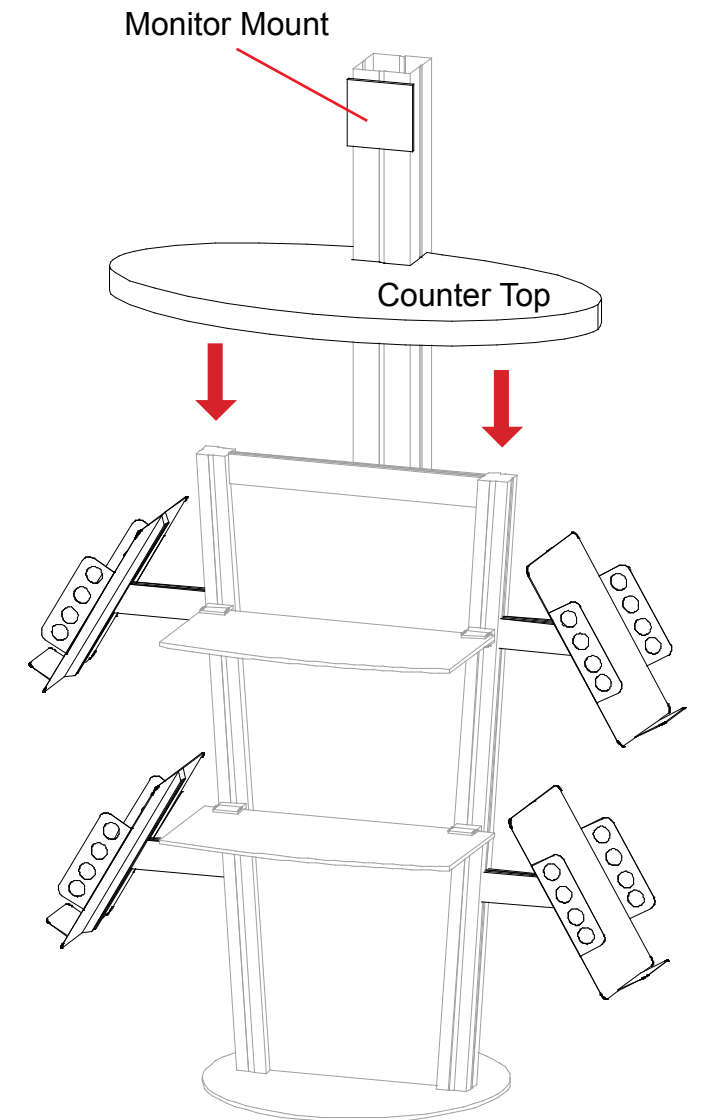

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

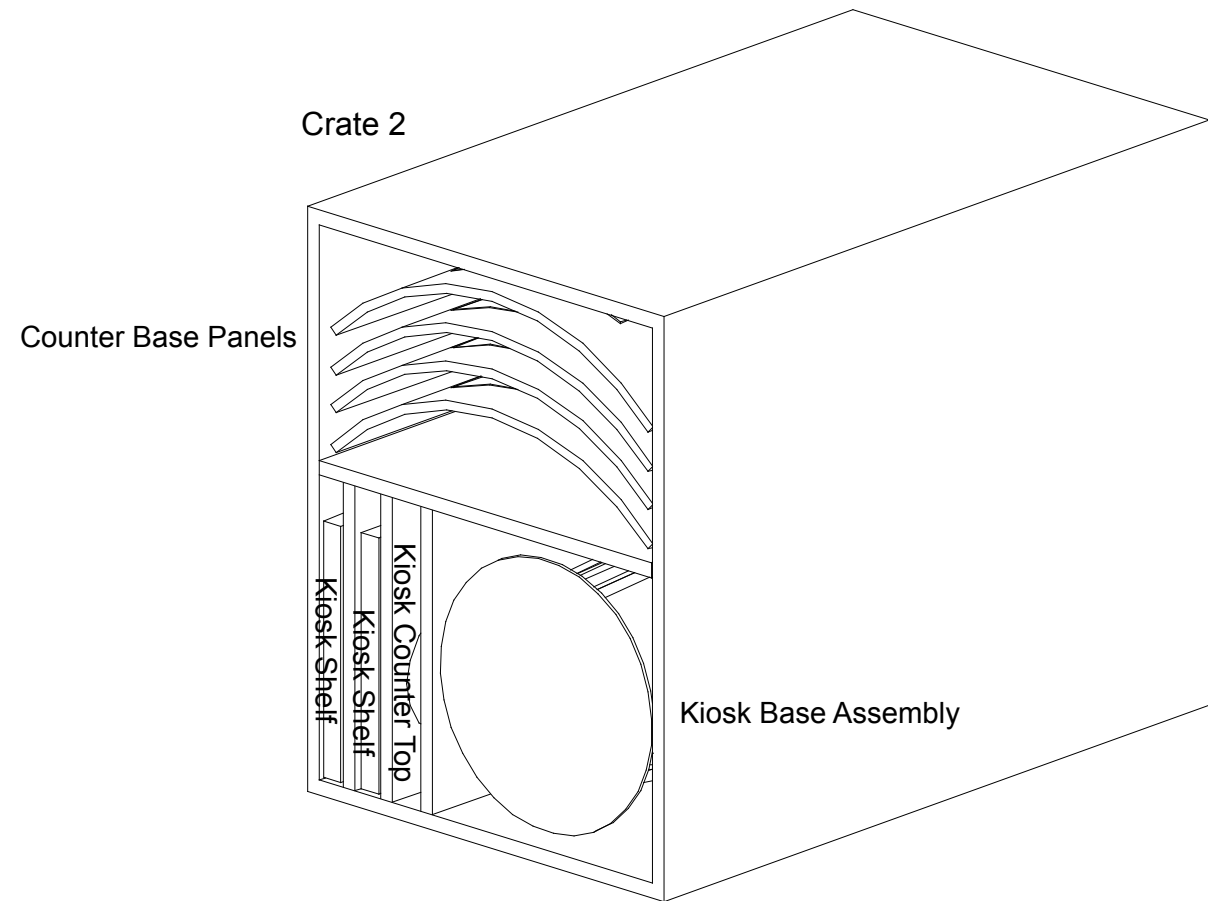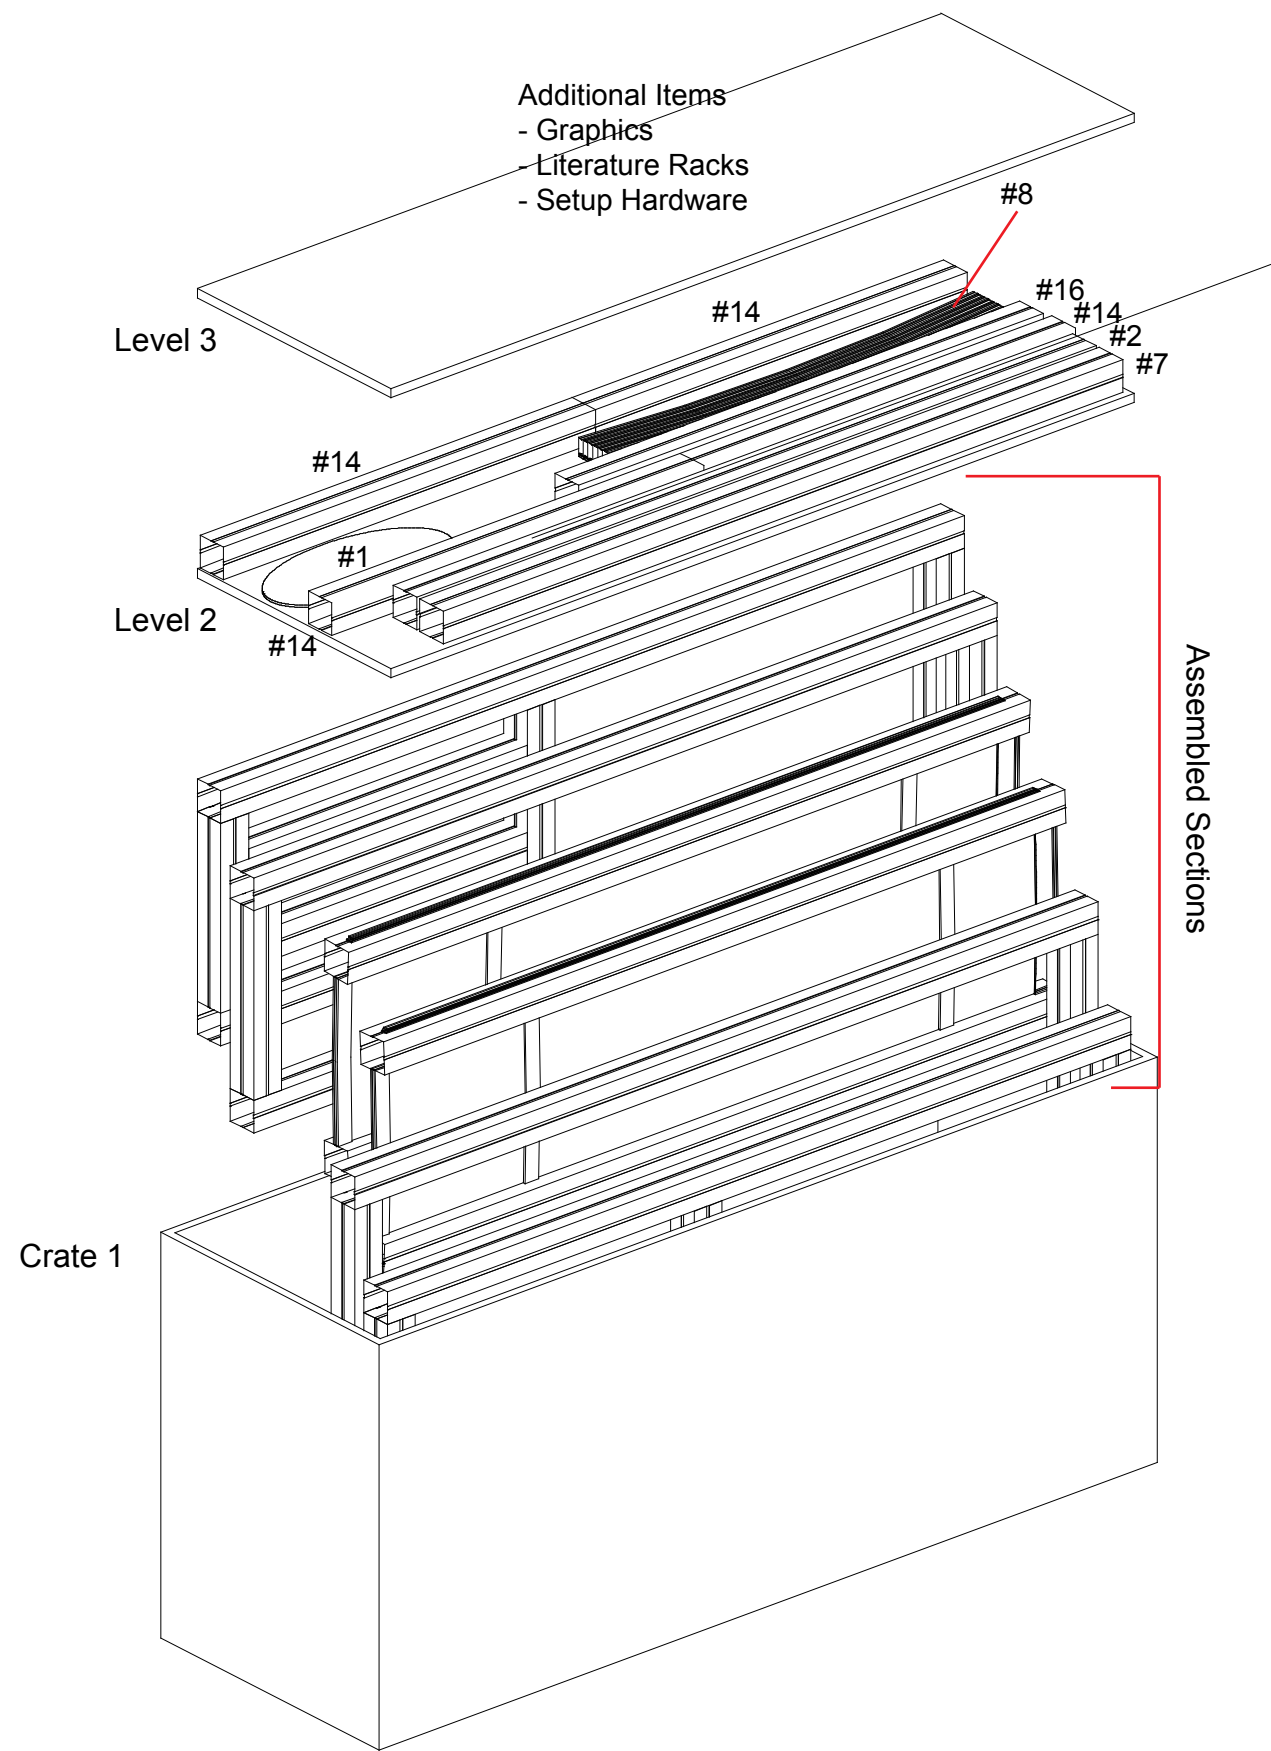

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING