



Perfect 10 Hybrid Displays

Part Number	Description
1	Left Leg Assembly
2	Right Leg Assembly
3	Upper Left Curved Vertical
4	Upper Right Curved Vertical
5	23" w Horizontal
6	23" w Monitor Mount Attachment Bar


NOTE: Can be assembled either face down on floor then lifted upright or upright as shown in drawings.

- Connect vertical leg assemblies [1 and 2] together by connecting horizontal extrusion [5] between assemblies tightening BLACK knobs on backside of extrusion making sure Velcro faces toward BACK and placing it about one inch up from bottom and tightening.
- Connect vertical extrusions [3 and 4] to leg assemblies [1 and 2] using vertical connection bar as shown.
- Connect horizontal extrusions [5 and 6] between vertical assemblies [3 and 4] as shown, upper horizontal [5] should be about one inch down from top.

NOTE: Make sure the lock is flush with extrusion before tightening. If lock will not fully engage, gently rock lock and extrusion back and forth while turning knob until lock fully opens.

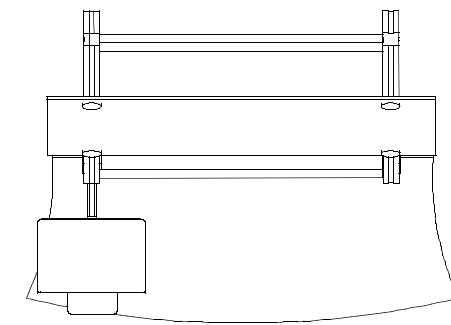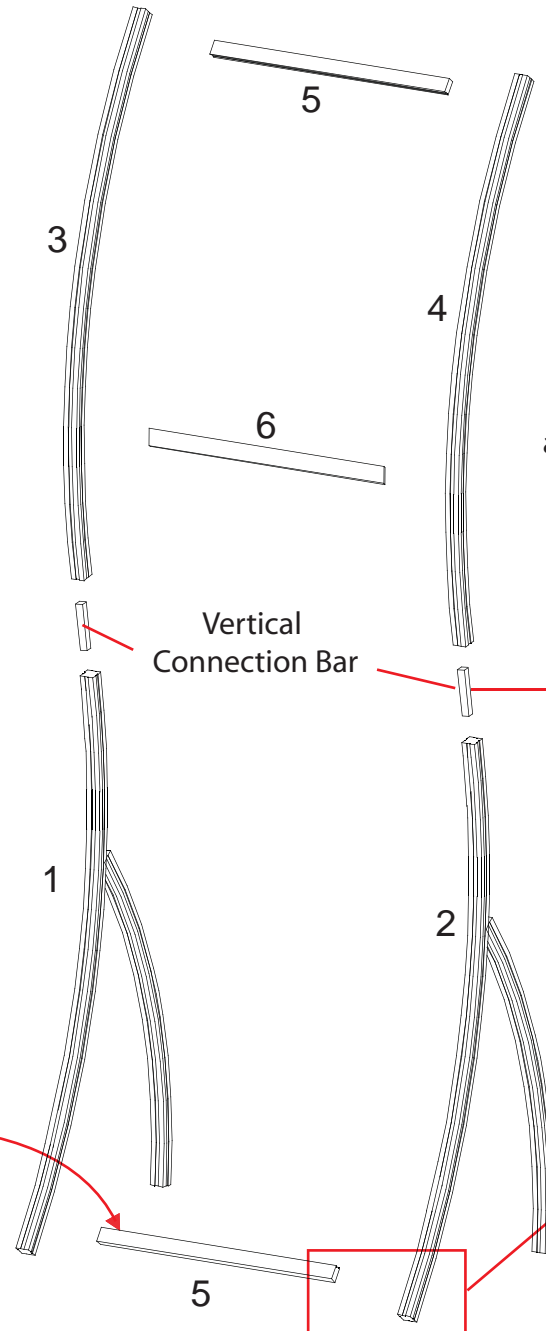


Plan View

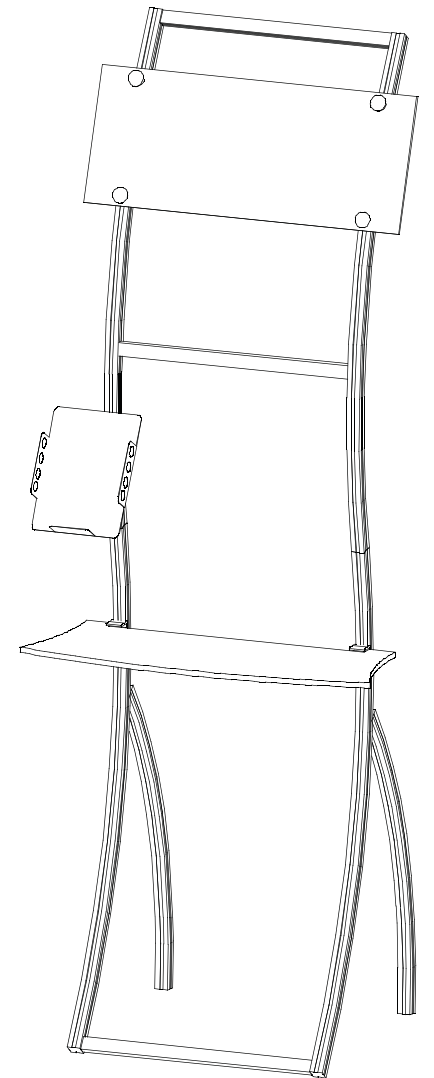


Graphic Attachment
Attach graphic to Velcro located on back of assembled banner stand.

Slide Connection Bar into lower leg assembly. Slide upper vertical over bar and secure both.

NOTE: When assembling horizontals they should be placed approximately one inch from TOP and BOTTOM.

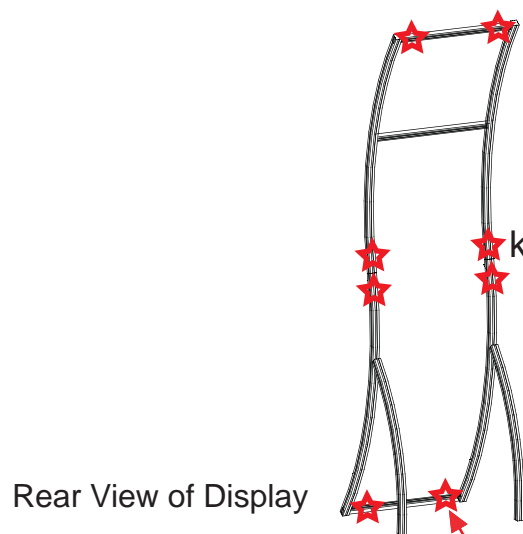

STAR indicates location of knobs on BACKSIDE of unit.




Turn Knob Clockwise to Tighten Lock



Slide horizontal into groove

Assure that a good connection is made and tighten to secure.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

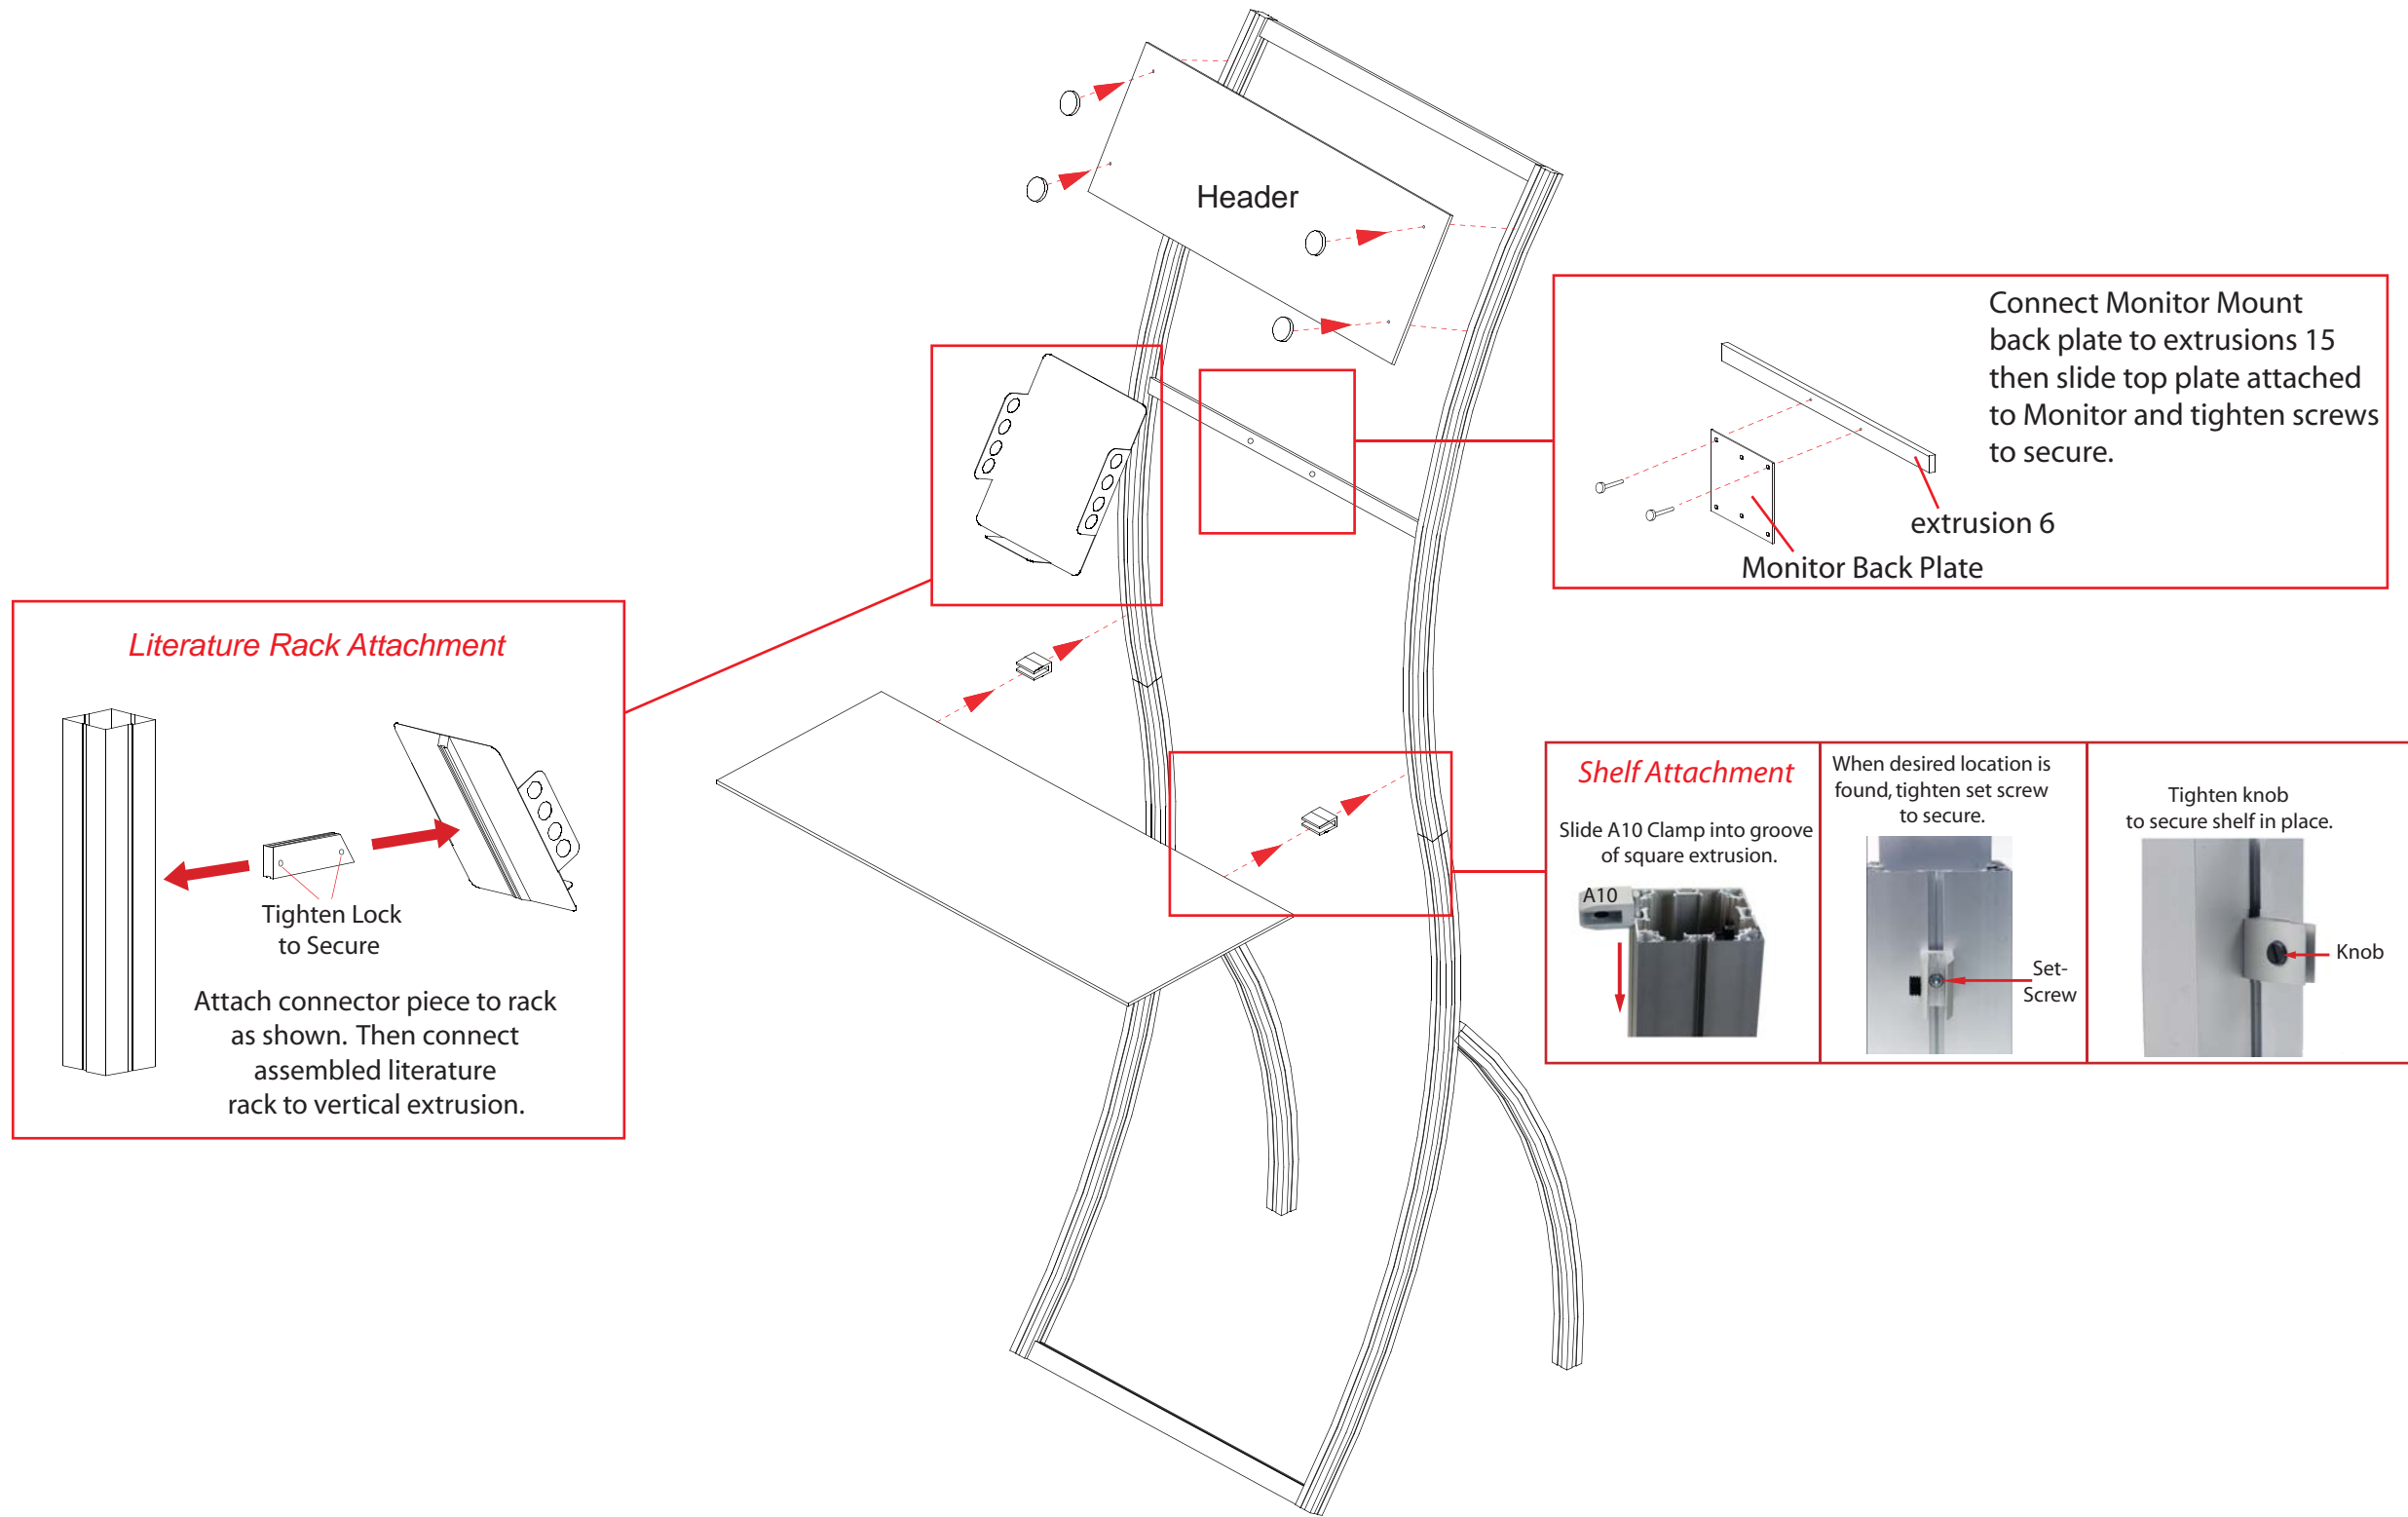

Literature Rack Attachment

Tighten Lock to Secure

Attach connector piece to rack as shown. Then connect assembled literature rack to vertical extrusion.

Connect Monitor Mount back plate to extrusions 15 then slide top plate attached to Monitor and tighten screws to secure.

extrusion 6

Monitor Back Plate

Shelf Attachment

Slide A10 Clamp into groove of square extrusion.

A10

When desired location is found, tighten set screw to secure.

Set-Screw

Tighten knob to secure shelf in place.

Knob


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Case #1 - Banner Stand Components


Top View of each Level

Literature Rack
QTY. 1


Graphics
QTY. 1
&
Setup Hardware

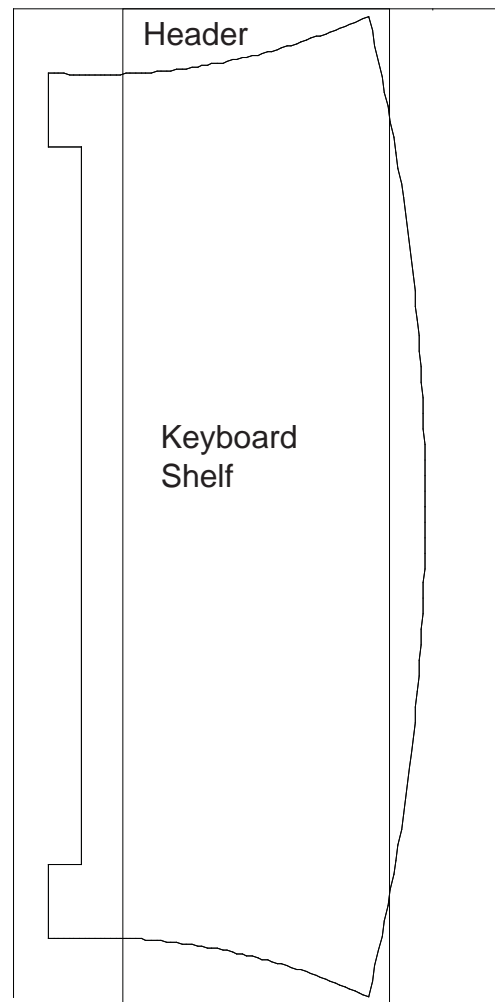


Level 1

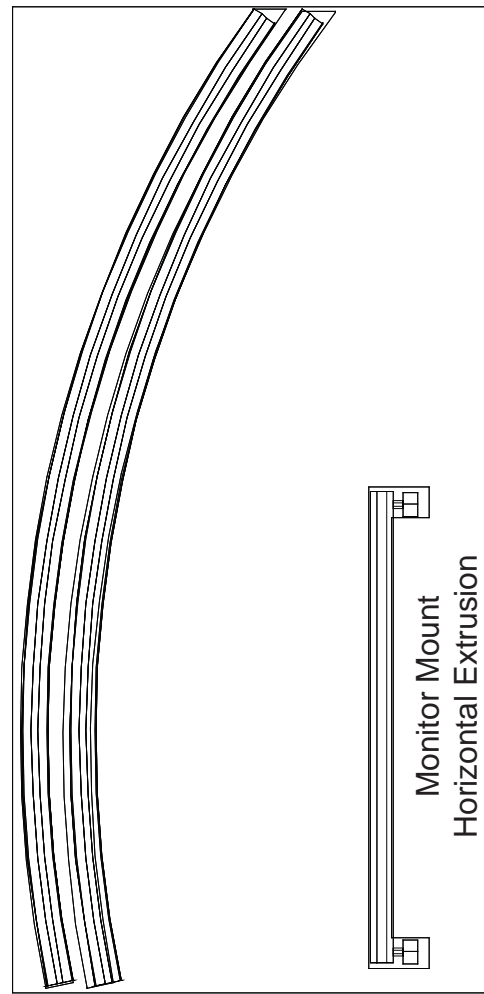

Level 2

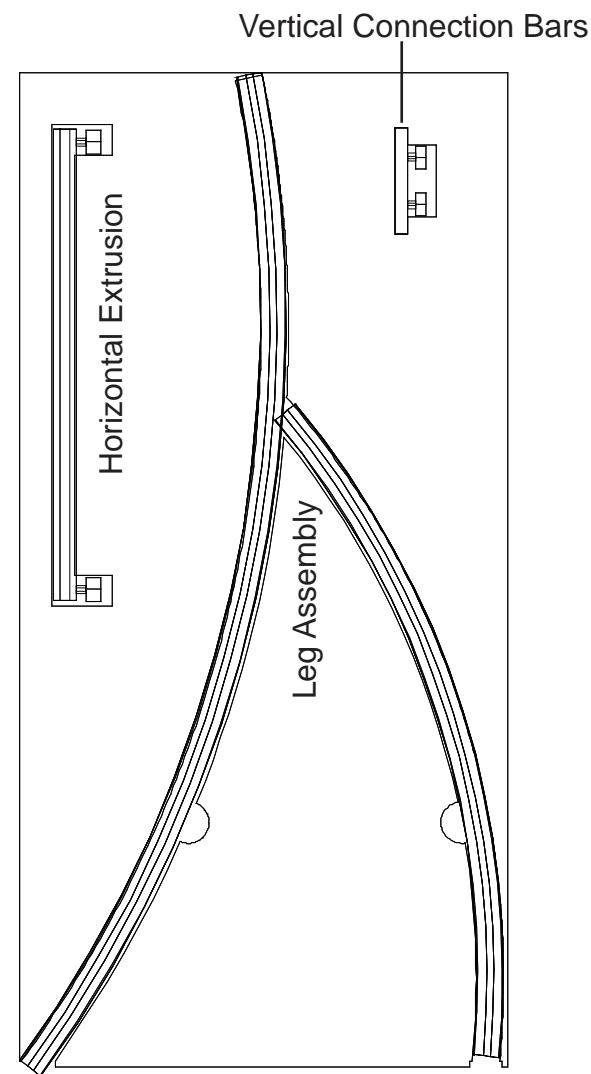

Level 3

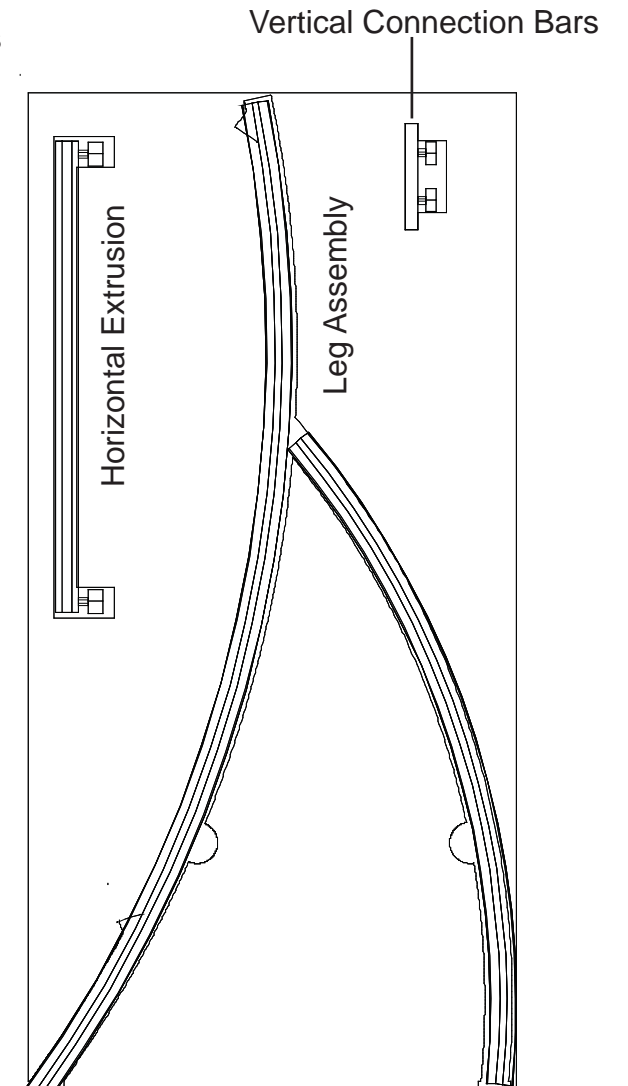

Level 4

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING