

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

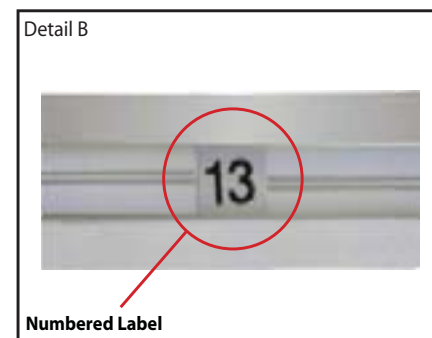


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.




Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

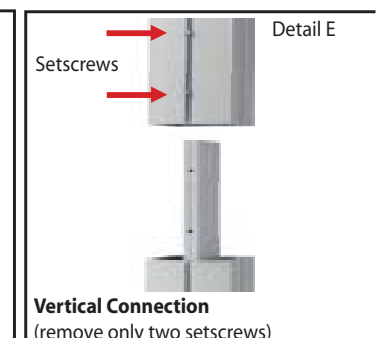


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

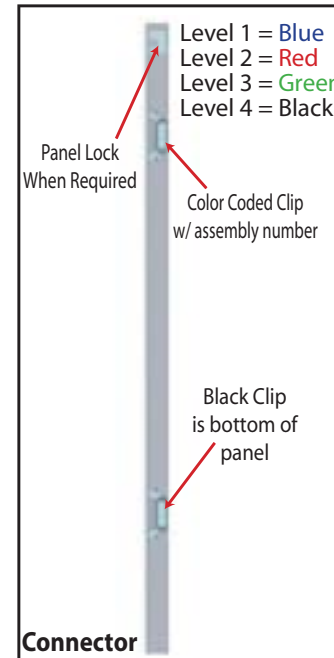


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

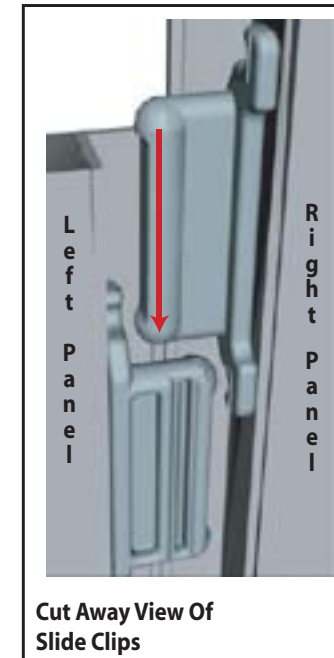

Components connect together by aligning them and sliding downward connecting clips together.

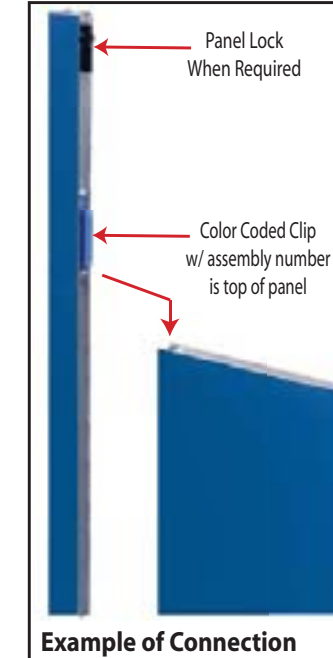

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

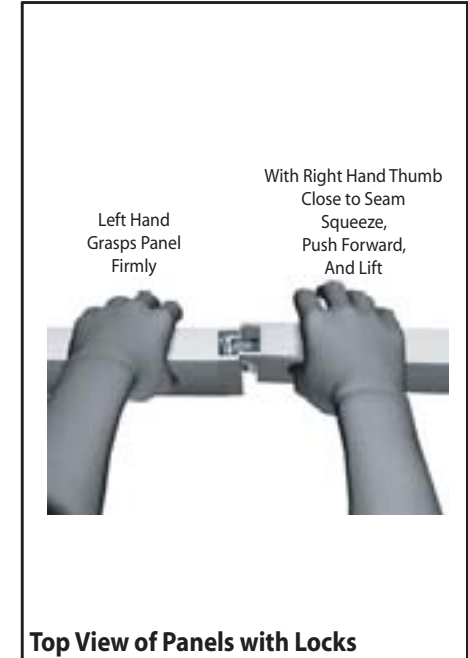




The first level of components contain pane locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description:
2	1	Oval Base Plate
3	1	Oval Base Plate
4	1	82"h Square Vertical Extrusion
5	1	82"h Square Vertical Extrusion
6	1	Curved Extrusion
7	1	Curved Extrusion
8	1	Curved Extrusion
9	1	Curved Extrusion
10	1	Curved Extrusion
11	1	Curved Extrusion
12	1	22.34" Horizontal Extrusion w/ Angle Cut
13	1	8.645" Horizontal Extrusion
14	1	22.34" Horizontal Extrusion w/ Angle Cut
15	1	22.34" Horizontal Extrusion w/ Angle Cut
16	1	8.645" Horizontal Extrusion
17	1	22.34" Horizontal Extrusion w/ Angle Cut

Steps:

- 2) Attach vertical extrusions [4 & 5] to oval base plates [2&3].
- 3) Attach horizontal pieces [12, 13, & 14] to vertical extrusion [4].
Note: Place Infill between horizontals and verticals as shown.
- 4) Attach horizontal pieces [15, 16, & 17] to vertical extrusion [5].
Note: Place Infill between horizontals and verticals as shown.
- 5) Assemble curved pieces together [6 thru 11] as shown.
- 6) Connect assembled circular frame between vertical assemblies using horizontals as shown, placing infills where indicated.
- 7) Apply circular graphic to back of circular frame.
- 8) Attach monitor mount to vertical extrusion [5]. Refer to detail.

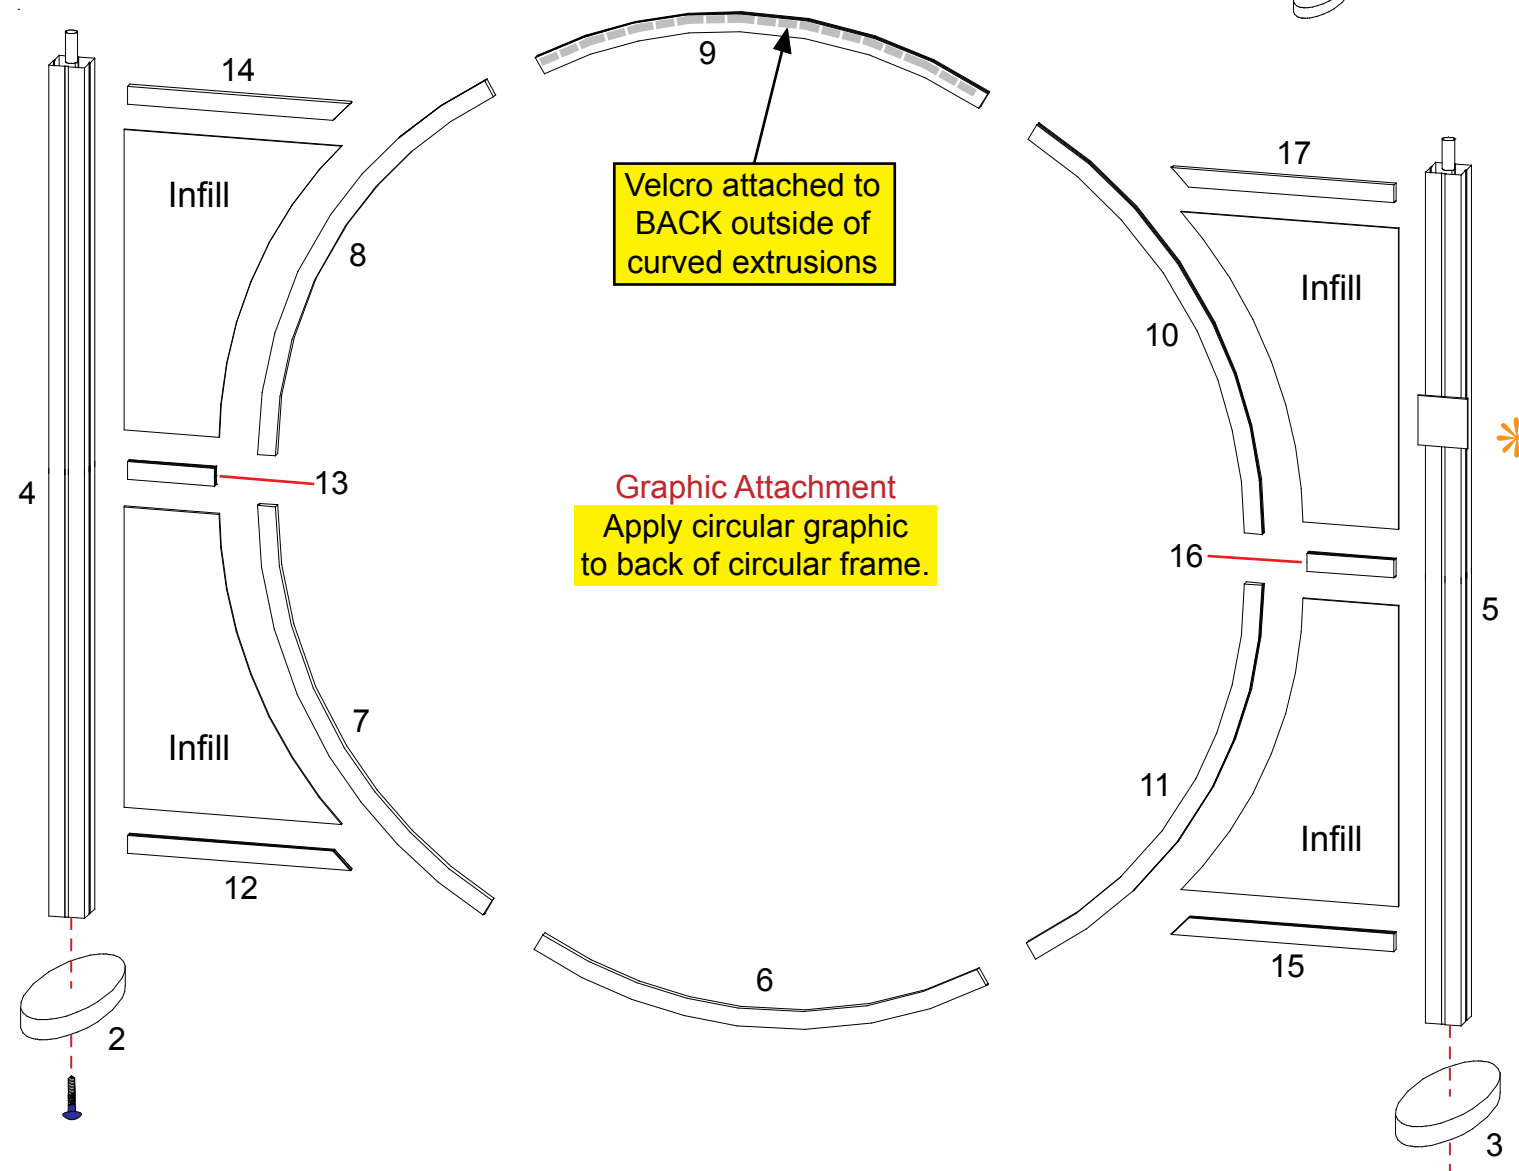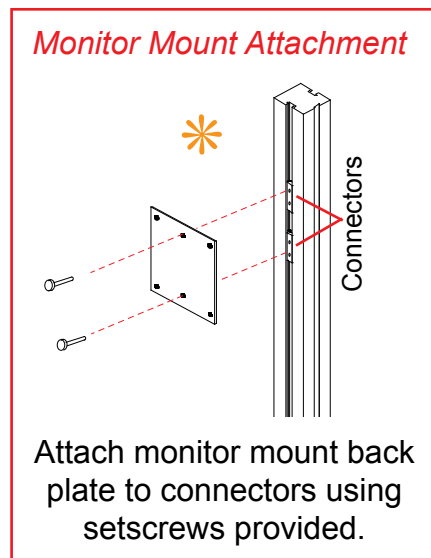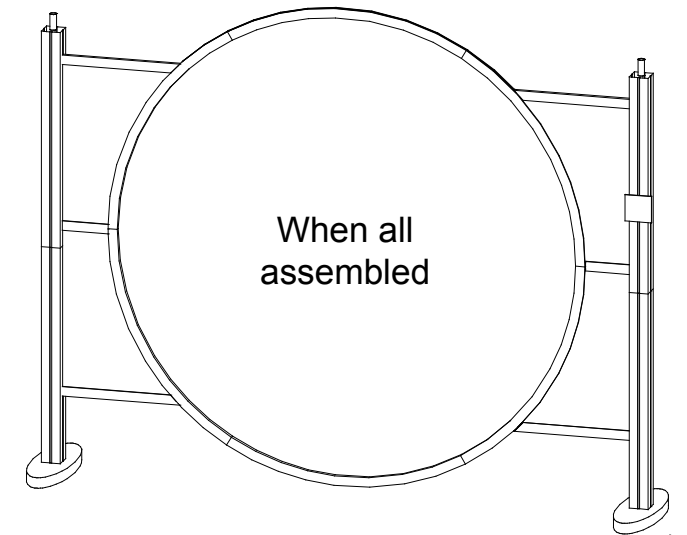

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING




Using Your Setup Instructions

The Aero Overhead Sign Setup Instructions are created specifically for your configuration. They include an exploded view of the frame which is sequentially numbered. We encourage you to study the instructions before attempting to assemble your exhibit.



Connections are kept very simple: no tools. Everything assembles with push-button connectors and pre-connected horizontal sections.

Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

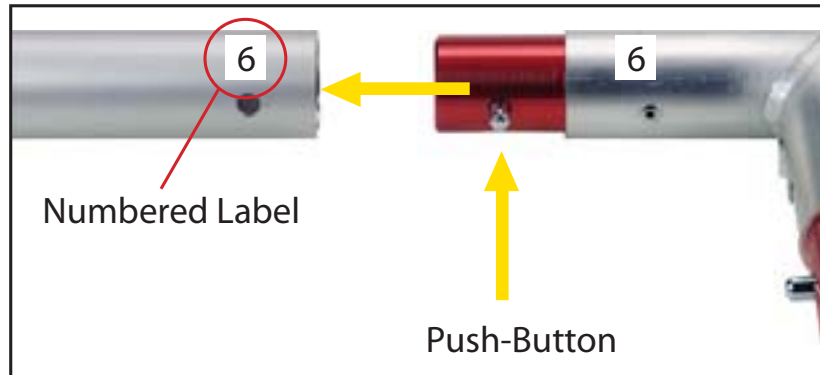

Connections are made by holding the button down and sliding the red tube into opposing tube until the connection is made. To disassemble push button and pull or twist extrusions apart.

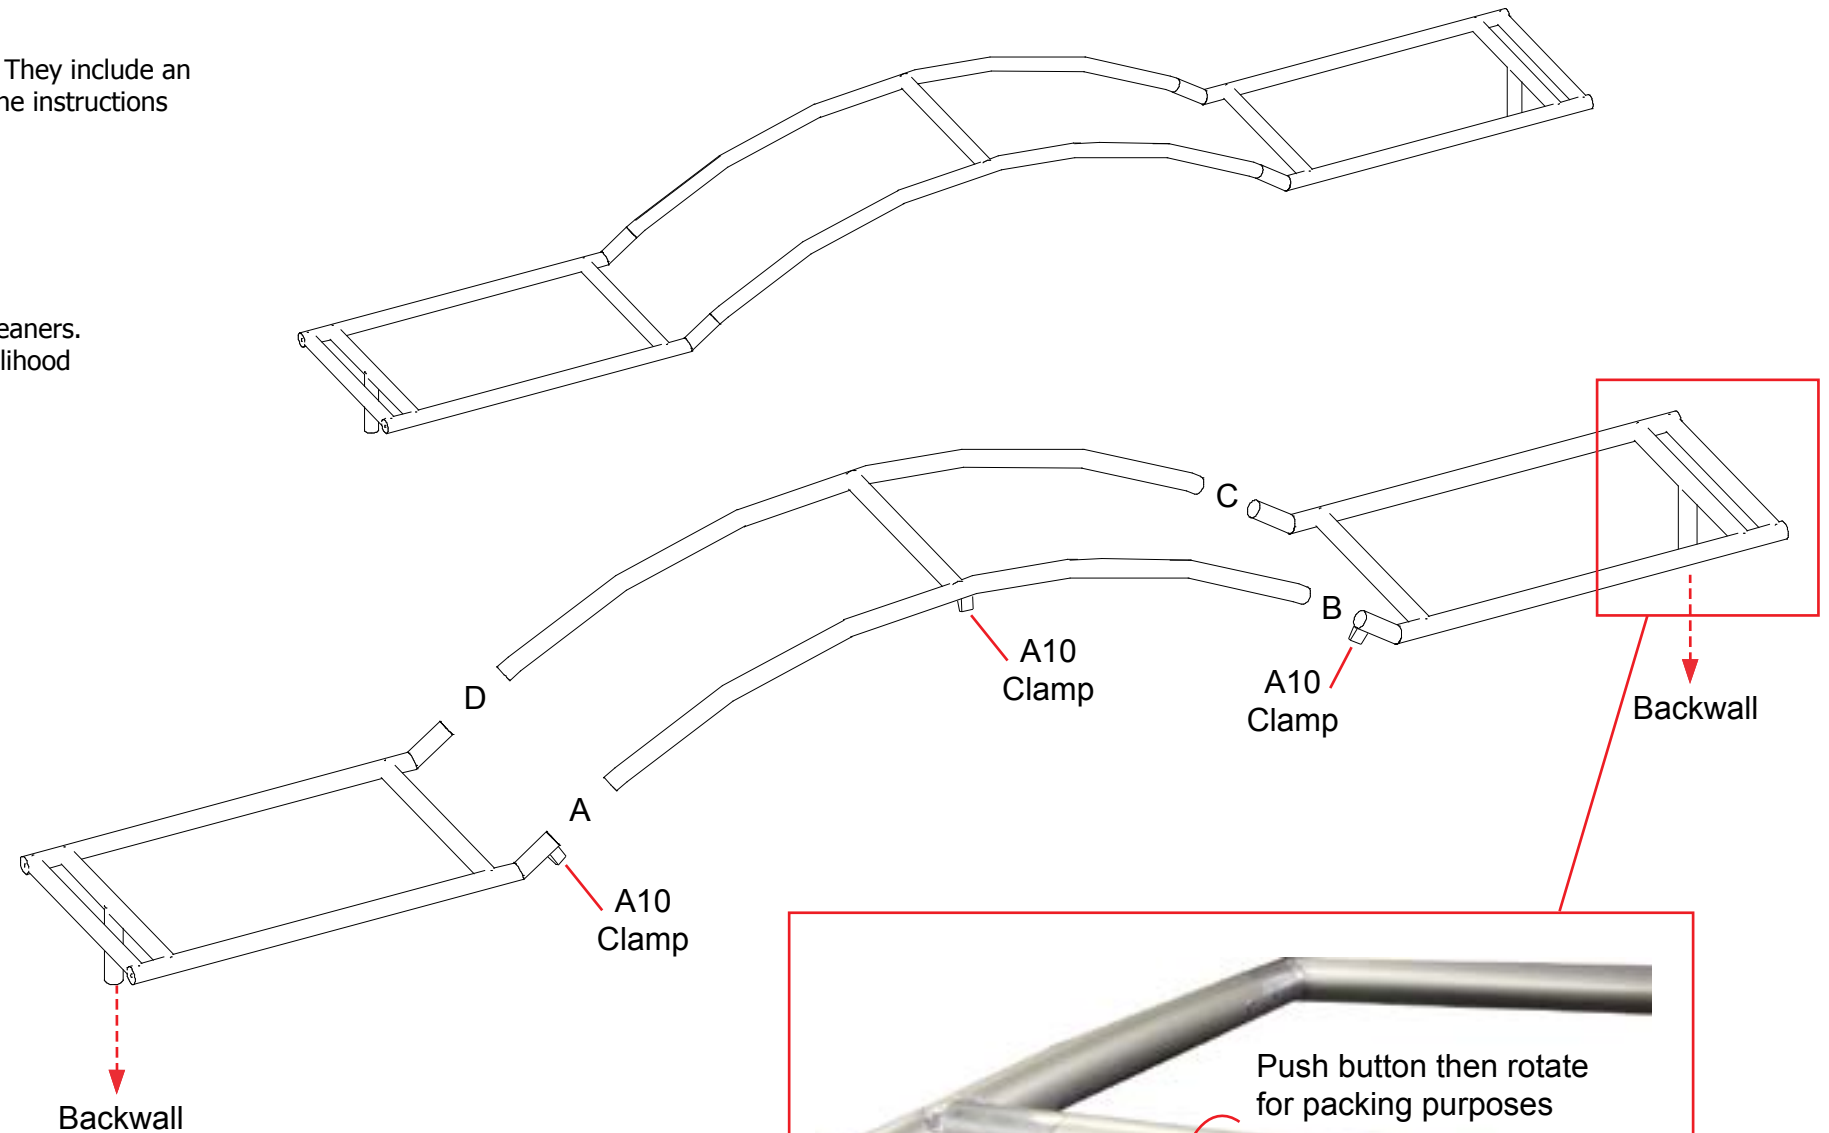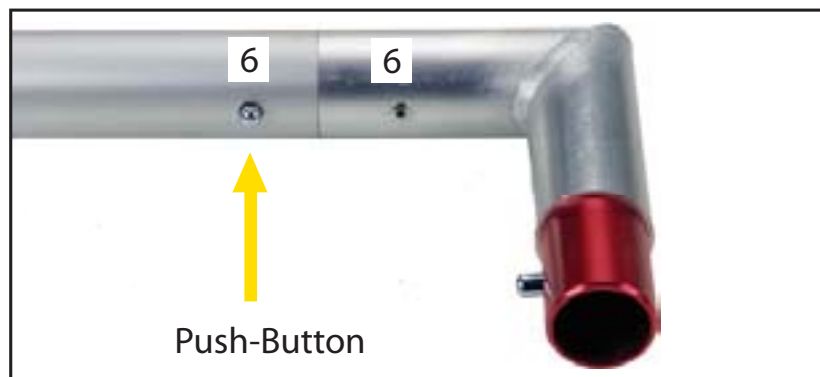

- Steps:
- 1) Connect canopy pieces together as shown.
 - 2) Apply pillow case graphic to assembled canopy

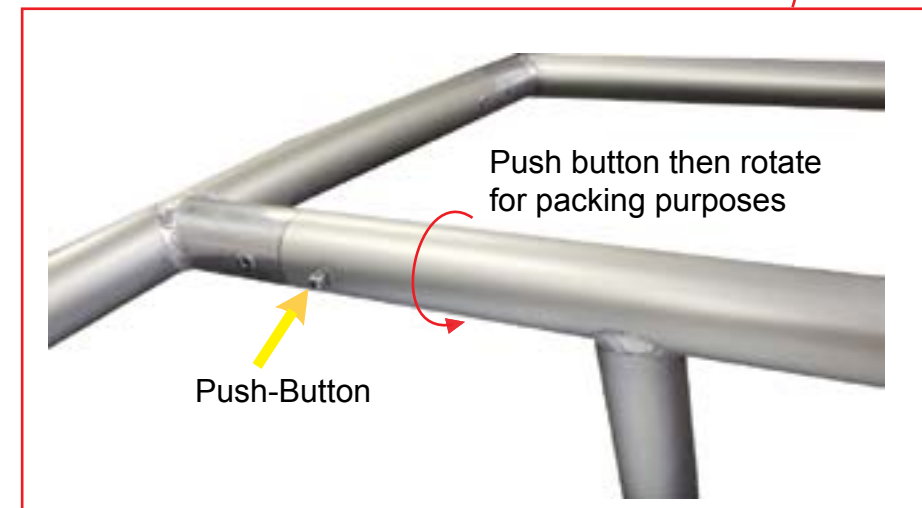





WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Steps:

- 1) Place canopy atop assembled backwall as shown.
- 2) Attach graphic header to canopy using A10 clamps.
- 3) Attach shelf support [18] perpendicular to shelf support [19].
- 4) Lock shelf support assemblies to vertical as shown.
- 5) Place shelves atop shelf supports and secure in place.

Item	Qty.	Description:
18	5	8" Shelf Support
19	5	6" Shelf Support

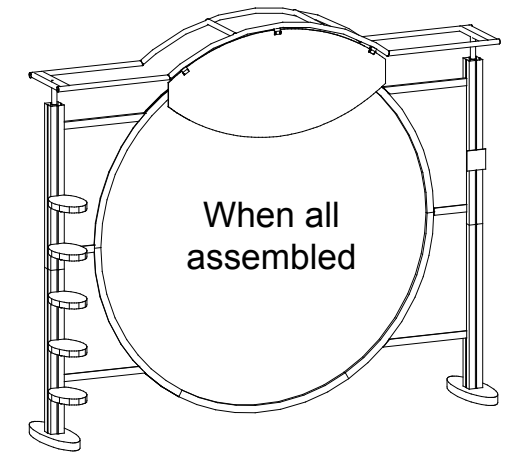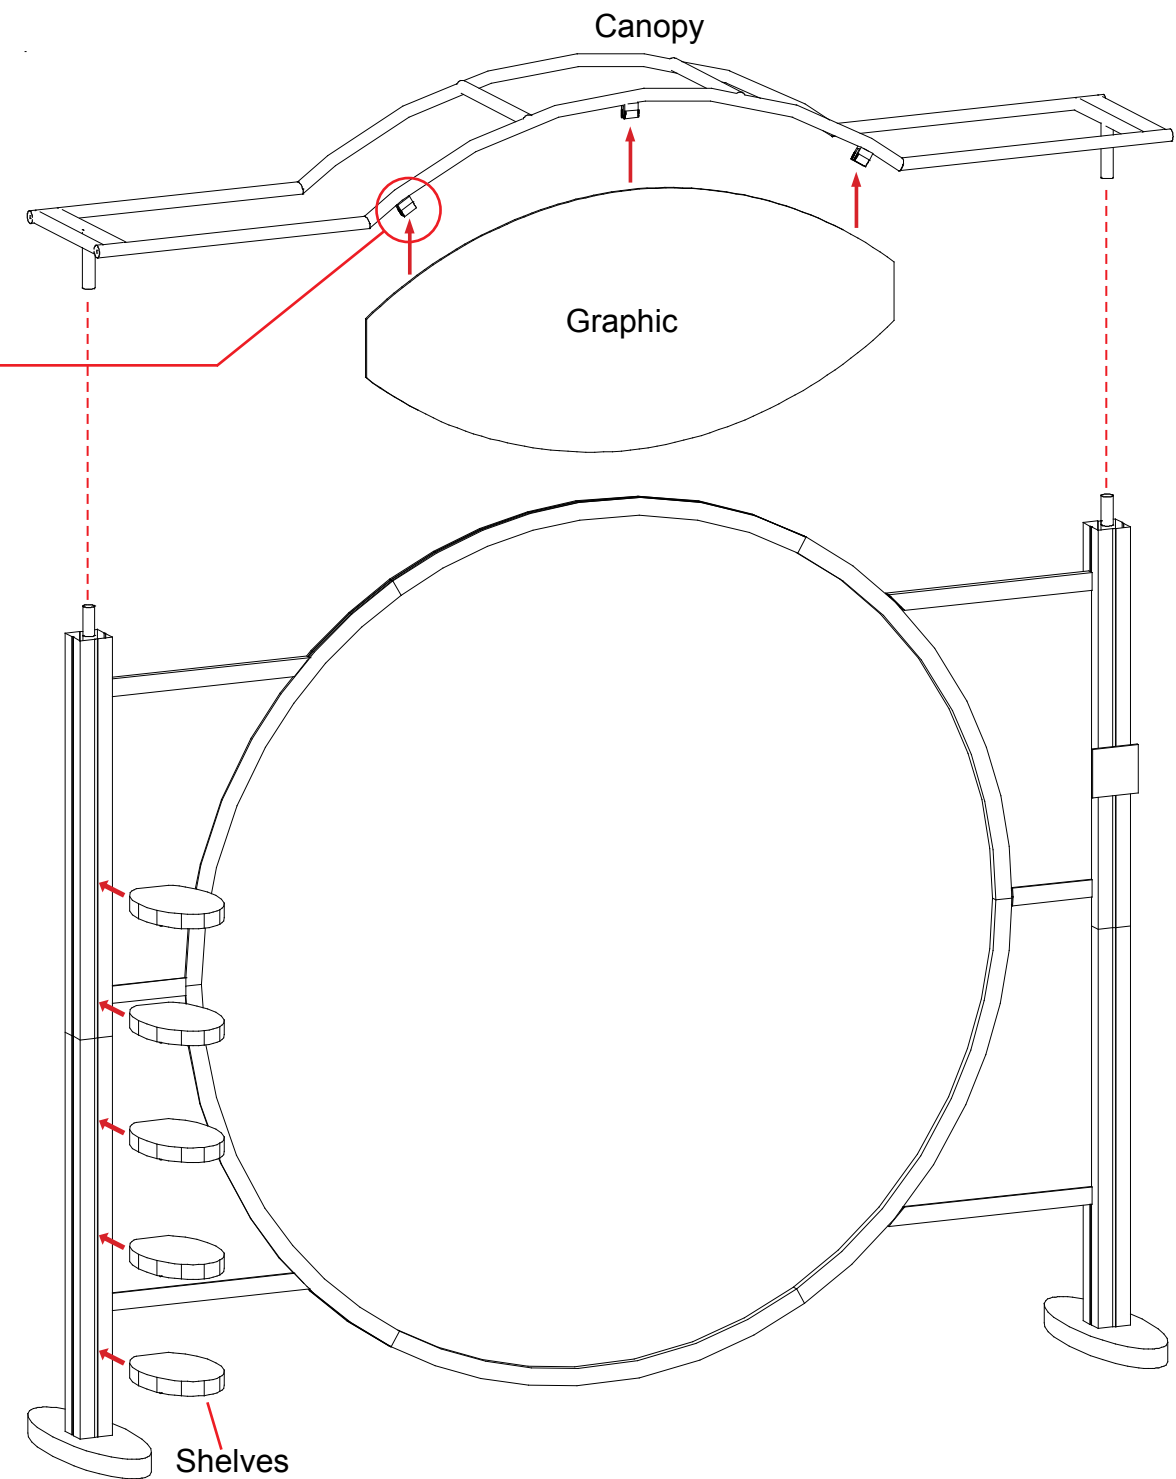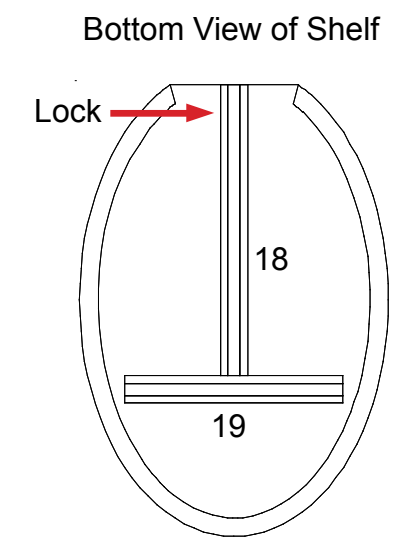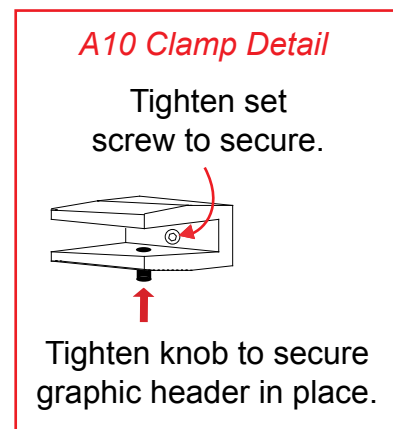





WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item #	Qty.	Description:
1	1	30"h Square Vertical Extrusion


Item #	Description:
1	38"h 90d Corner Connector
2	19"w x 38"h Panel with Door
3	19"w x 38"h Panel with Door
4	38"h 90d Corner Connector
5	19"w x 38"h Panel
6	38"h 90d Corner Connector
7	19"w x 38"h Panel
8	19"w x 38"h Panel
9	38"h 90d Corner Connector
10	19"w x 38"h Panel

Steps:

- 1) Assemble LT panels by starting at # [1] and continue in numerical order.
- 2) Velcro attach shelf supports to inside of assembled panels as shown.
- 3) Place shelf atop shelf supports.
- 4) Place counter top atop assembled pedestal.
- 5) Attach vertical extrusion [1] atop counter top.
- 6) Velcro attach front graphic to front of assembled pedestal.
- 7) Attach monitor mount to vertical extrusion [1]. Refer to detail.

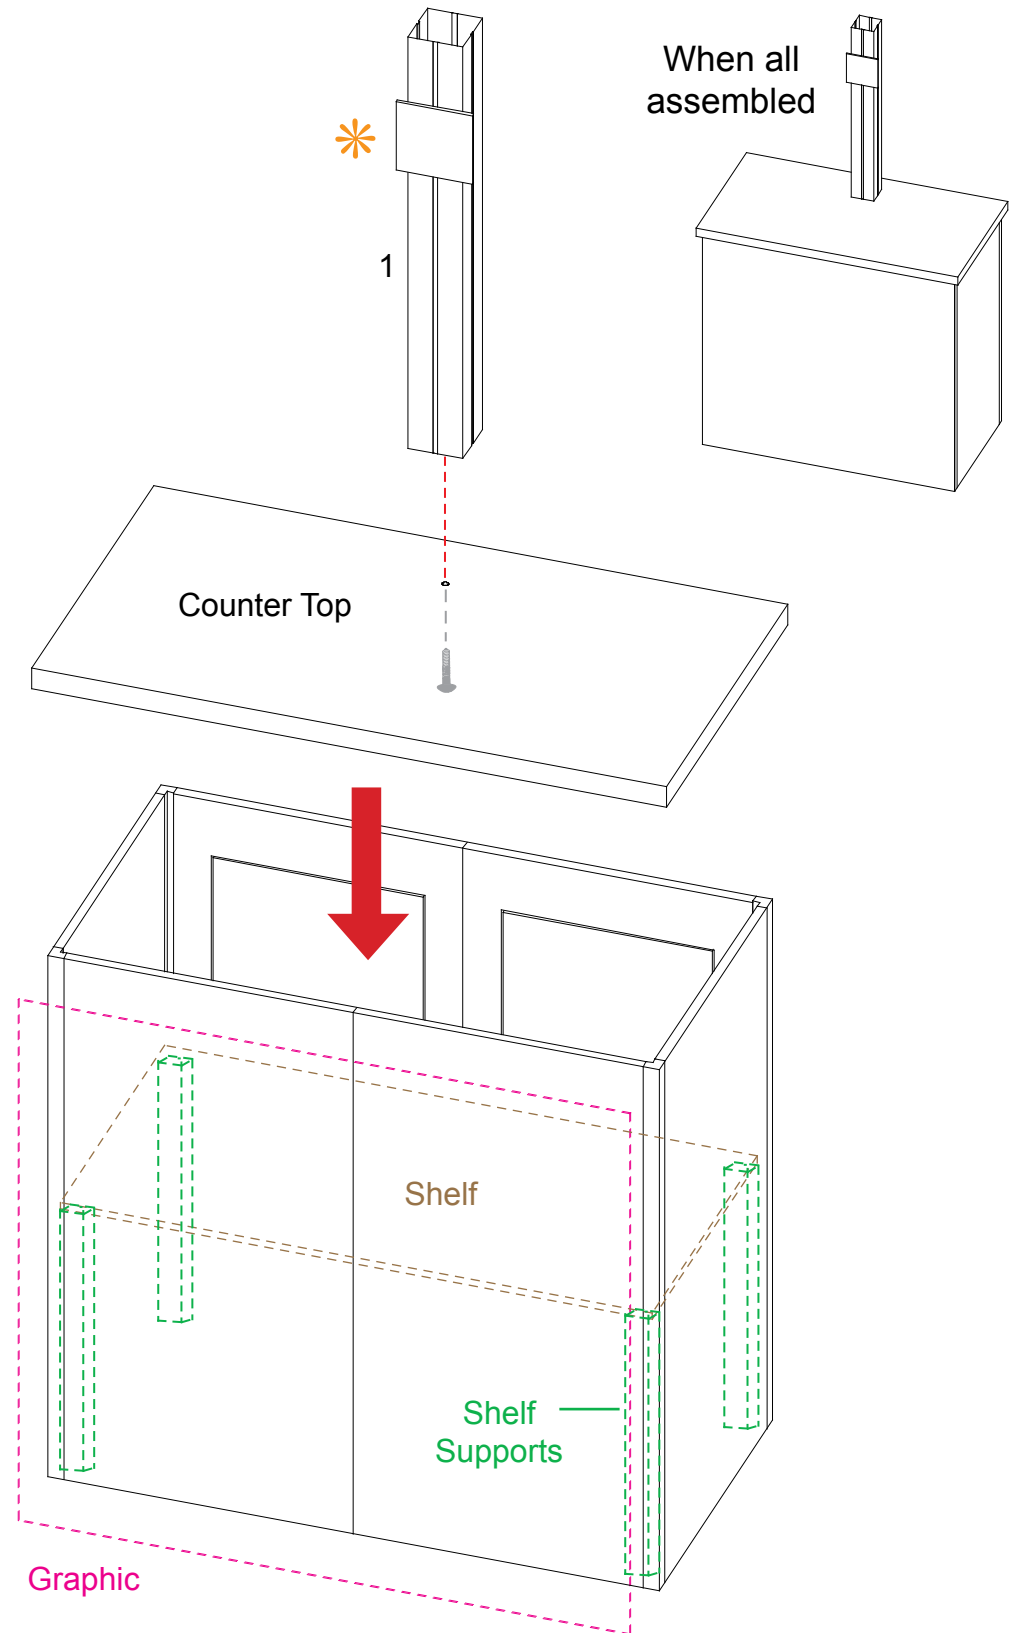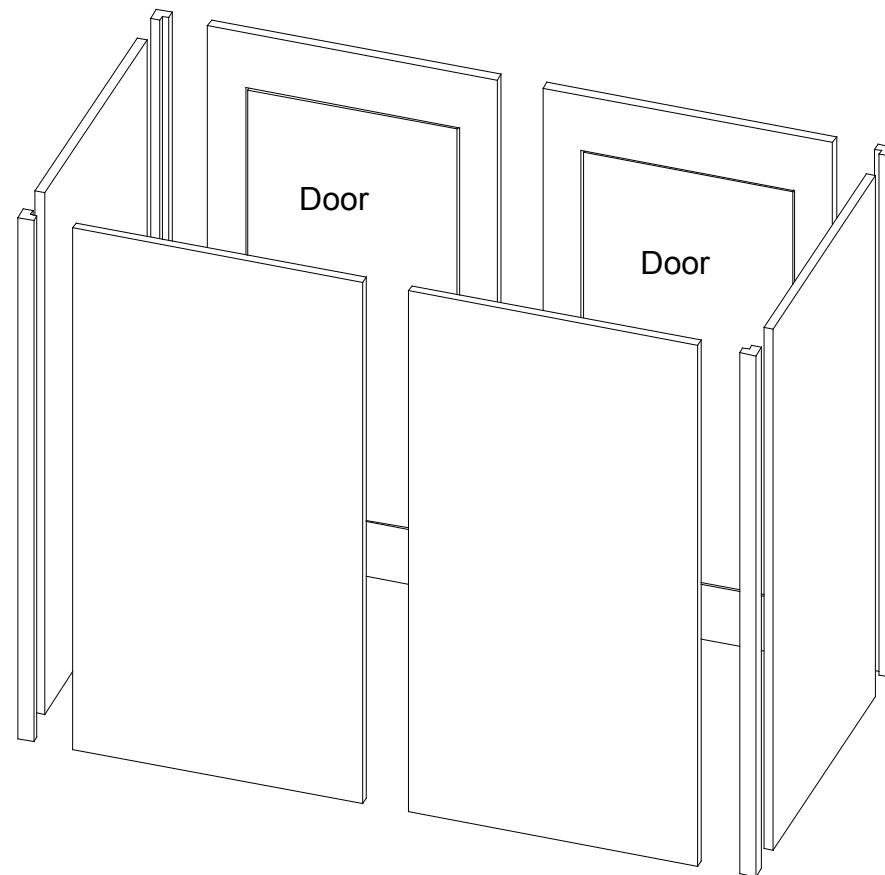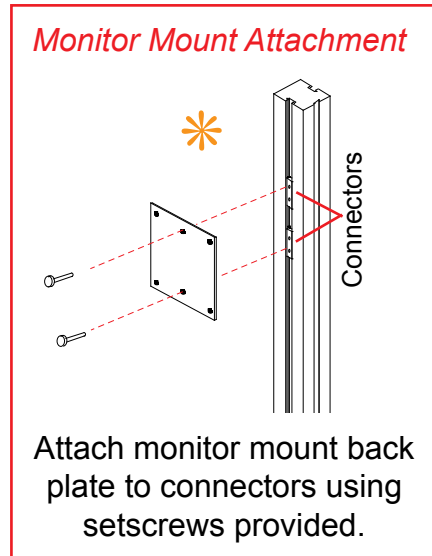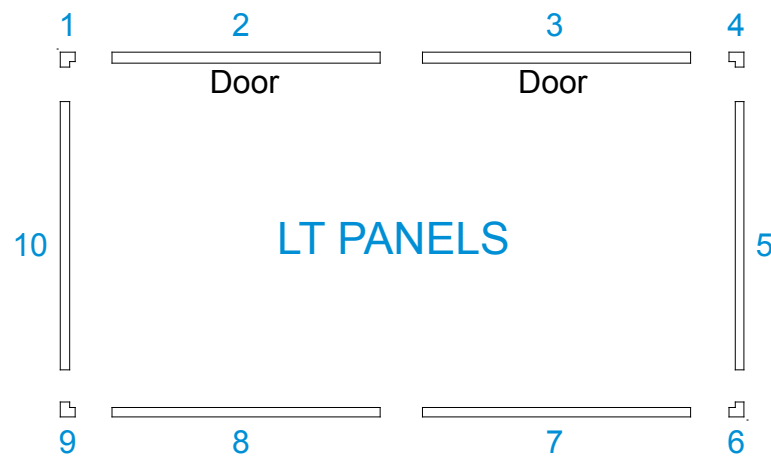


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

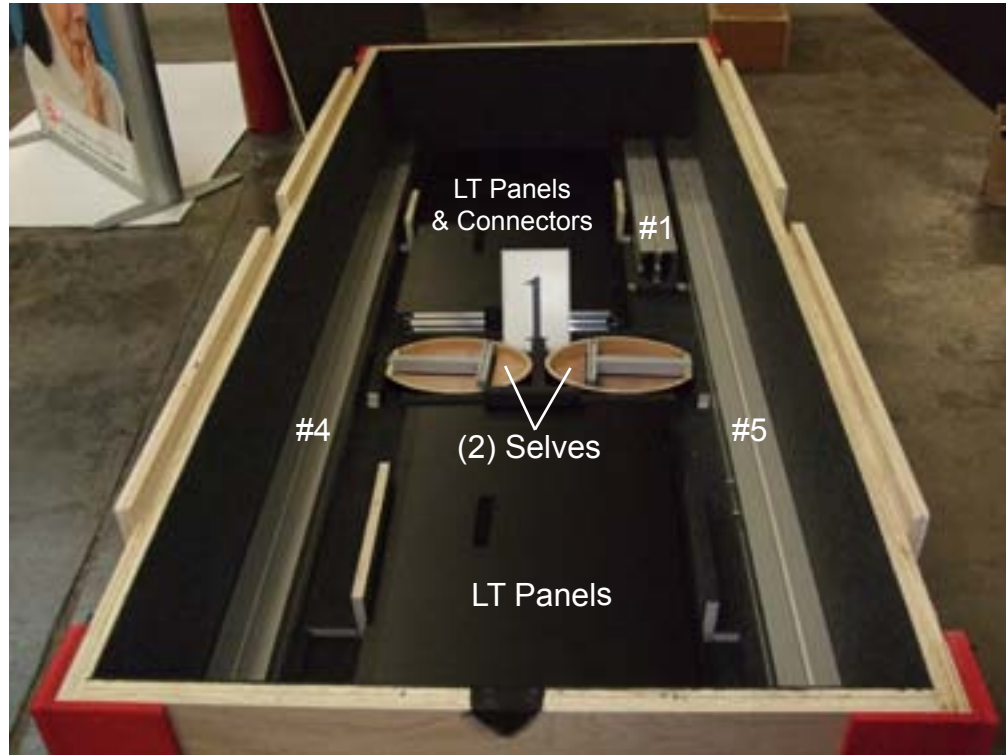


Level 1



Level 2

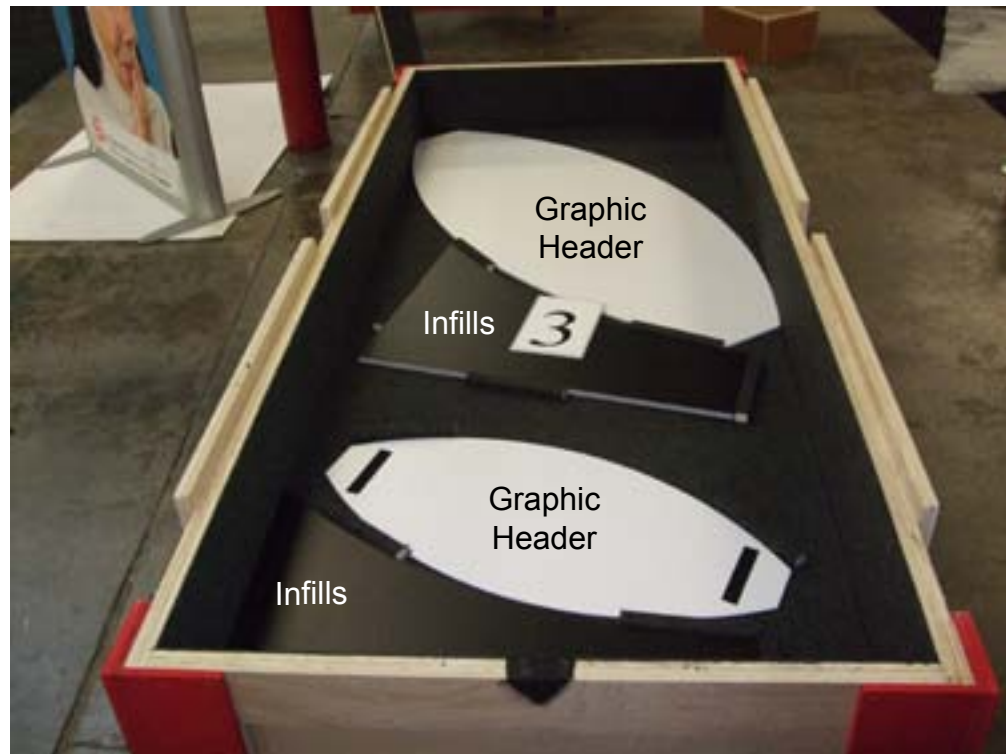

Level 1

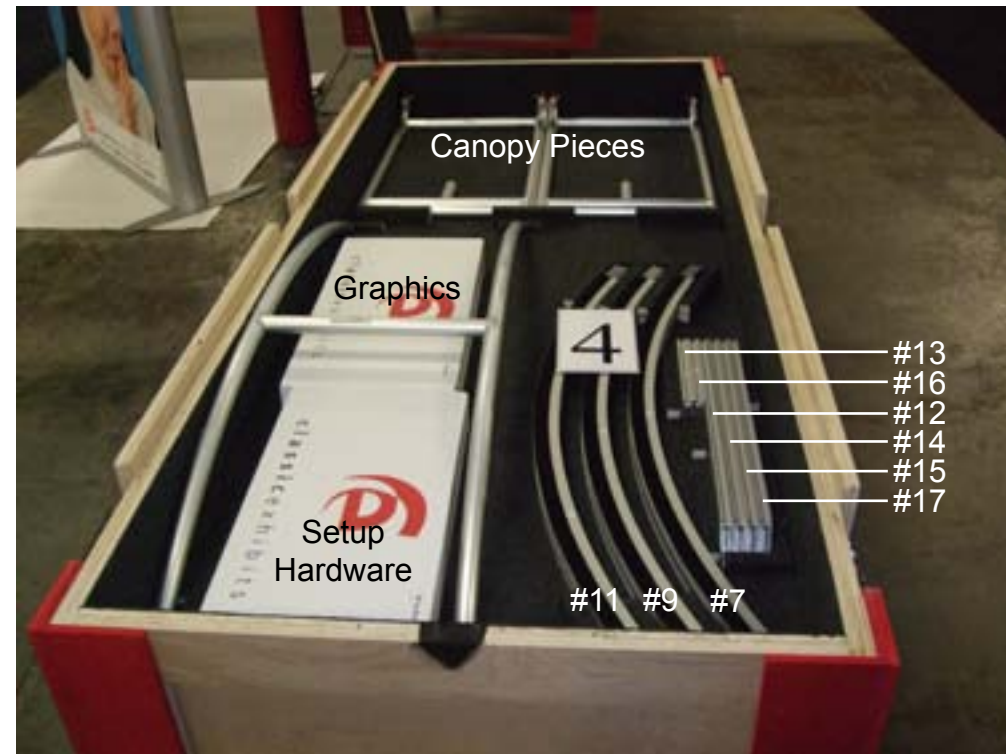

Level 2

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING