


Plan View

10'

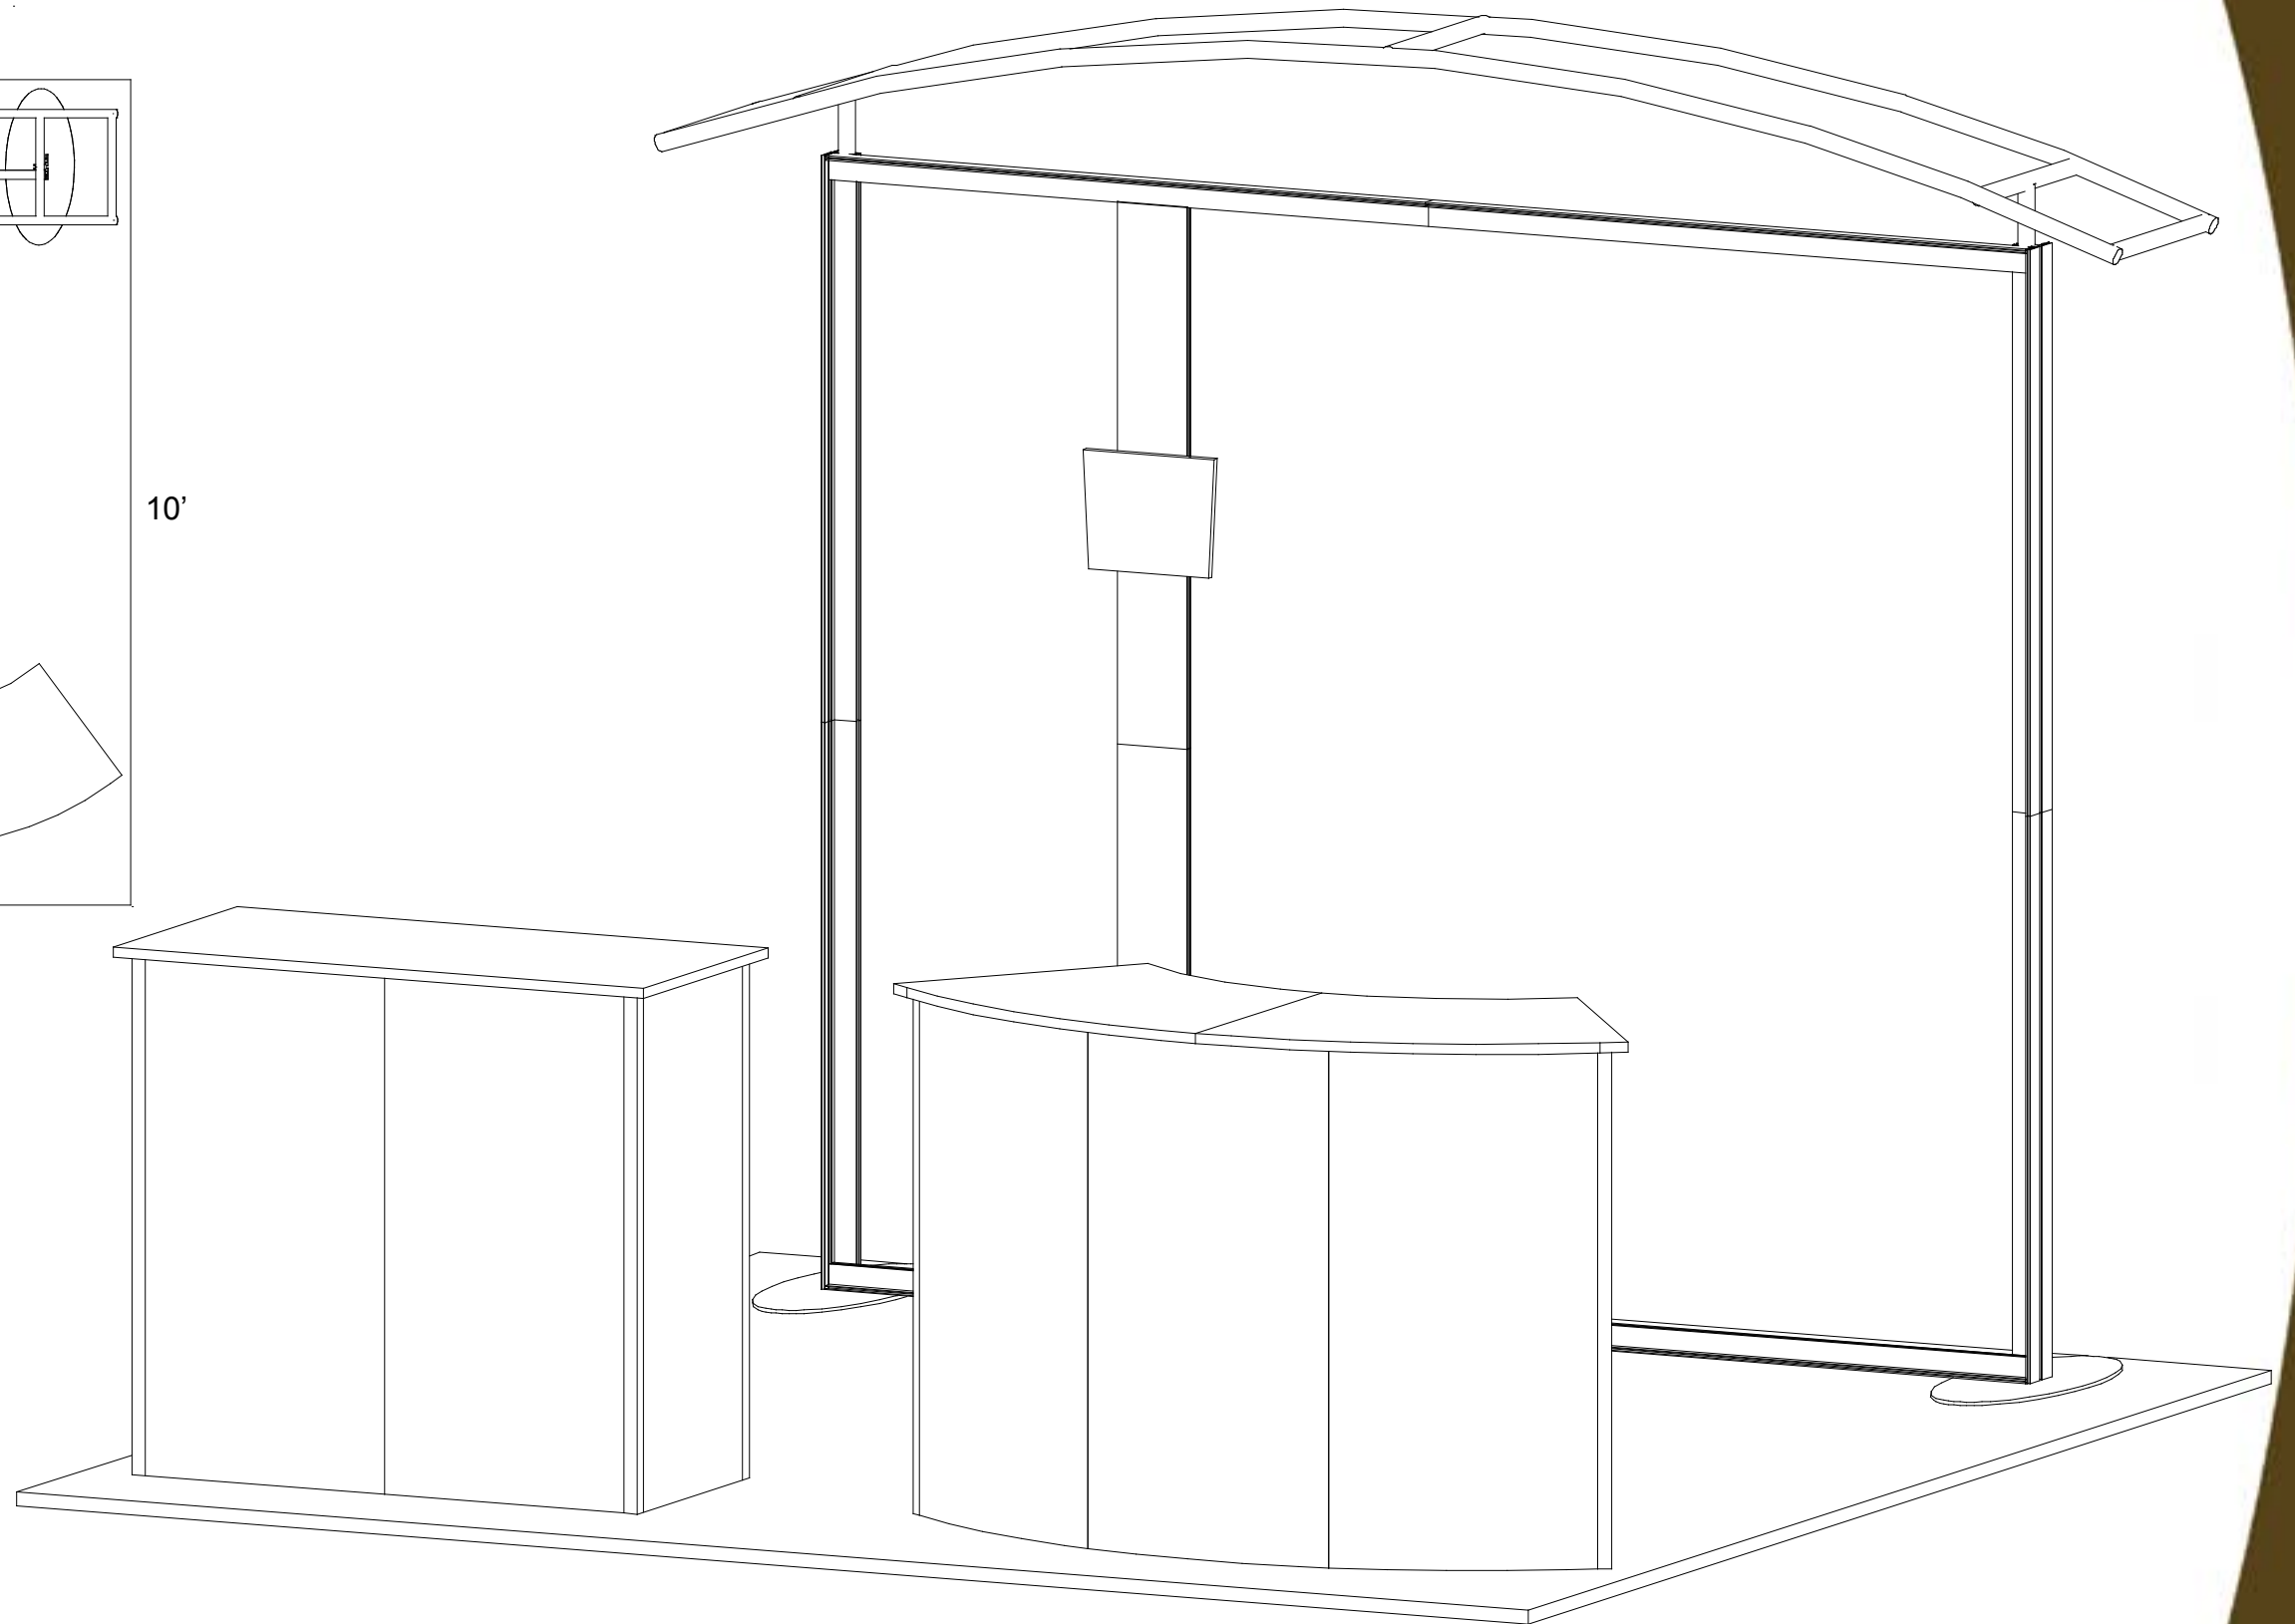

General Setup Instructions

Using Your Setup Instructions


The Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or Eco Glass inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage. Each Layer will be labeled with the packing order.


General Setup Instructions for Panel System

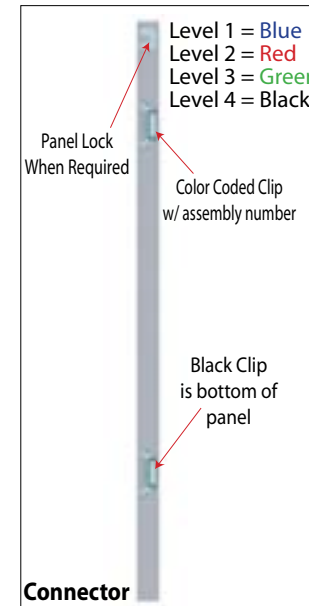

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish the level. The color coded clip also contains the numbered label.

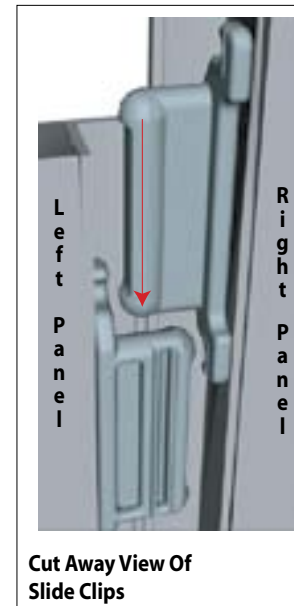

Components connect together by aligning them and sliding downward connecting clips together.

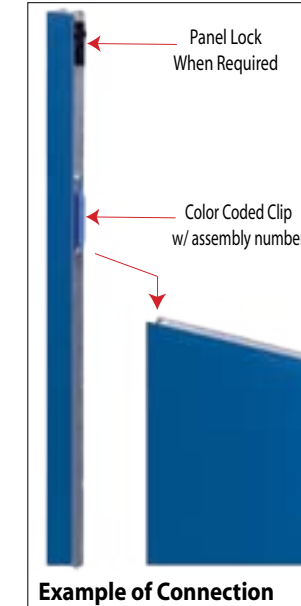

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.



The first level of components contains panel locks that are located at the top of the panel for extra stability and a seamless connection. When disassembling panels, twist top connection slightly and lift right panel upward.


General Setup Instructions for Extrusion System




Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, other tools may be needed.



Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

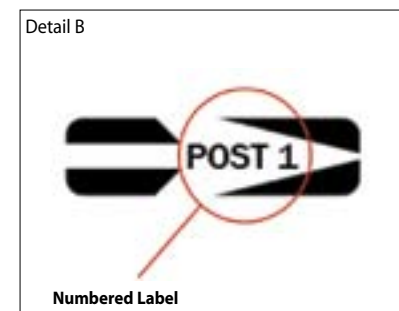


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

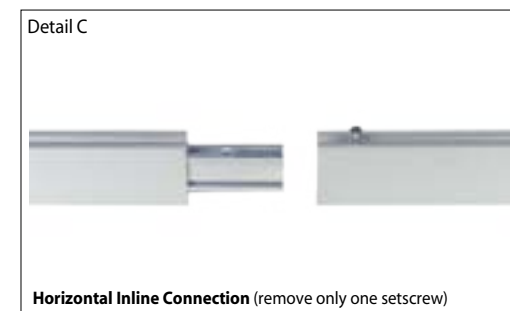

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.



Attach base plate to vertical extrusion using the lock provided. Place base plate on ground and set vertical post/lock in base plate slot. Tighten lock with Multitool.

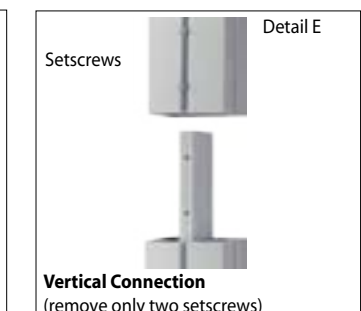


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

SEG Graphic: To Ensure Proper Fit

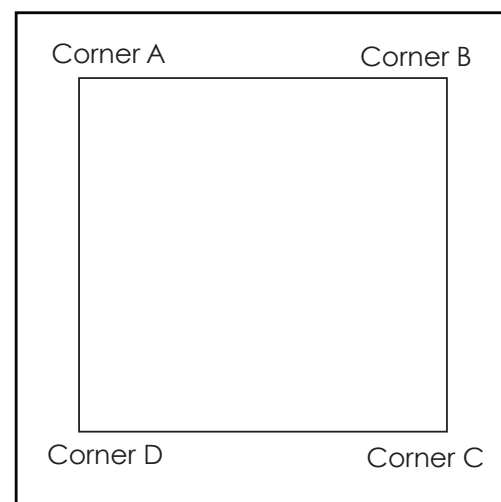

It is important to first insert graphic into each alternater corner then to the sides of the frame.
If this is not done, graphic will not fit into the frame.



Step 1
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side



Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of



Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center.

Graphic Removal





To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.

Item Number	Qty.	Description
1	2	Base Plate
2	1	41" h TSP50 Vertical Extrusion
3	1	41" h TSP50 Vertical Extrusion
4	1	41" h TSP50 Vertical Extrusion
5	1	41" h TSP50 Vertical Extrusion
6a/6b	1/1	47.6" w TSP46 Horizontal Extrusion
6c/6d	1/1	47.6" w TSP46 Horizontal Extrusion w/ Canopy Mounts
7a/7b	1/1	39.2" h Z140 Vertical Extrusion

Steps:

- 1) Connect vertical extrusions [2,4] to base plates. See Detail D on the *General Setup Instructions* page.
- 2) Connect vertical extrusions [3,5] to verticals [2,4] as shown.
- 3) Connect horizontal extrusions [6a,6b] and attach between vertical assemblies [2/3,4/5] as shown.
- 4) Connect vertical extrusions [7a,7b] and attach between horizontal assemblies [6a/6b] as shown.
- 5) Attach assembled canopy to canopy mounts on assembled backwall
- 6) Apply SEG Graphics. See *Graphics Detail* on previous page.
- 7) Attach monitor mount to vertical assembly [7a/7b] with screws.

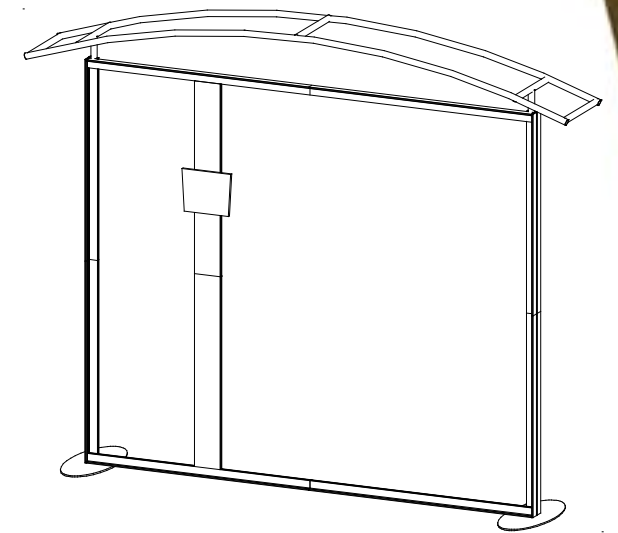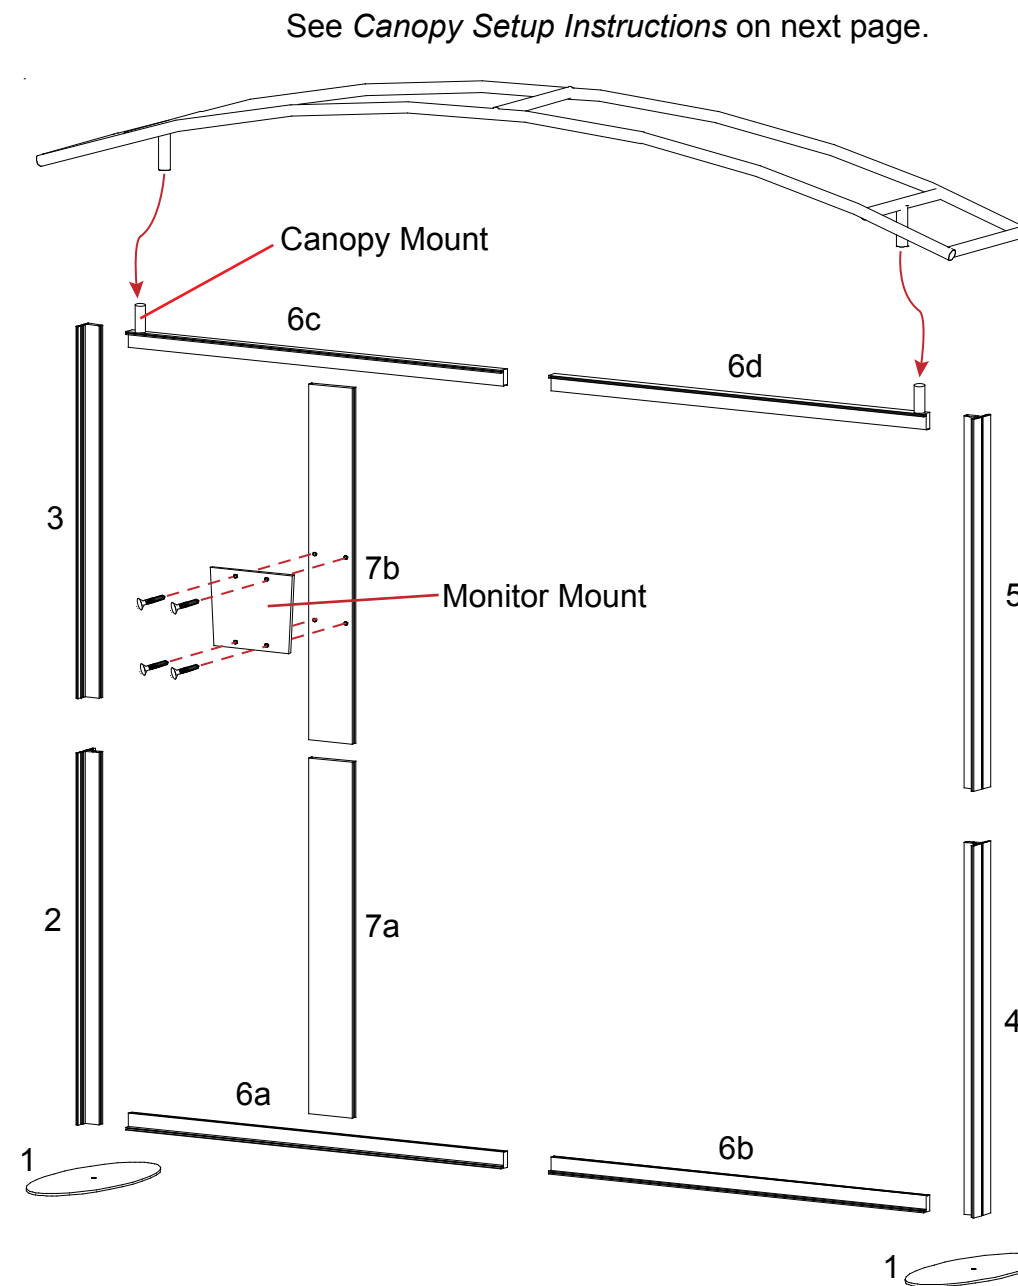




Using Your Setup Instructions

The Aero Overhead Setup Instructions are created specifically for your configuration. They include an exploded view of the frame which is sequentially numbered. We encourage you to study the instructions **before** attempting to assemble your exhibit.


Push-button connectors and pre-connected horizontal sections make assembly very simple. No tools are required for assembly.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



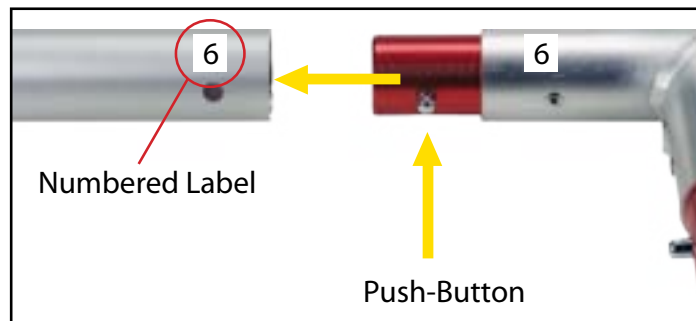


Connections are made by holding the button down and sliding the red tube into the opposing tube until it locks in place. To disassemble, push button and pull or twist extrusions apart.

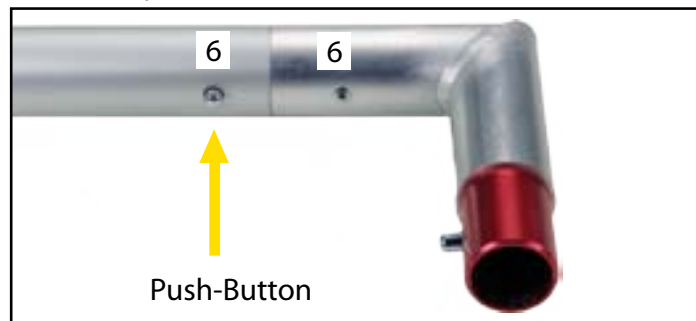

Steps:

- 1) Connect canopy pieces together as shown.
- 2) Apply pillow case graphic to assembled canopy.

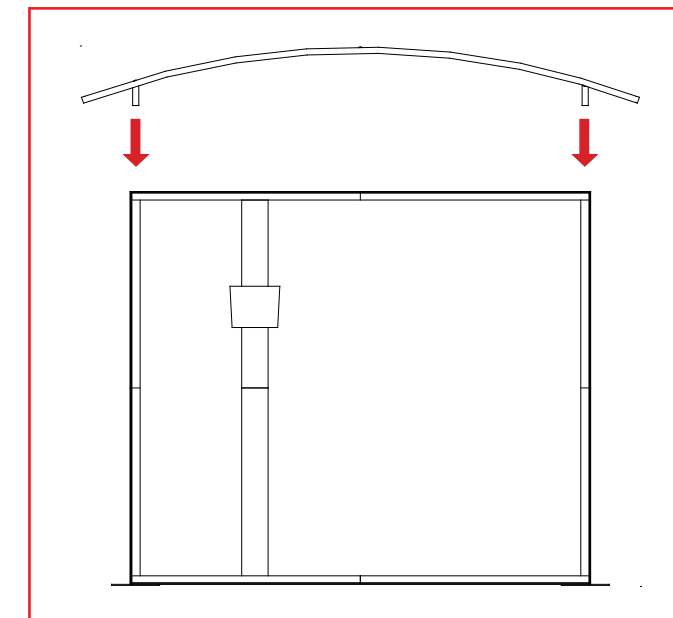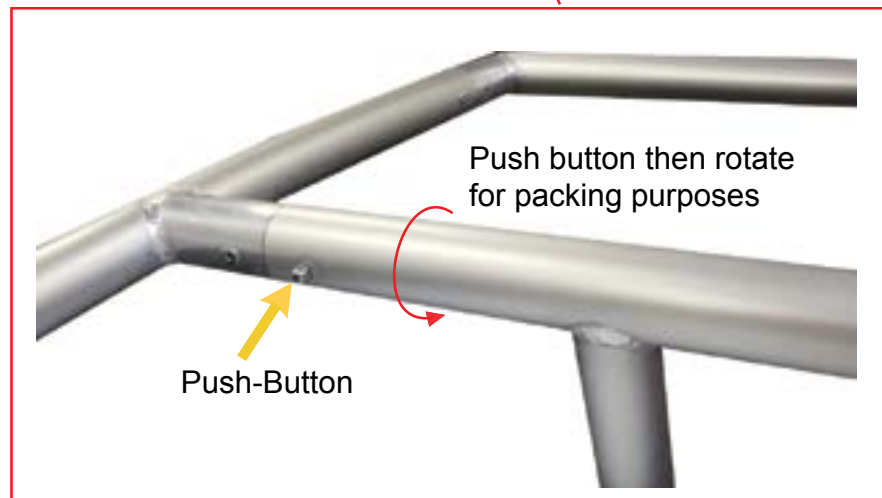
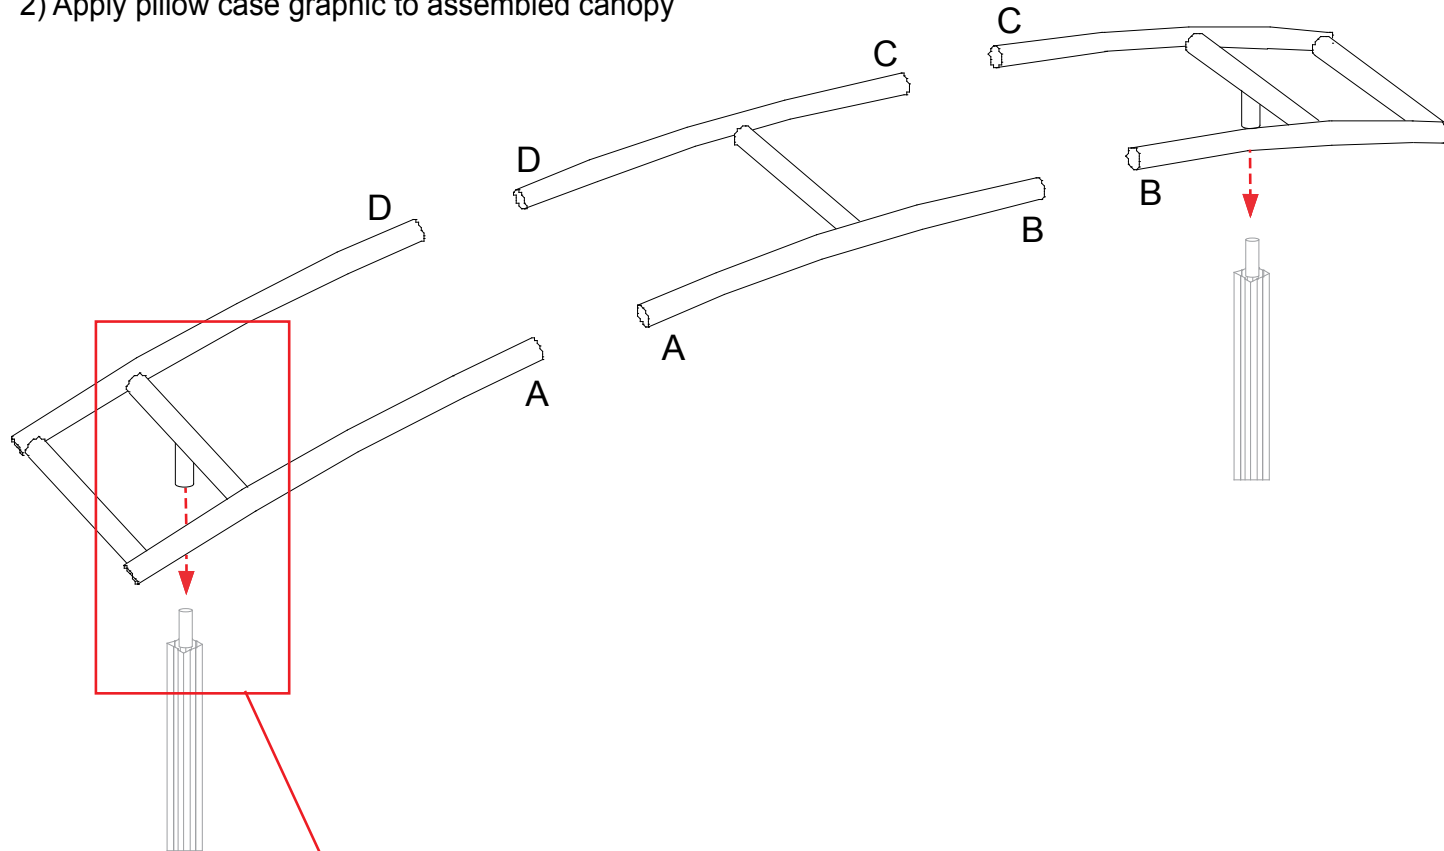


Steps:

- 1) Connect Panels in numerical order. See *General Setup Instructions for Panel Systems* on the *General Information Page*.
- 2) Attach **shelf supports** to velcro on assembled cabinet.
- 3) Place **shelf** on **shelf supports** and counter top on assembled cabinet.

Item Number	Description
8	37.5" h 90° Connector
9	19" w x 37.5" h Door Panel
10	19" w x 37.5" h Door Panel
11	37.5" h 90° Connector
12	16" w x 37.5" h Panel
13	37.5" h 90° Connector
14	19" w x 37.5" h Panel
15	19" w x 37.5" h Panel
16	37.5" h 90° Connector
17	16" w x 37.5" h Panel

Top View


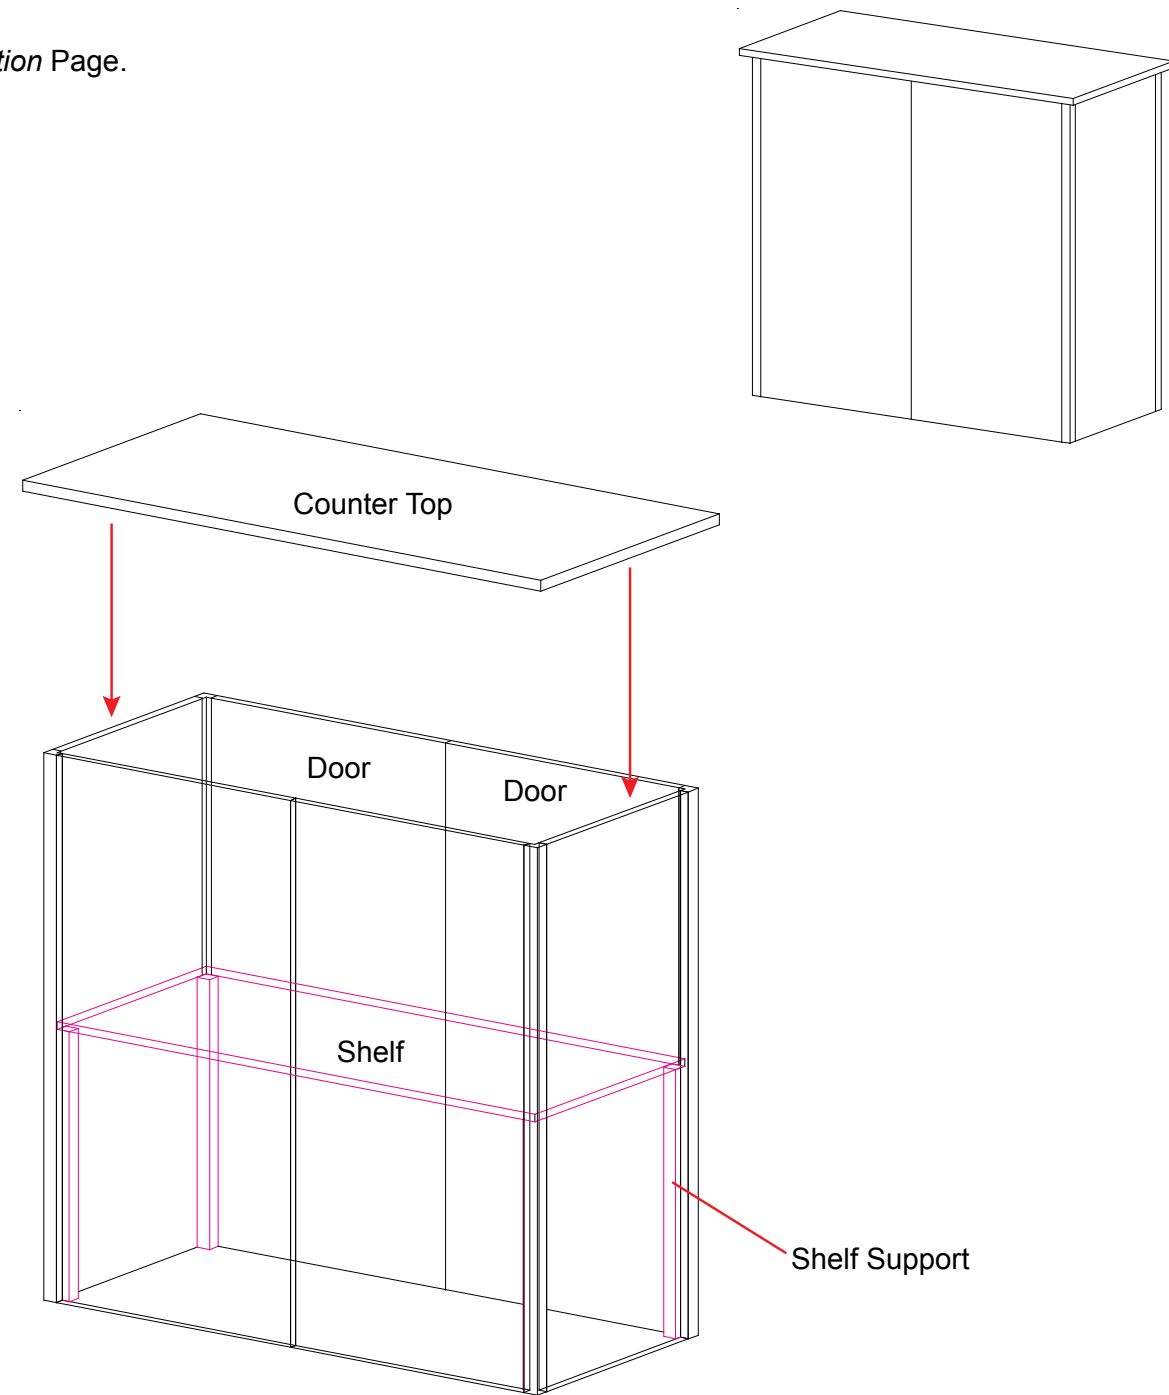
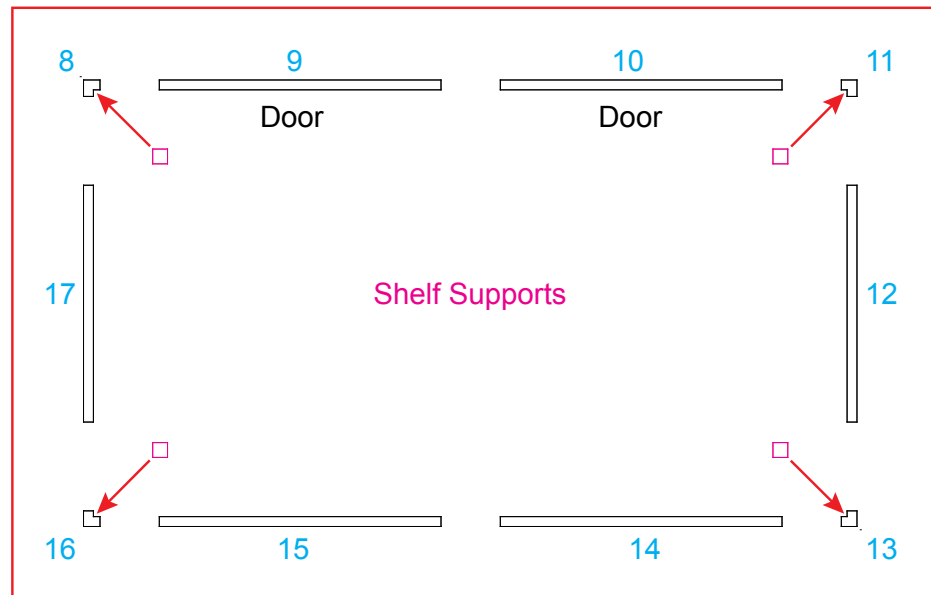


Steps:


- 1) Connect Panels in numerical order. See *General Setup Instructions for Panel Systems* on the *General Information Page*.
- 2) Attach **shelf supports** to velcro on assembled cabinet.
- 3) Place **shelves** on **shelf supports** and counter top on assembled cabinet.

Item Number	Description
18	37.5”h 90° Connector
19	17.7”w x 37.5”h Curved Door Panel
20	17.7”w x 37.5”h Curved Door Panel
21	37.5”h 90° Connector
22	16”w x 37.5”h Panel
23	37.5”h 90° Connector
24	19.3”w x 37.5”h Curved Panel
25	19.3”w x 37.5”h Curved Panel
26	19.3”w x 37.5”h Curved Panel
27	37.5”h 90° Connector
28	16”w x 37.5”h Panel


Top View

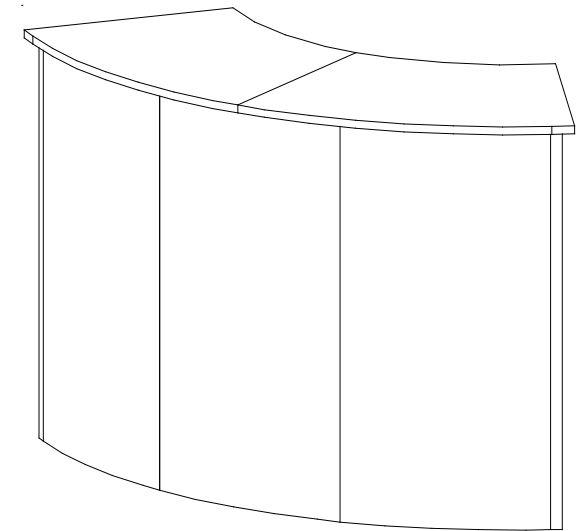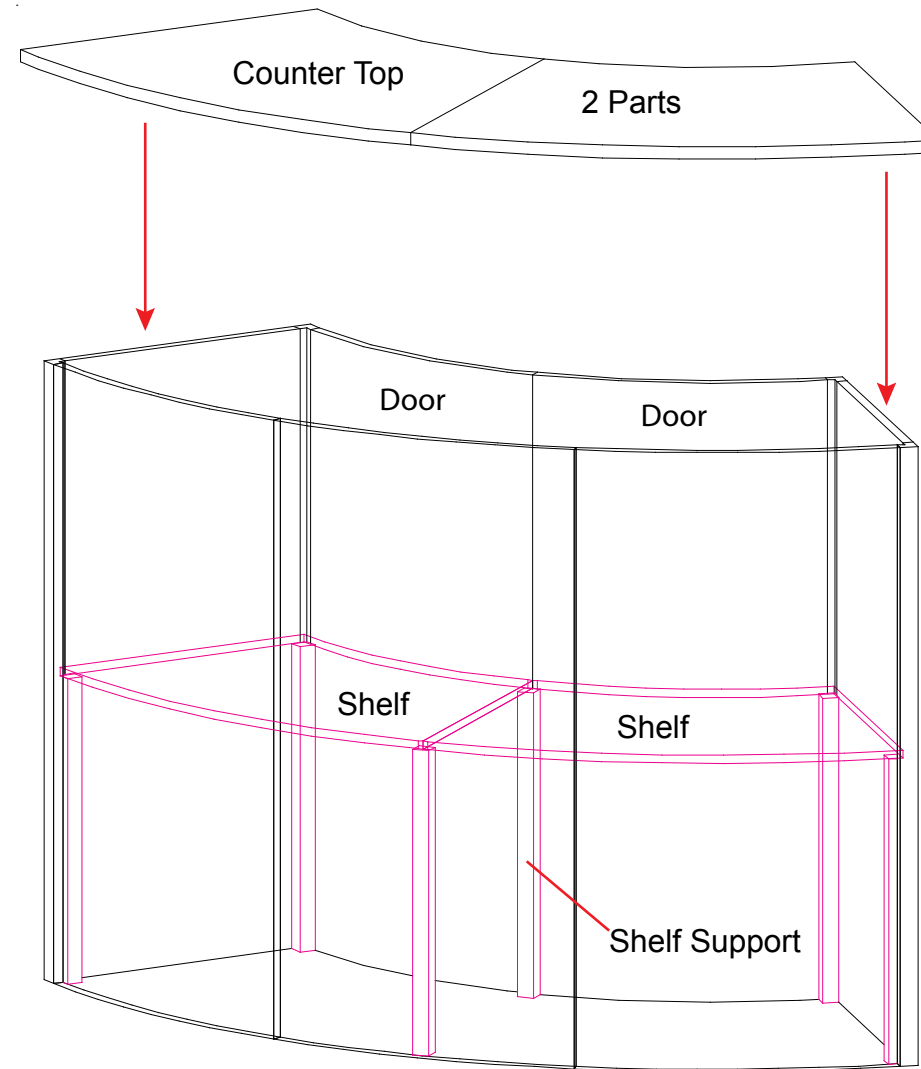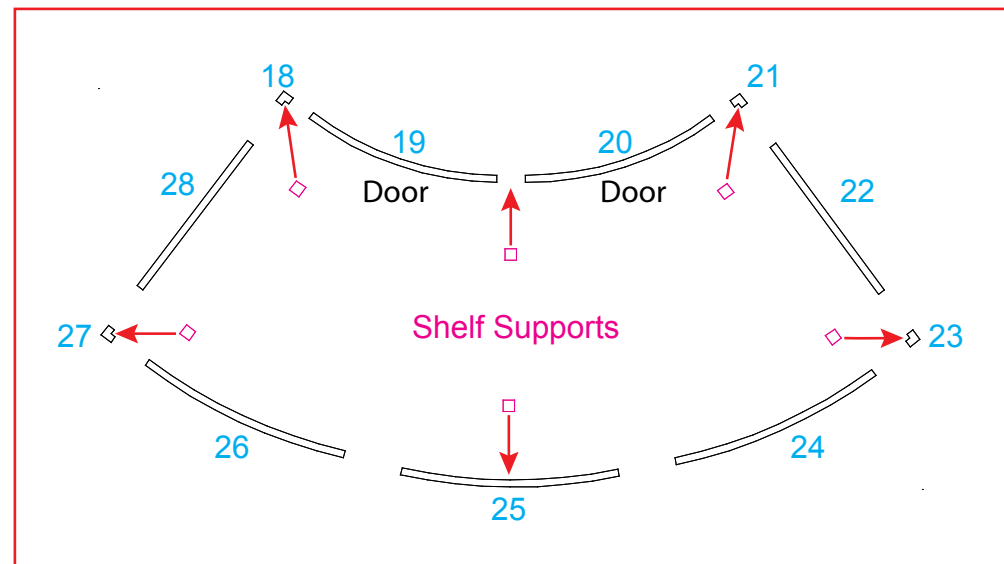


Top View: Backwall

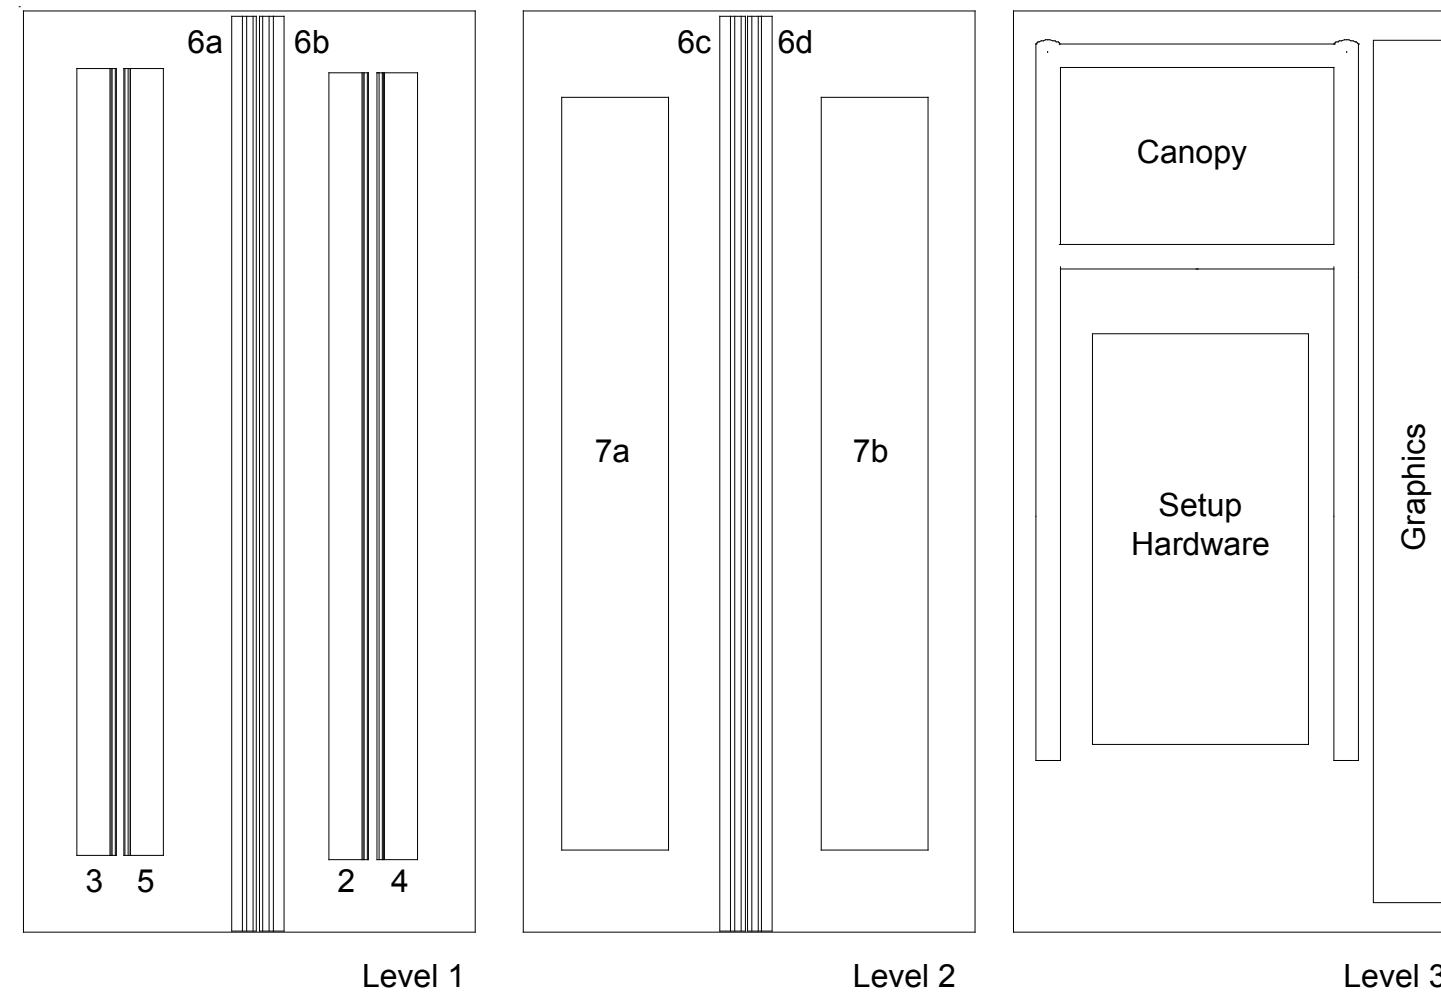

Top View: Curved Pedestal

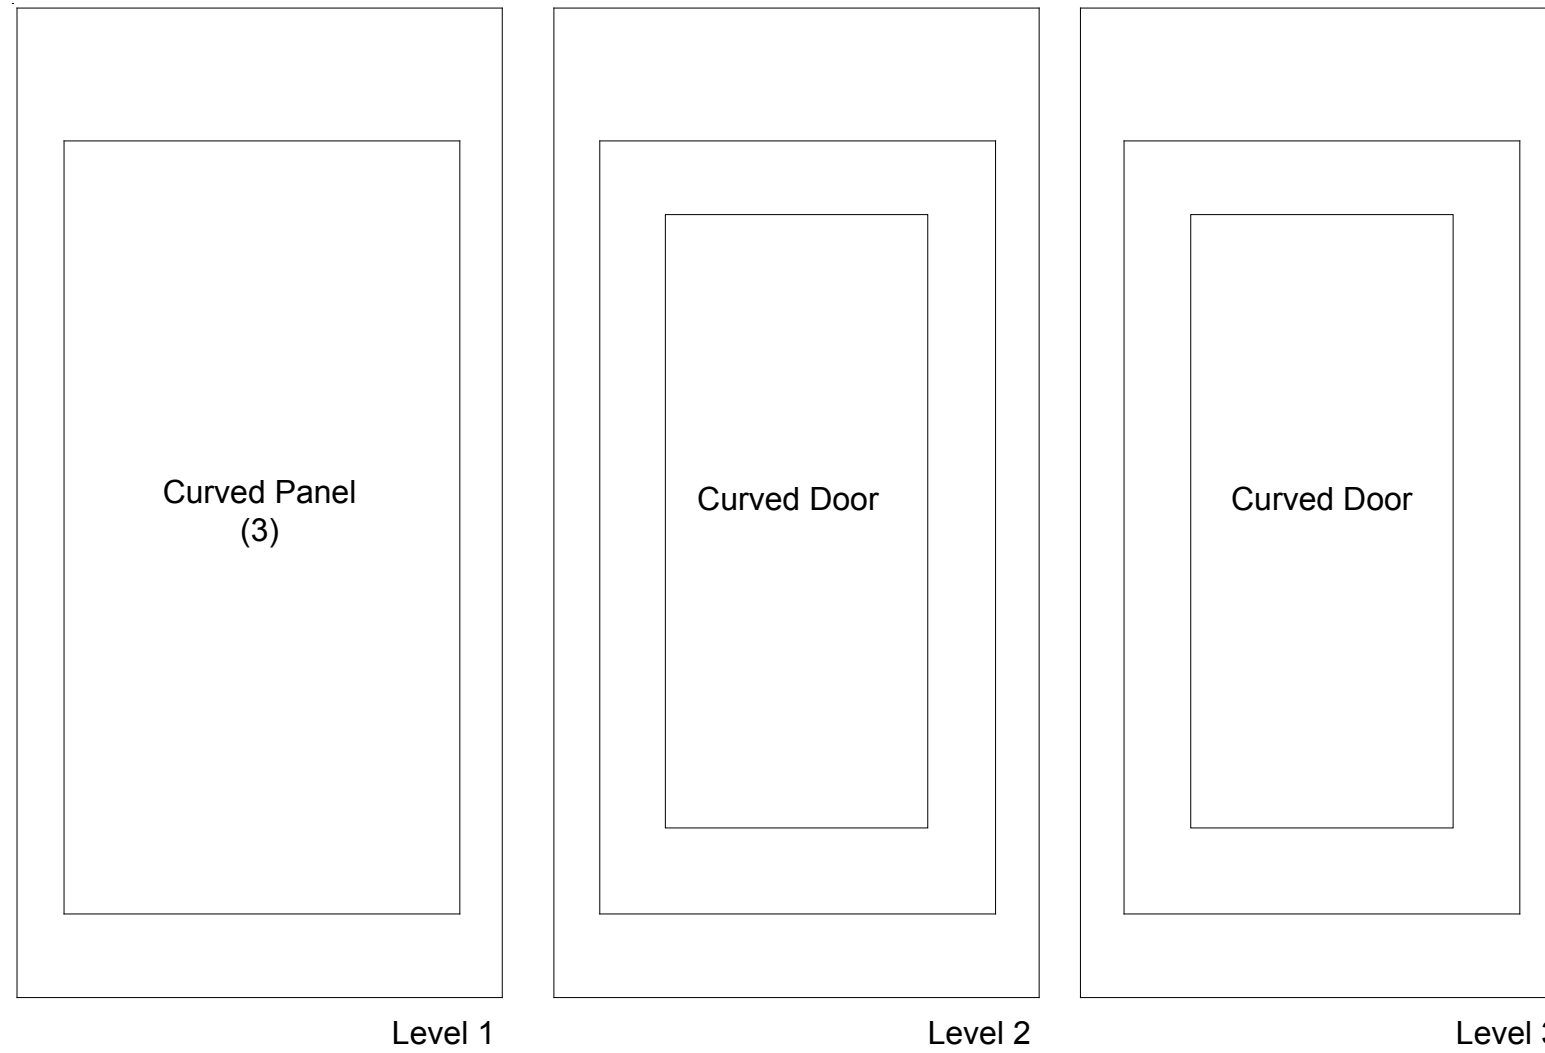

Top View: Curved Pedestal & Base Plates

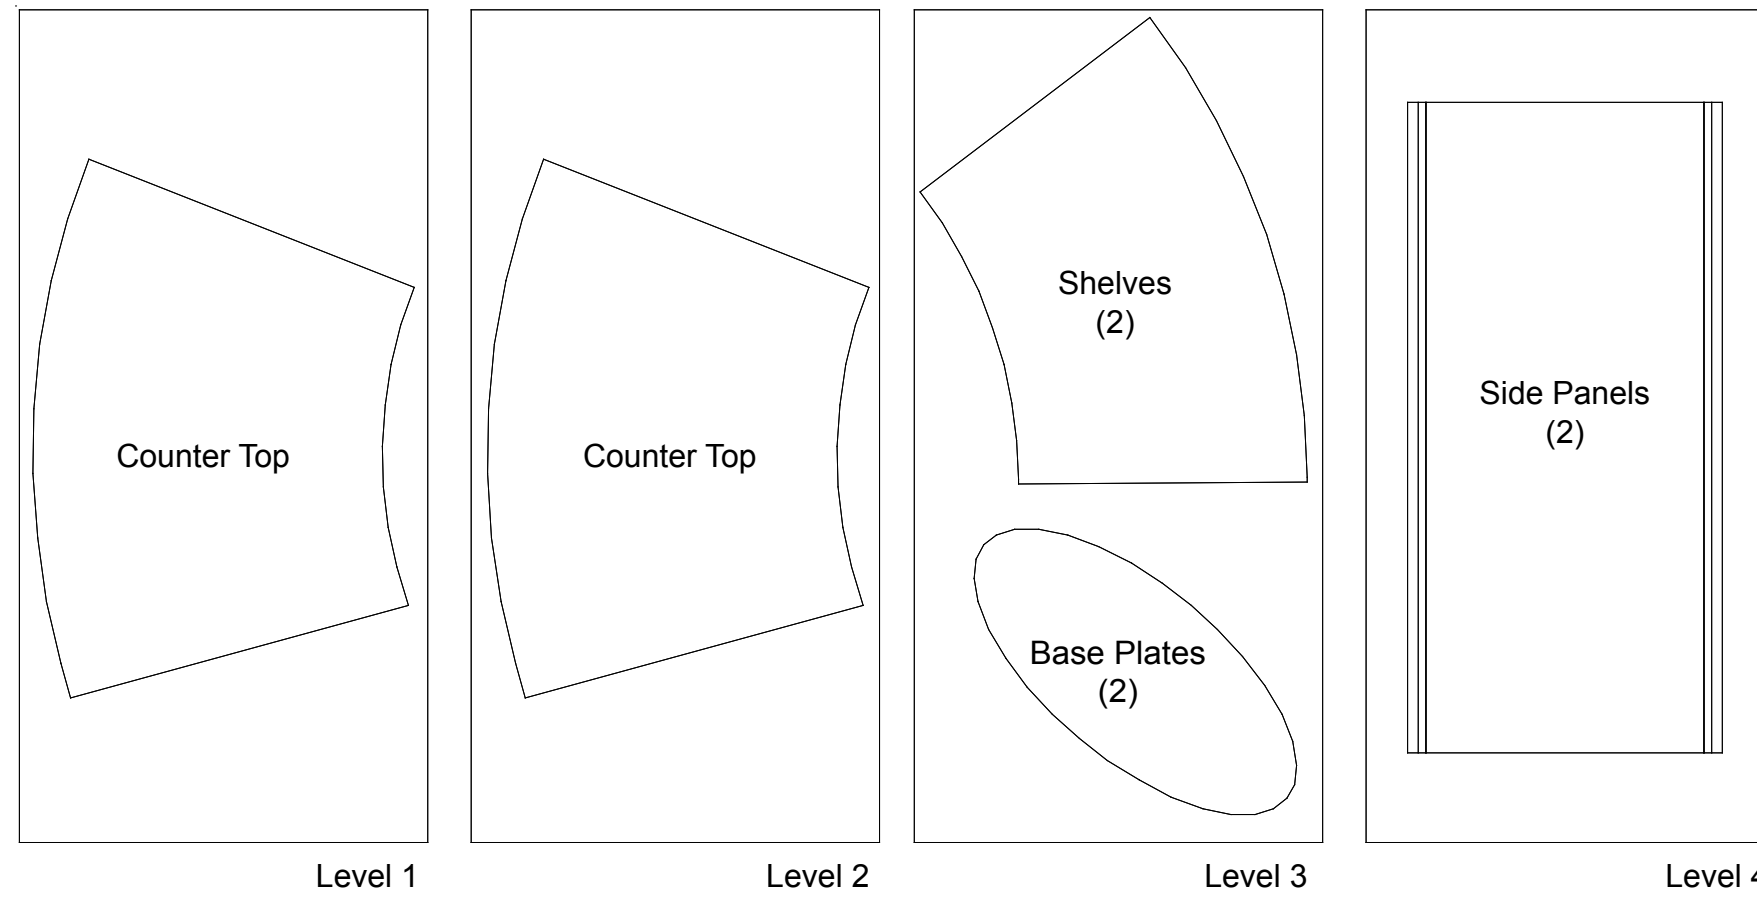

Top View: Pedestal

