


# euro It | *HYBRIDS*

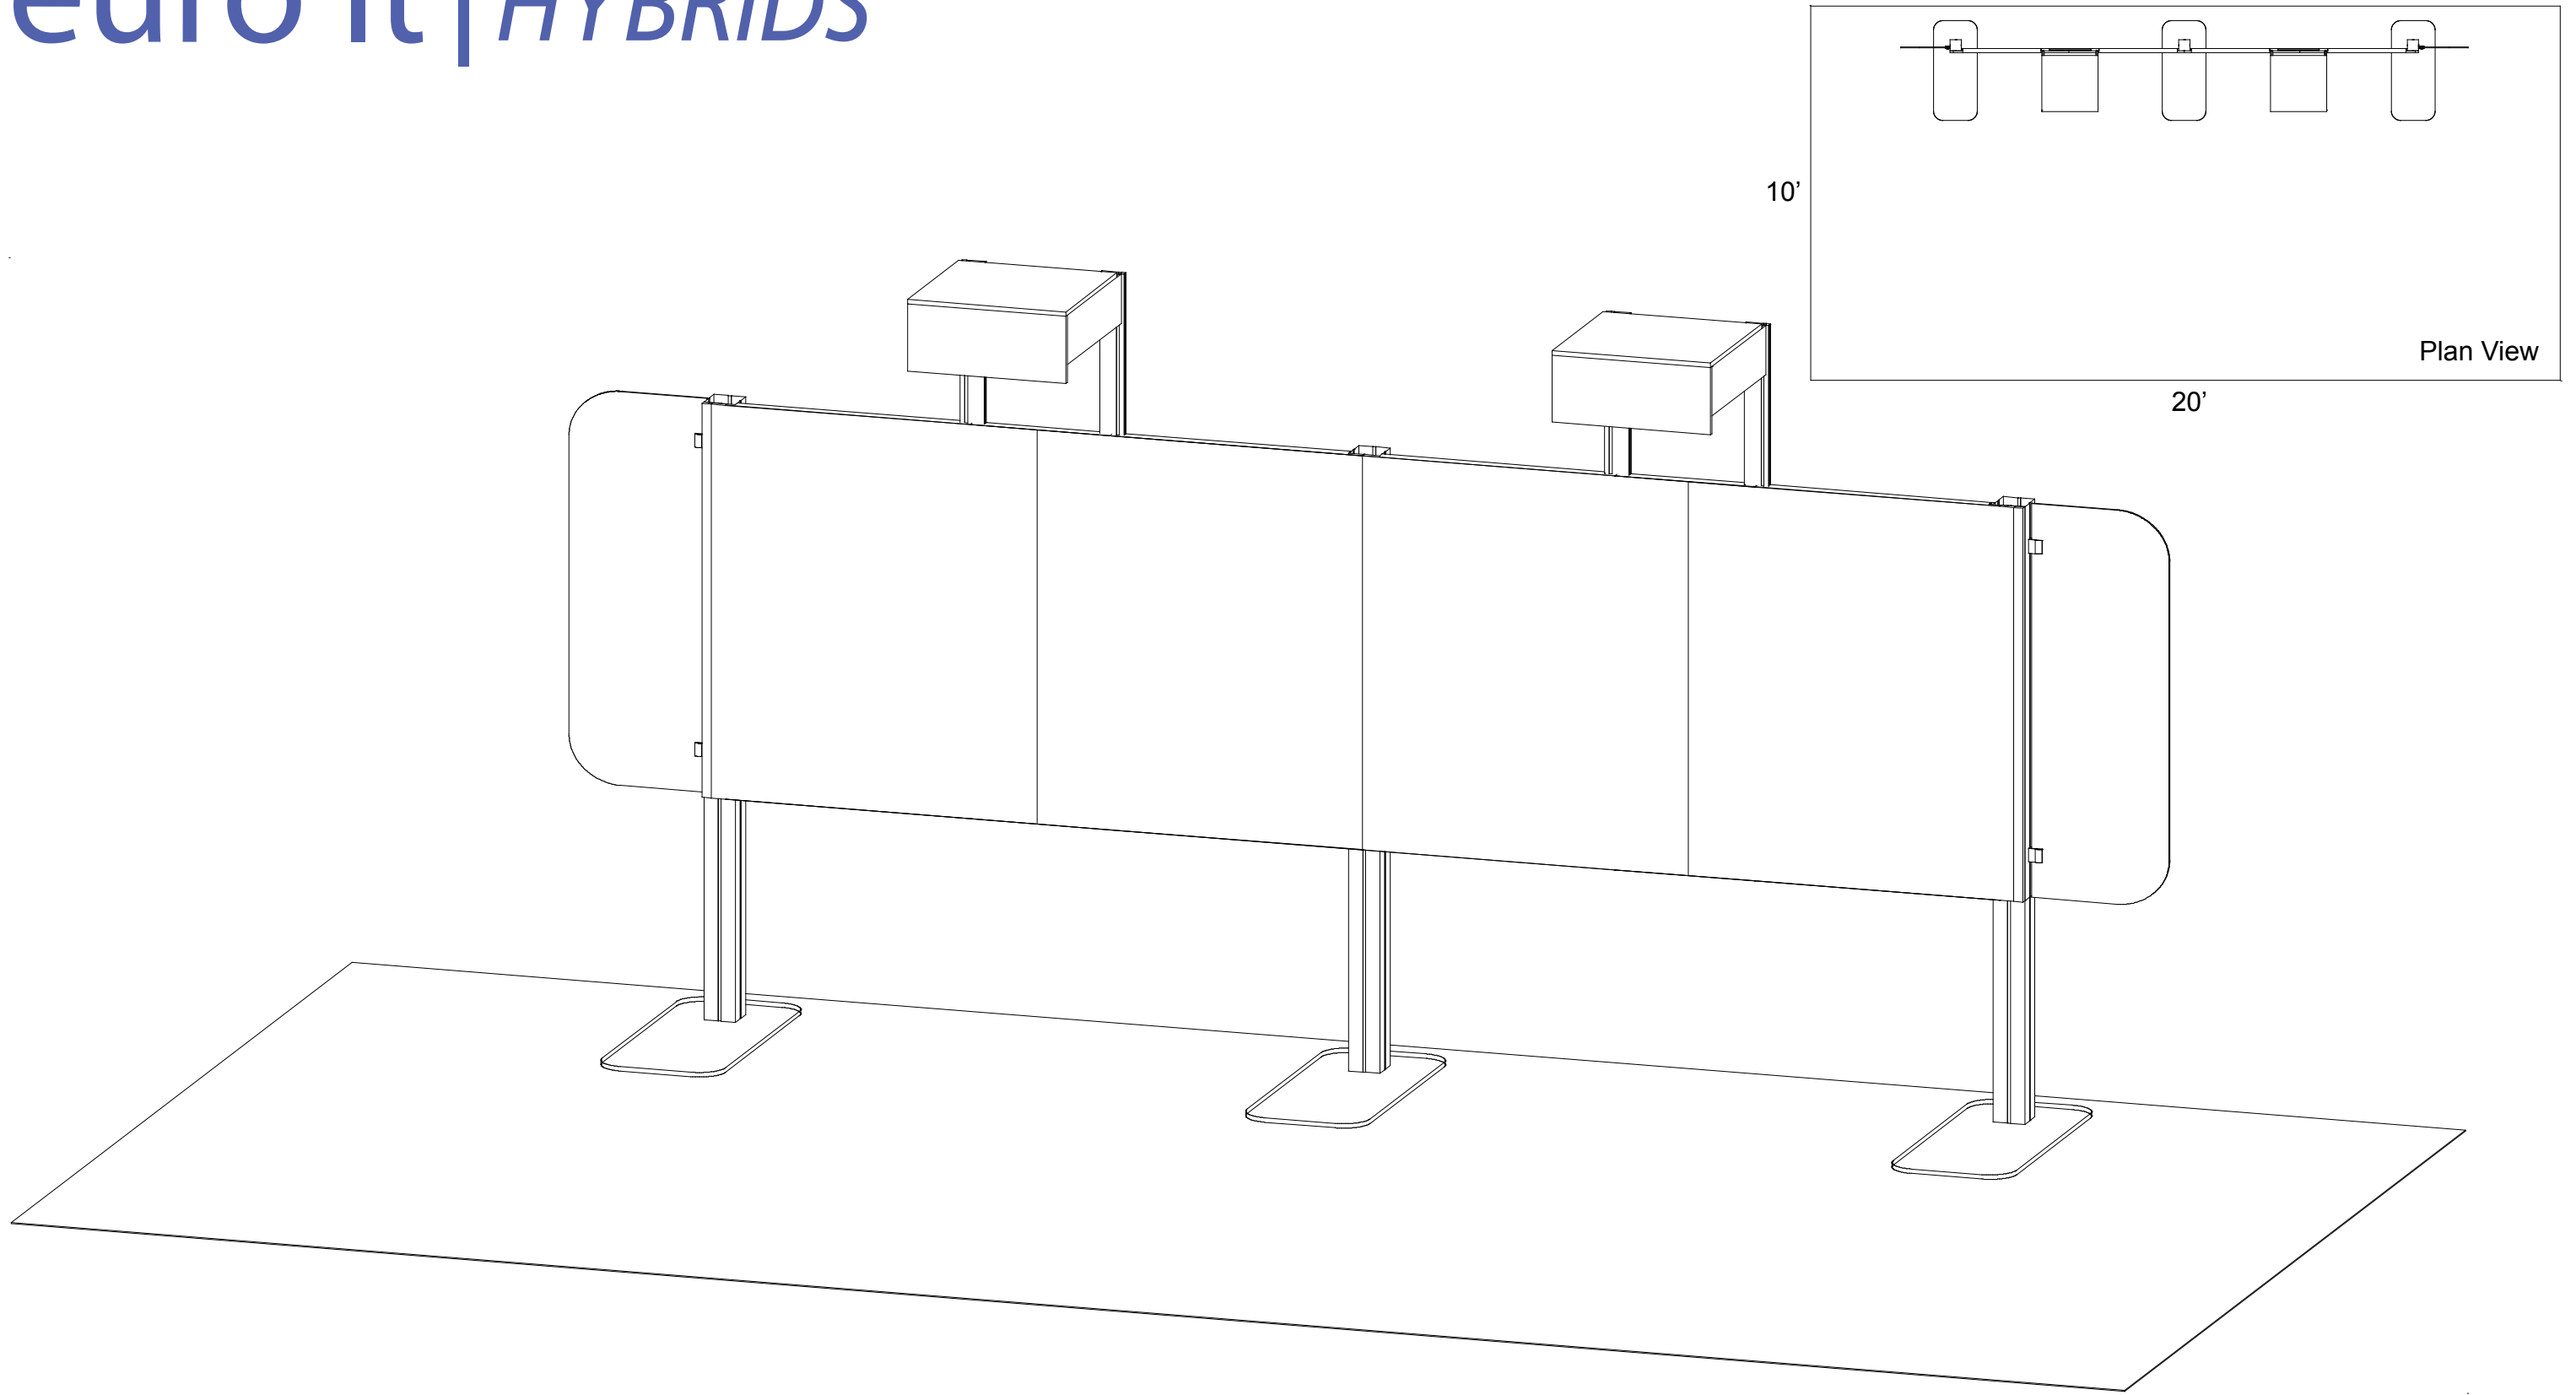

# euro lt | HYBRIDS

## Euro LT Hybrids General Setup Instructions - Order #xxxxx

### Using Your Setup Instructions


The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


### Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


## General Setup Instructions for Panel System

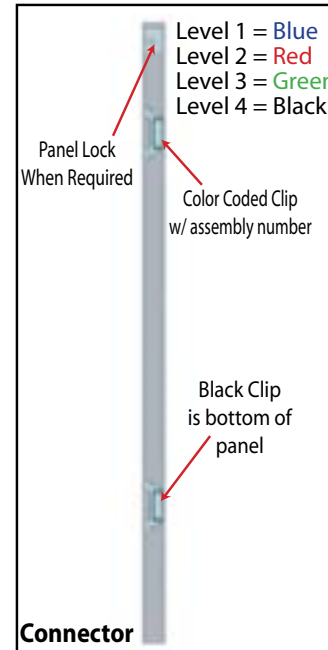


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish the level. The color coded clip also contains the numbered label.

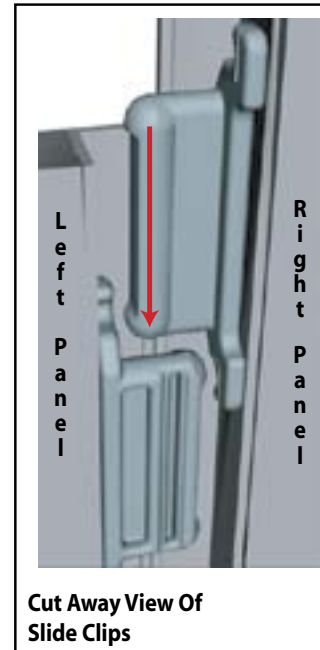

Components connect together by aligning them and sliding downward connecting clips together.

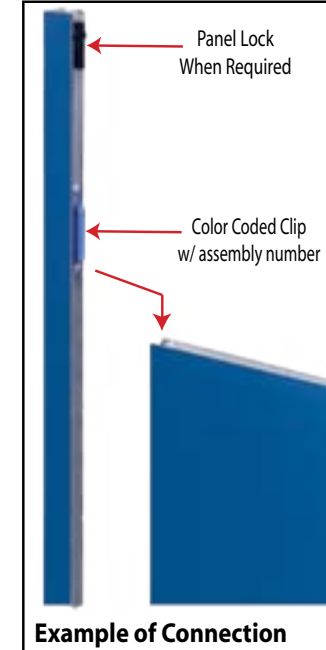

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

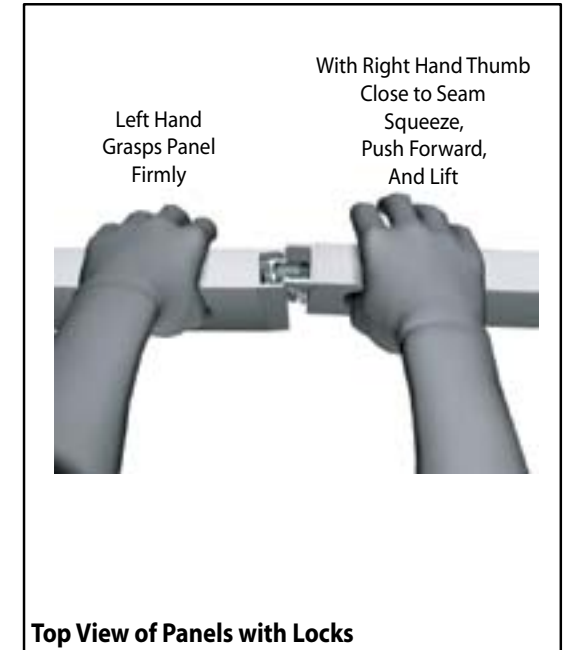


The first level of components contains panel locks that are located at the top of the panel for extra stability and a seamless connection. When disassembling panels, twist top connection slightly and lift right panel upward.


## General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.

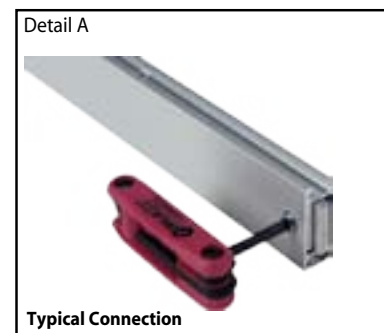


Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

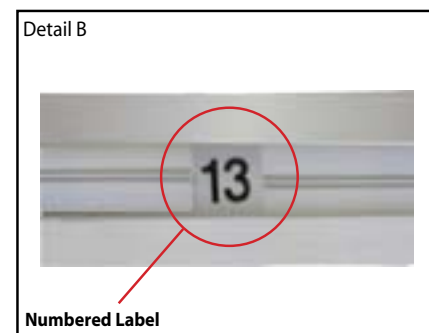


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

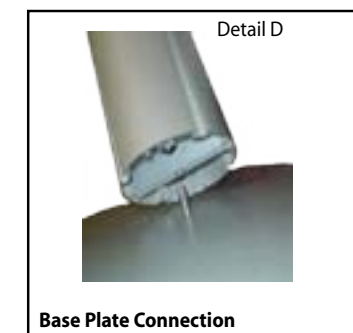

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

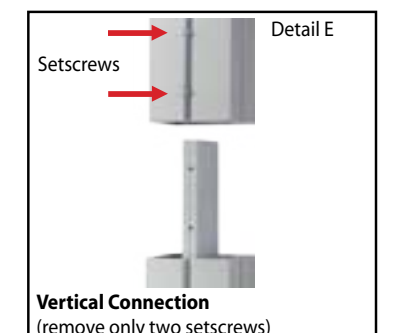

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.



Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

866.652.2100

Item #	Qty.	Description
1	3	Base Plate
2	1	25"h Q914 Lower Vertical Extrusion
3	1	44"h Q914 Upper Vertical Extrusion
4	1	25"h Q914 Lower Vertical Extrusion
5	1	44"h Q914 Upper Vertical Extrusion
6	1	25"h Q914 Lower Vertical Extrusion
7	1	44"h Q914 Upper Vertical Extrusion
8a/8b	2/2	18"h Z73 Lower Vertical Extrusion
9a/9b	2/2	48"h Z73 Upper Vertical Extrusion
10	1	25"w Z72 Lower Horizontal Extrusion w/Panel Carriage
11	1	13"w Z72 Lower Horizontal Extrusion w/Panel Carriage
12	1	25"w Z72 Lower Horizontal Extrusion w/Panel Carriage
13	1	25"w Z72 Lower Horizontal Extrusion w/Panel Carriage
14	1	13"w Z72 Lower Horizontal Extrusion w/Panel Carriage
15	1	25"w Z72 Lower Horizontal Extrusion w/Panel Carriage

- Steps:
- 1) Attach lower vertical extrusions [2,4,6] to base plates with cam locks.
  - 2) Connect upper vertical extrusions [3,5,7] to verticals [2,4,6] as shown.
  - 3) Connect vertical extrusions [8a,9a and 8b,9b] as shown.
  - 4) Connect vertical assemblies [8a/9a,8b/9b] with horizontal extrusions [11,14].
  - 5) Use horizontal extrusions [10,12,13,15] to connect all vertical assemblies as shown.

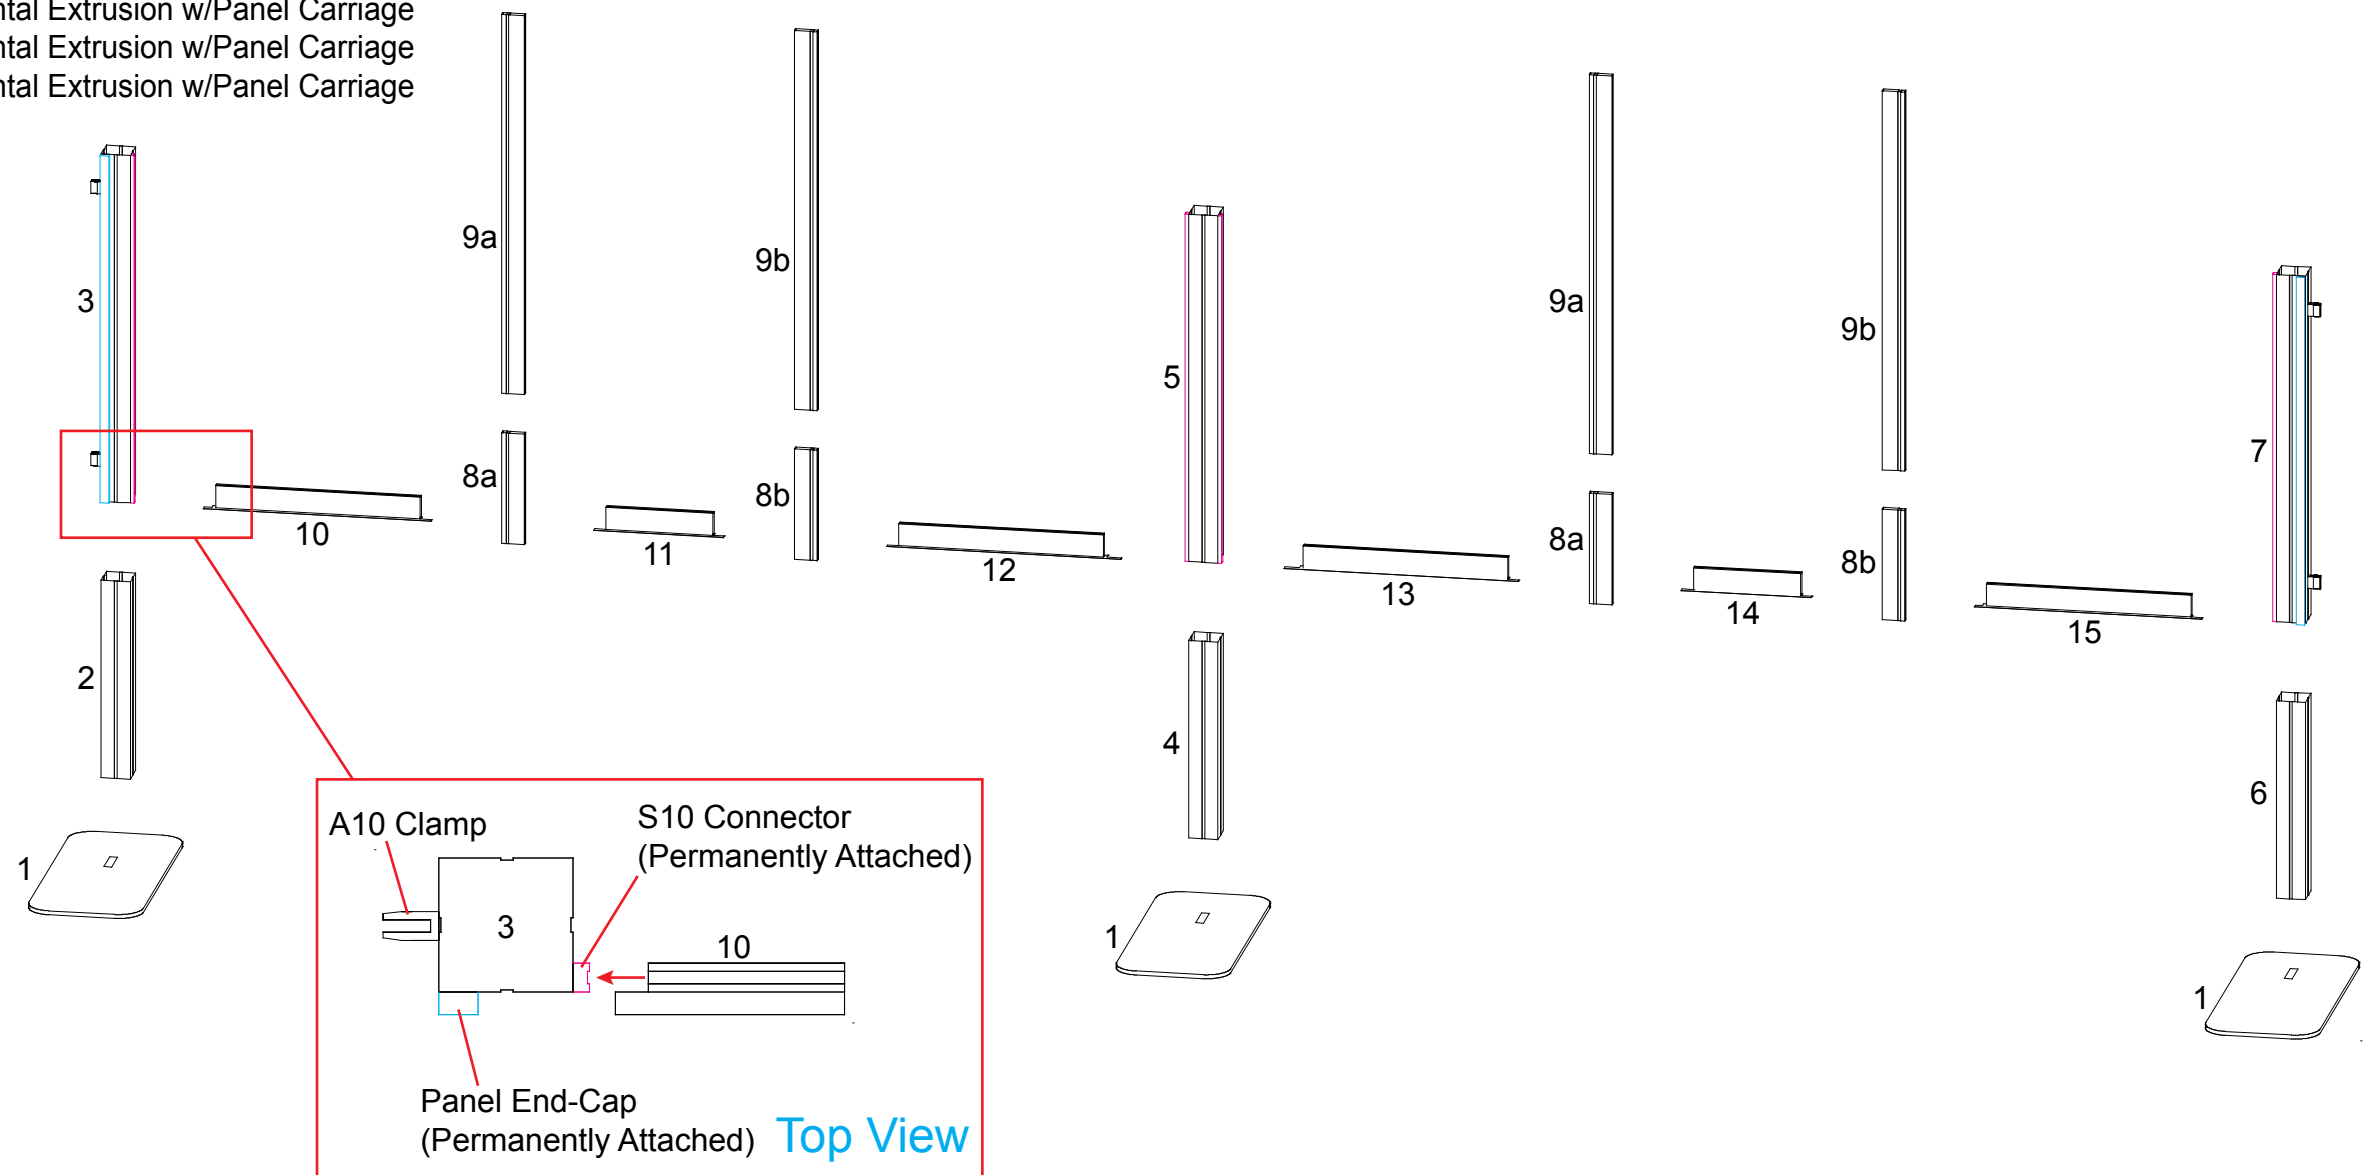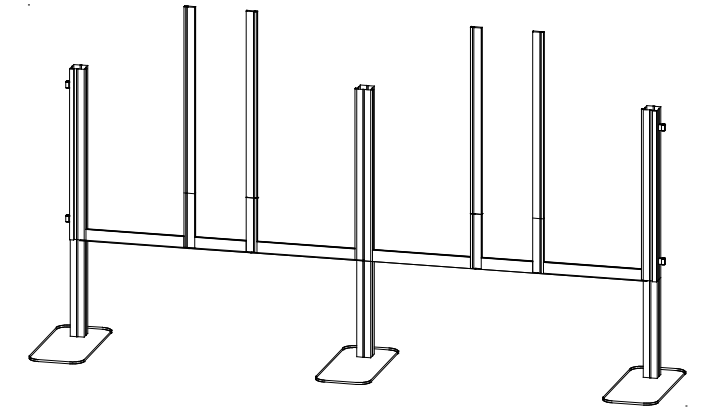




866.652.2100

Item #	Qty.	Description
16	1	25" w Z72 Upper Horizontal Extrusion w/Panel Carriage
17	1	13" w Z72 Upper Horizontal Extrusion w/Panel Carriage
18	1	25" w Z72 Upper Horizontal Extrusion w/Panel Carriage
19	1	25" w Z72 Upper Horizontal Extrusion w/Panel Carriage
20	1	13" w Z72 Upper Horizontal Extrusion w/Panel Carriage
21	1	25" w Z72 Upper Horizontal Extrusion w/Panel Carriage

Steps:

- 1) Set **Panel 1** in the lower panel carriage and connect to the **Panel End-Cap** attached to vertical assembly [2/3]. See the *General Setup Instructions for Panel Systems* on the *General Information* page.
- 2) Connect **Panels 1,2,3,4** connecting **Panel 4** to the **Panel End-Cap** attached to vertical assembly [6/7].
- 3) Connect upper horizontal extrusions [16-21] as shown, securing the assembled panels with the upper panel carriage.

Panels labeled in Blue


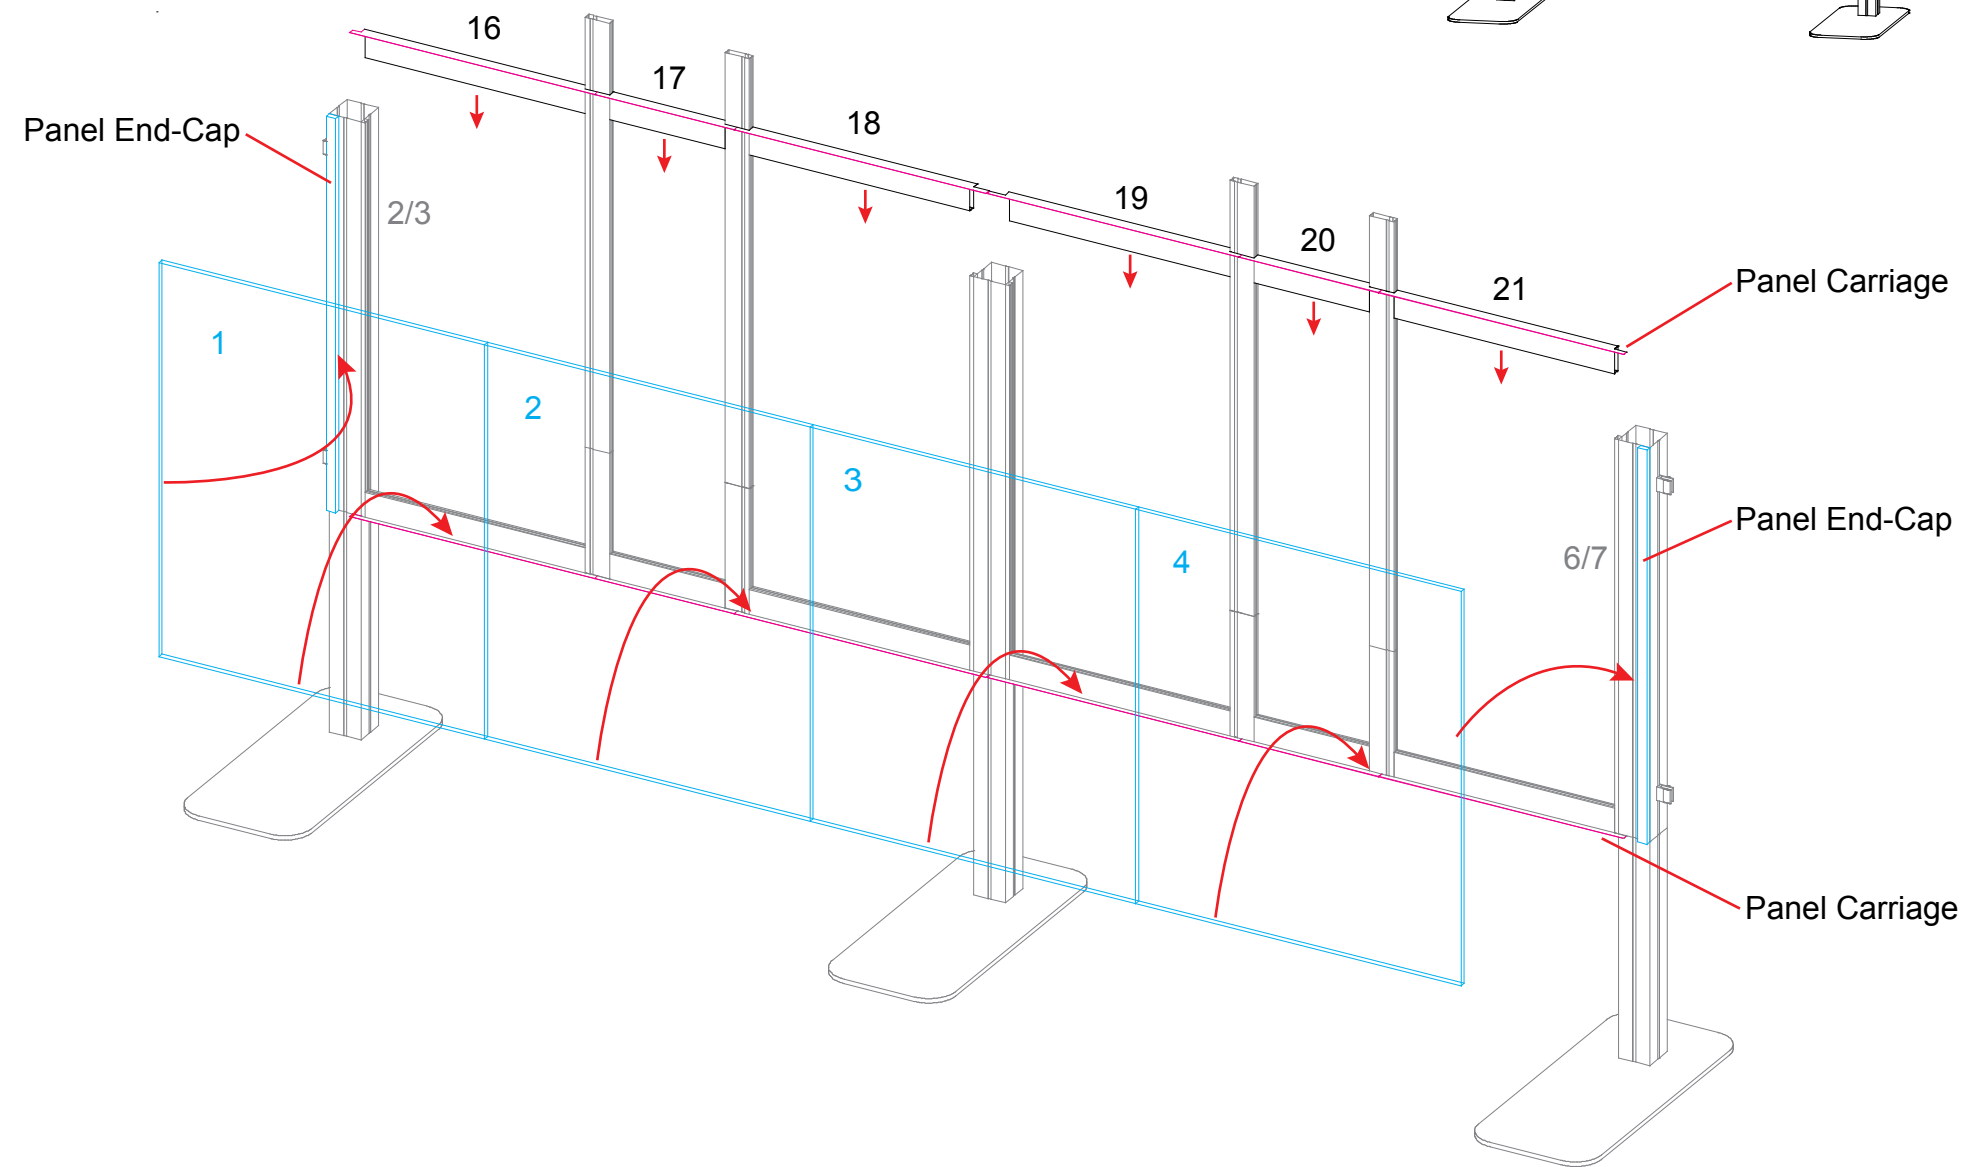
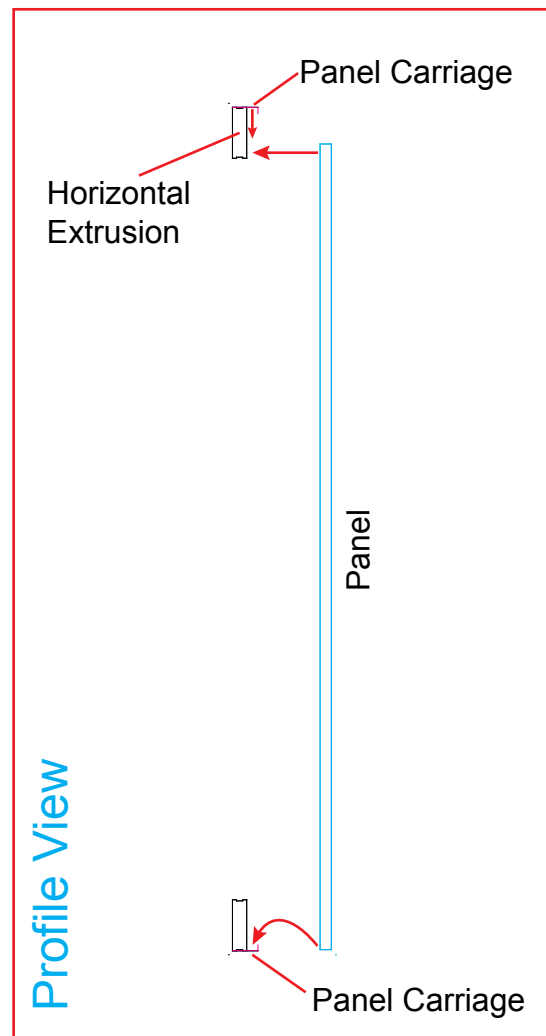
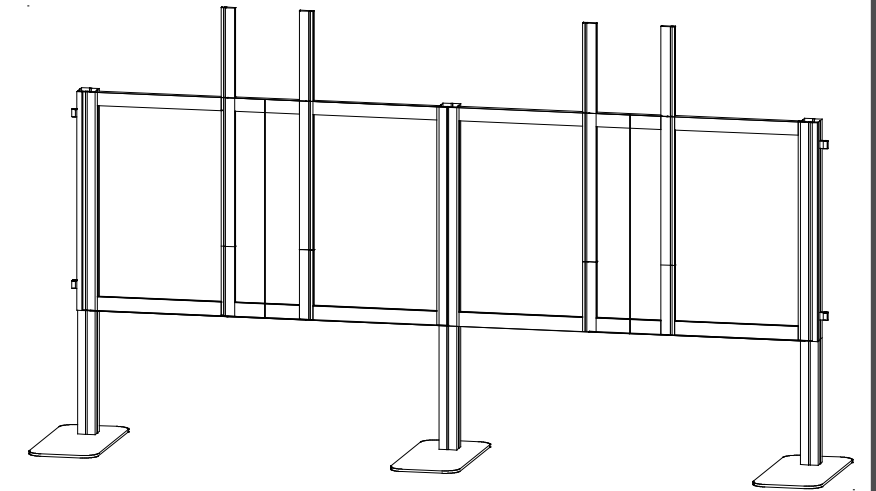


866.652.2100

Steps:

- 1) Connect shelf supports [22] to vertical extrusions as shown. Height is adjustable.
- 2) Attach projector shelf to shelf supports [22] as shown in the [Projector Box Detail](#).
- 3) Attach wings to A10 clamps at the ends of assembled backwall as shown.

Item #	Qty.	Description
22	4	19" w Z140 Shelf Supports

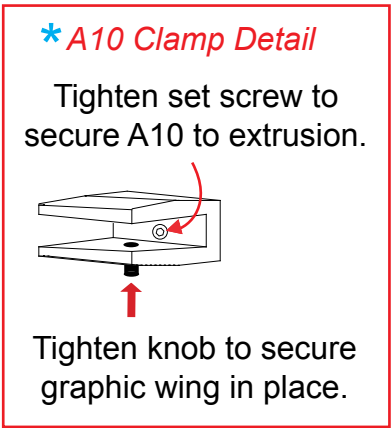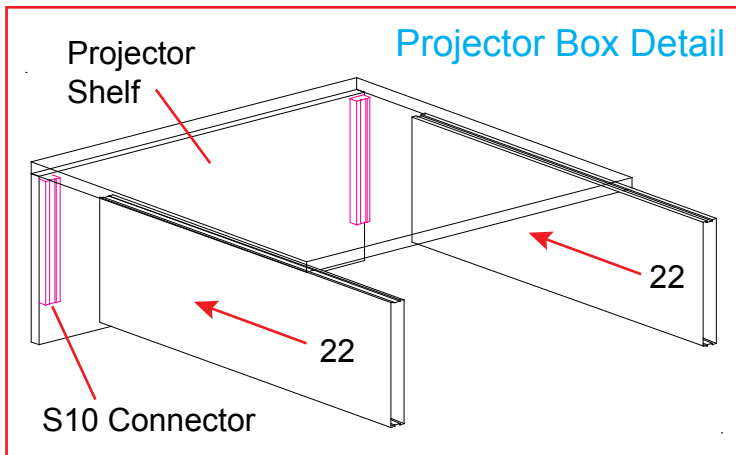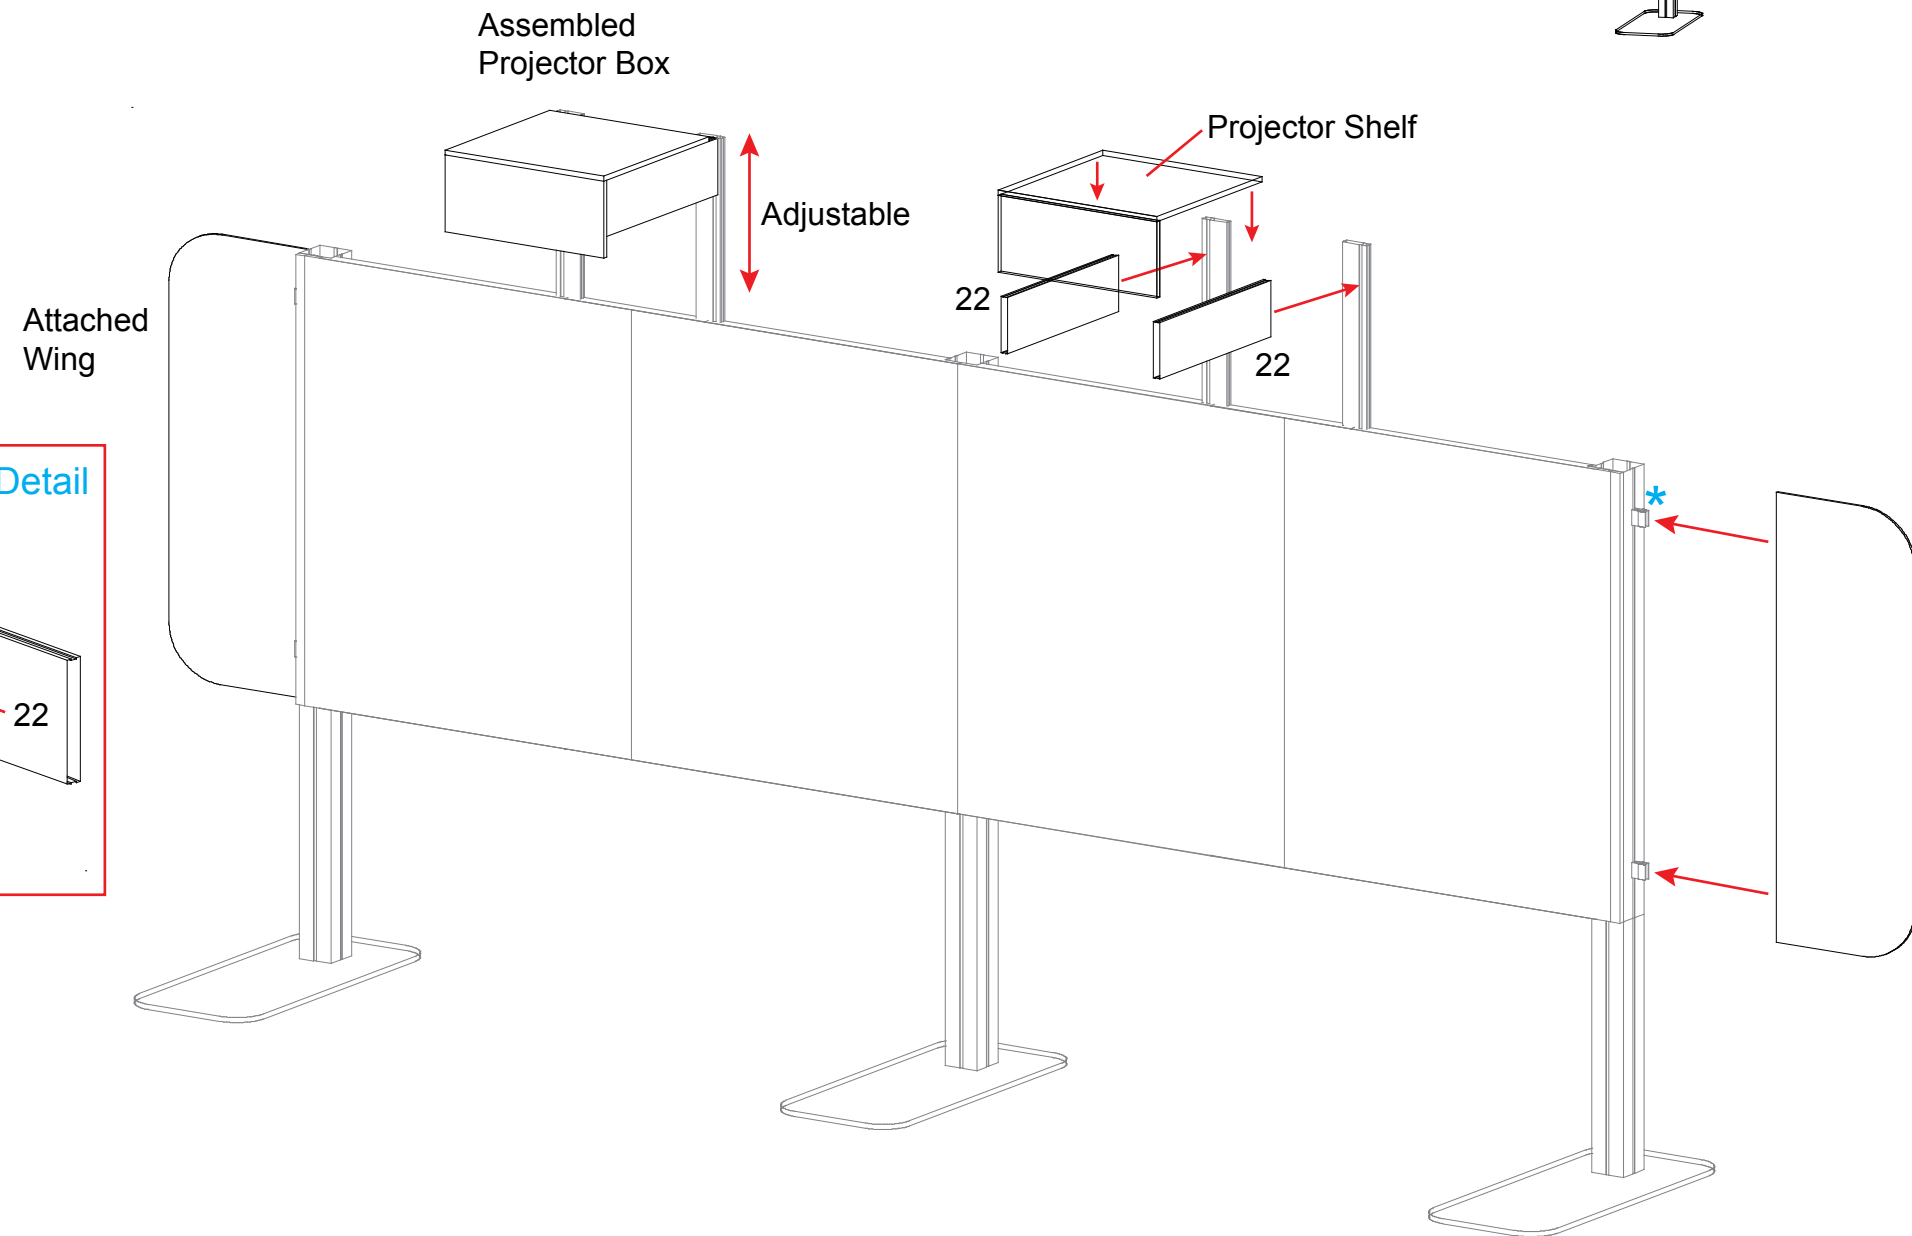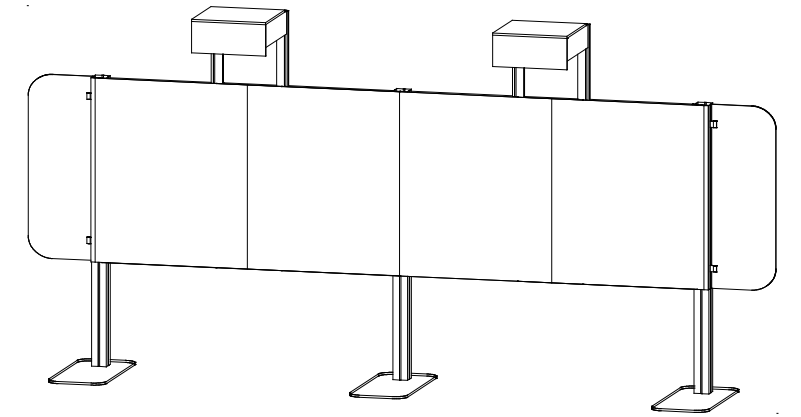

866.652.2100

Steps:

- 1) Run cords through plastic conduit.
- 2) Attach conduit where indicated by pinching the opening and inserting into the groove.

