

Iso View

Plan View

10'

20'

General Setup Instructions

Using Your Setup Instructions


The Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.


Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or Eco Glass inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage. Each Layer will be labeled with the packing order.


General Setup Instructions for Panel System

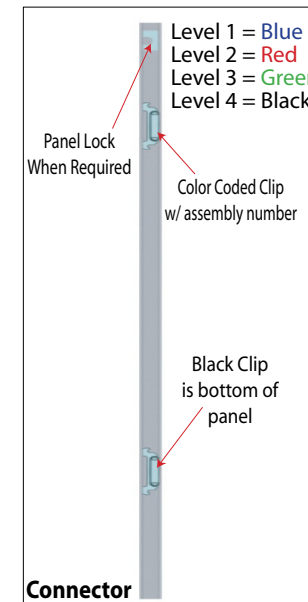


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish the level. The color coded clip also contains the numbered label.

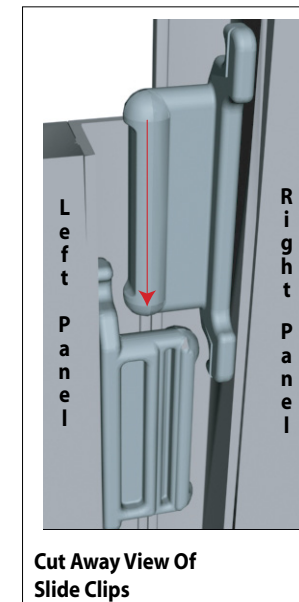

Components connect together by aligning them and sliding downward connecting clips together.

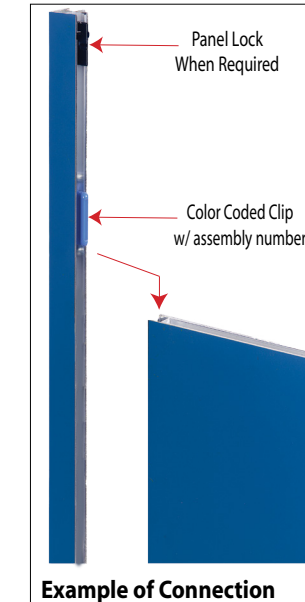

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

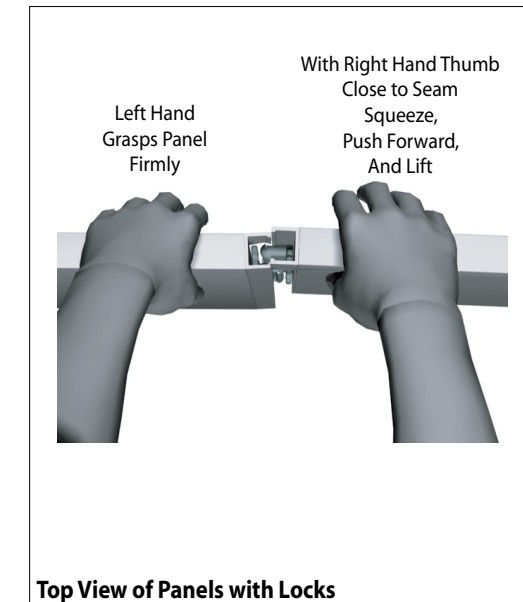

The first level of components contains panel locks that are located at the top of the panel for extra stability and a seamless connection. When disassembling panels, twist top connection slightly and lift right panel upward.


General Setup Instructions for Extrusion System




Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, other tools maybe needed.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

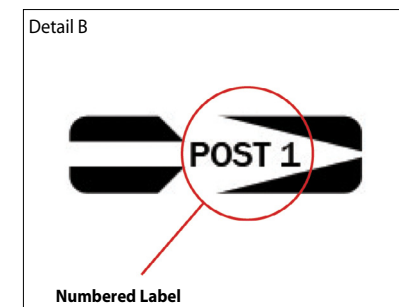


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

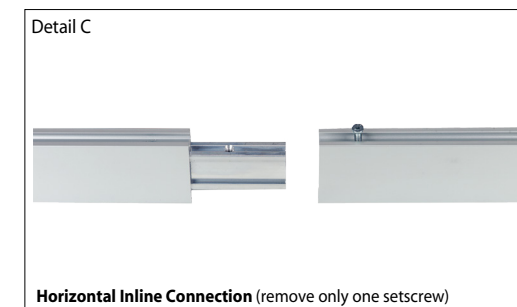

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.



Attach base plate to vertical extrusion using the lock provided. Place base plate on ground and set vertical post/lock in base plate slot. Tighten lock with Mulit-tool.

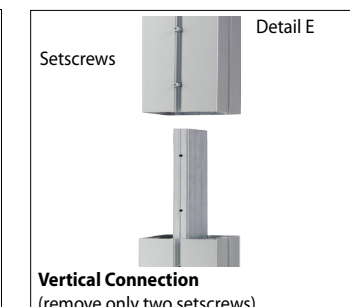

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.



Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description:
1	2	Base Plate
2	1	88" Round Vertical Extrusion
3	1	88" Round Vertical Extrusion
4	1	88" Round Vertical Extrusion
5	1	88" Round Vertical Extrusion
6	2	60" Curved Horizontal Extrusion
7	2	60" Curved Horizontal Extrusion
8	1	56.5" Curved Horizontal Extrusion
9	1	56.5" Curved Horizontal Extrusion
10	1	56.5" Curved Horizontal Extrusion
11	1	50.066"w x 5.512"h Horizontal Plate

Steps:






- 1) Attach base plates [1] to vertical extrusions [2 & 5].
- 2) Attach horizontal extrusions [6 thru 11] between vertical extrusions [2 thru 5] as shown. Note: Place infills between verticals and horizontals as shown.
- 3) Velcro attach graphic to front side of assembled backwall as shown.

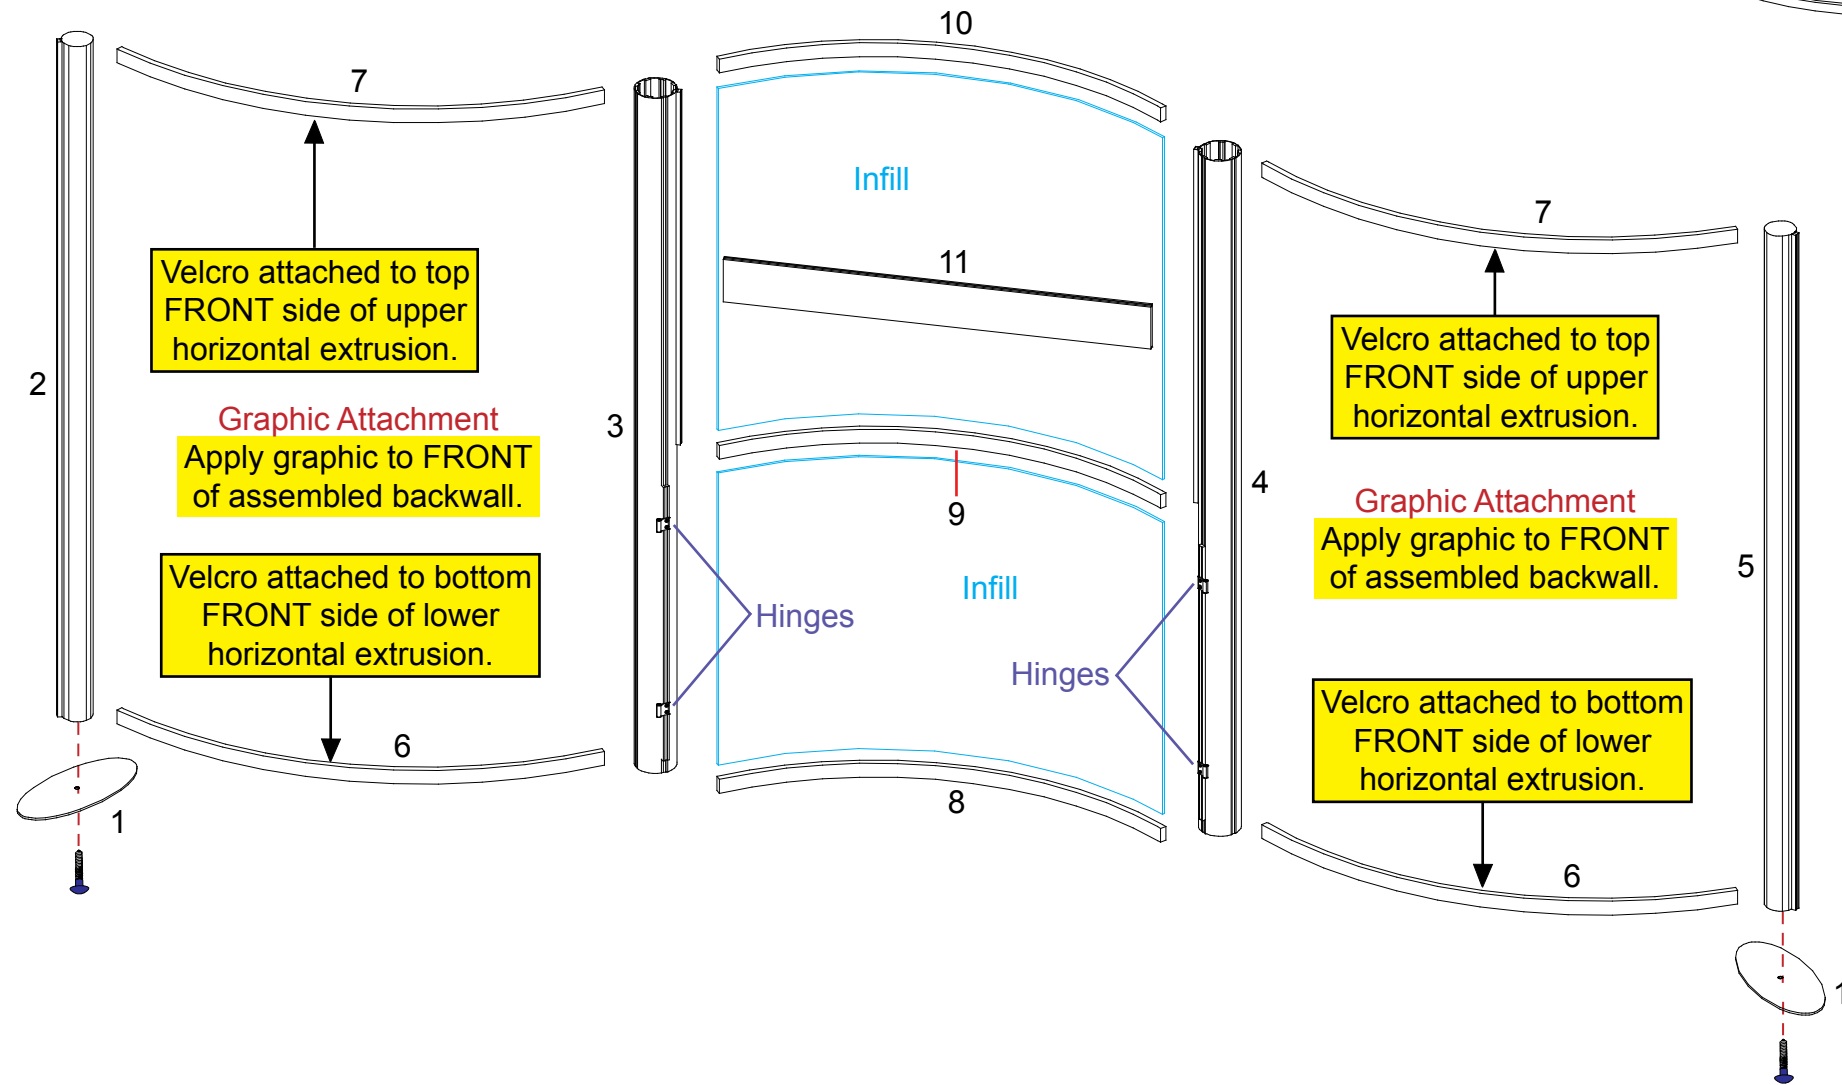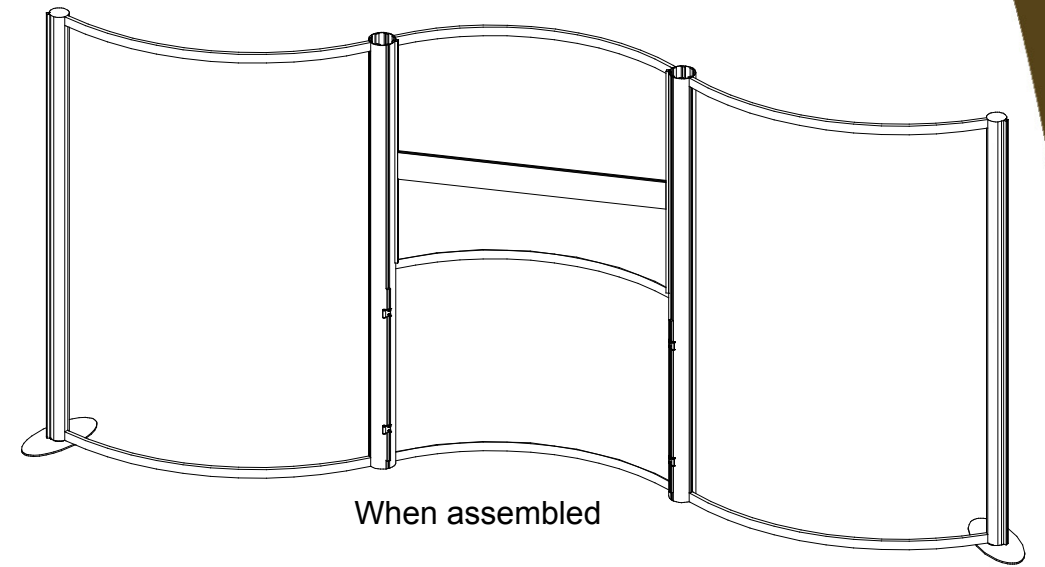

Item	Qty.	Description:
12	2	62.125" Curved Horizontal Extrusion
13	1	35.6875" Vertical Extrusion w/ Door Stoppers





Steps:

- 1) Attach lower curved extrusion [12] between verticals [3 & 4].
- 2) Attach vertical extrusion [13] atop horizontal extrusion [12] at center.
- 3) Attach doors to verticals [3 & 4]. Refer to *Door Attachment* detail.
- 4) Attach upper curved extrusion [12] between verticals [3 & 4] and atop vertical [13]. Note: Refer to detail below for correct placement/attachment.
- 5) Velcro attach counter supports to assembled backwall as shown.
- 6) Place counter top atop assembled backwall counter and secure in place.

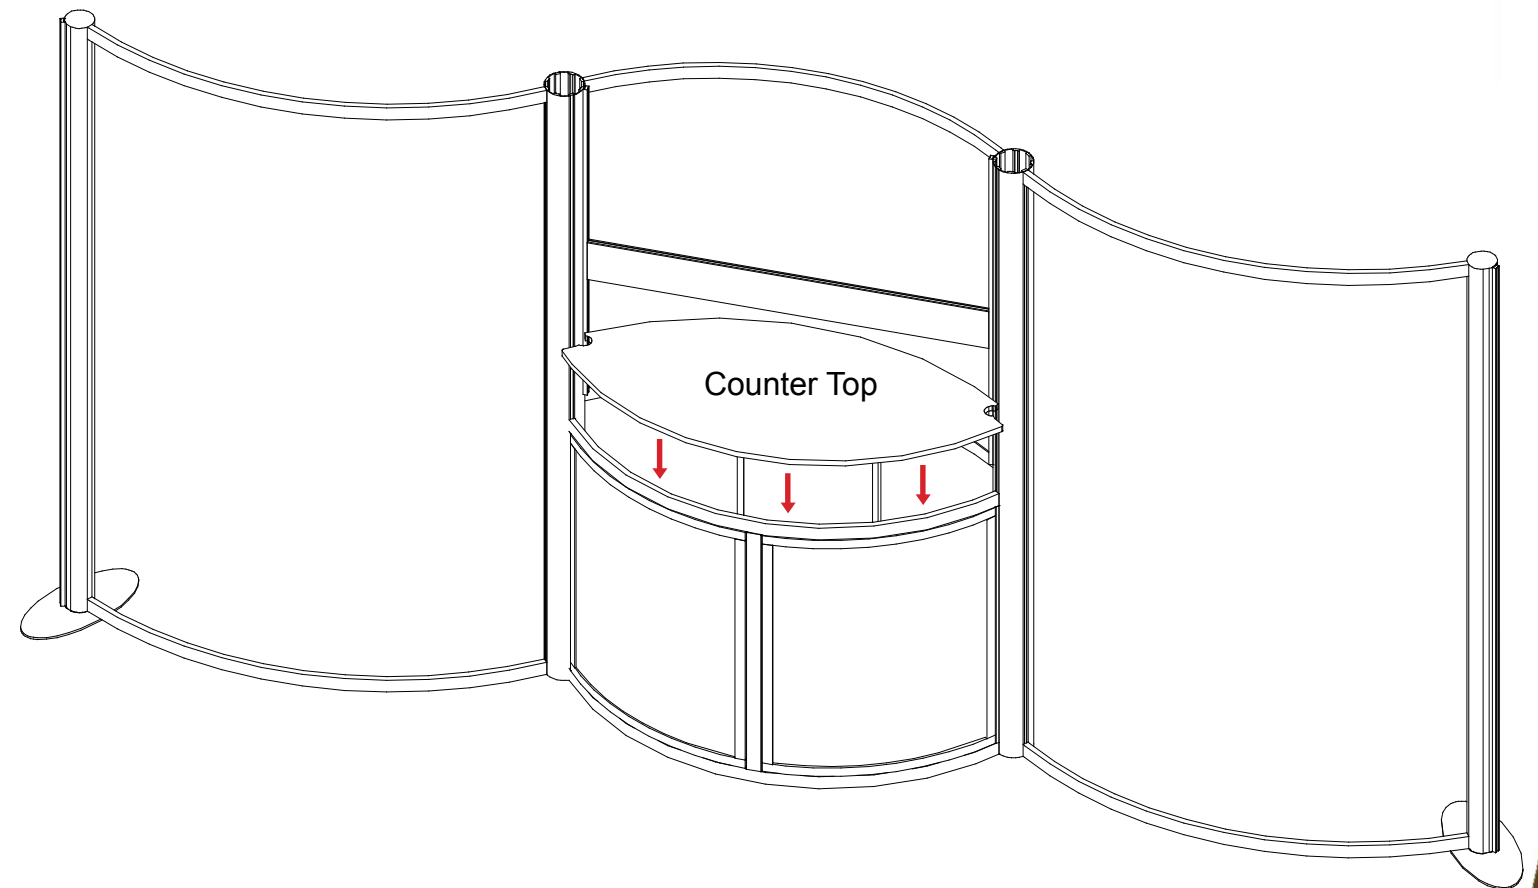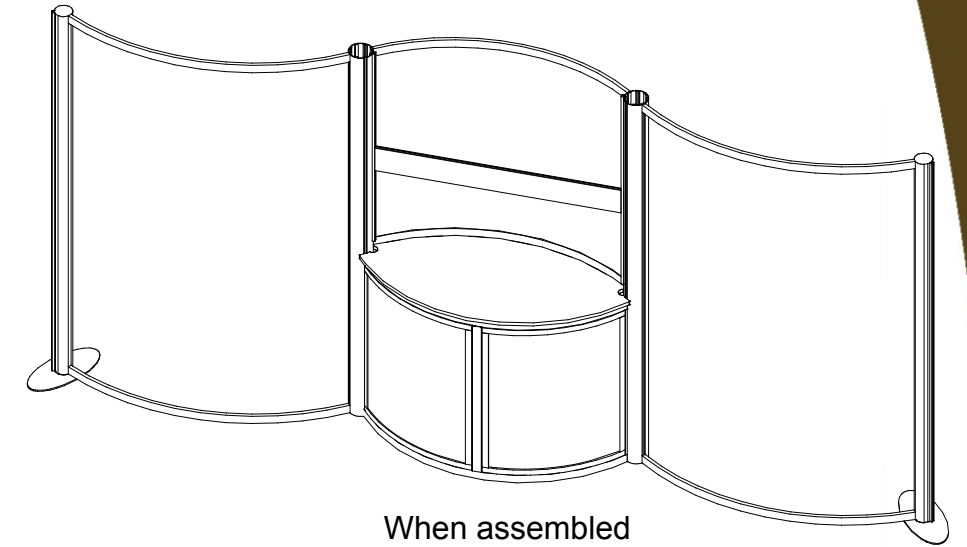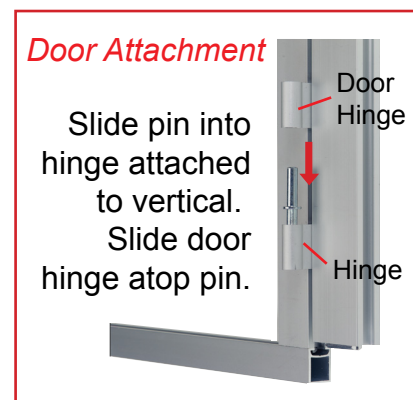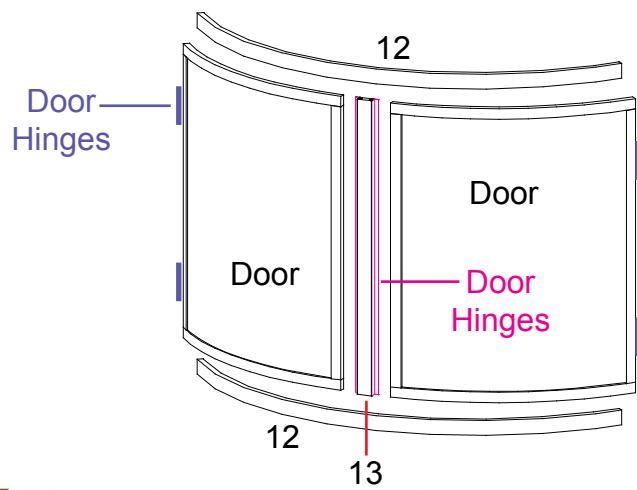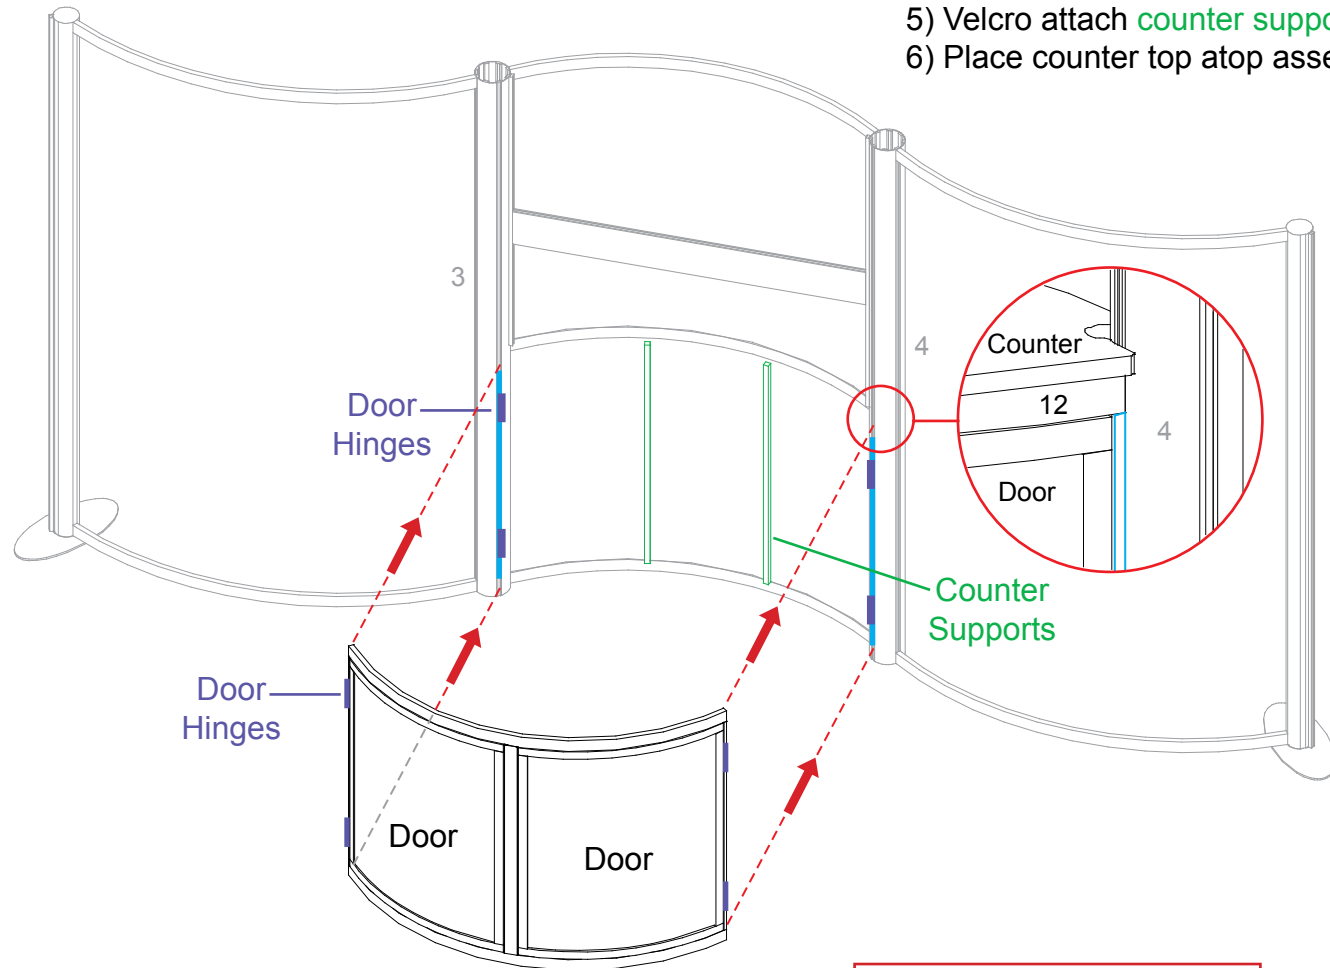

Item	Qty.	Description:
14	2	30.925" Curved Horizontal Extrusion
15	2	30.925" Curved Horizontal Extrusion
16	10	27.961" Curved Shelf Support
17	10	5"w Shelf Support
18	2	84" Round Vertical Extrusion
19	1	40"w Graphic Support

- Steps:
- 1) Attach curved horizontal extrusions [14, 15, & 16] between verticals.
 - 2) Attach shelf supports [17] to curved horizontals [16] as shown.
 - 3) Place shelves atop shelf supports and secure in place using screw caps.
 - 4) Velcro attach graphic to horizontal [19] as shown.
 - 5) Hook graphic with horizontal [19] atop assembled backwall as shown.
 - 6) Attach monitor mount to plate [11]. Refer to *Monitor Mount Attachment* detail.
 - 7) Apply graphic to FRONT of assembled shelf backwall as shown.

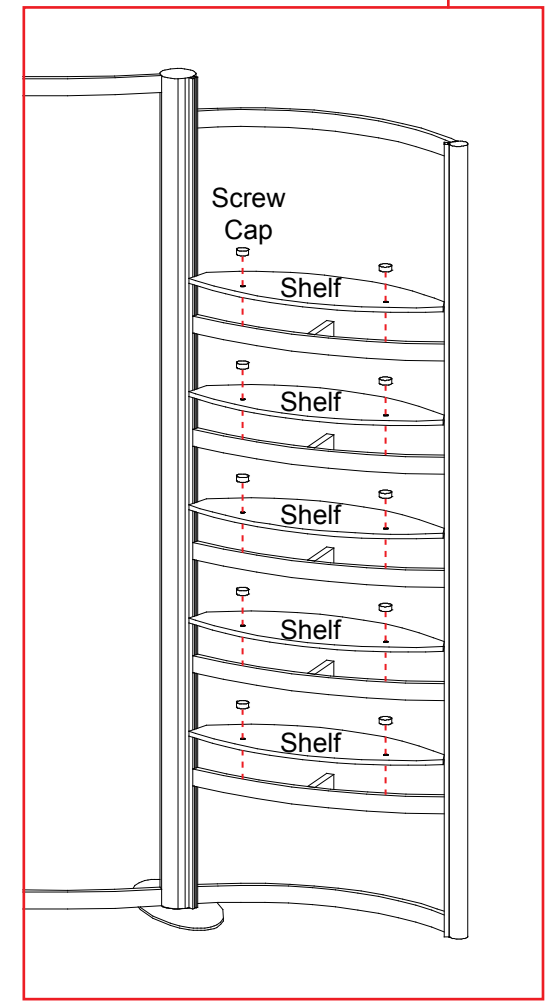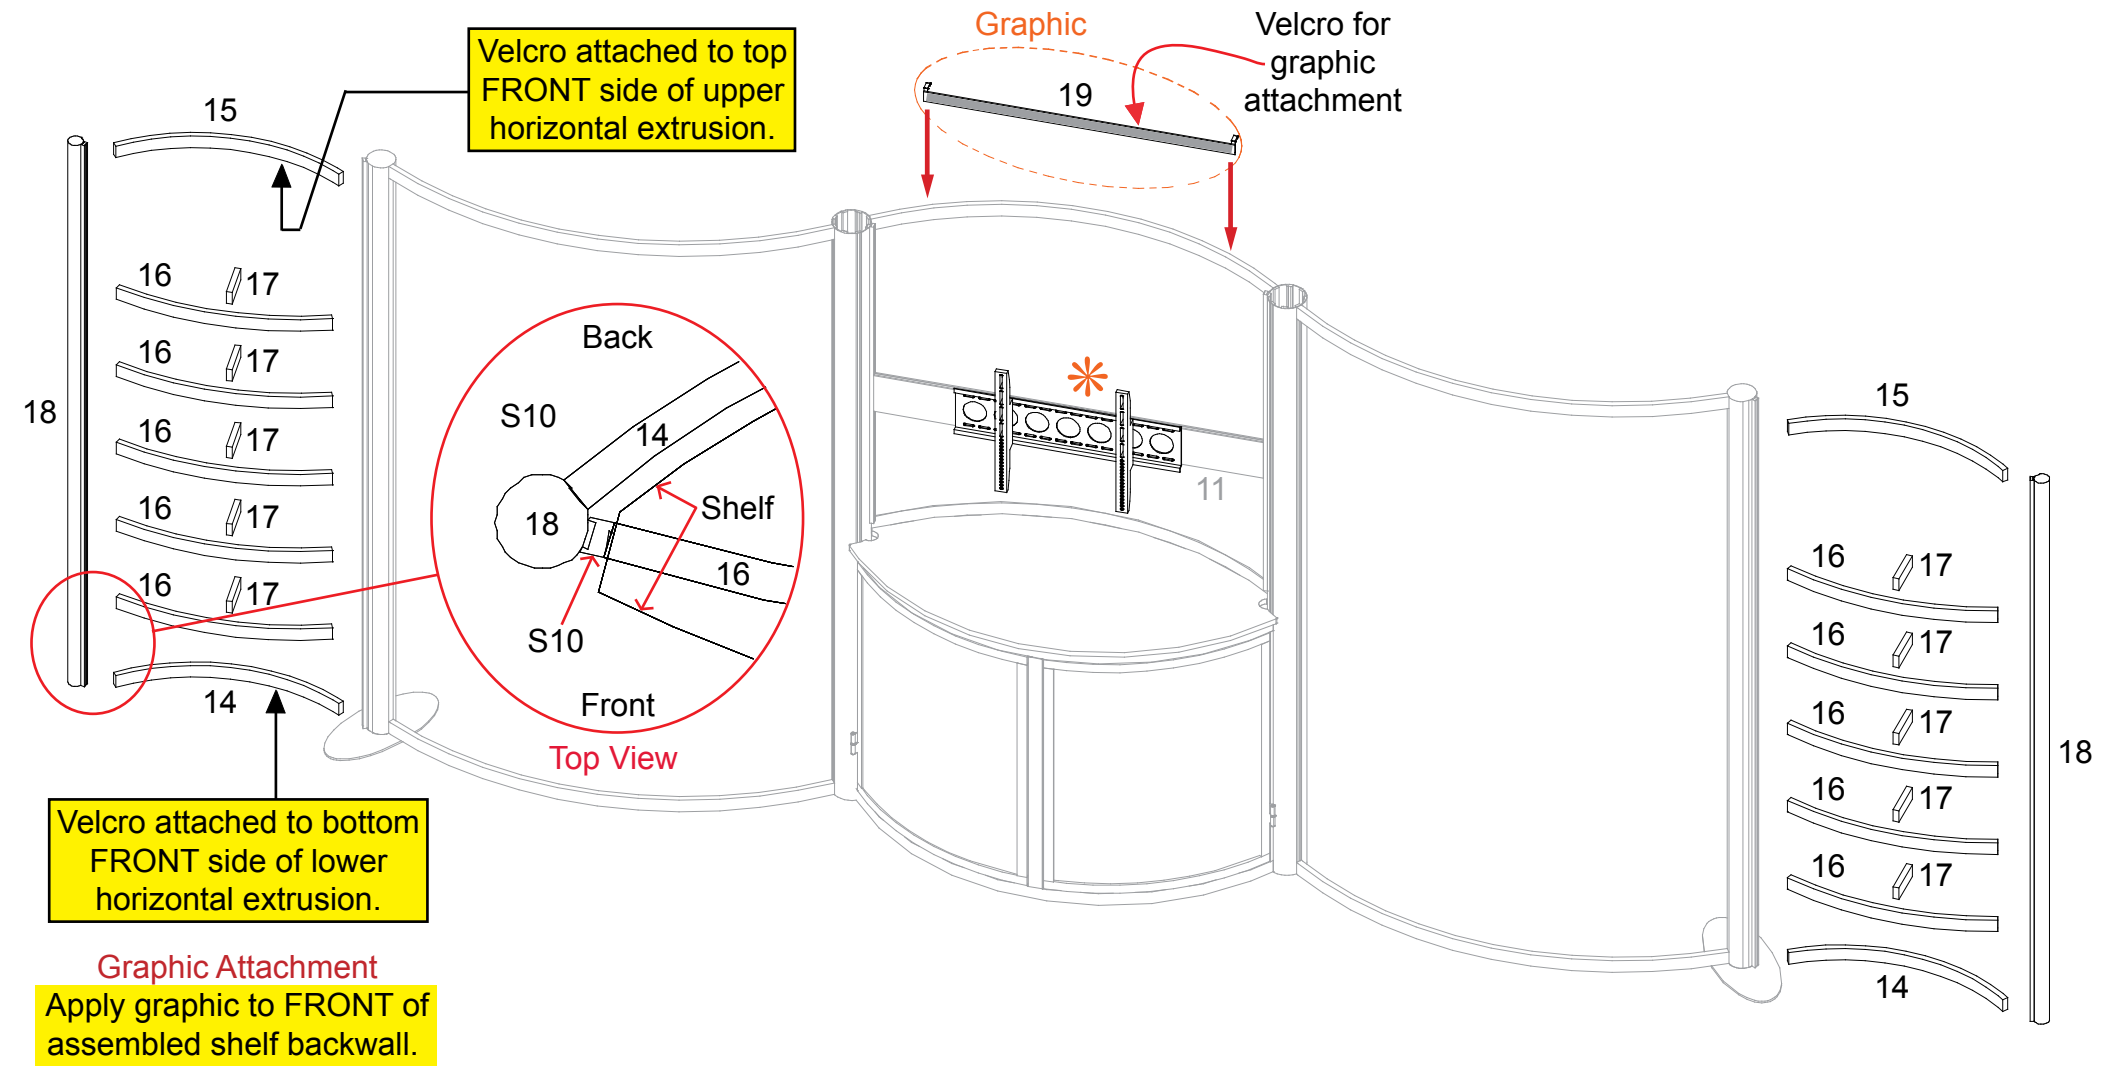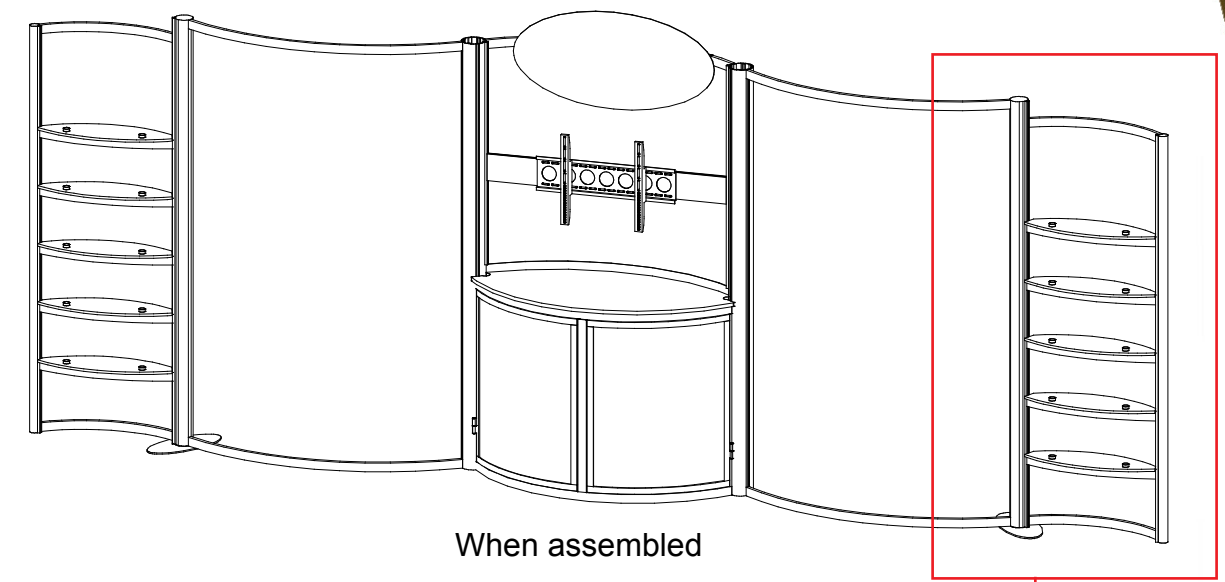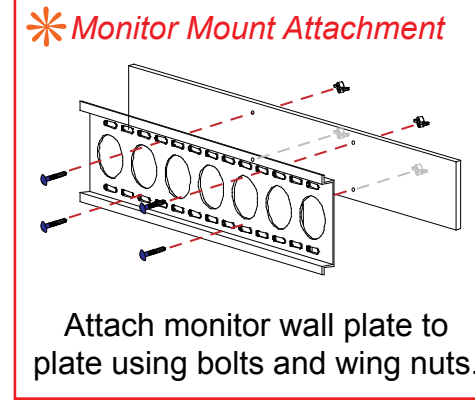

Item	Qty.	Description:
20	1	84" Round Vertical Extrusion
21	1	84" Round Vertical Extrusion
22	6	18" Horizontal Extrusion

Steps:

- 1) Attach horizontal extrusions [22] between verticals [20 & 21].
- 2) Attach base to verticals [20 & 21] using bolts.
- 3) Slide infill into place between verticals [20 & 21].
- 4) Attach ceiling to verticals [20 & 21] using bolts as shown.

