
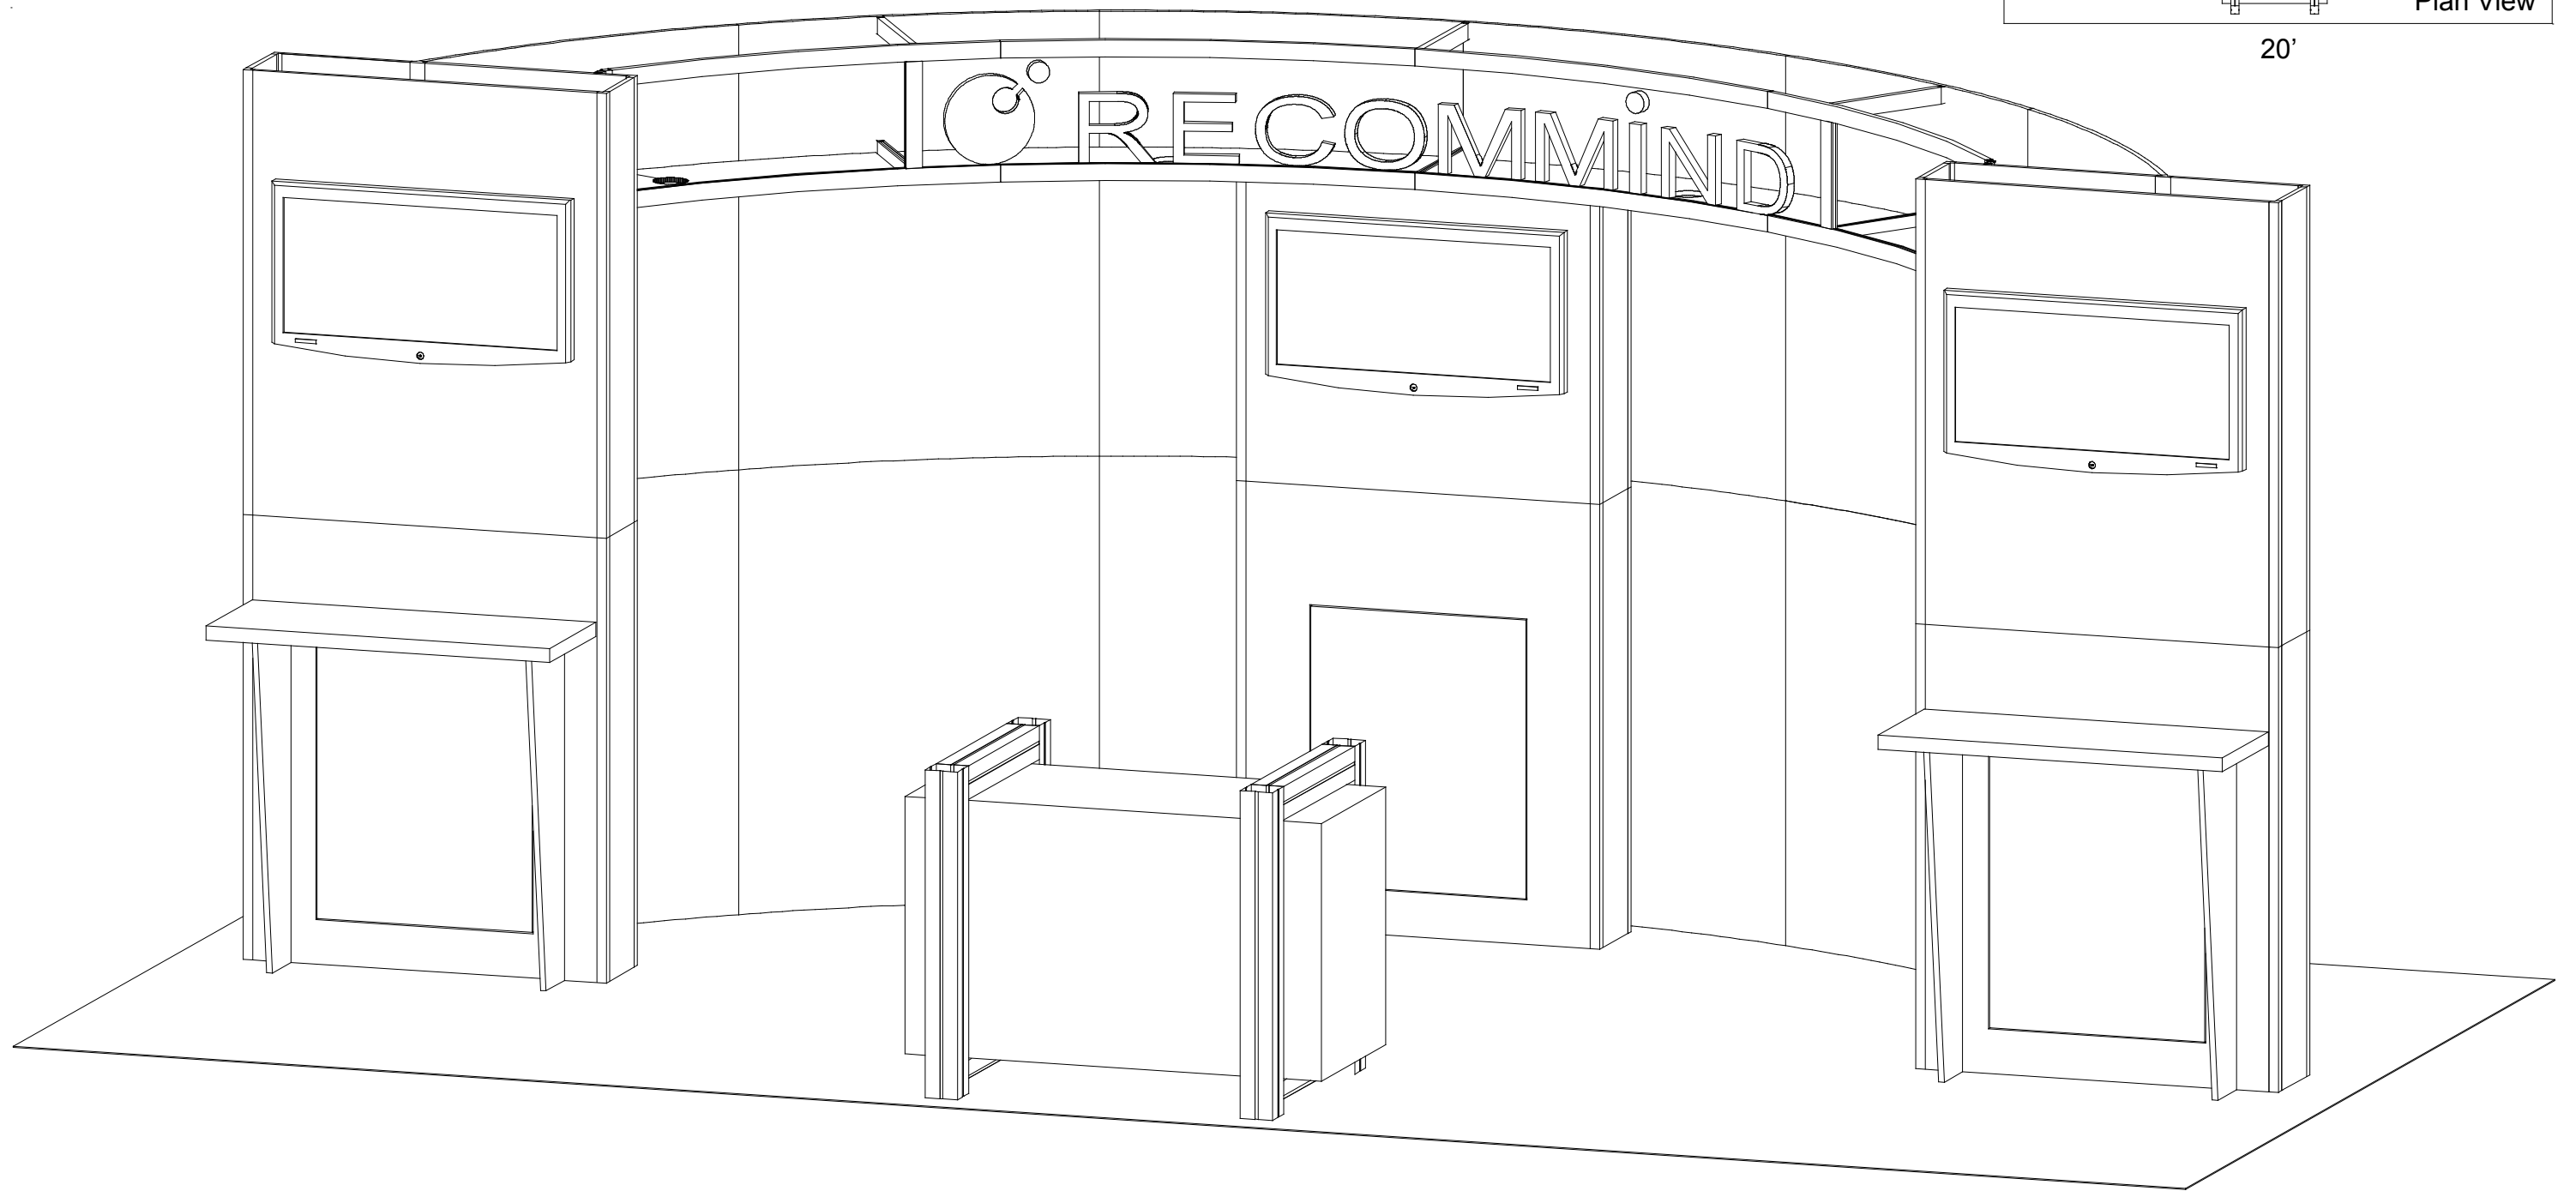


# euro It | HYBRIDS

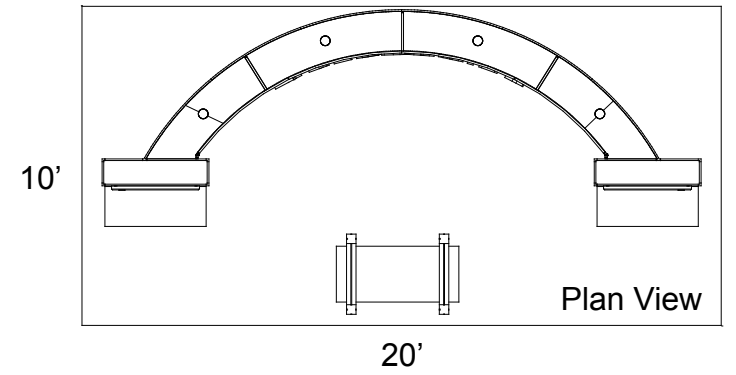

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

# euro It | HYBRIDS

## Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is **VERY IMPORTANT**.

## Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

## General Setup Instructions for Extrusion System



The Tool

Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.




Typical Connection (cont'd)

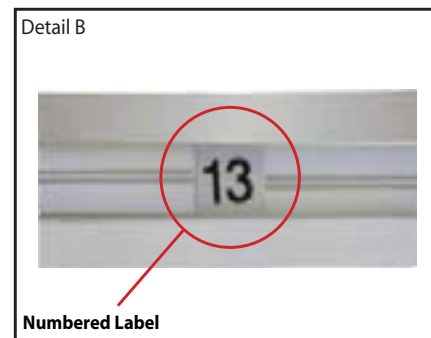


Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

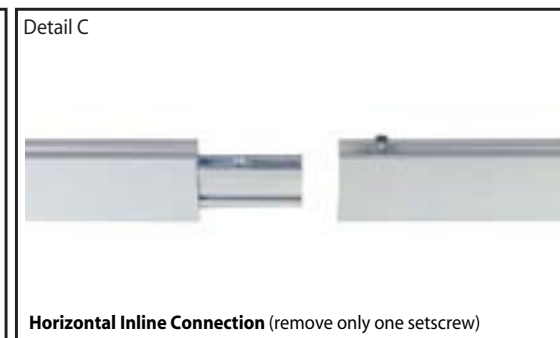


Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

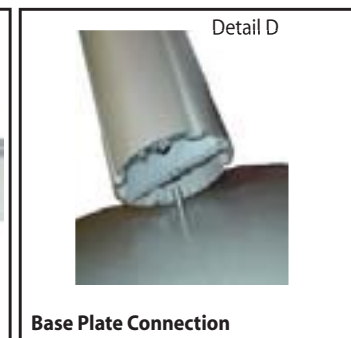

Base Plate Connection


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

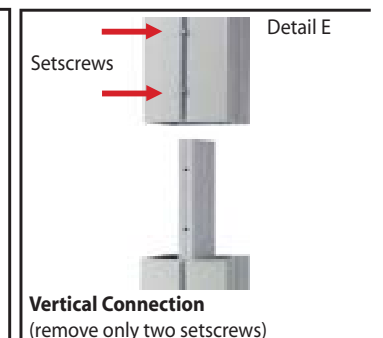

Vertical Connection (remove only two setscrews)


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

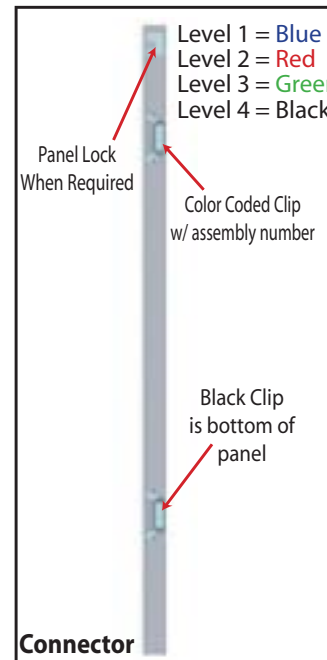


Connector

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

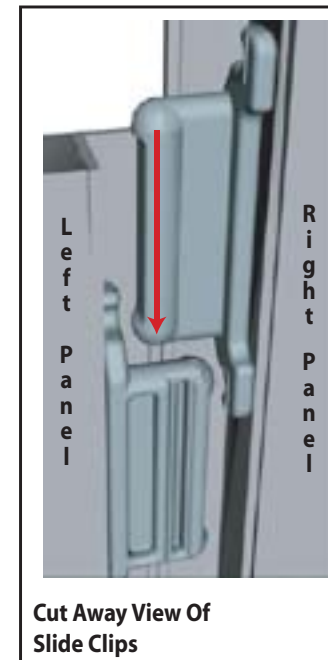


Cut Away View Of Slide Clips

Components connect together by aligning them and sliding downward connecting clips together.

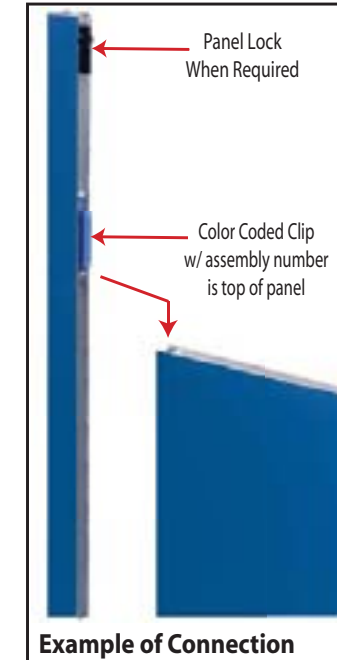

Example of Connection

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

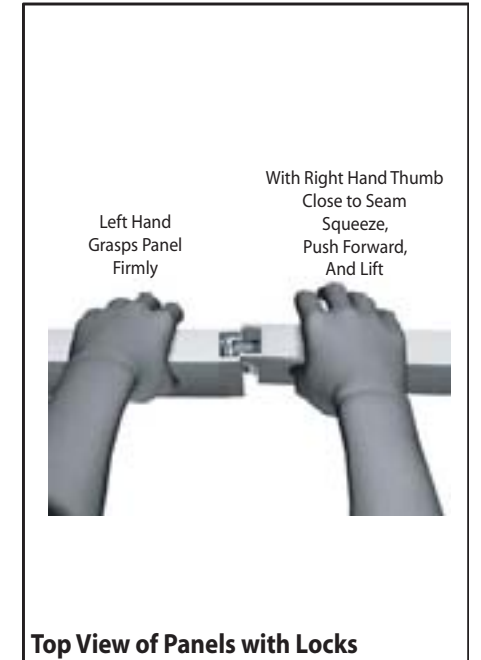

Top View of Panels with Locks



The first level of components contain pane locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

Panel	Description
1/1	14.125" x 47.5" Panel
2/2	47.5" 90° Connector
3/3	8" x 47.5" Panel
4/4	47.5" 90° Connector
5/5	38" x 47.5" Panel
6/6	47.5" 90° Connector
7/7	8" x 47.5" Panel
8/8	47.5" 90° Connector
9/9	22.22" x 47.5" Panel
10/10	47.5" 3-Panel Connector
11/11	111.42" x 47.5" Curved Panel
12/12	111.42" x 47.5" Curved Panel
13/13	111.42" x 47.5" Curved Panel
14/14	111.42" x 47.5" Curved Panel
15/15	111.42" x 47.5" Curved Panel
16/16	111.42" x 47.5" Curved Panel
17/17	47.5" 3-Panel Connector
18/18	22.22" x 47.5" Panel
19/19	47.5" 90° Connector
20/20	8" x 47.5" Panel
21/21	47.5" 90° Connector
22/22	38" x 47.5" Panel
23/23	47.5" 90° Connector
24/24	8" x 47.5" Panel
25/25	47.5" 90° Connector
26/26	14.125" x 47.5" Panel

Steps:  
 1) Assemble **Level 1** Panels in numerical order.  
 See *Setup Instructions for Panel Systems* on the *General Information* page.  
 2) Assemble **Level 2** Panels on top of **Level 1**.

Level 2 Numbered in Red  
 Level 1 Numbered in Blue

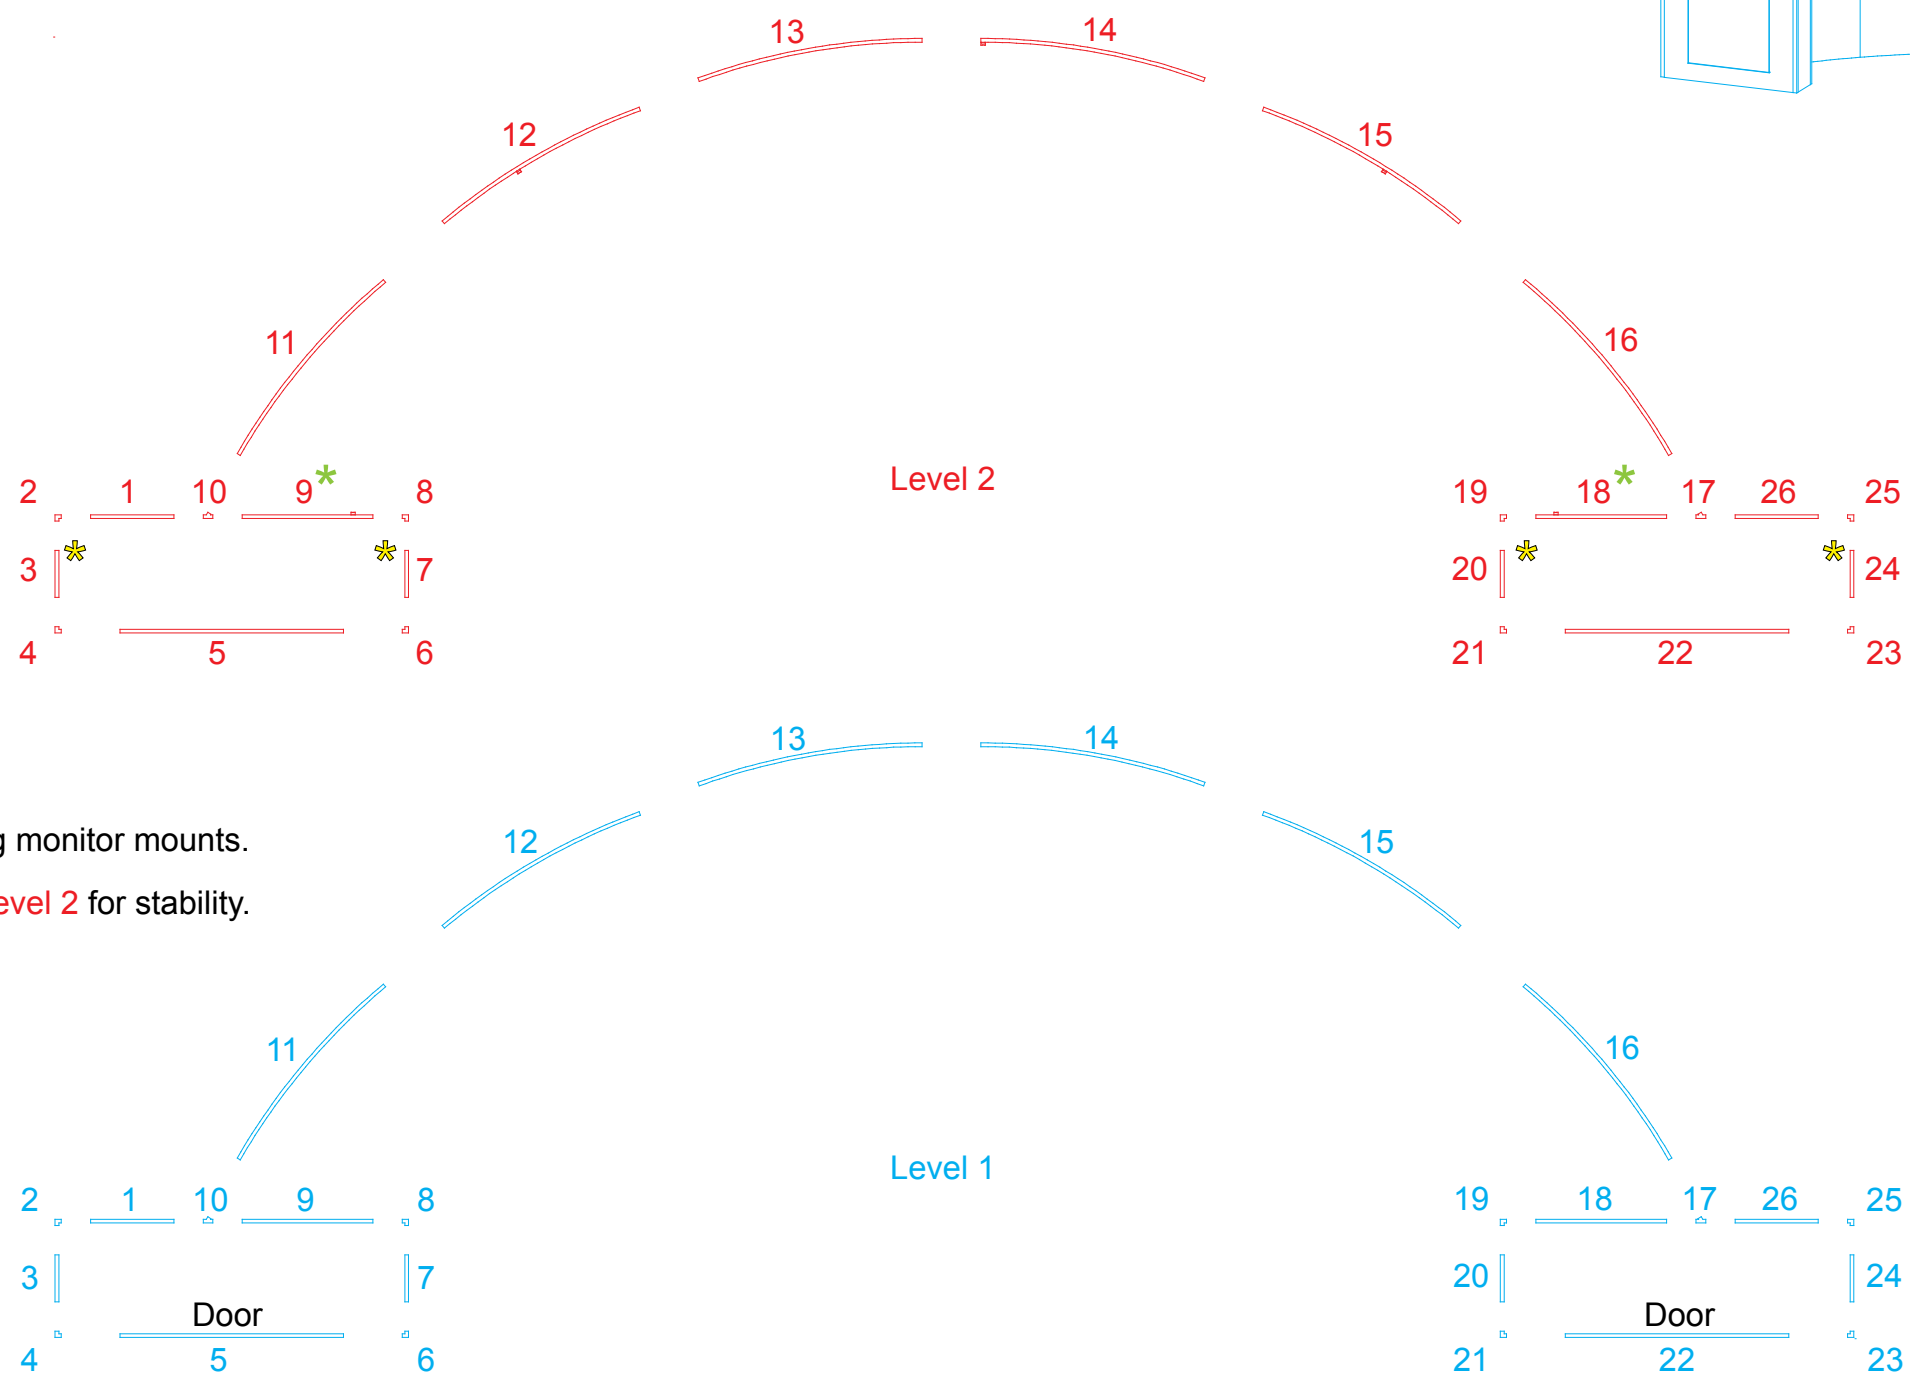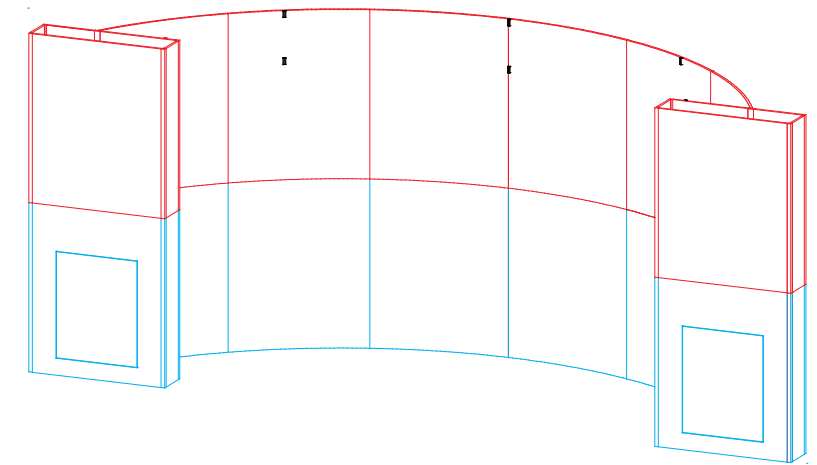


\* Attach panels 9 & 18 after attaching monitor mounts.  
 \* Thumbscrew connects Level 1 & Level 2 for stability.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


Panel	Description	Panel	Description
27	38" x 47.5" Panel	27	38" x 32.5" Panel
28	47.5" 90° Connector	28	32.5" 90° Connector
29	8" x 47.5" Panel	29	8" x 32.5" Panel
30	47.5" 90° Connector	30	32.5" 90° Connector
31	38" x 47.5" Panel	31	38" x 32.5" Panel
32	47.5" 90° Connector	32	32.5" 90° Connector
33	8" x 47.5" Panel	33	8" x 32.5" Panel
34	47.5" 90° Connector	34	32.5" 90° Connector
35	38" Tapered Panel		

Steps:



- 1) Assemble **Level 1** Panels in numerical order.
- 2) Assemble **Level 2** Panels on top of **Level 1**.
- 3) Attach tapered panels [35] to velcro on towers as shown.
- 4) Set counter tops on tapered panels [35] and attach to towers with thumbscrews.
- 5) Attach monitor mounts to towers with screws.
- 6) Attach panels [9,18,33].

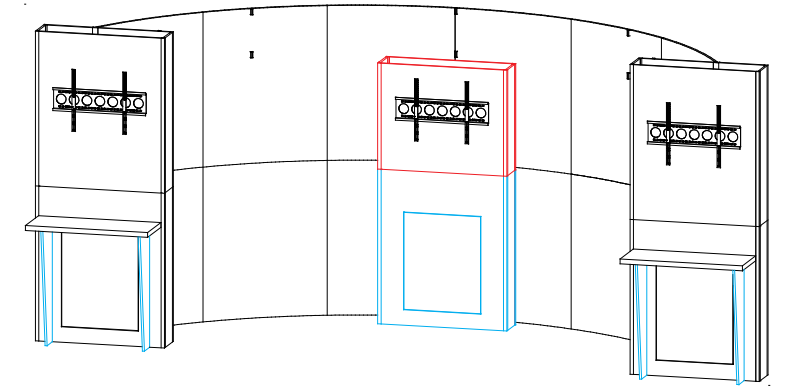

Level 2 Numbered in Red  
Level 1 Numbered in Blue

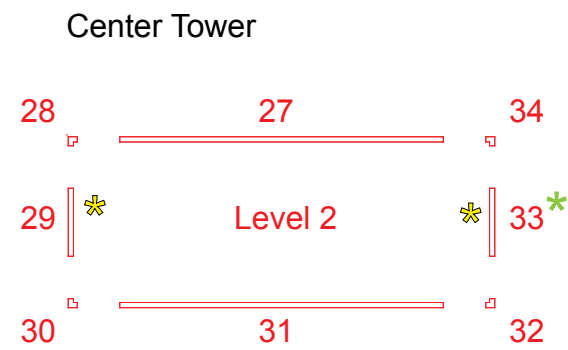

\*Attach panels 33 after attaching monitor mount.  
\*Thumbscrew connects Level 1 & Level 2 for stability.






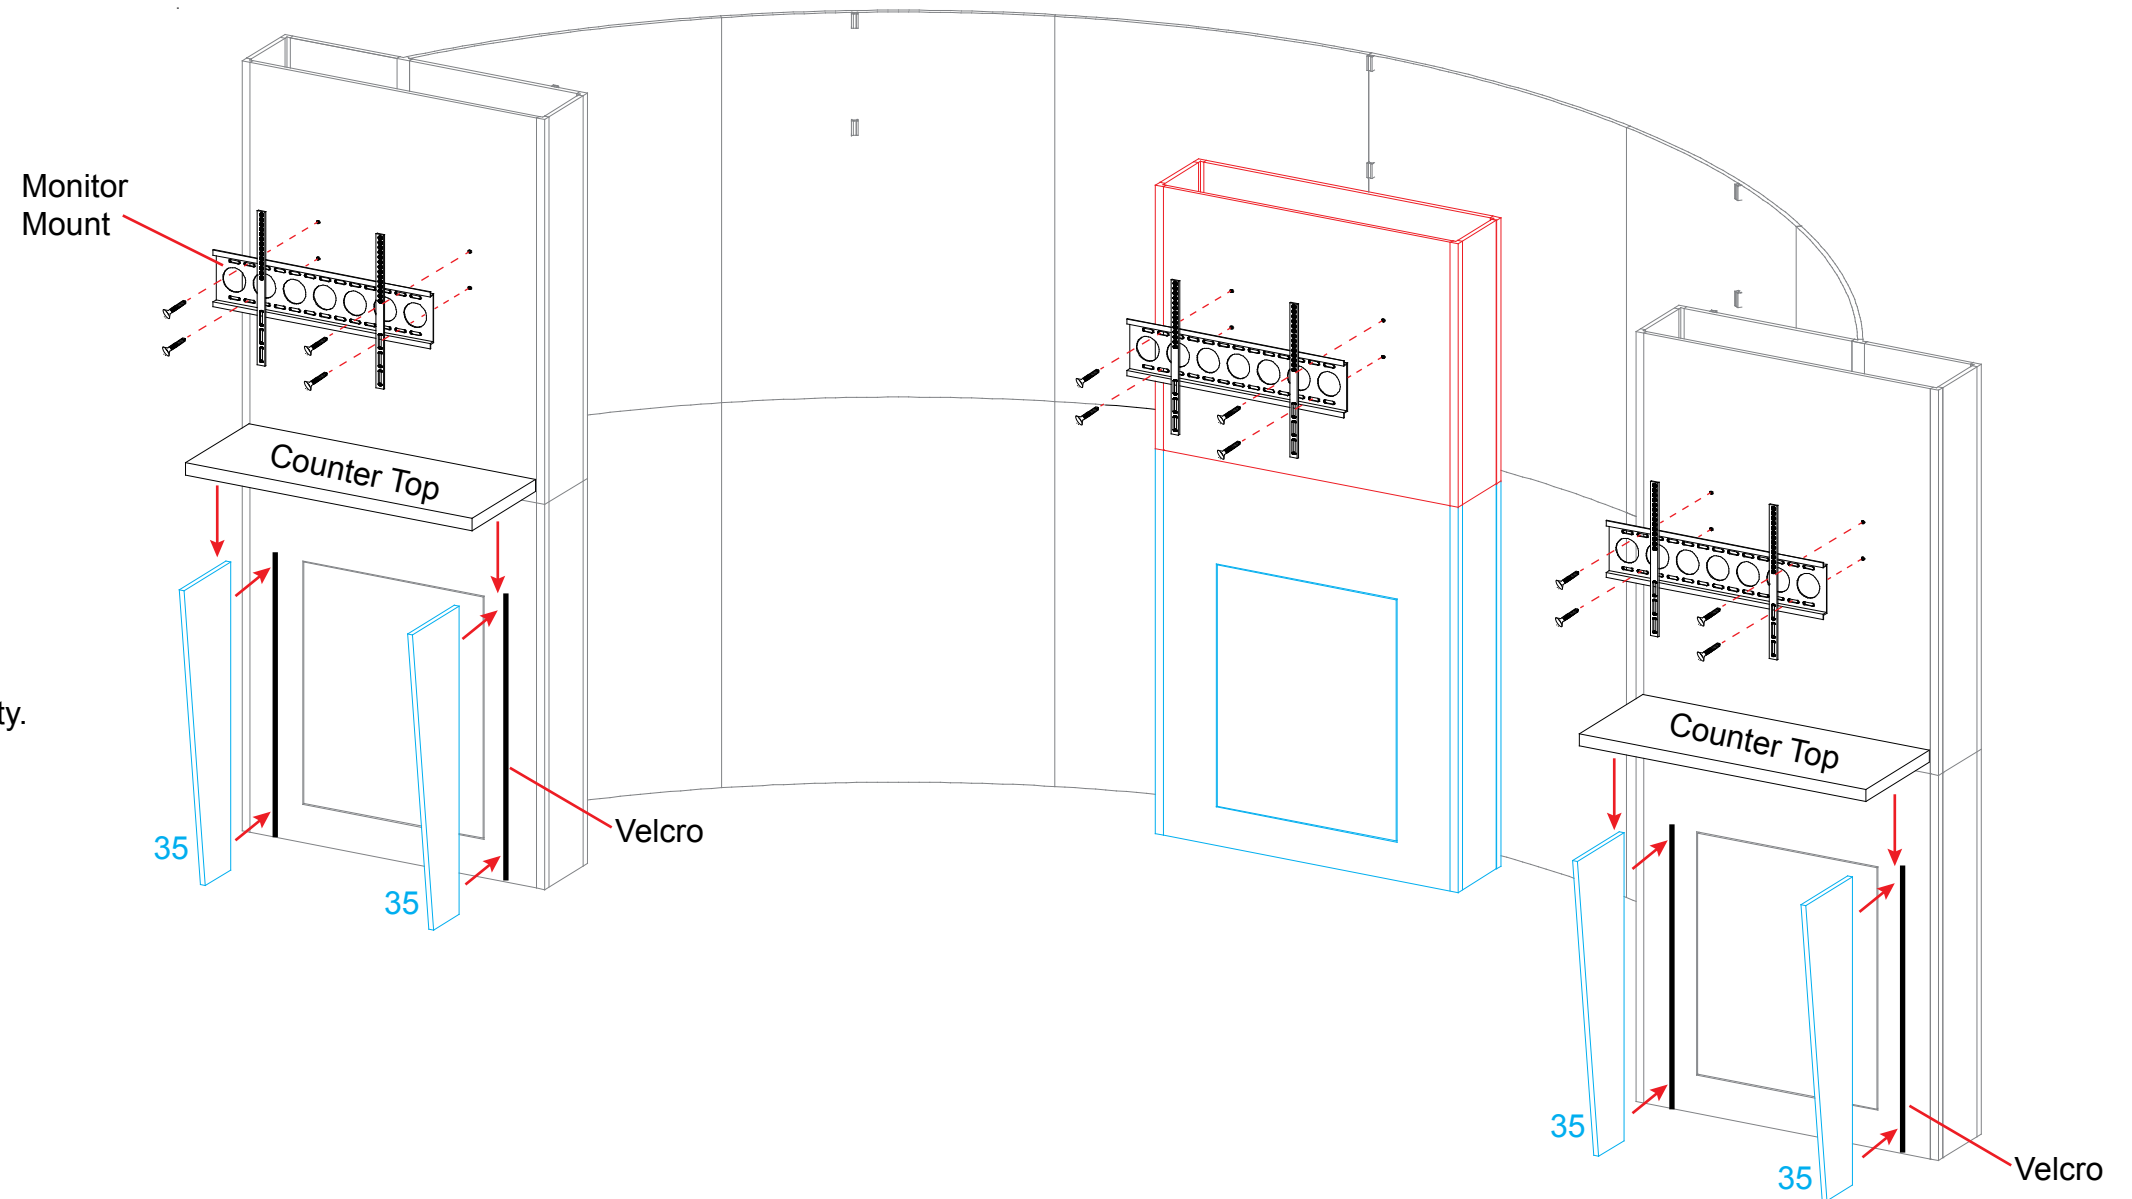
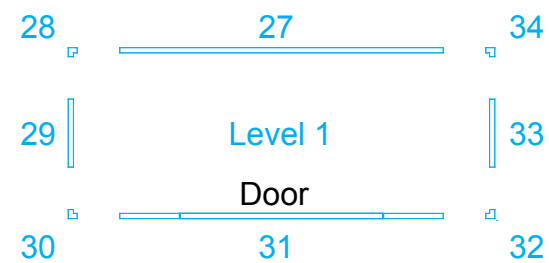


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Part	Qty.	Description
1	1	15" Hinged Connector
2	1	15" Hinged Connector
3a/3b	1/1	44" Curved Horizontal Extrusion
3c/3d	1/1	44" Curved Horizontal Extrusion
4a/4b	1/1	44" Curved Horizontal Extrusion
4c/4d	1/1	44" Curved Horizontal Extrusion
5	6	14.45" Horizontal Extrusions
6	4	11.4" Vertical Extrusions
7	2	6" Vertical Extrusions

- Steps:
- 1) Attach assembled center section [4a-4c] to backwall panels with horizontals [5].
  - 2) Attach hinged connectors [1,2] to extrusions on tower backwalls.
  - 3) Connect horizontal extrusions [3a-3d] with verticals [6].
  - 4) Lock assemblies [3a/3b & 3c/3d] between connectors [1,2] and center section [4a-4c] and secure to backwall with horizontals [5].
  - 5) Lock verticals [7] to center horizontal [5] to prevent center tower from rocking.

Center Section Ships & Packs Assembled

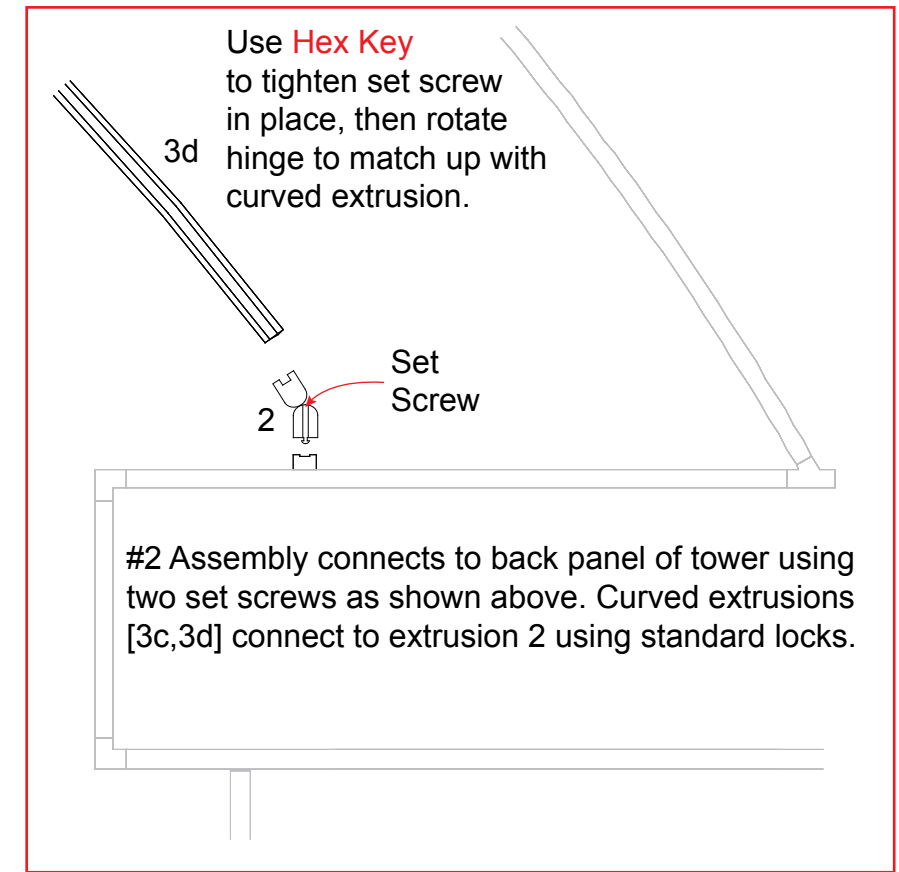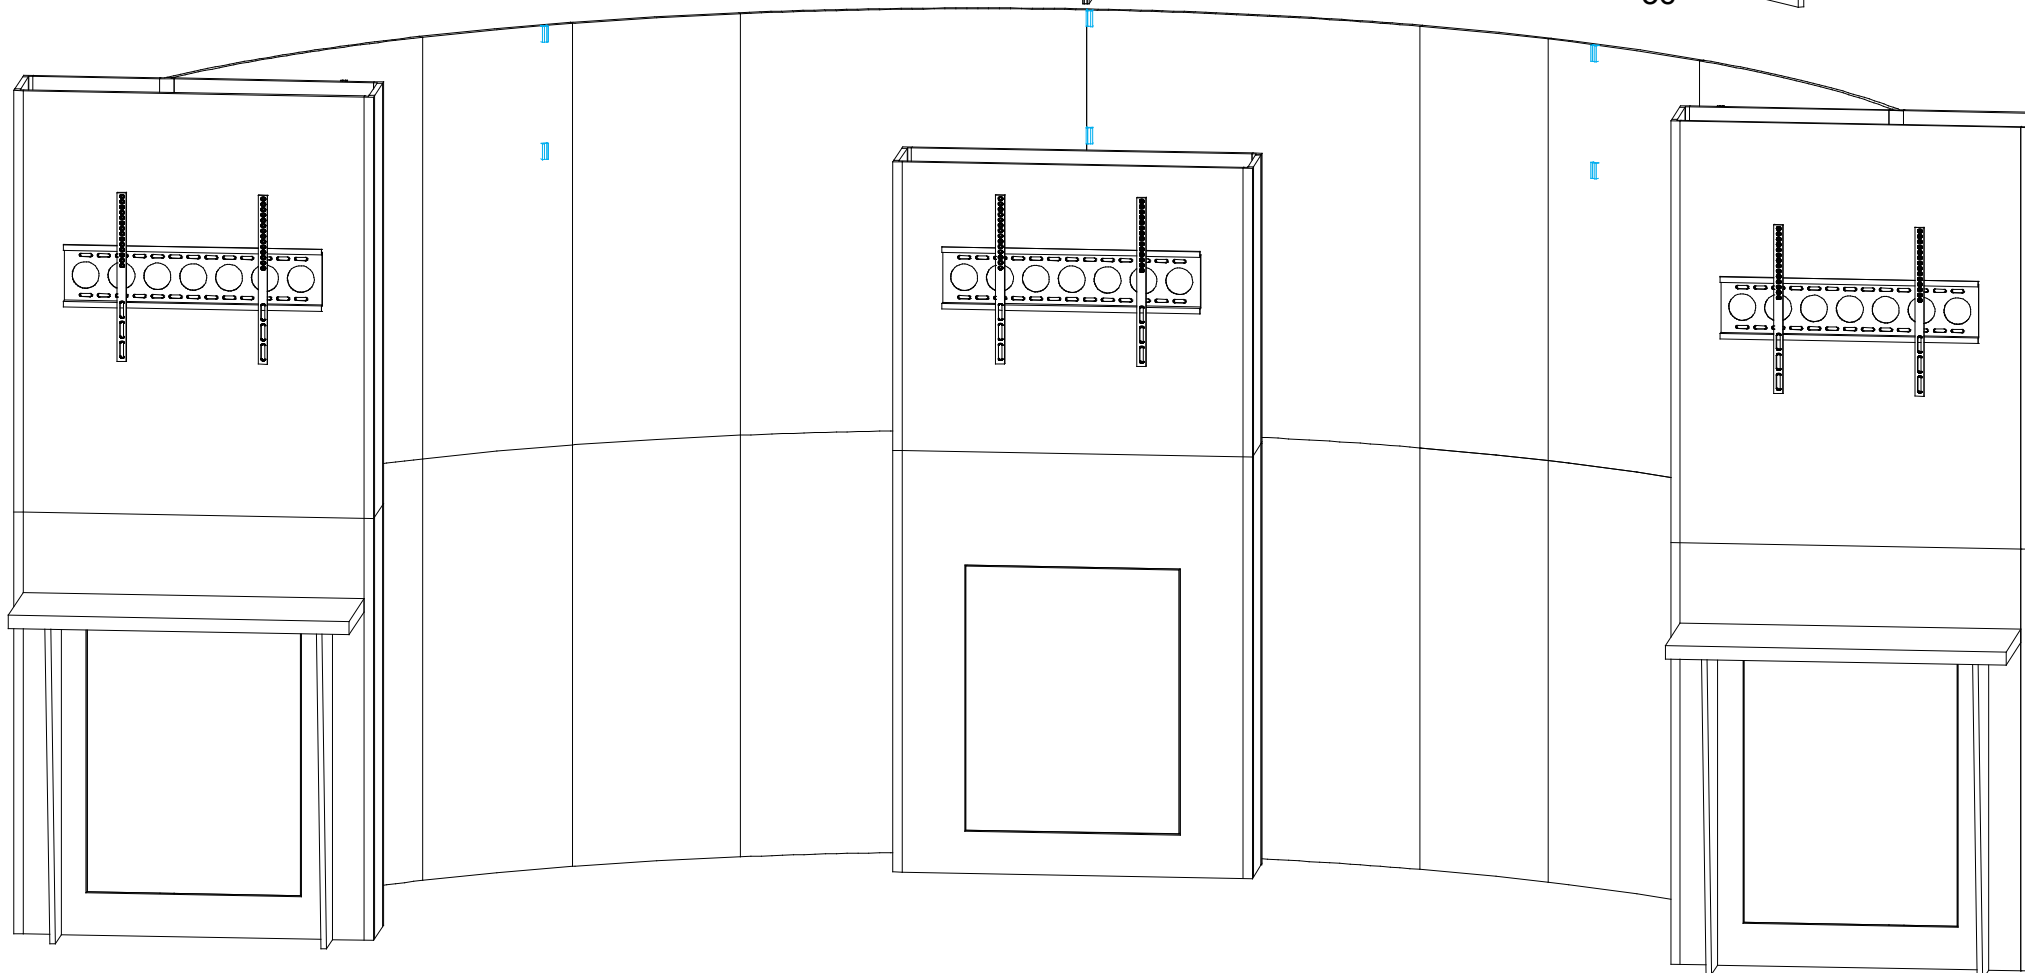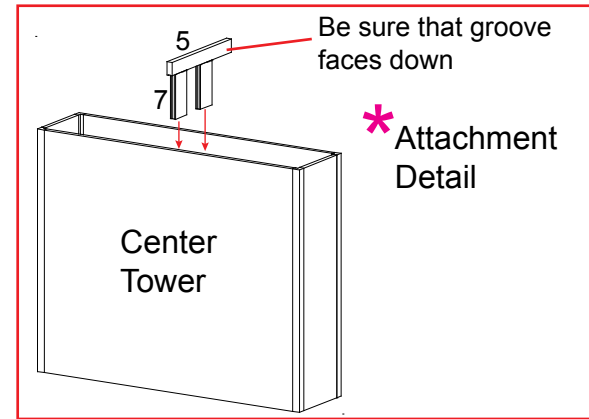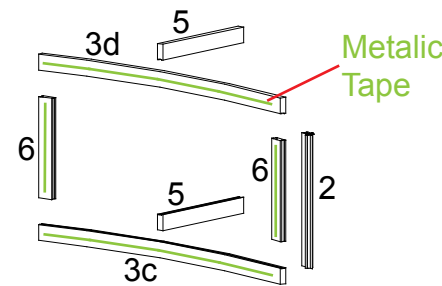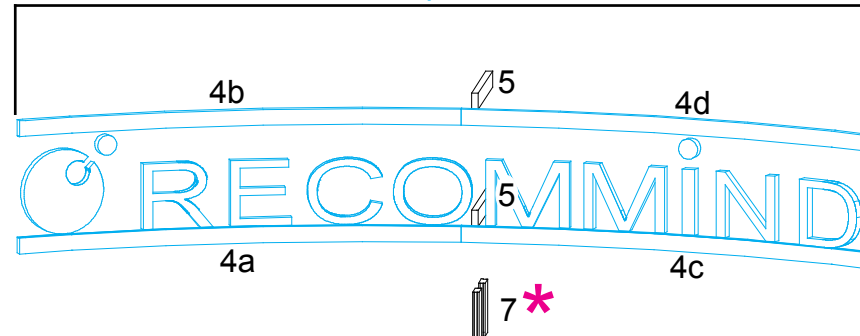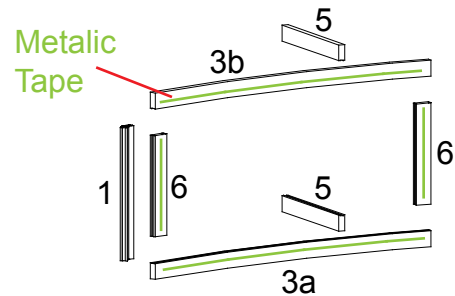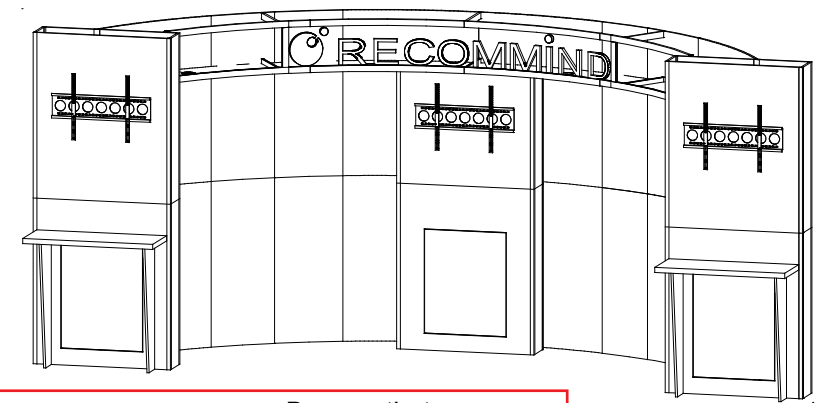


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Setups:


- 1) Set ceiling panels inside header frame on pins set into backwall and the backs of the lower curved extrusions.
- 2) Attach magnetic graphics to the end sections of the header frame.

Tilt ceiling panels in from underneath header frame

\* Header garphic is backlit by lights that attach to the ceiling panels

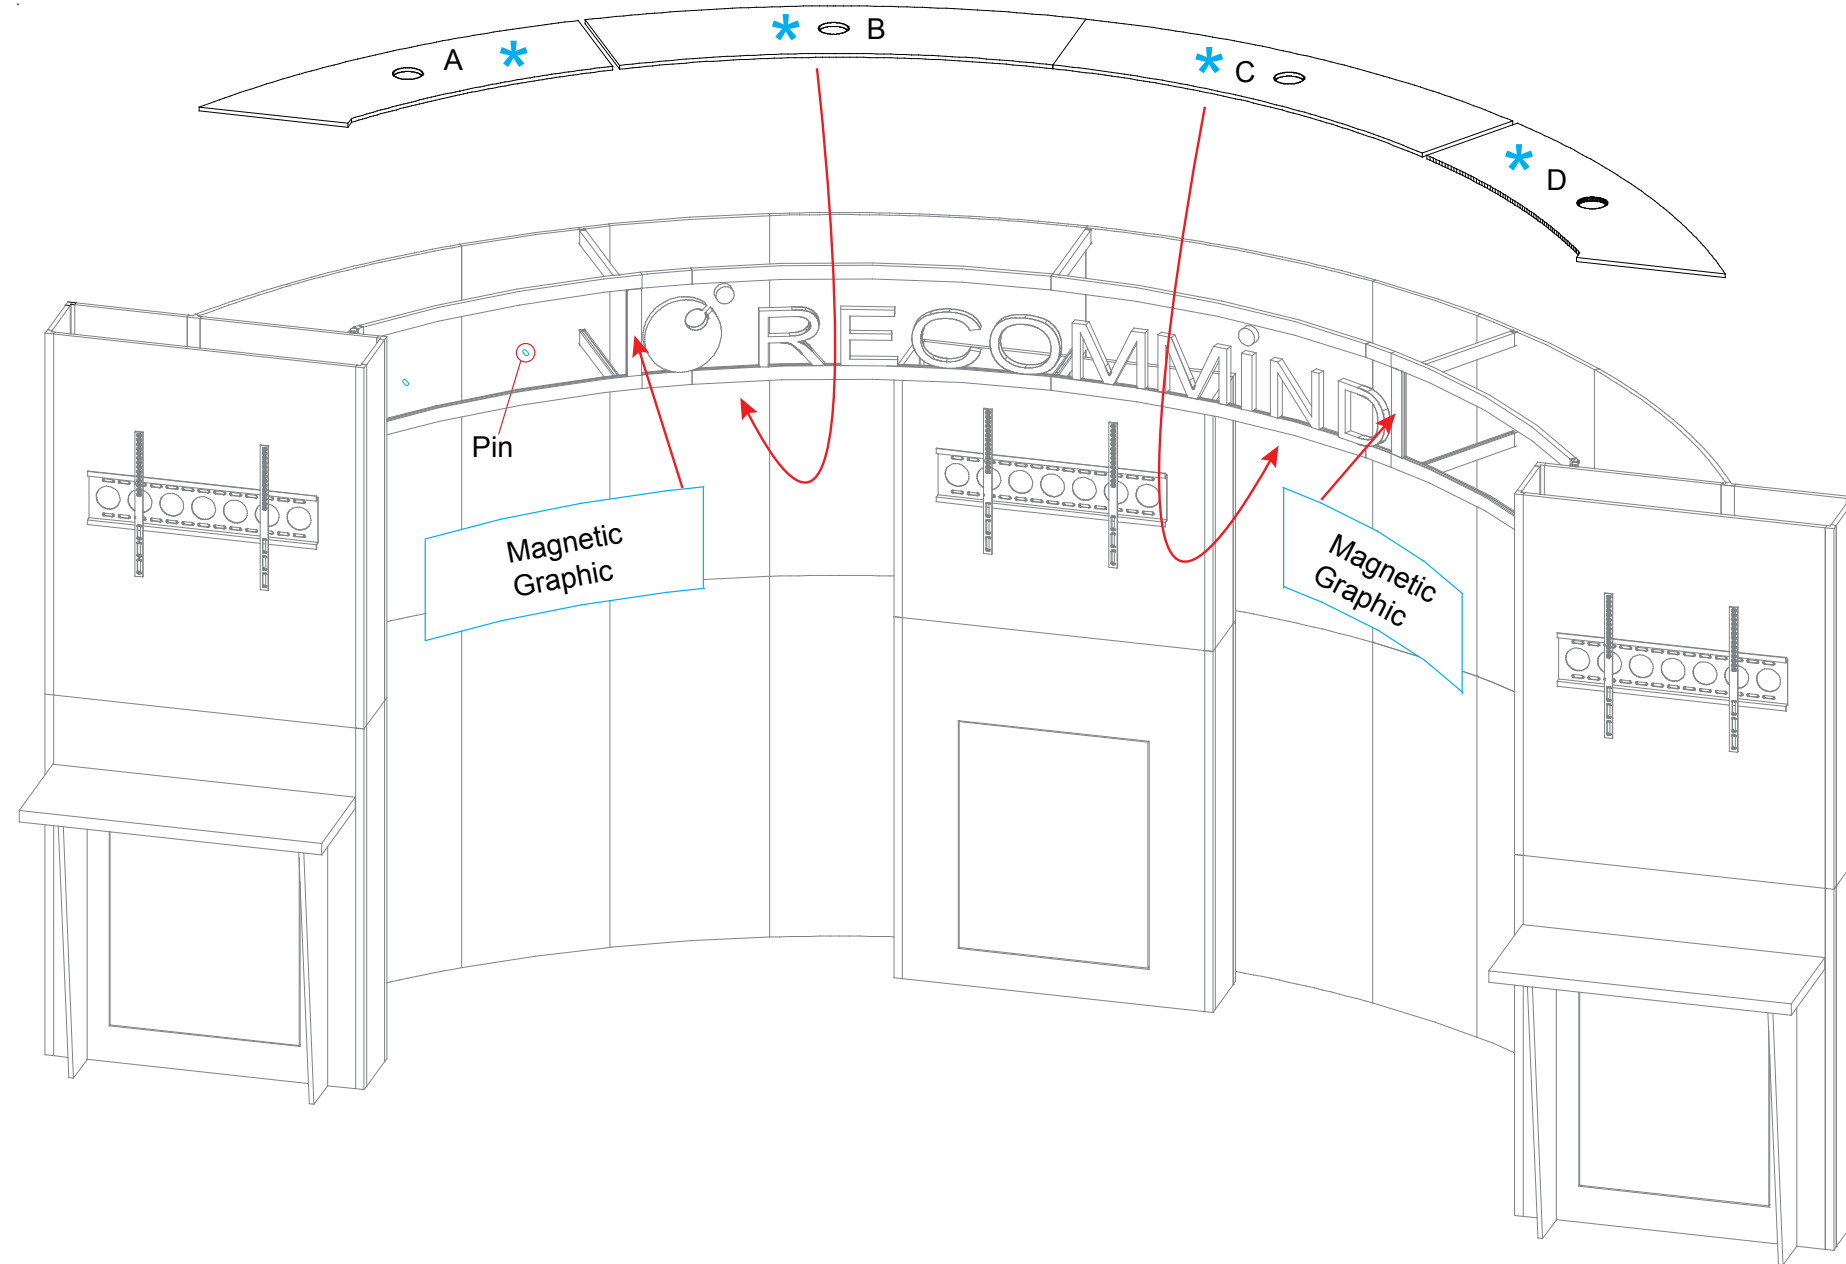

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

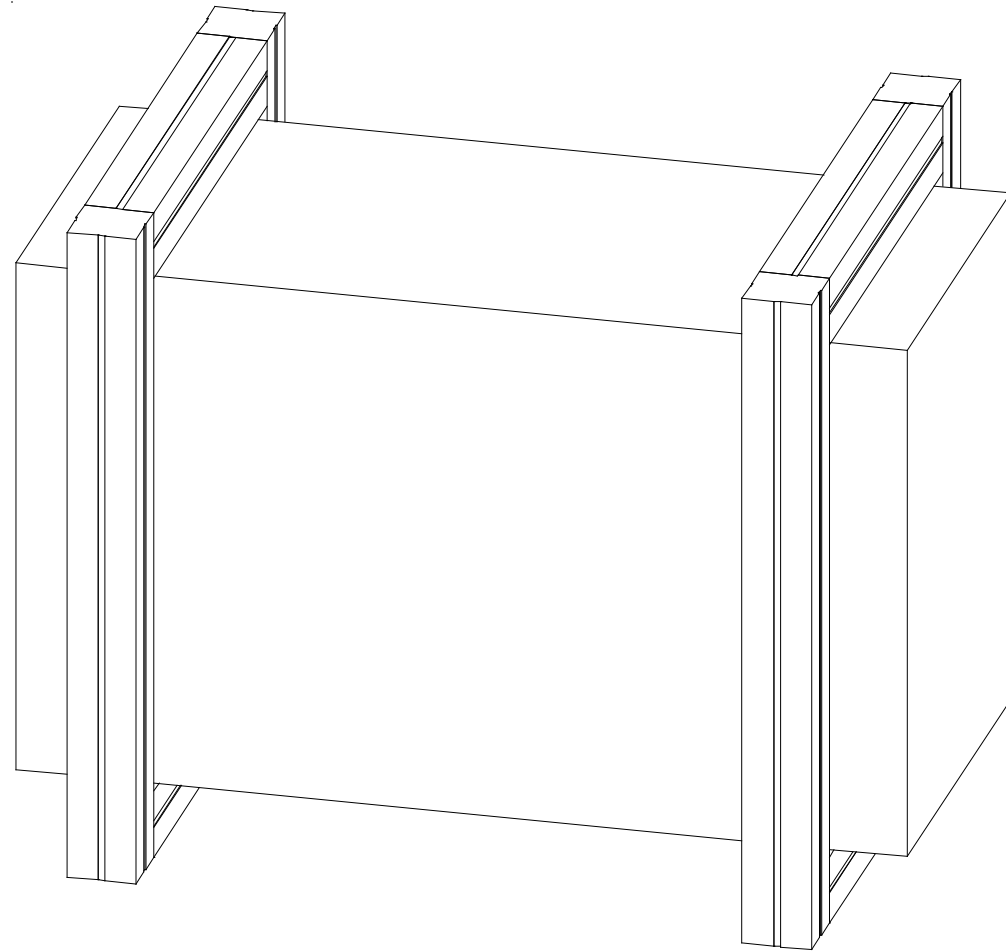


Pedestal ships & packs assembled.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING




Crate 1  
Side 1

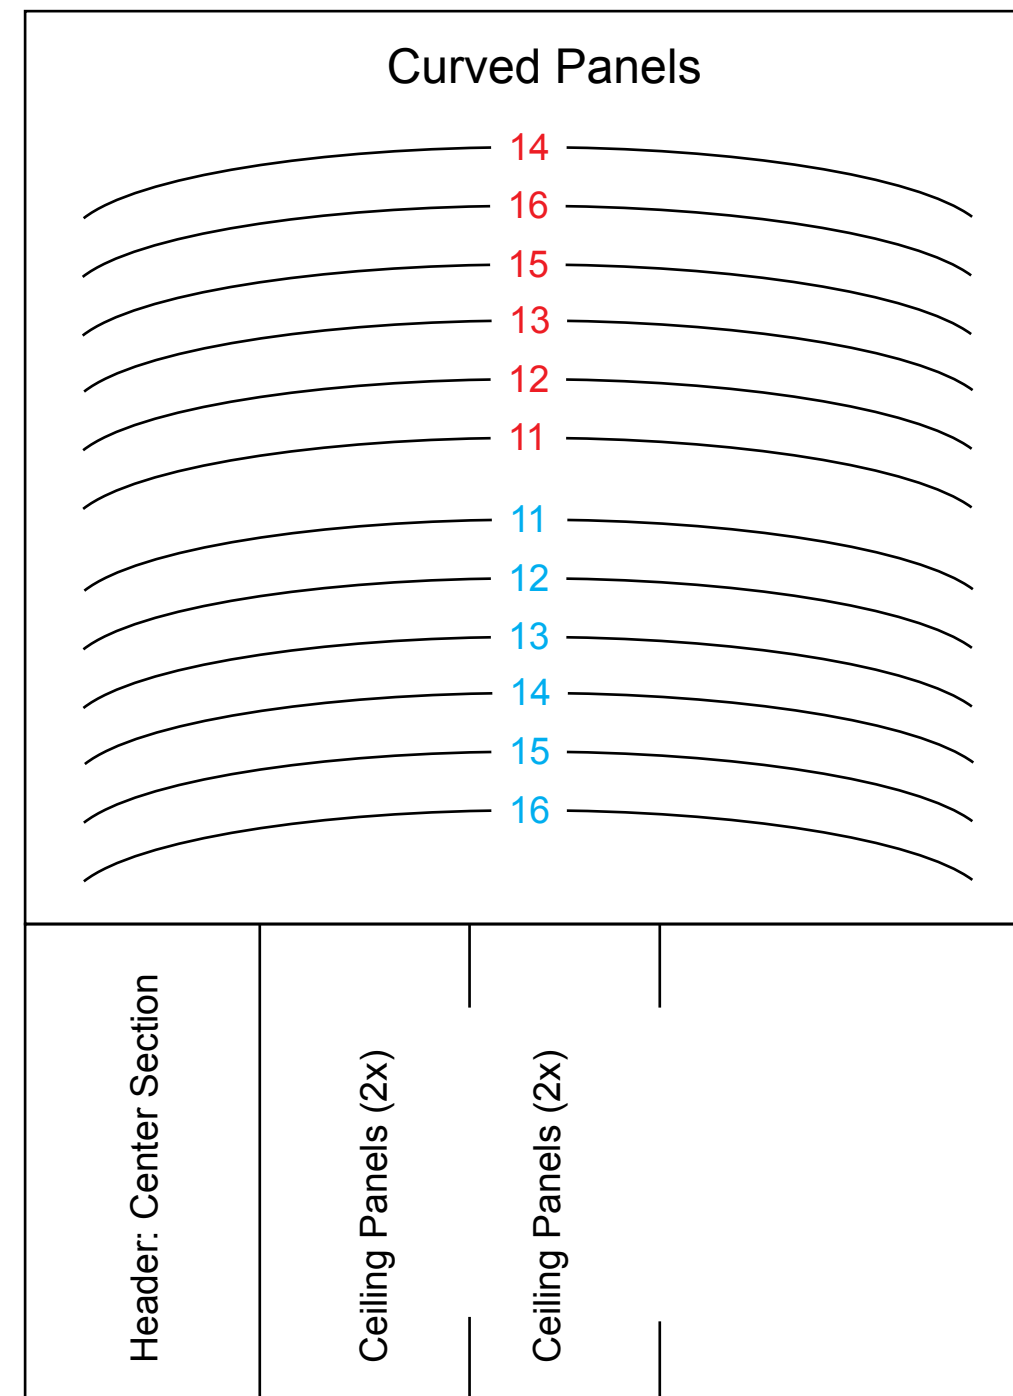

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

# Crate 1 Side 2

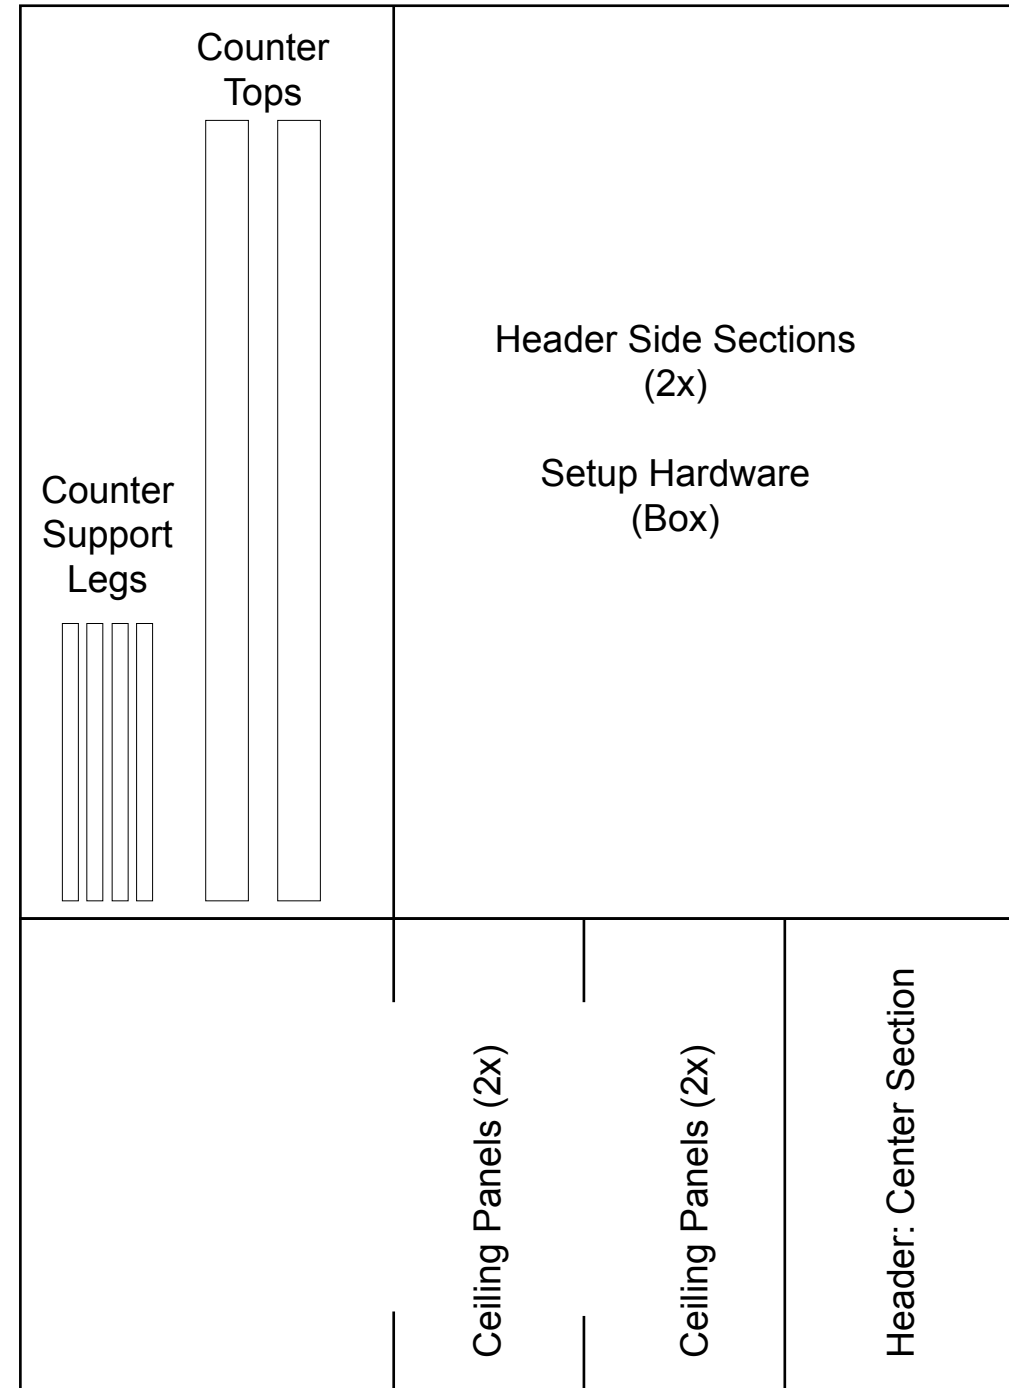

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

