
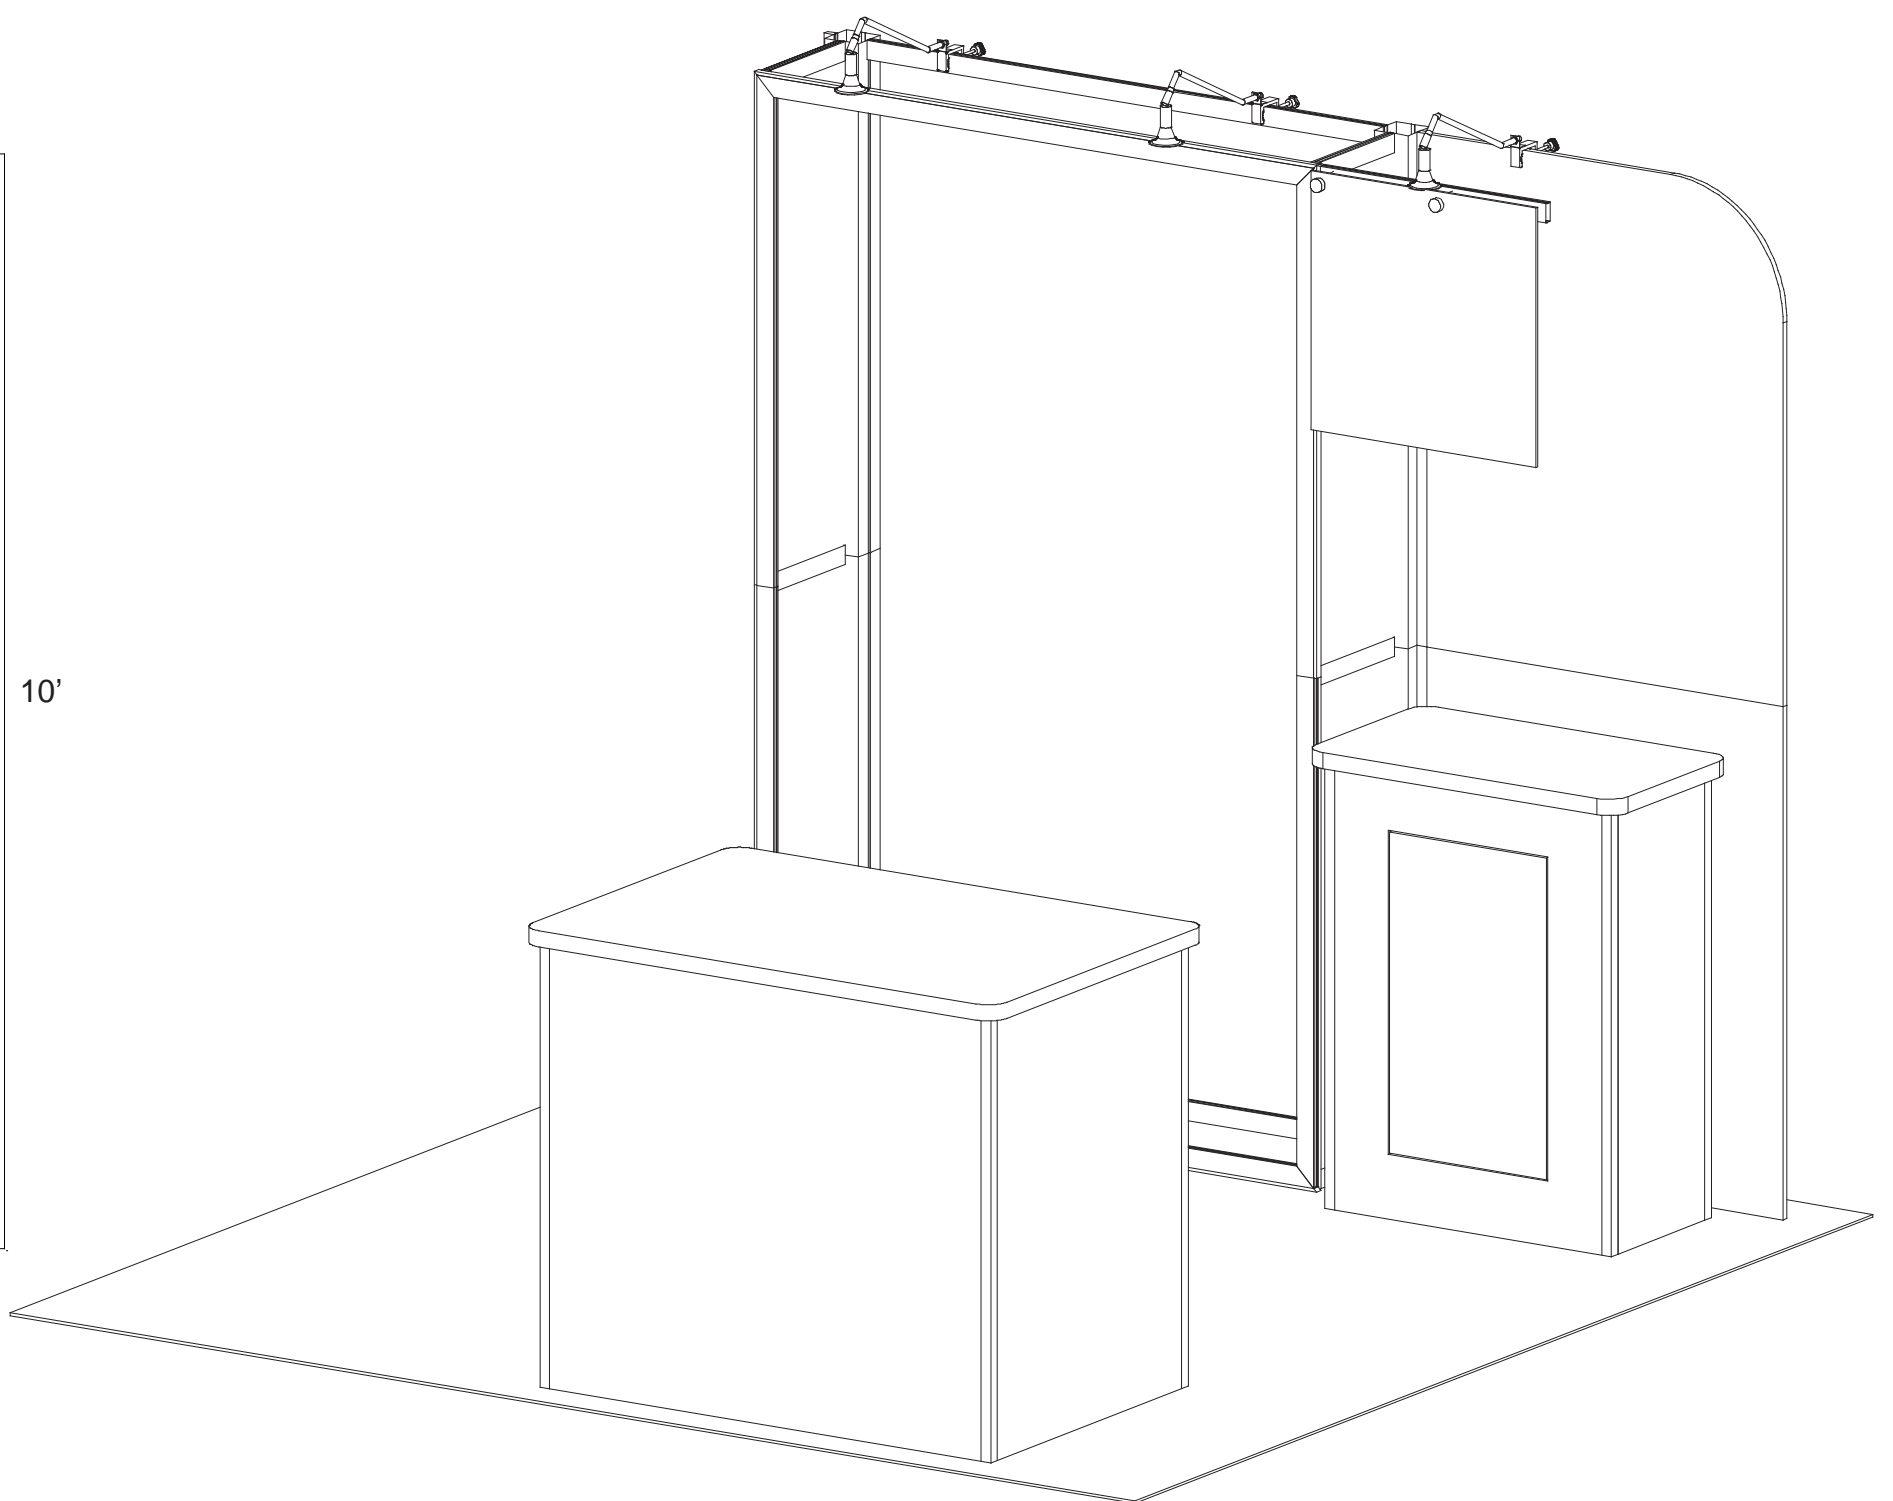


euro It | *HYBRIDS*

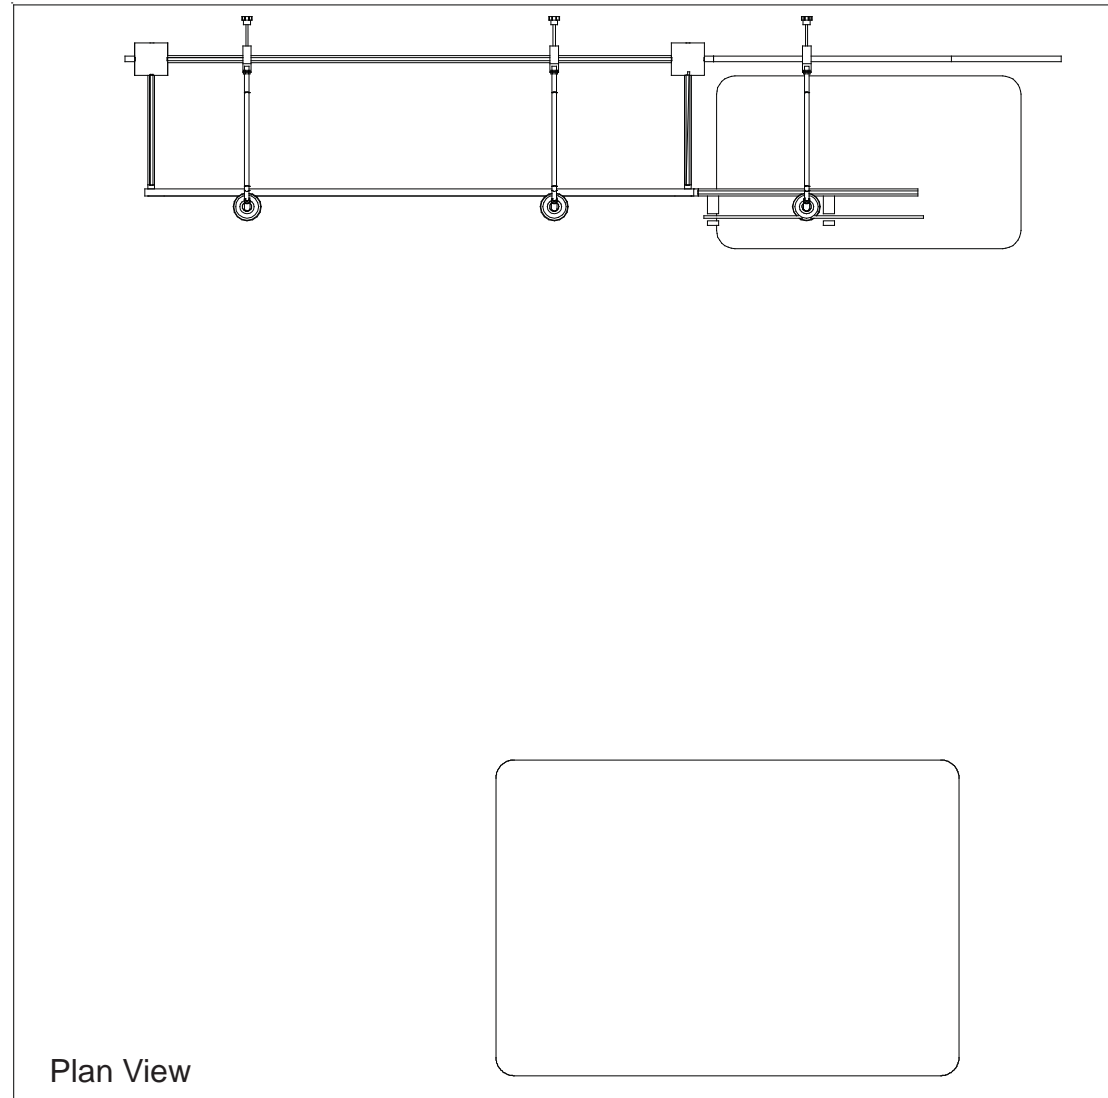

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Extrusion System




Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

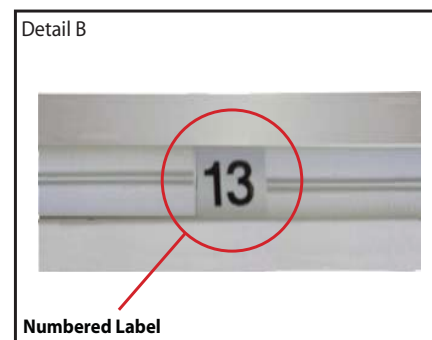


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.

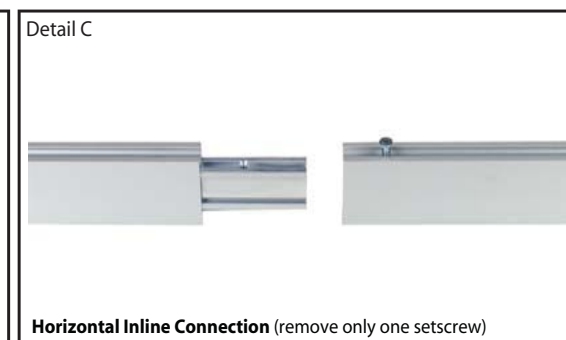

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

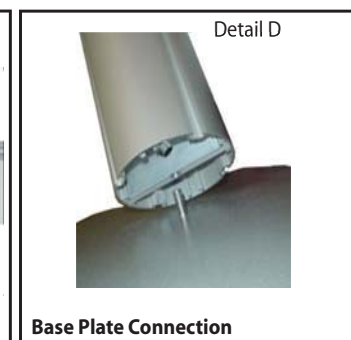


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

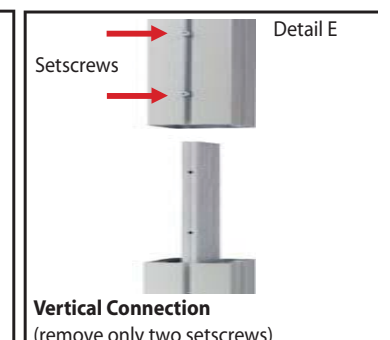


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

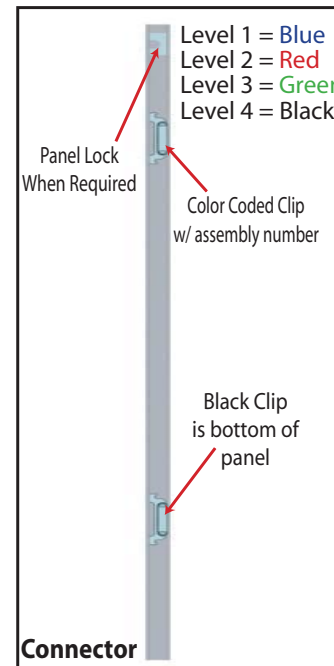


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

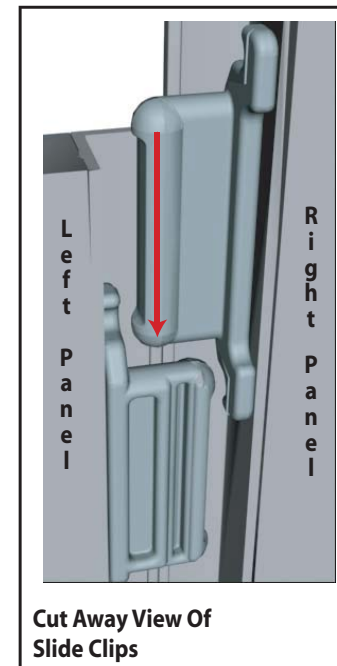

Components connect together by aligning them and sliding downward connecting clips together.

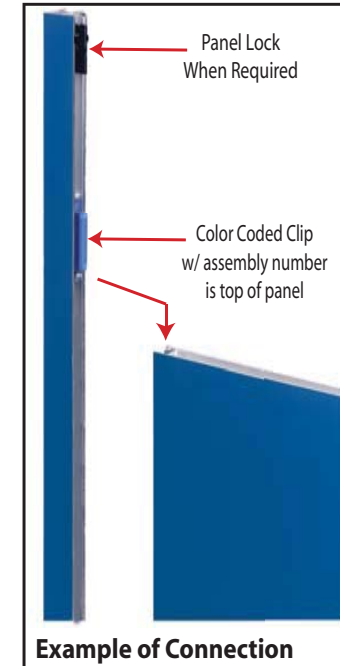

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

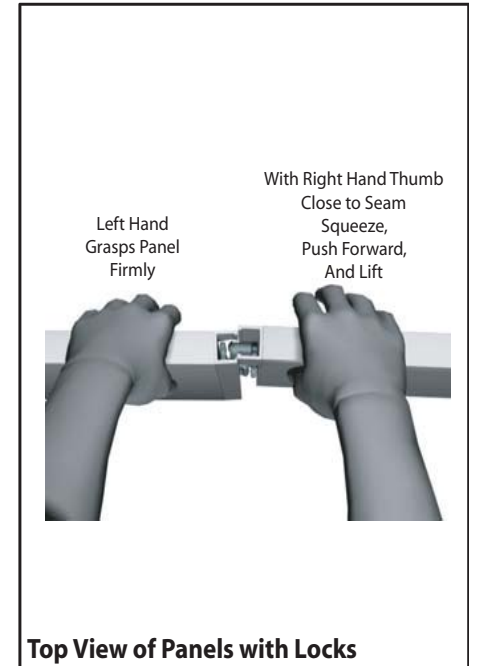


The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Part Number	Qty for Step	Description
27	1	47.5"h Lower Vertical Extrusion
28	1	47.5"h Upper Vertical Extrusion
29	1	47.5"h Lower Vertical Extrusion
30	1	47.5"h Upper Vertical Extrusion
31	2	55.069" Horizontal Extrusion
32	6	12" Horizontal Extrusion
33	1	59.4" Miter Cut Horizontal Extrusion
34	1	59.4" Miter Cut Horizontal Extrusion
35	1	47.5" Miter Cut Vertical Extrusion
36	1	47.5" Miter Cut Vertical Extrusion
37	1	47.5" Miter Cut Vertical Extrusion
38	1	47.5" Miter Cut Vertical Extrusion
39	1	24"w Horizontal Extrusion

Steps

- 1) Attach lower vertical extrusion [27] to upper vertical extrusion [28].
- 2) Attach lower vertical extrusion [29] to upper vertical extrusion [30].
- 3) Connect horizontal extrusions [31] between verticals [27/28 and 29/30].
- 4) Assemble Graphic frame by connecting extrusions [33, 34, 35, 36, 37 and 38] together
- 5) Connect horizontal extrusions [32] to assembled verticals [27/28 and 29/30] and to back of assembled frame, placing inserts as shown.
- 6) Attach horizontal extrusion [39] to connector where indicated.

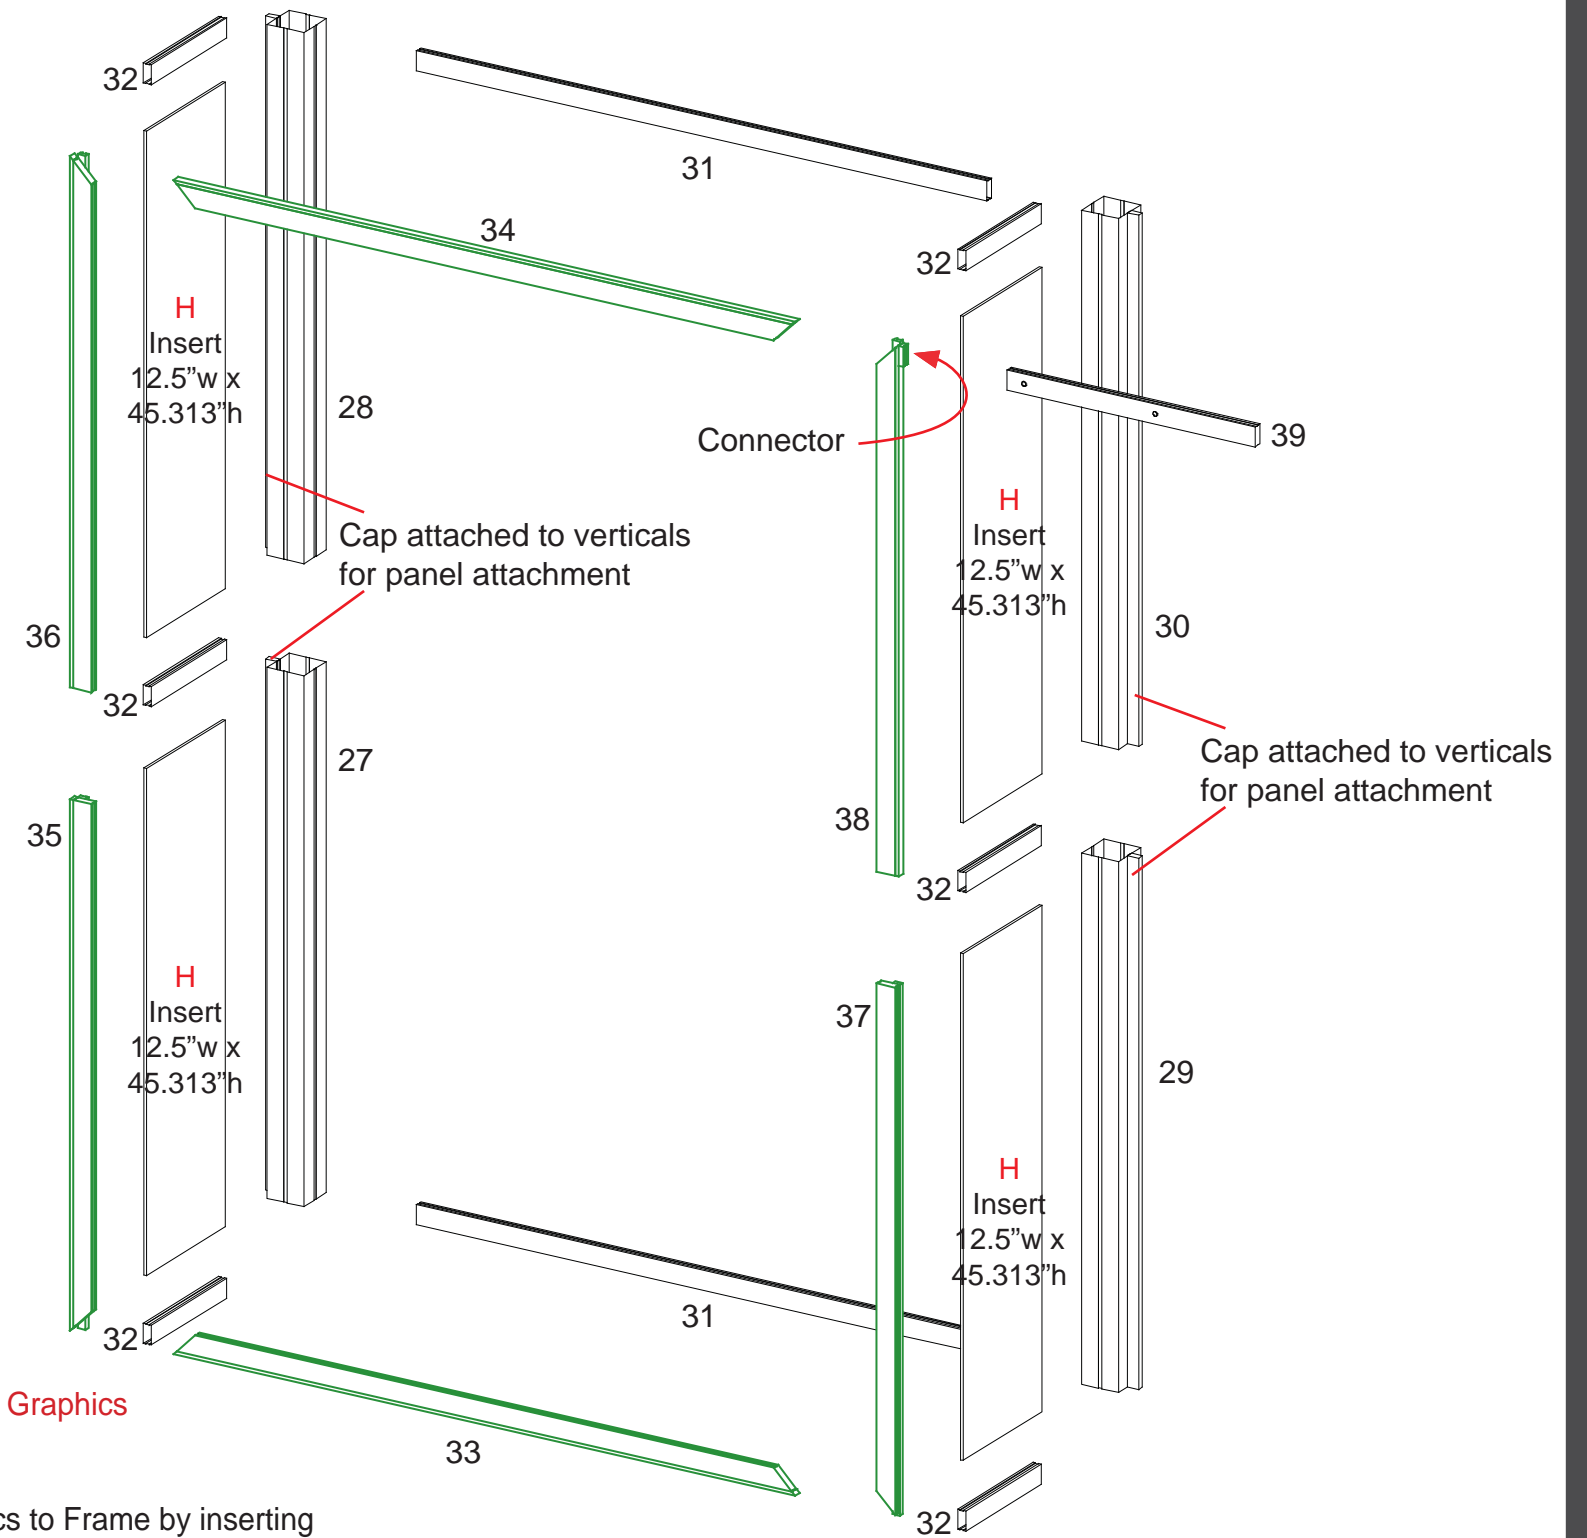

Note: Attaching Graphics

**

Attach Backwall Graphics to Frame by inserting rubber gasket into groove on Front of frame.




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Level 1

Item Number	Description
37	38"w x 47.5"h Flat Panel
38	28"w x 42"h Flat Door Panel
39	42"h 90° Connector
40	14.125"w x 42"h Flat Panel
41	42"h 90° Connector
42	28"w x 42"h Flat Panel
43	42"h 90° Connector
44	14.125"w x 42"h Flat Panel
45	42"h 90° Connector

Steps:

Connect panels to vertical extrusions where indicated in illustrations.
Assemble pedestal pieces together in numerical order.

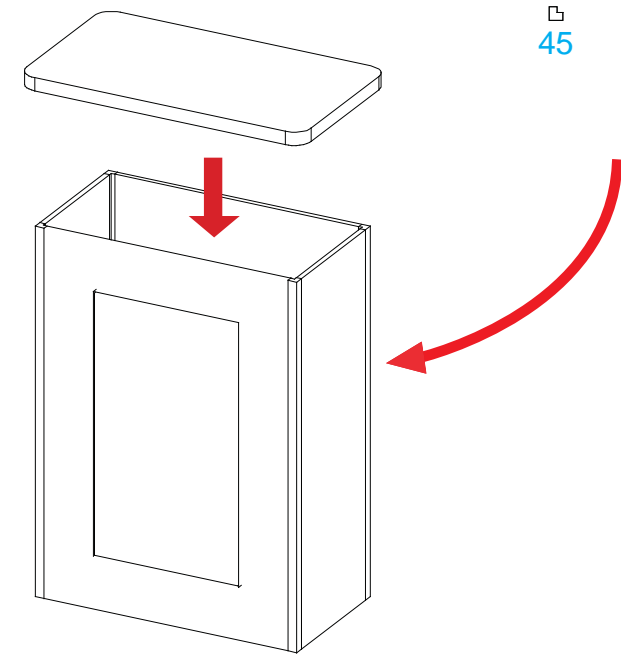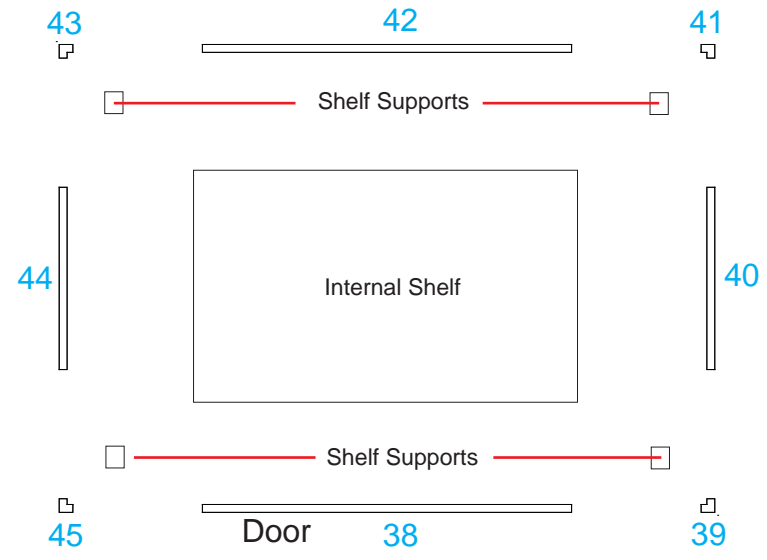
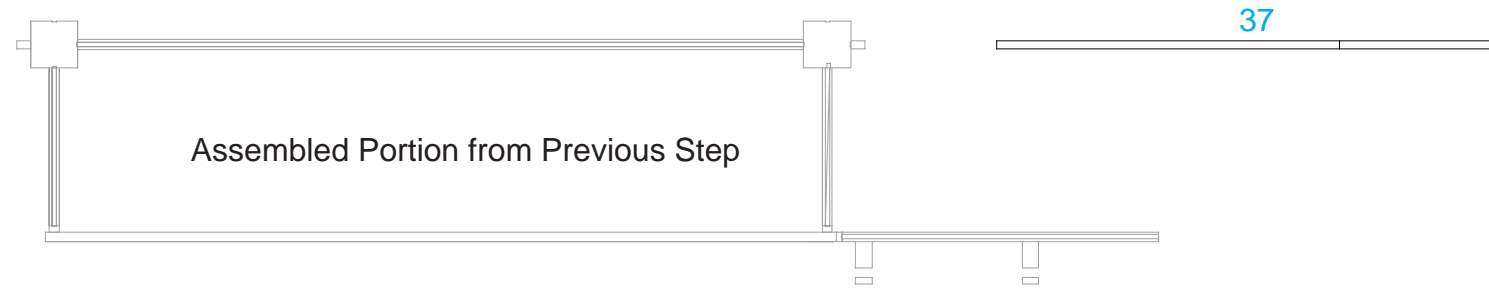


Place internal shelf atop
Velcro shelf supports

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING




Level 2

Item Number	Description
36	11.5"w x 47.5"h Flat Panel
37	38"w x 47.5"h Flat Panel

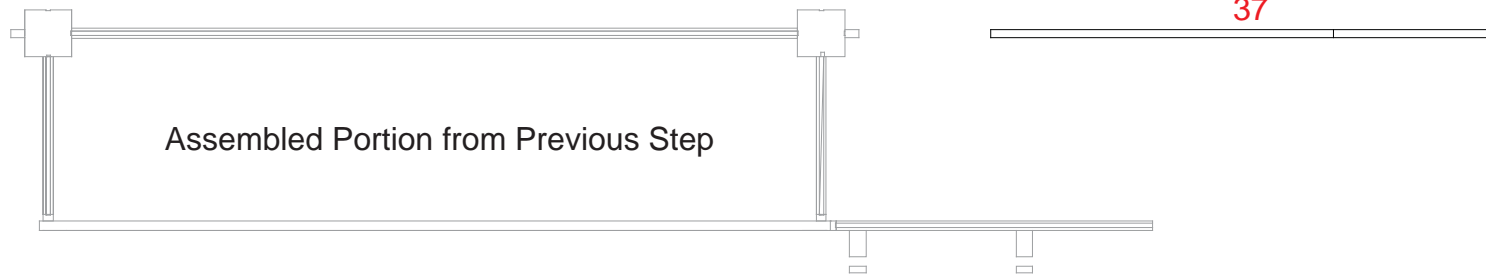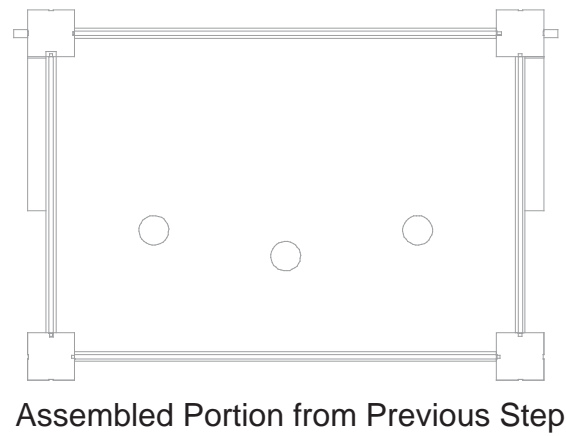

Steps:
Connect panels to vertical extrusions where indicated in illustrations.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

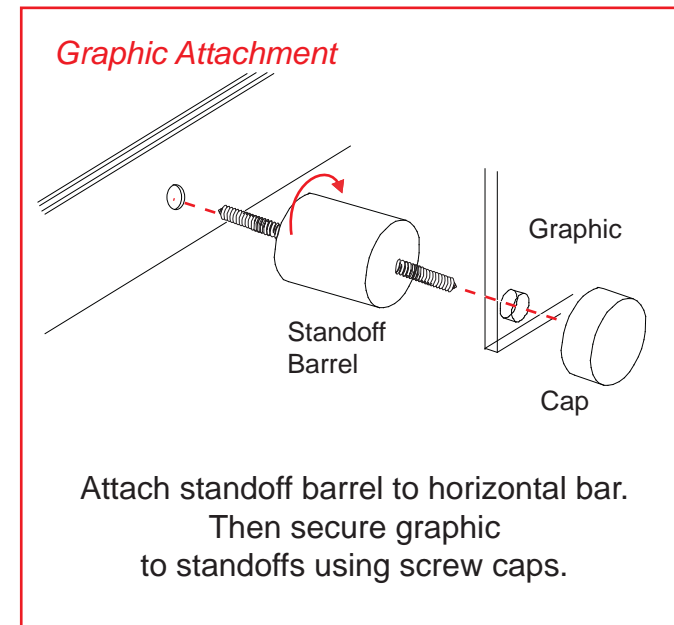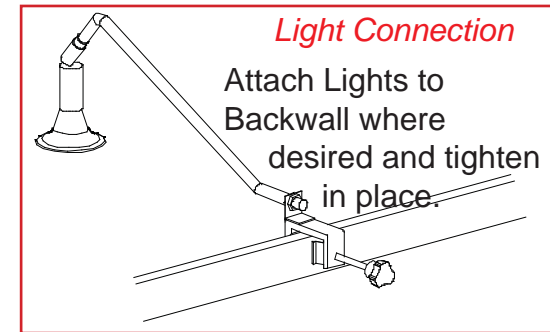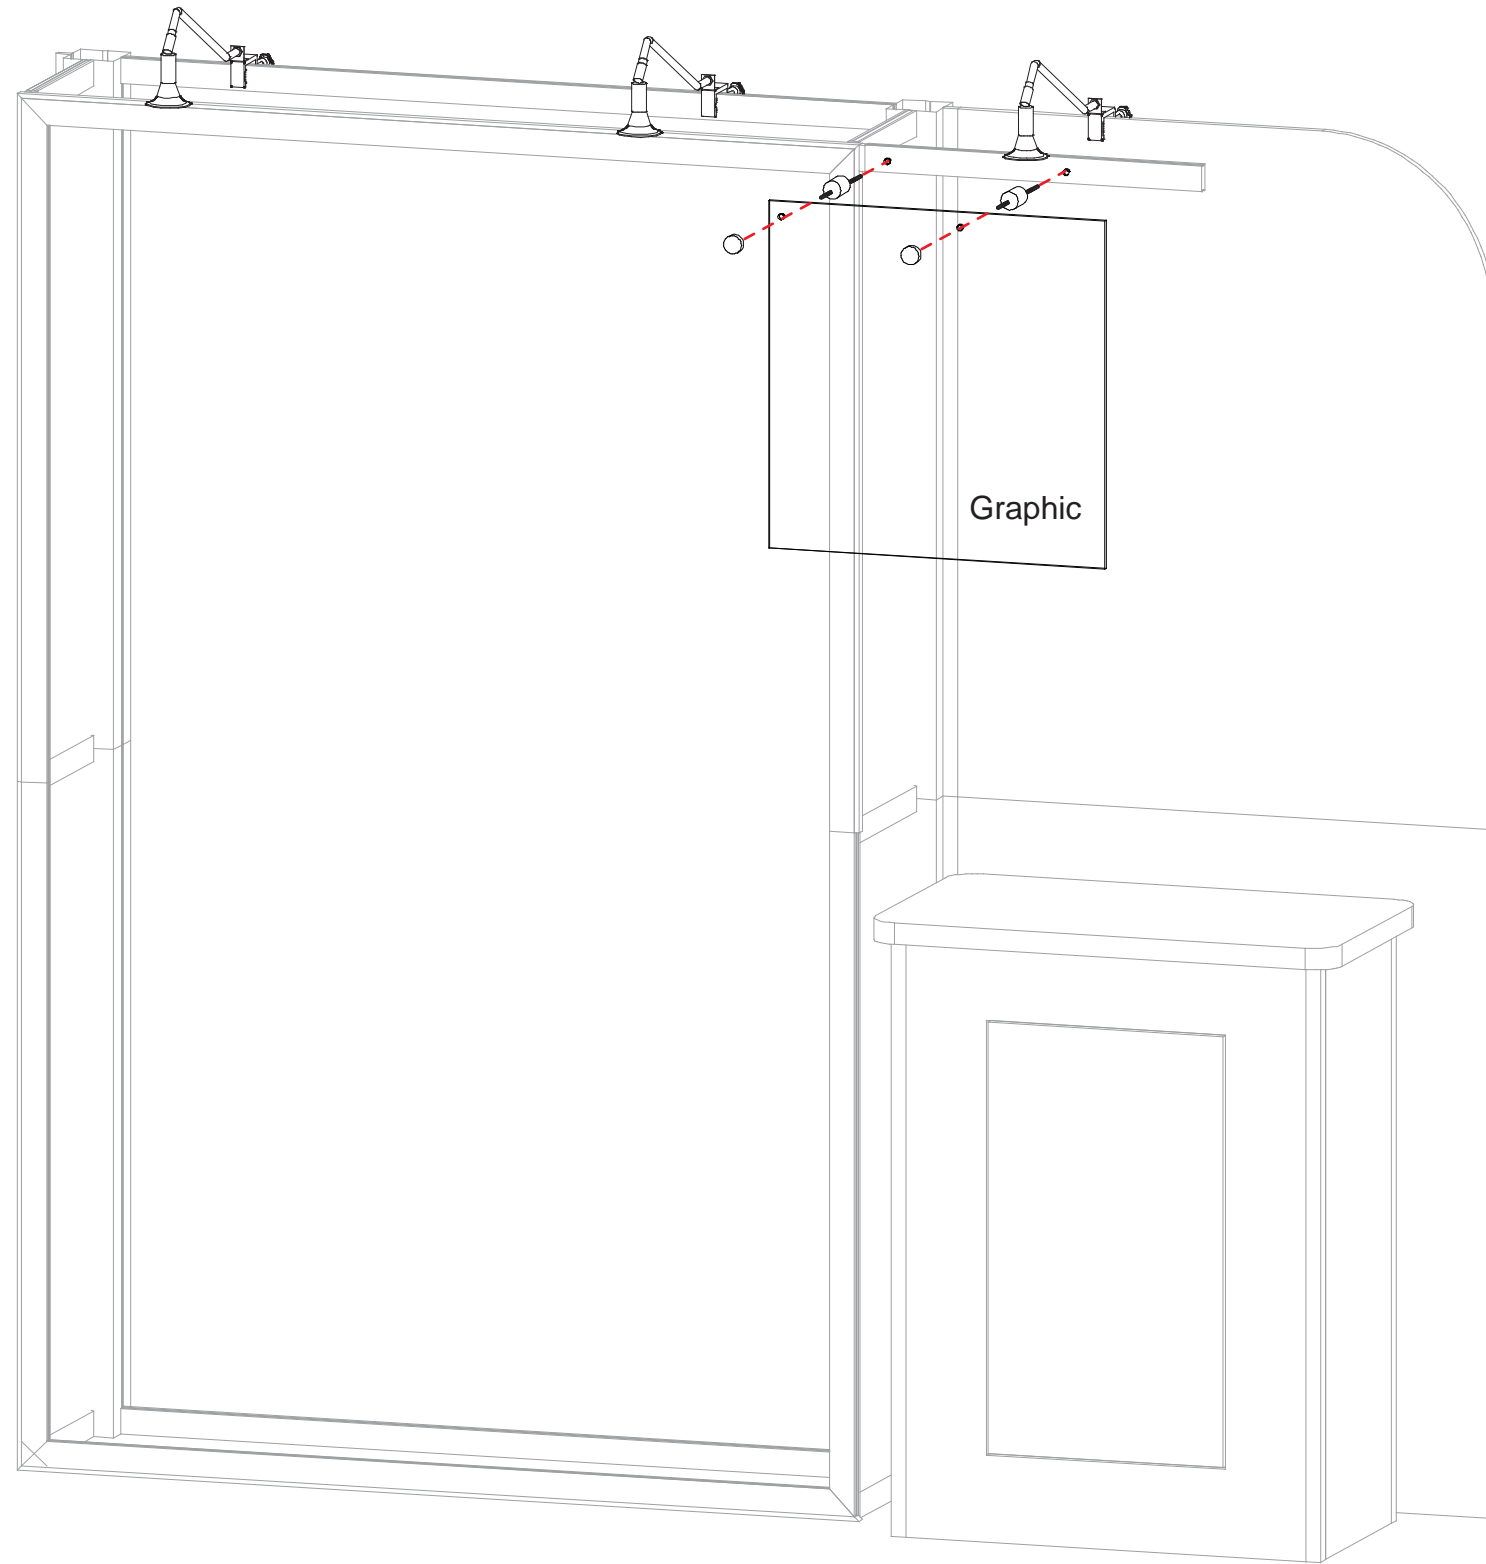


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

Item Number	Description
46	46" w x 42" h Flat Door Panel
47	42" h 90° Connector
48	30" w x 42" h Flat Panel
49	42" h 90° Connector
50	46" w x 42" h Flat Panel
51	42" h 90° Connector
52	30" w x 42" h Flat Panel
53	42" h 90° Connector


Steps:
Assemble pedestal pieces together in numerical order.

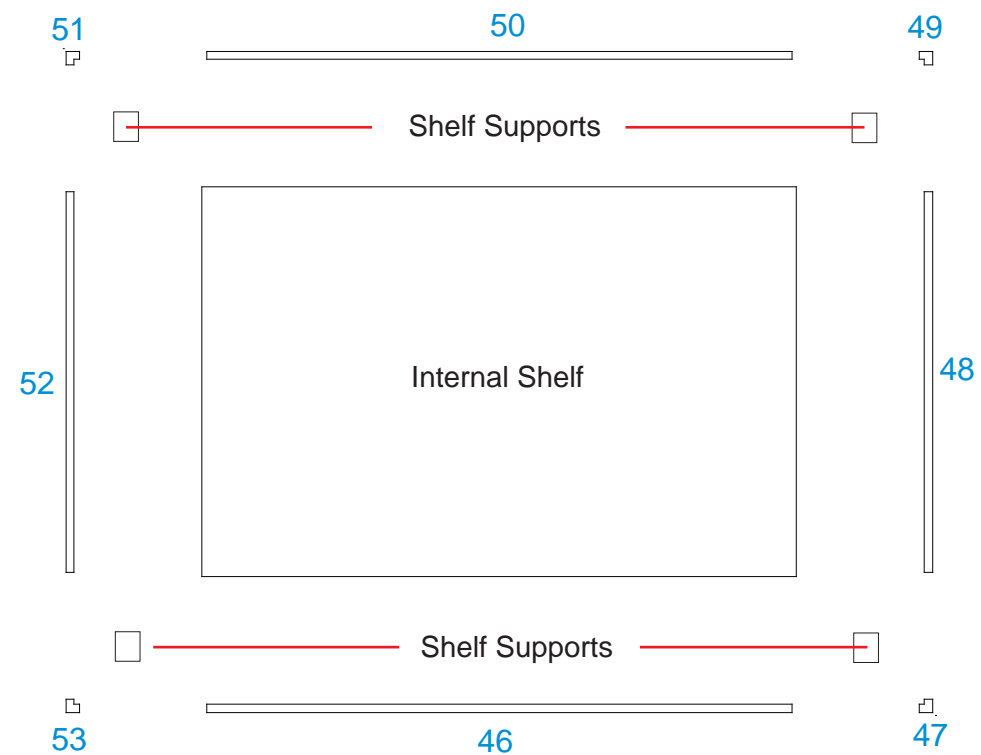

Place internal shelf atop
Velcro shelf supports

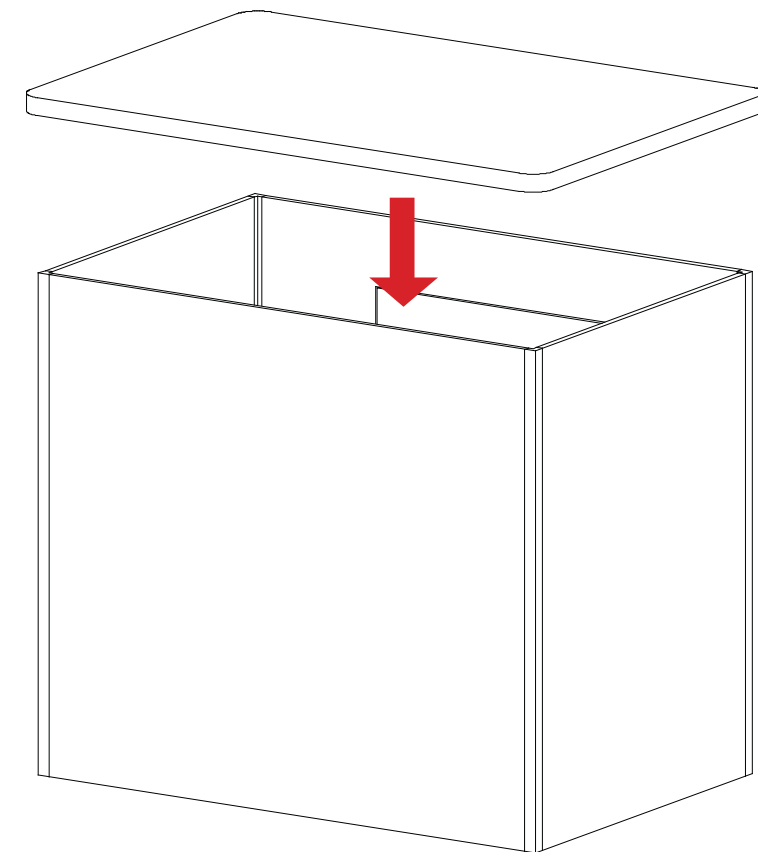


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

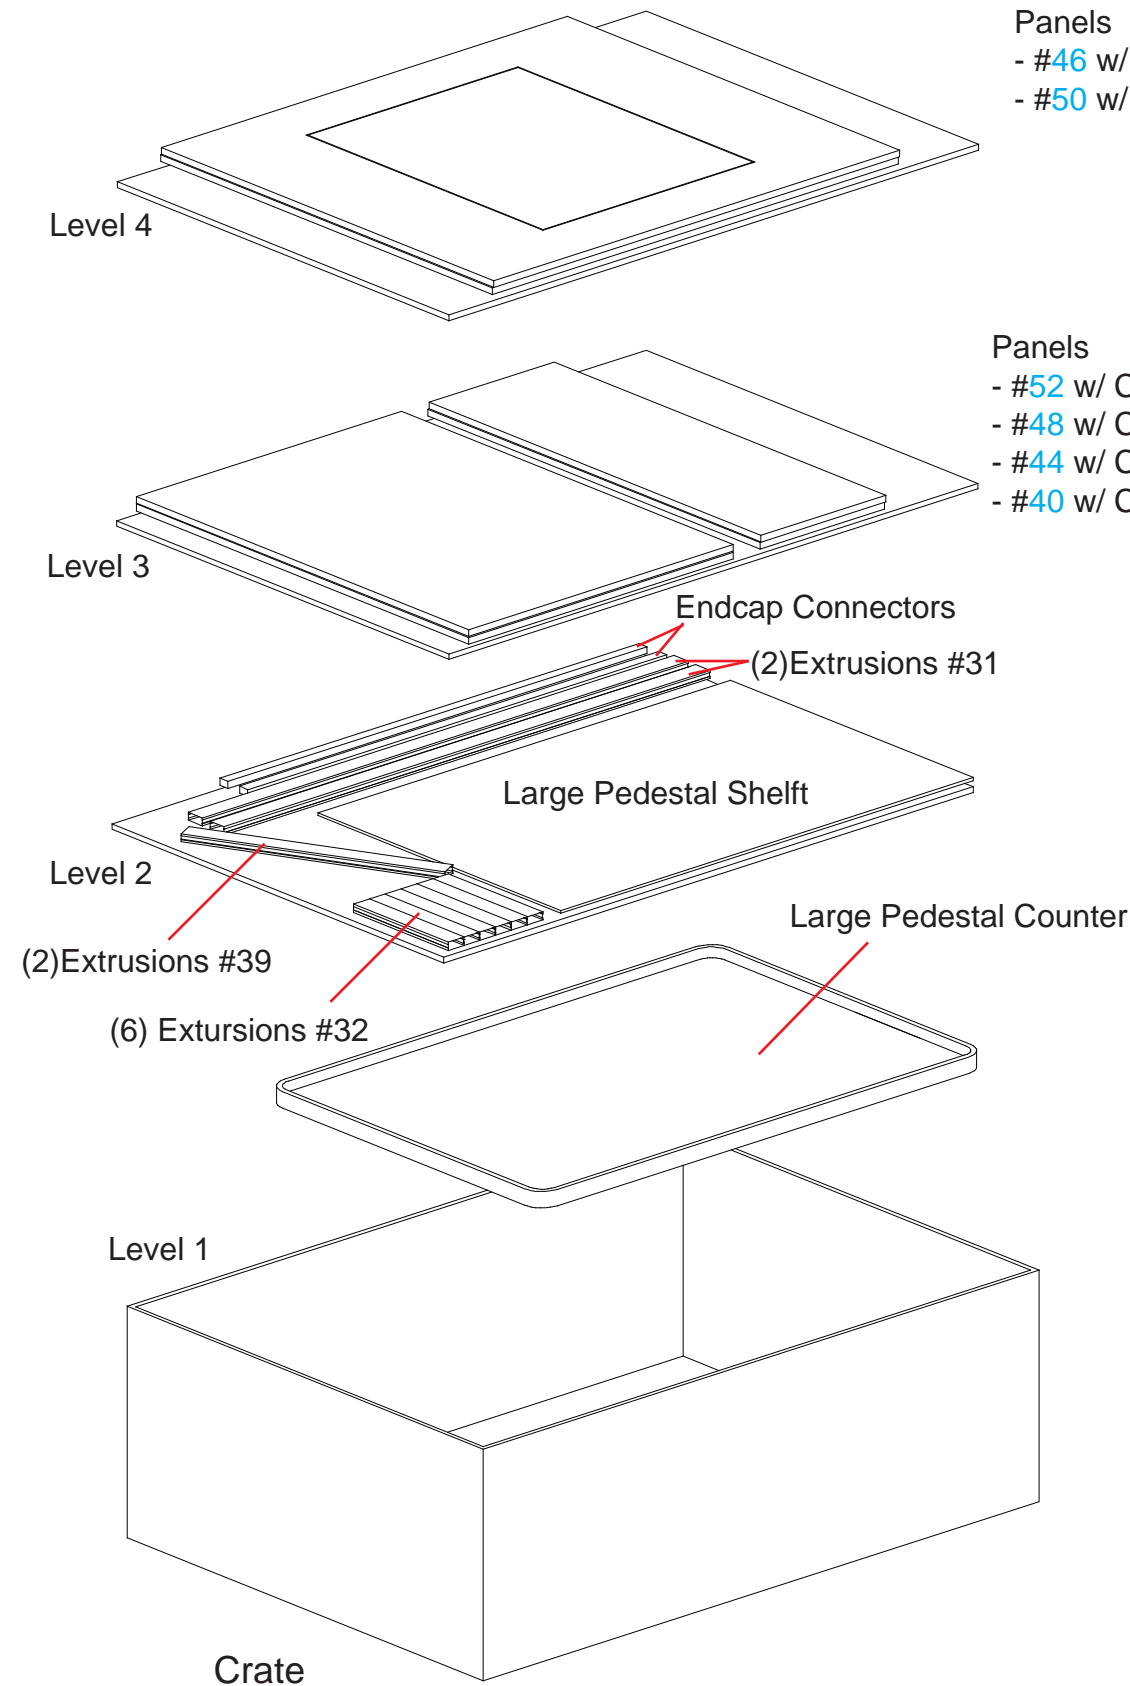

- Panels
- #46 w/ Connector #47
 - #50 w/ Connector #51

- Panels
- #52 w/ Connector #53
 - #48 w/ Connector #49
 - #44 w/ Connector #45
 - #40 w/ Connector #41

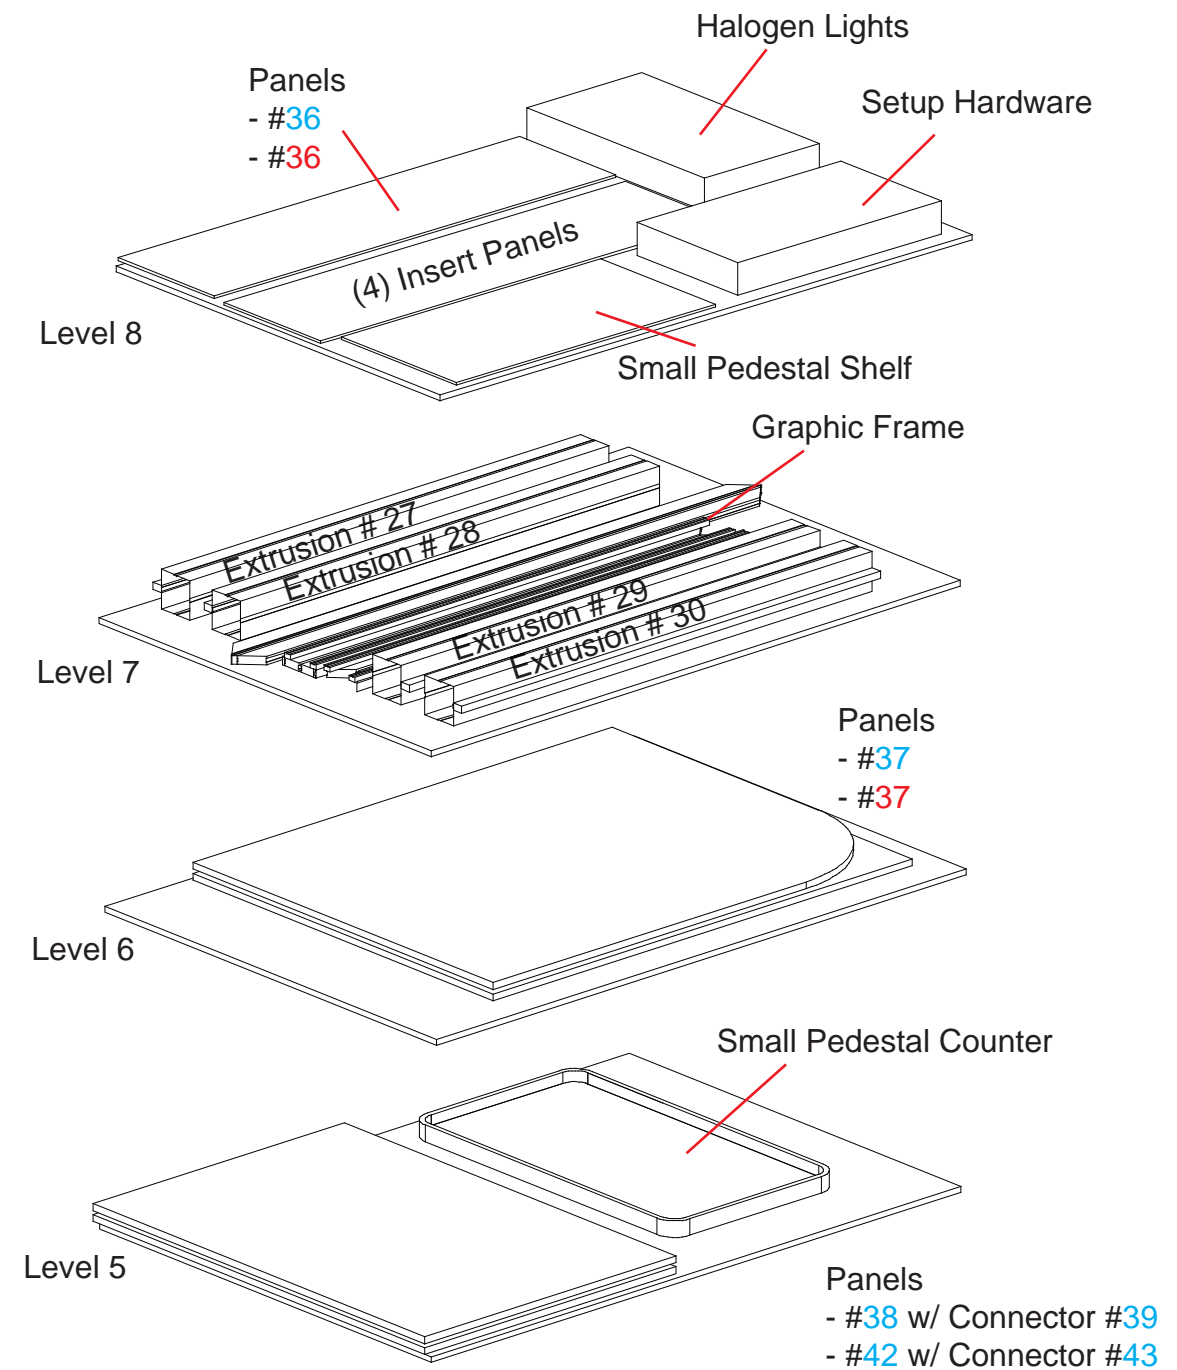

- Panels
- #36
 - #36

- Panels
- #37
 - #37

- Panels
- #38 w/ Connector #39
 - #42 w/ Connector #43

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING




Level 7



Level 8



Setup Hardware Box and Light Box

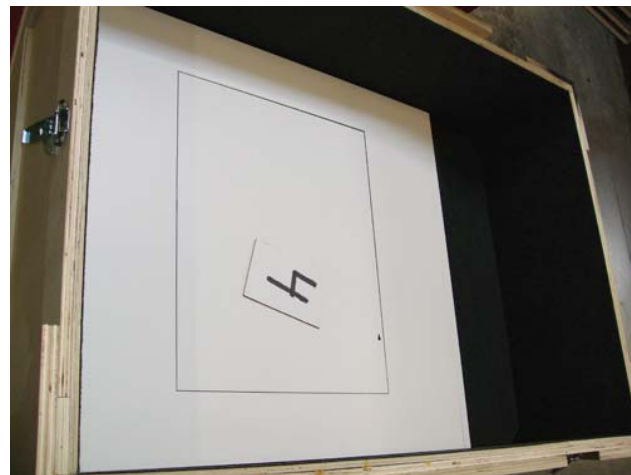


Level 4



Level 5



Level 6

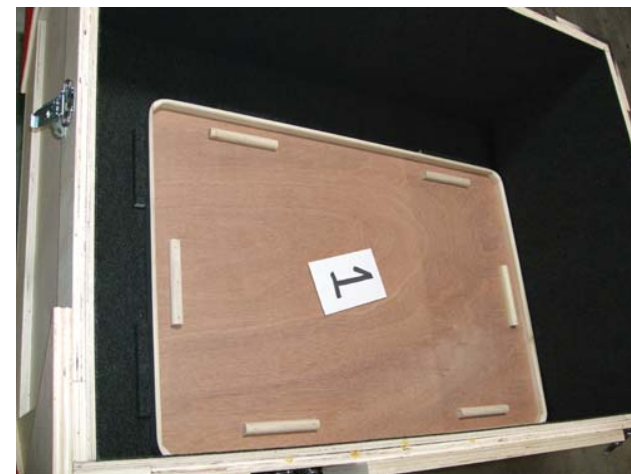

Level 1



Level 2



Level 3

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING