


Top View

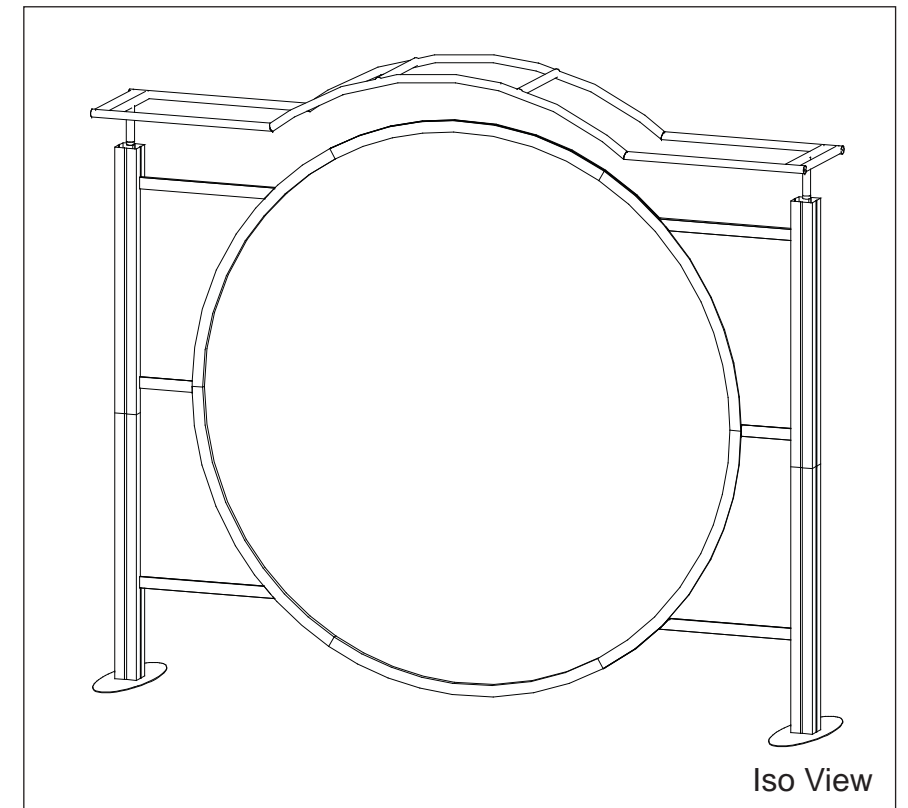

Iso View

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

General Setup Instructions for Extrusion System



The Tool

Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.



Typical Connection (cont'd)

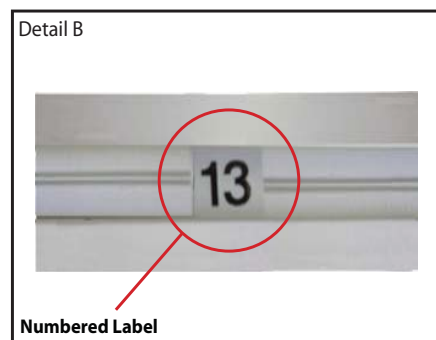


Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.




Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

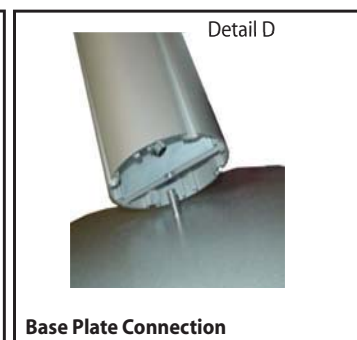

Base Plate Connection


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

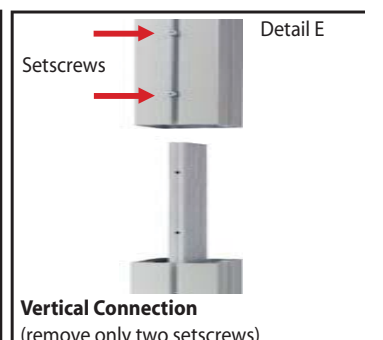

Vertical Connection (remove only two setscrews)


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

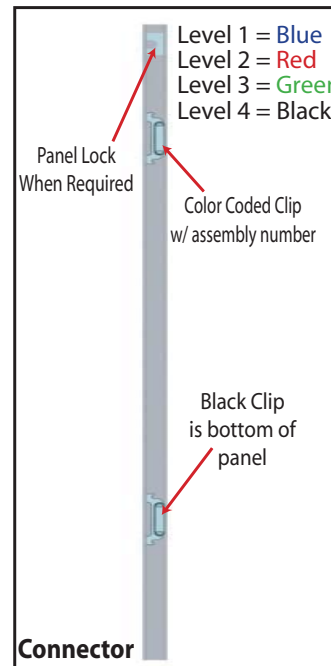


Connector

Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

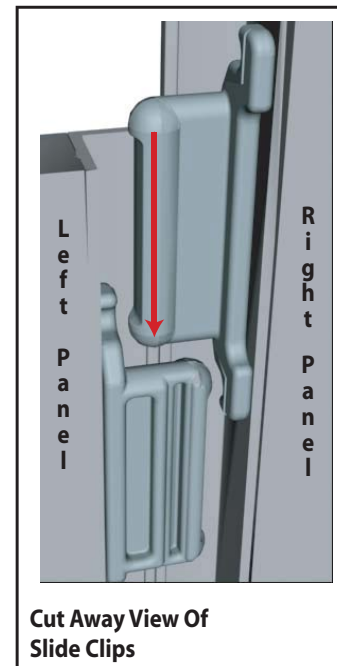


Cut Away View Of Slide Clips

Components connect together by aligning them and sliding downward connecting clips together.

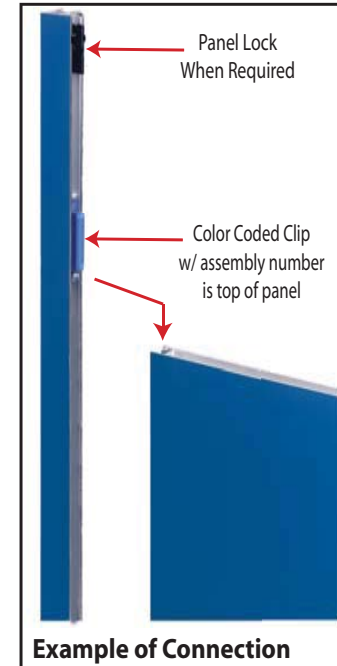

Example of Connection

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

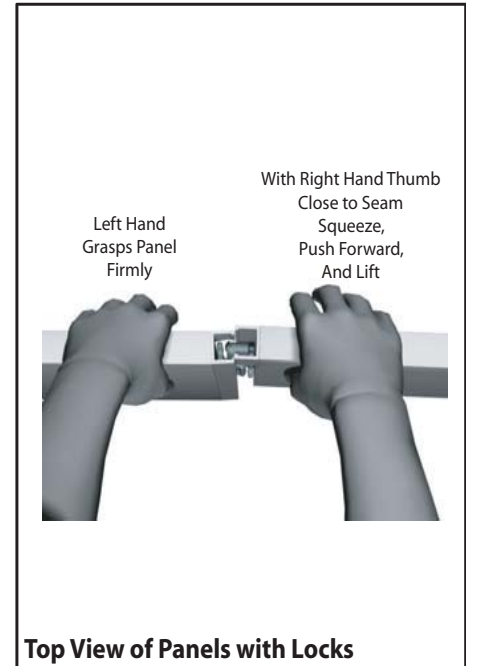

Top View of Panels with Locks

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Quantity	Description
1	2	Oval Base Plates
2	2	42" Square Vertical Extrusion
3	2	42" Square Vertical Extrusion
4	1	47.1923" Curved Extrusion w/ Attached Velcro to Back of Extrusion
5	1	47.1923" Curved Extrusion w/ Attached Velcro to Back of Extrusion
6	1	47.1923" Curved Extrusion w/ Attached Velcro to Back of Extrusion
7	1	47.1923" Curved Extrusion w/ Attached Velcro to Back of Extrusion
8	1	47.1923" Curved Extrusion w/ Attached Velcro to Back of Extrusion
9	1	47.1923" Curved Extrusion w/ Attached Velcro to Back of Extrusion
10	1	20.115" Tapered Horizontal Extrusion
11	1	20.115" Tapered Horizontal Extrusion
12	1	7.322" Horizontal Extrusion
13	1	7.322" Horizontal Extrusion
14	1	20.115" Tapered Horizontal Extrusion
15	1	20.115" Tapered Horizontal Extrusion

Steps:

- 1) Connect curve pieces together to complete backwall circle.
- 2) Attach vertical extrusions [2] to base plates [1].
- 3) Attach upper vertical extrusions [3] to lower extrusions [2].
- 4) Attach horizontal extrusions [10 and 11] to vertical extrusions and atop stoppers.
- 5) Attach horizontal extrusions [12 and 13] to vertical extrusions where indicated, then slide infills between horizontal bars.
- 6) Attach horizontal extrusions [14 and 15] to vertical extrusions where indicated, then slide infills between horizontal bars.
- 7) Connect assembled circle between horizontal bars.

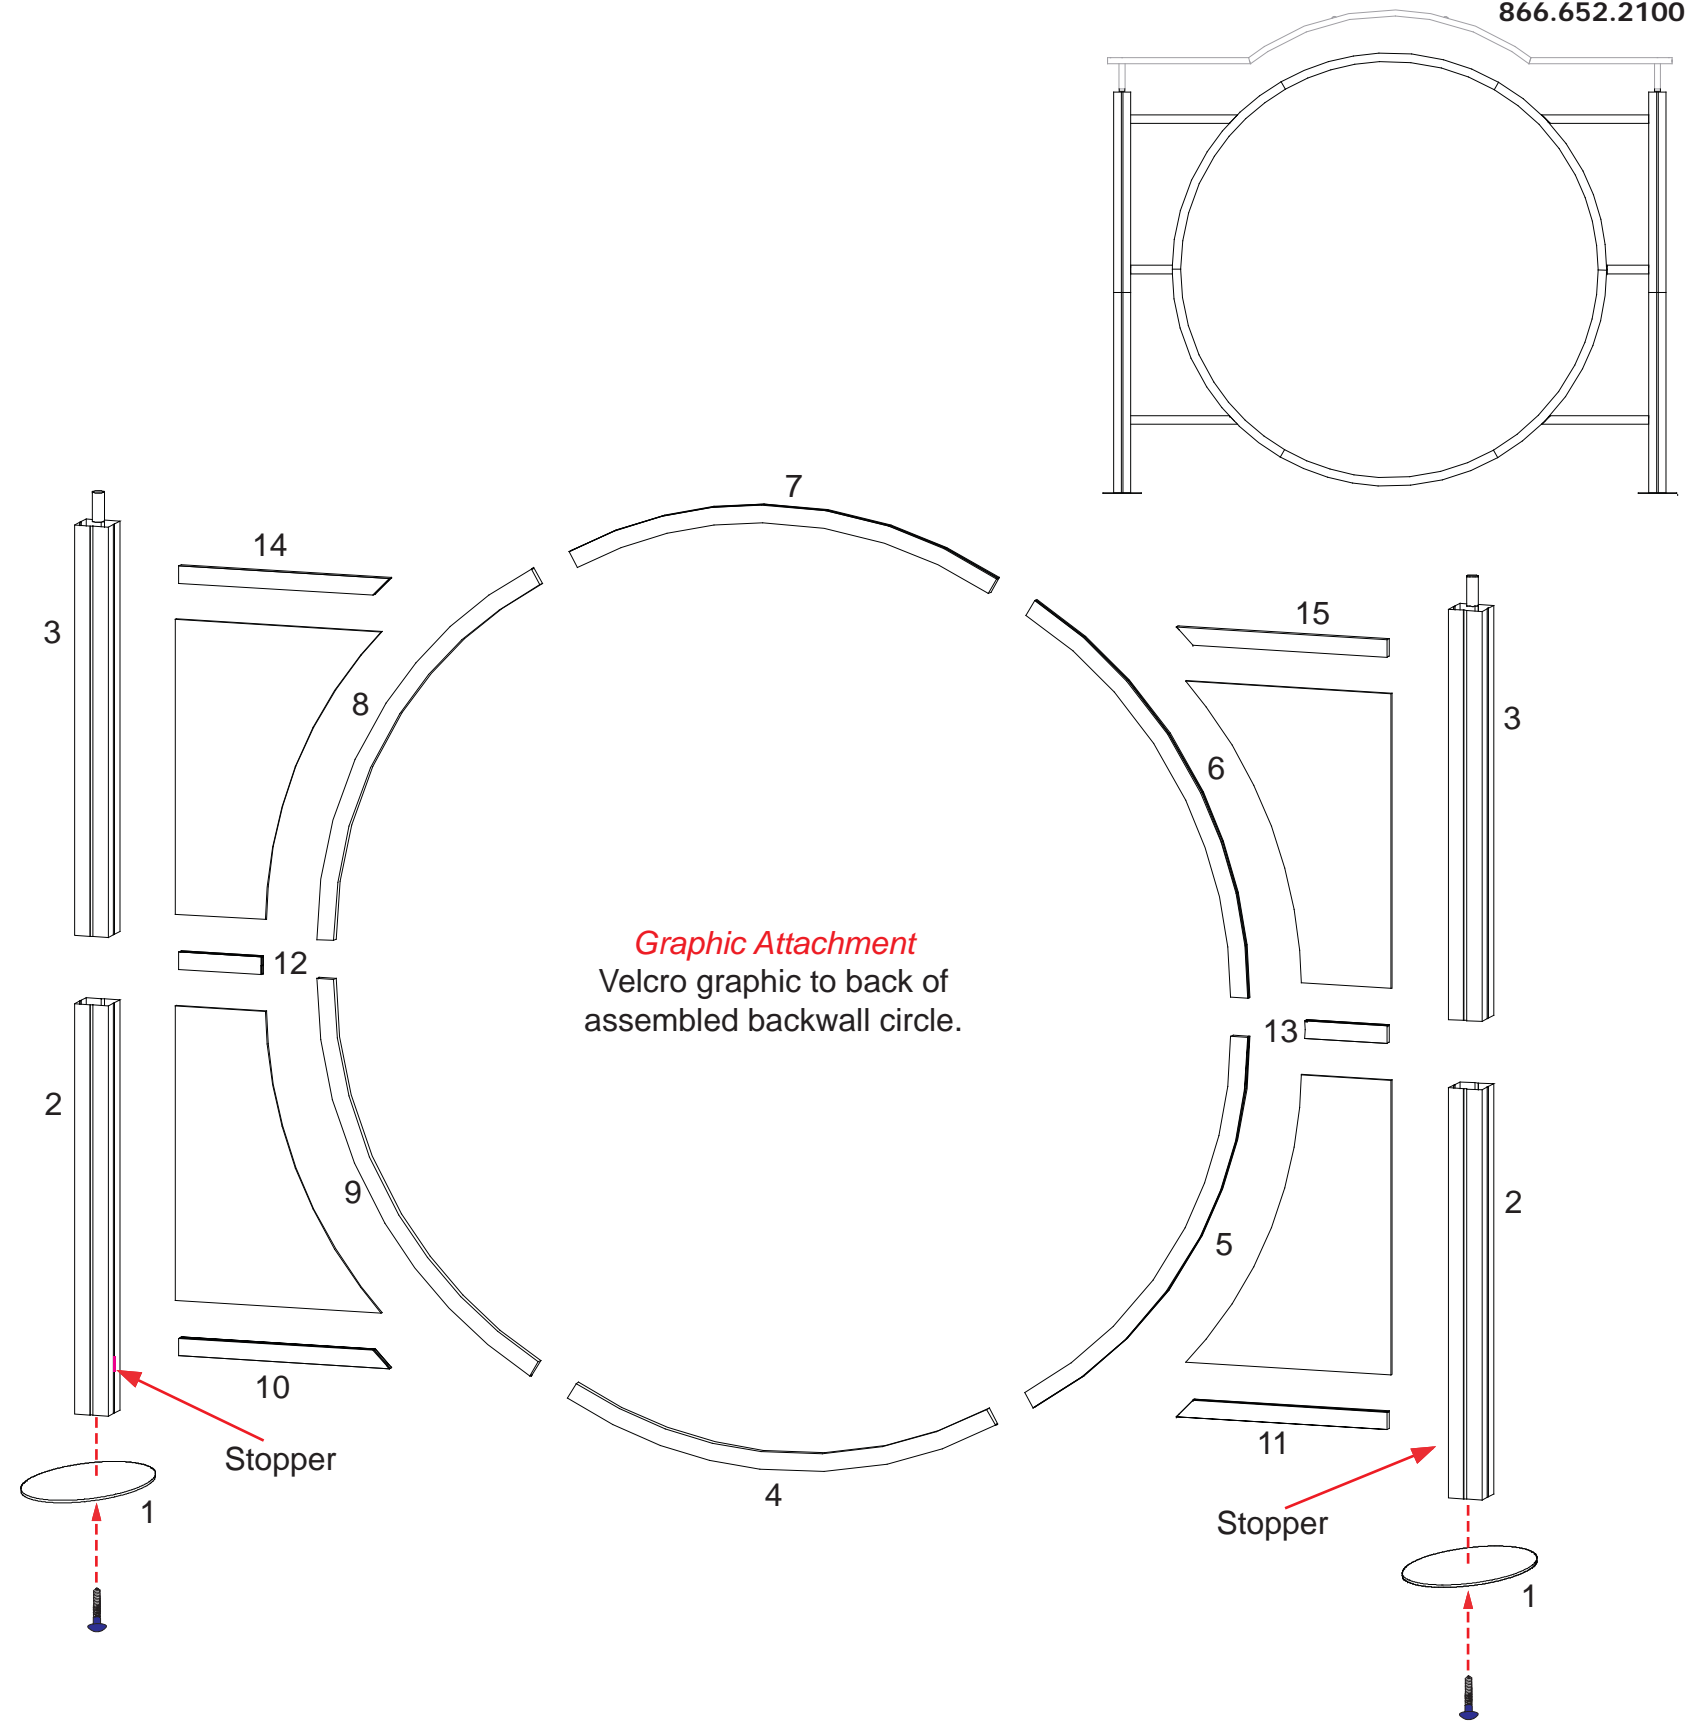

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING



Steps:

- 1) Connect canopy pieces together as shown.
- 2) Apply pillow case graphic to assembled canopy



Using Your Setup Instructions

The Aero Overhead Sign Setup Instructions are created specifically for your configuration. They include an exploded view of the frame which is sequentially numbered. We encourage you to study the instructions before attempting to assemble your exhibit.




Connections are kept very simple: no tools. Everything assembles with push-button connectors and pre-connected horizontal sections.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

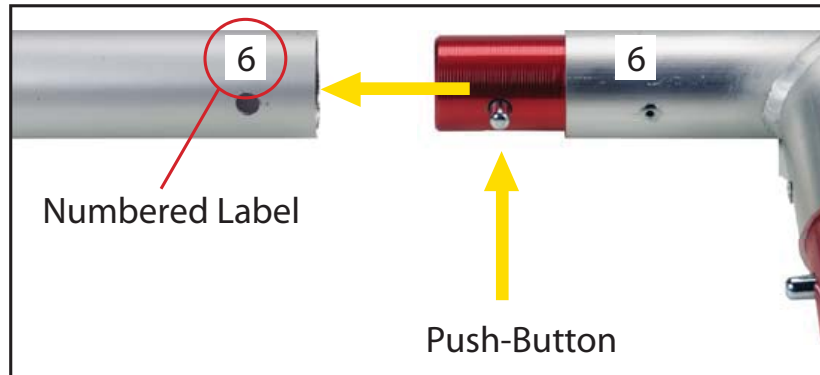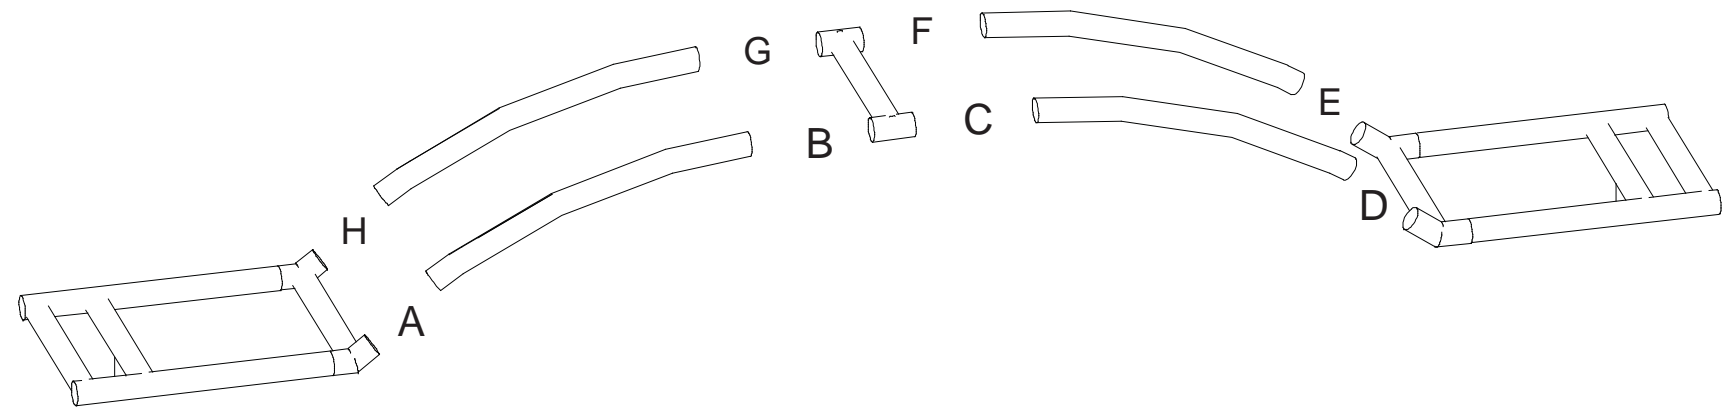

Connections are made by holding the button down and sliding the red tube into opposing tube until the connection is made. To disassemble push button and pull or twist extrusions apart.

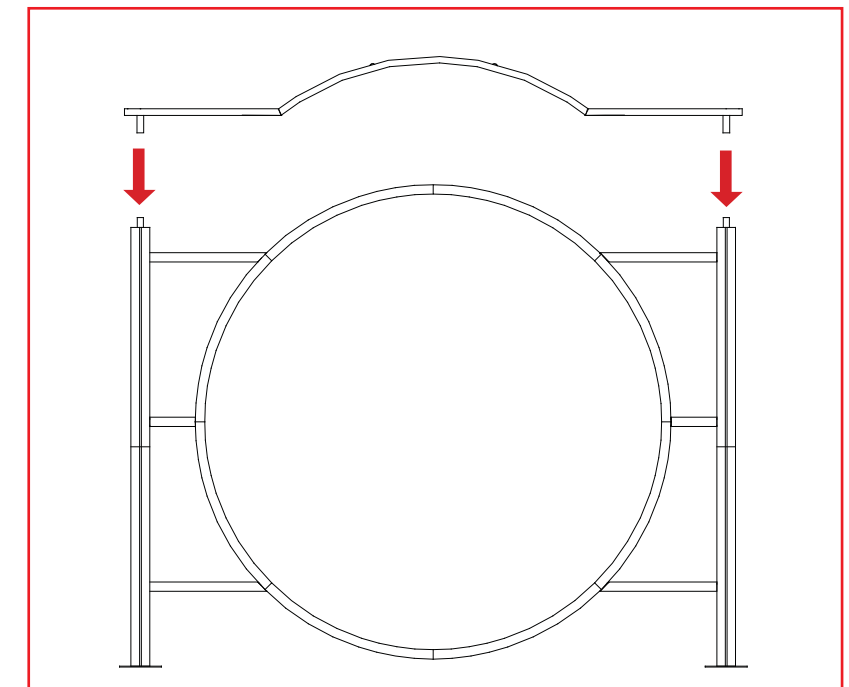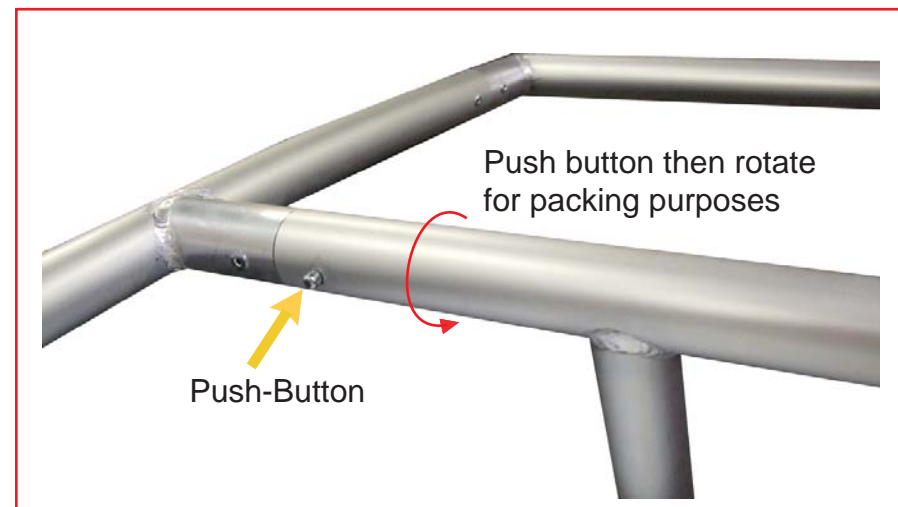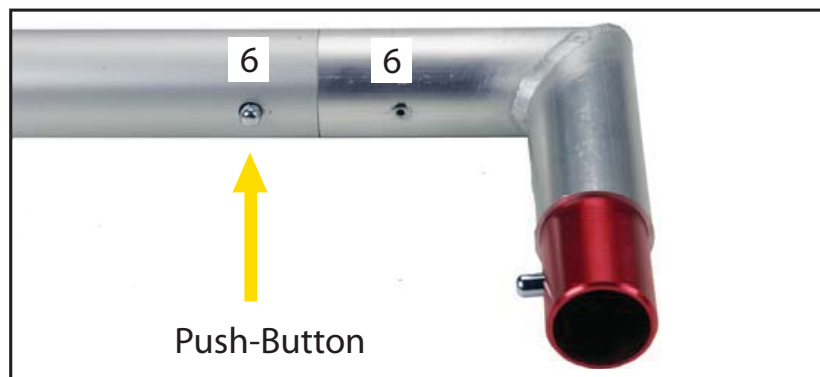





WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100




Item	Description
1	42”h Curved Panel w/ Door
2	42”h Curved Panel
3	42”h Curved Panel
4	42”h Curved Panel w/ Velcro
5	38”h Counter Support Panel

Steps:

- 1) Assemble panels in numerical order.
- 2) Attach counter support panel [5] to panel [4] w/ Velcro.
- 3) Velcro shelf supports to inside of assembled base.
- 4) Set internal shelf atop supports.
- 5) Place lower tier counter atop panel [5] and secure to panel [4] using thumbscrews.
- 4) Set circular counter atop assembled pedestal.

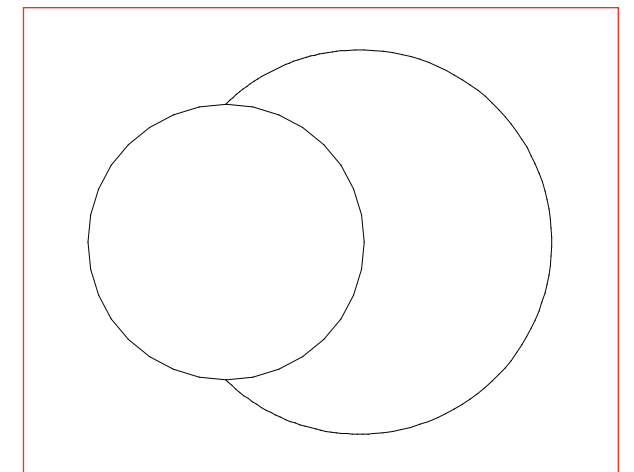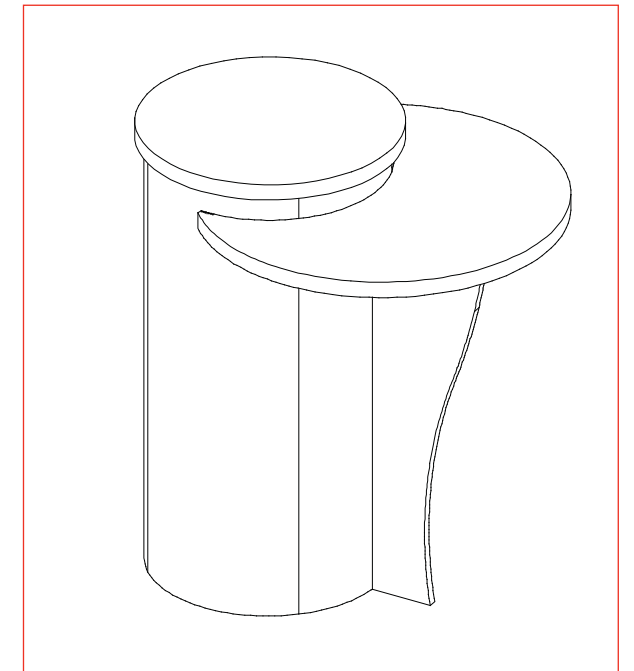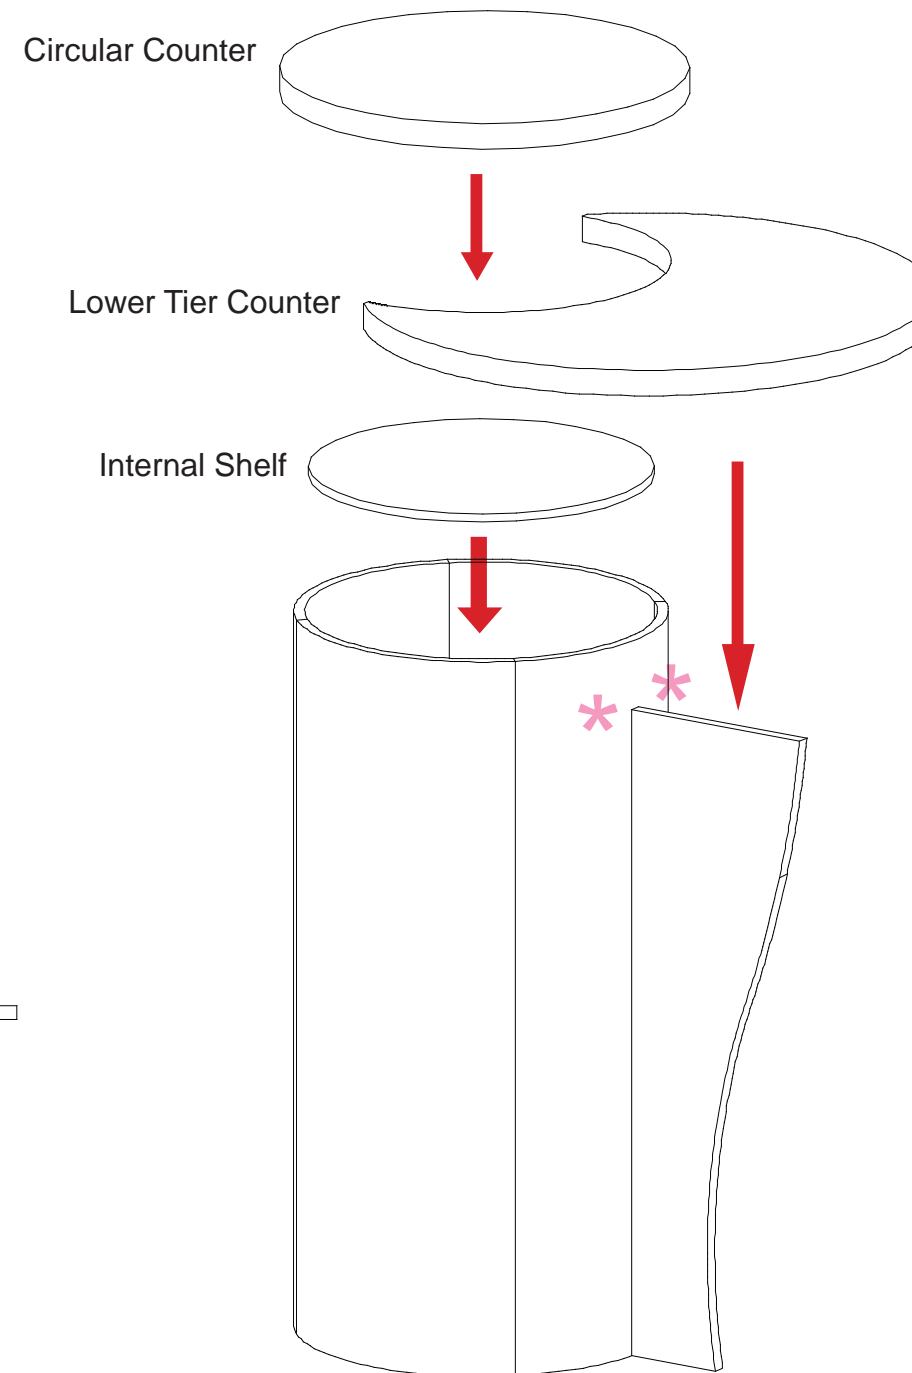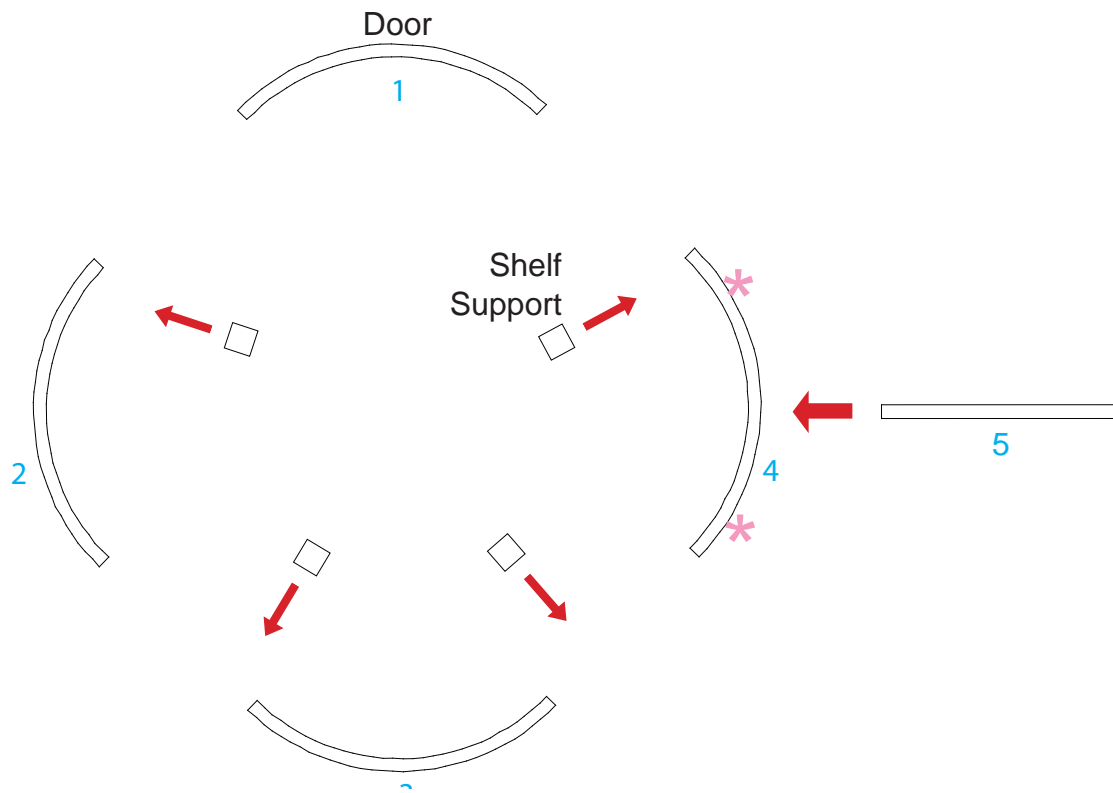

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

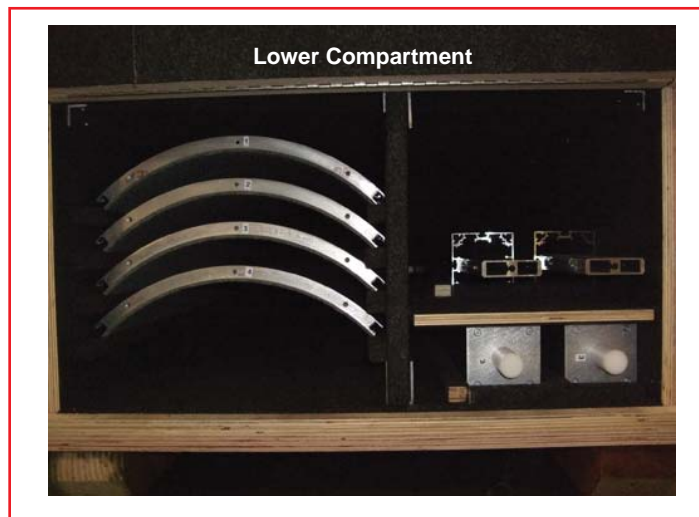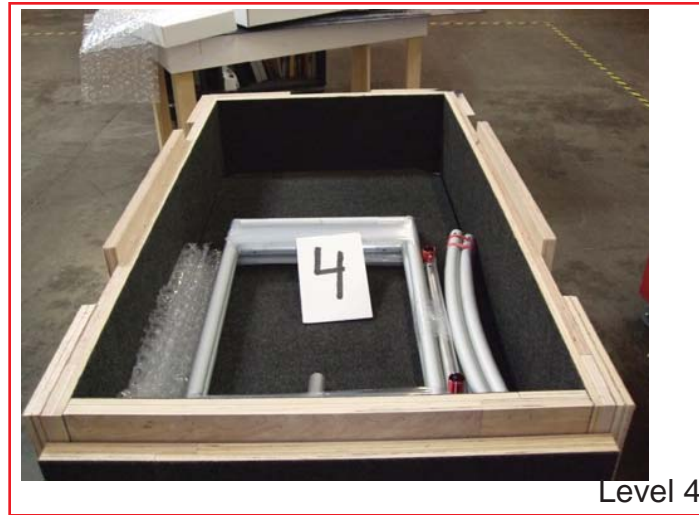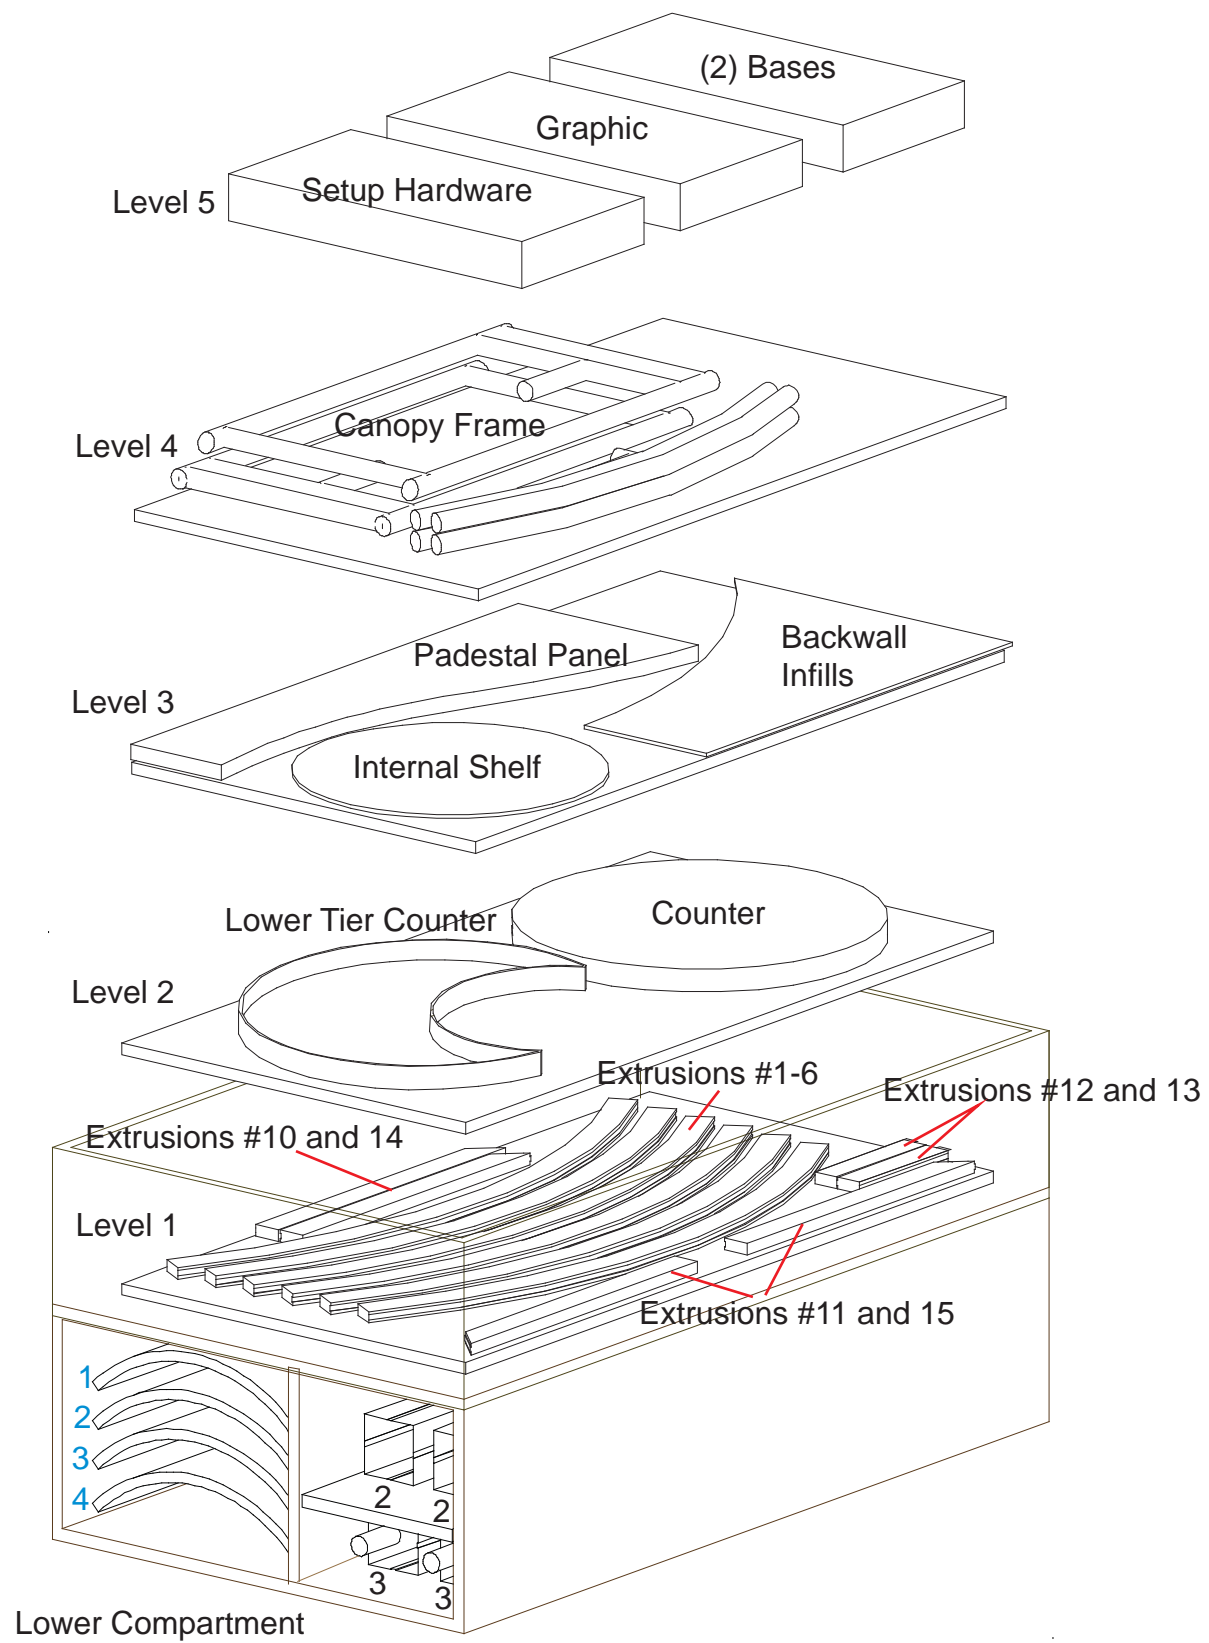

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING