

visionary™ DESIGNS

Using Your Setup Instructions

The Visionary Designs Setup Instructions are created specifically for your configuration. They are laid out sequentially, including an exploded view of the entire display, and then a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is **VERY IMPORTANT**.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts or countertops, use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



The Tool

Most Visionary Designs exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Detail A

Typical Connection



Typical Connection (cont'd)

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

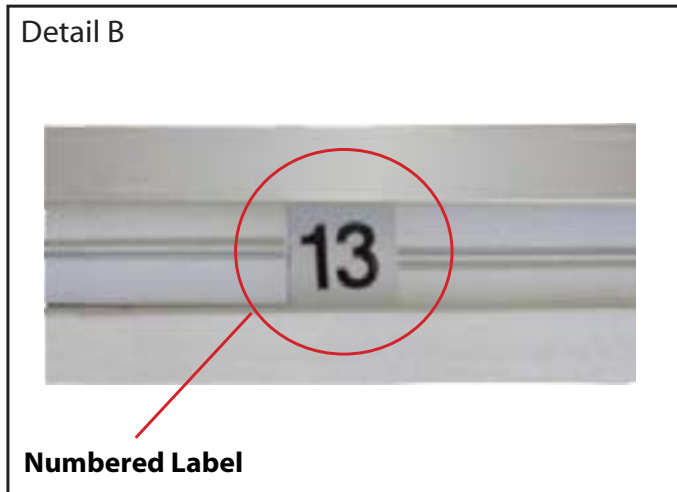

Detail B

Numbered Label


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With Visionary Designs the labels contain Black numbers unless otherwise specified.



Detail C

Horizontal Inline Connection (remove only one setscrew)


Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

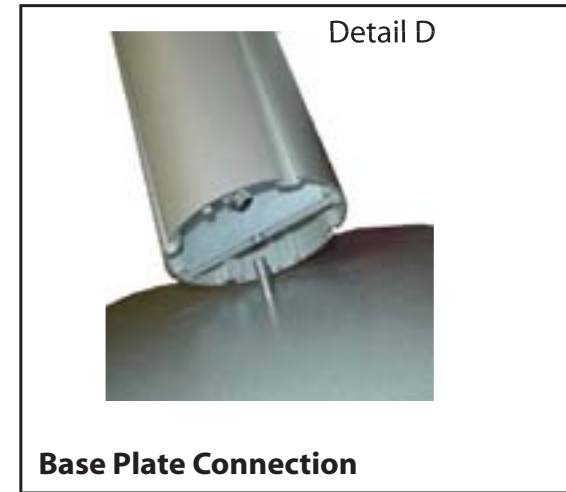

Detail D

Base Plate Connection

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

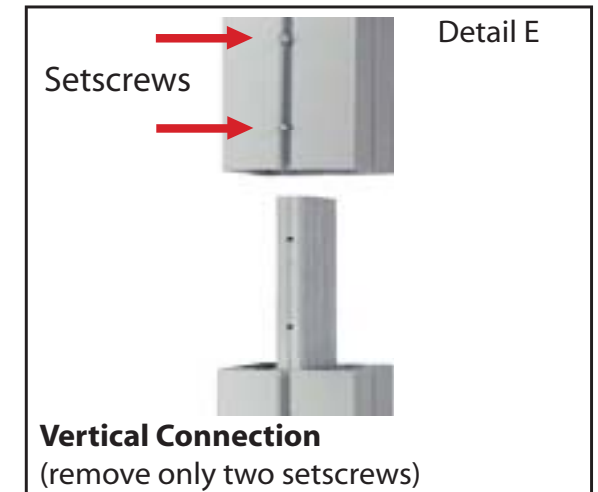

Detail E

Vertical Connection (remove only two setscrews)

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.



WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Qty.	Description
1a/1b	1/1	48" Vertical Extrusion
2a/2b	1/1	48" Vertical Extrusion
3a/3b	1/1	48" Vertical Extrusion
4a/4b	1/1	48" Vertical Extrusion
5a/5b	1/1	48" Vertical Extrusion
6a/6b	1/1	48" Vertical Extrusion
7a	1	18" Horizontal Extrusion
8a	1	30.5" Horizontal Extrusion
9a	1	30.5" Horizontal Extrusion
10a/10b	2/2	34.7" Horizontal Extrusion
11	2	18" Horizontal Extrusion
12	3	18" Horizontal Extrusion
13	1	17" Monitor Mount

Steps:

- 1) Connect all vertical extrusions [1a/1b...6a/6b] as shown.
- 2) Lock horizontals [7a,8a,9a] between vertical assemblies as shown.
- 3) Lock horizontals [12] and infills in place between vertical assemblies [3a/3b,5a/5b] and attach monitor mount [13] to connectors.
- 4) Connect horizontals [10a,10b].
- 5) Lock horizontals [10a/10b,11] between vertical assemblies as shown.

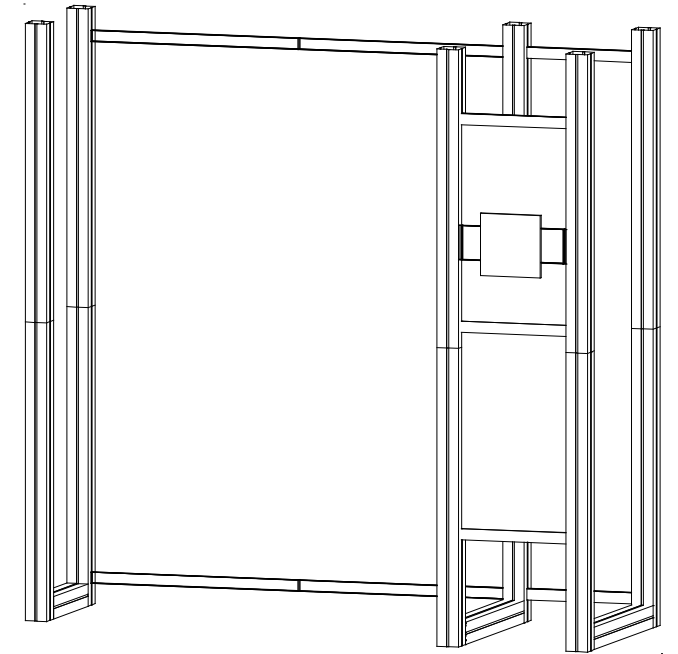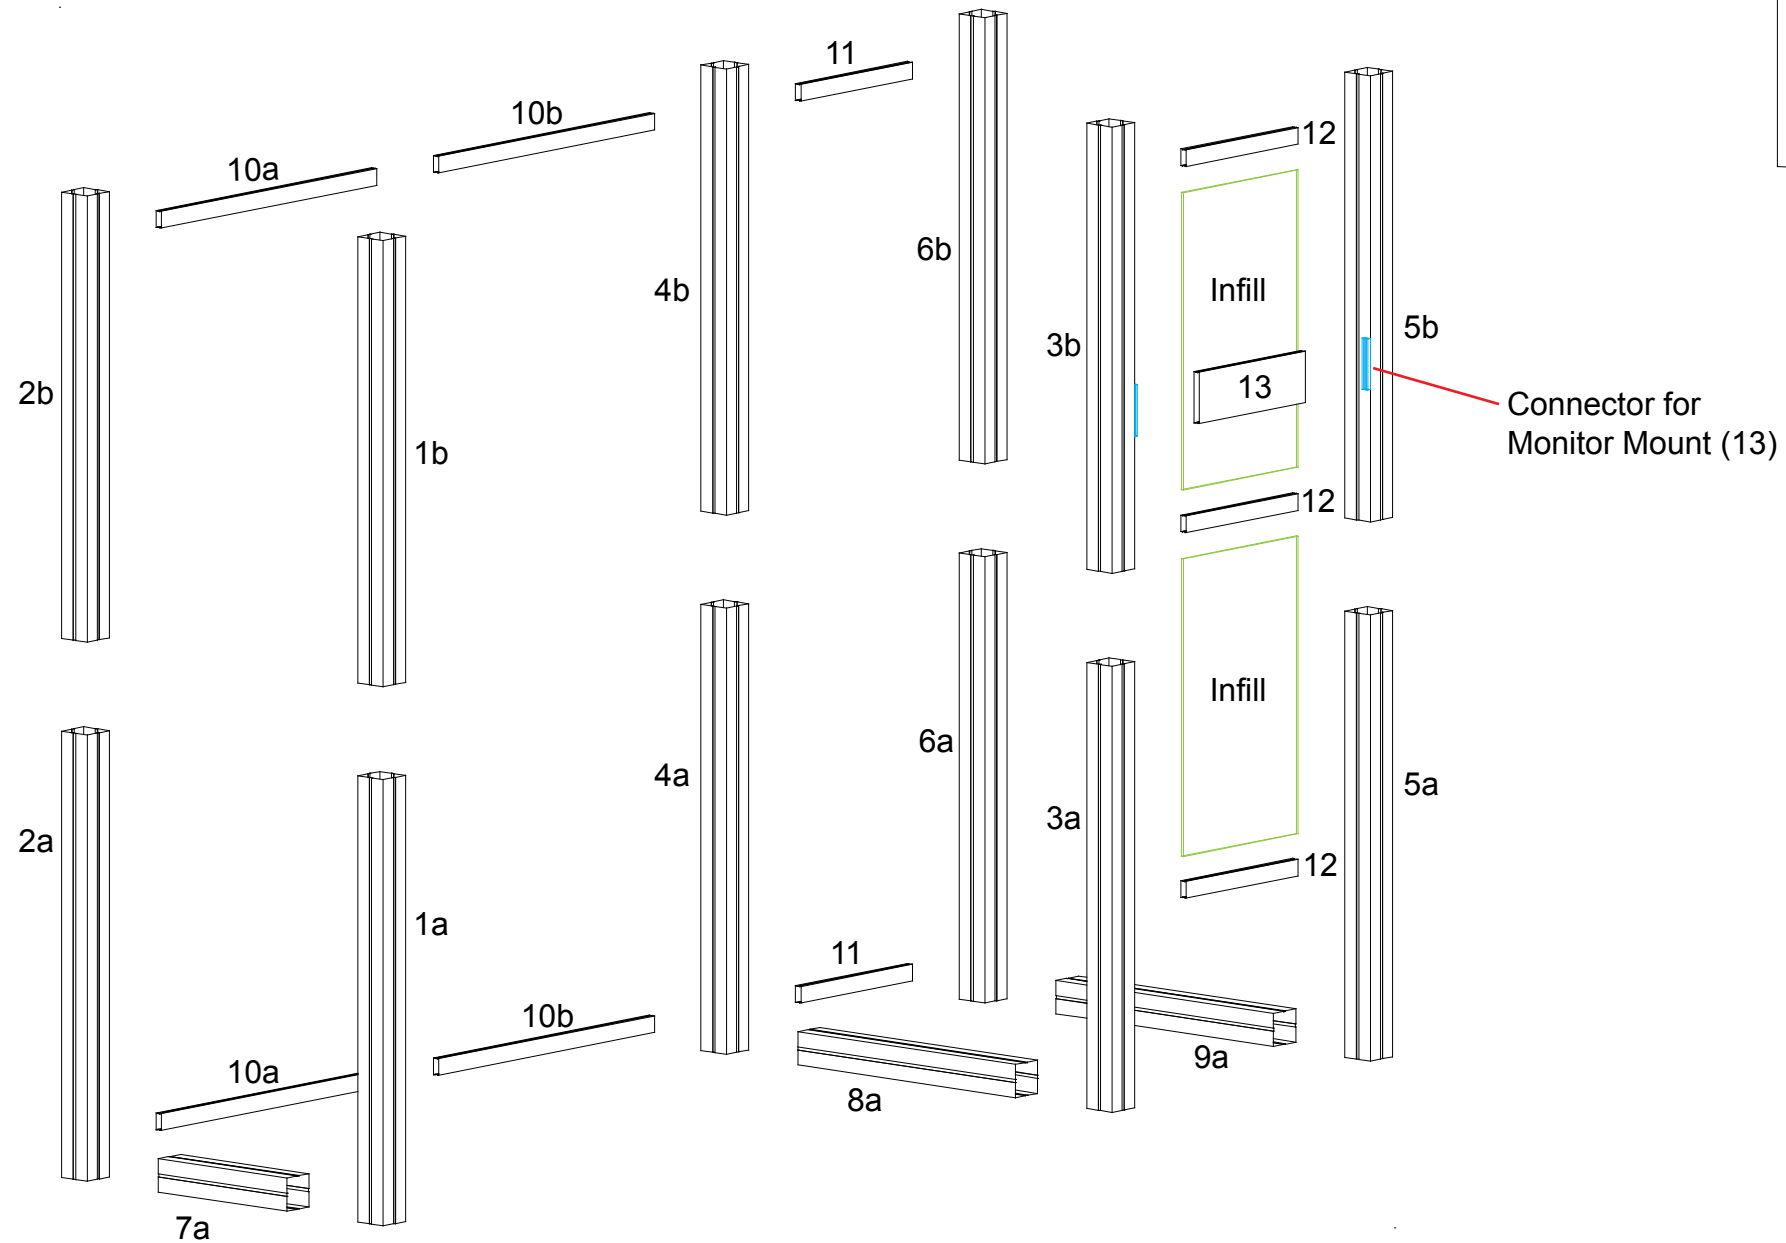

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING




Using Your Setup Instructions

The Aero Overhead Sign Setup Instructions are created specifically for your configuration. They include an exploded view of the frame which is sequentially numbered. We encourage you to study the instructions before attempting to assemble your exhibit.



Connections are kept very simple: no tools. Everything assembles with push-button connectors and pre-connected horizontal sections.

Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

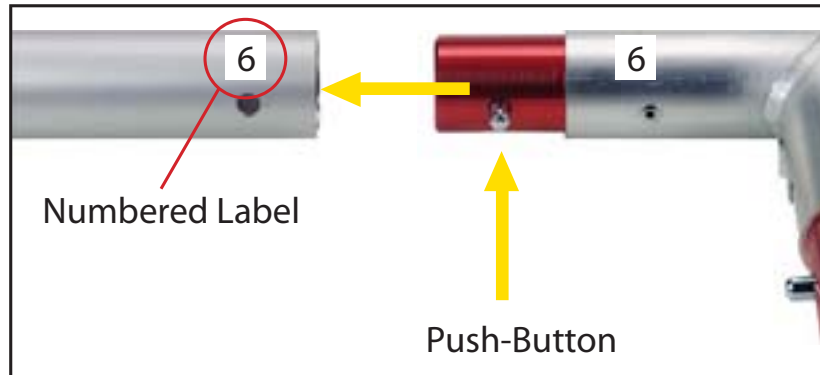

Connections are made by holding the button down and sliding the red tube into opposing tube until the connection is made. To disassemble push button and pull or twist extrusions apart.

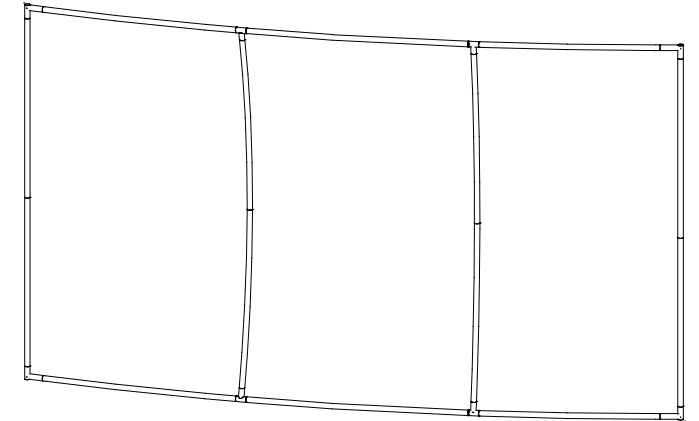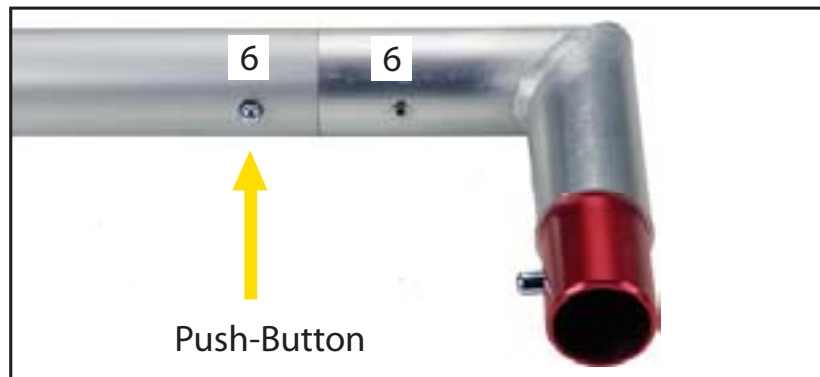

- Steps:
- 1) Assemble Parts in Alphabetical Order
 - 2) Apply Pillowcase Graphic


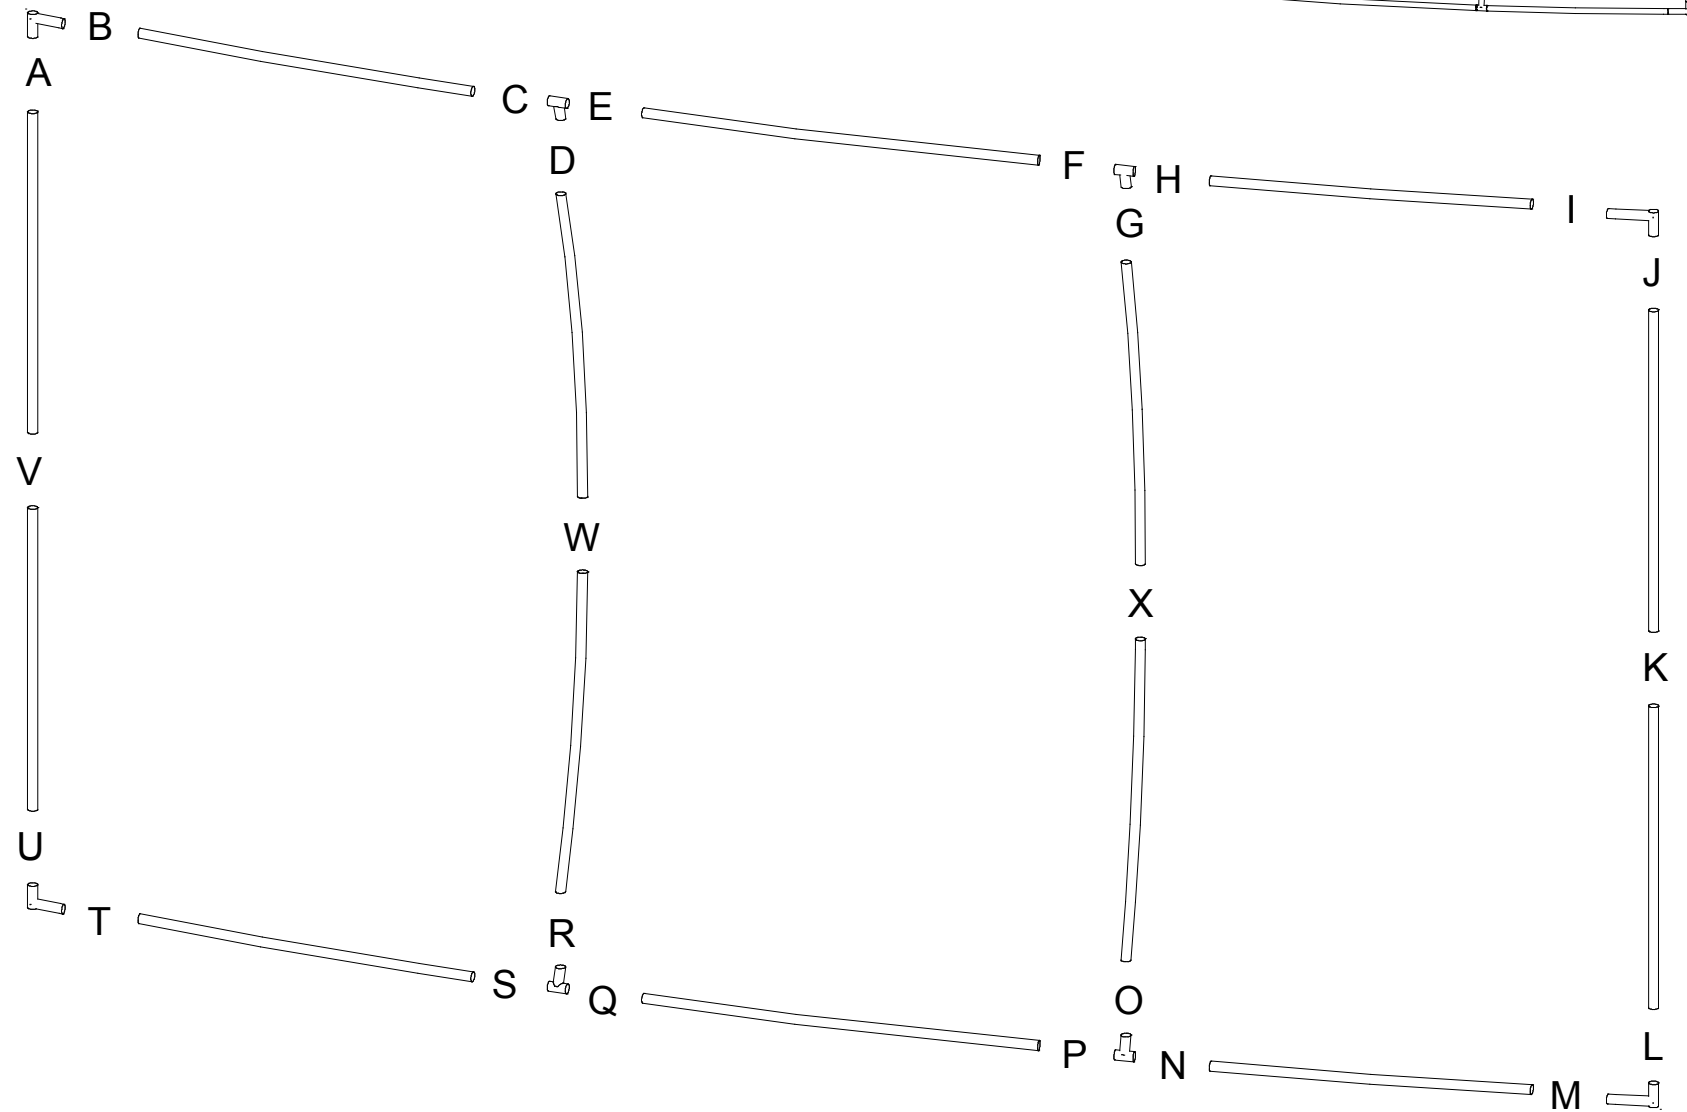


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

Item	Qty.	Description
7b	1	18" Horizontal Extrusion
8b	1	30.5" Horizontal Extrusion
9b	1	30.5" Horizontal Extrusion
14a	2	13.8" Horizontal Extrusion
14b	2	3" Horizontal Extrusion
15a	2	26" Horizontal Extrusion
15b	2	3" Horizontal Extrusion

- Steps:
- 1) Attach horizontals [14a,14b] to the top of lower horizontal extrusion [7a] and the bottom of upper horizontal extrusion [7b].
 - 2) Attach horizontals [15a,15b] to the top of lower horizontal extrusion [9a] and the bottom of upper horizontal extrusion [9b].
 - 3) Position graphic frame into the slots created by 14a & 14b and 15a & 15b on the lower horizontal extrusions.
 - 4) Lock the graphic frame into place by connecting horizontals [7b,8b,9b] between the vertical extrusions as shown.

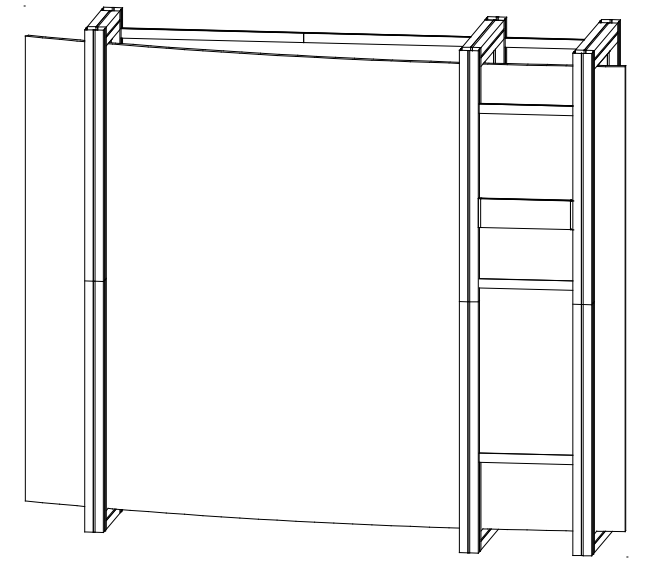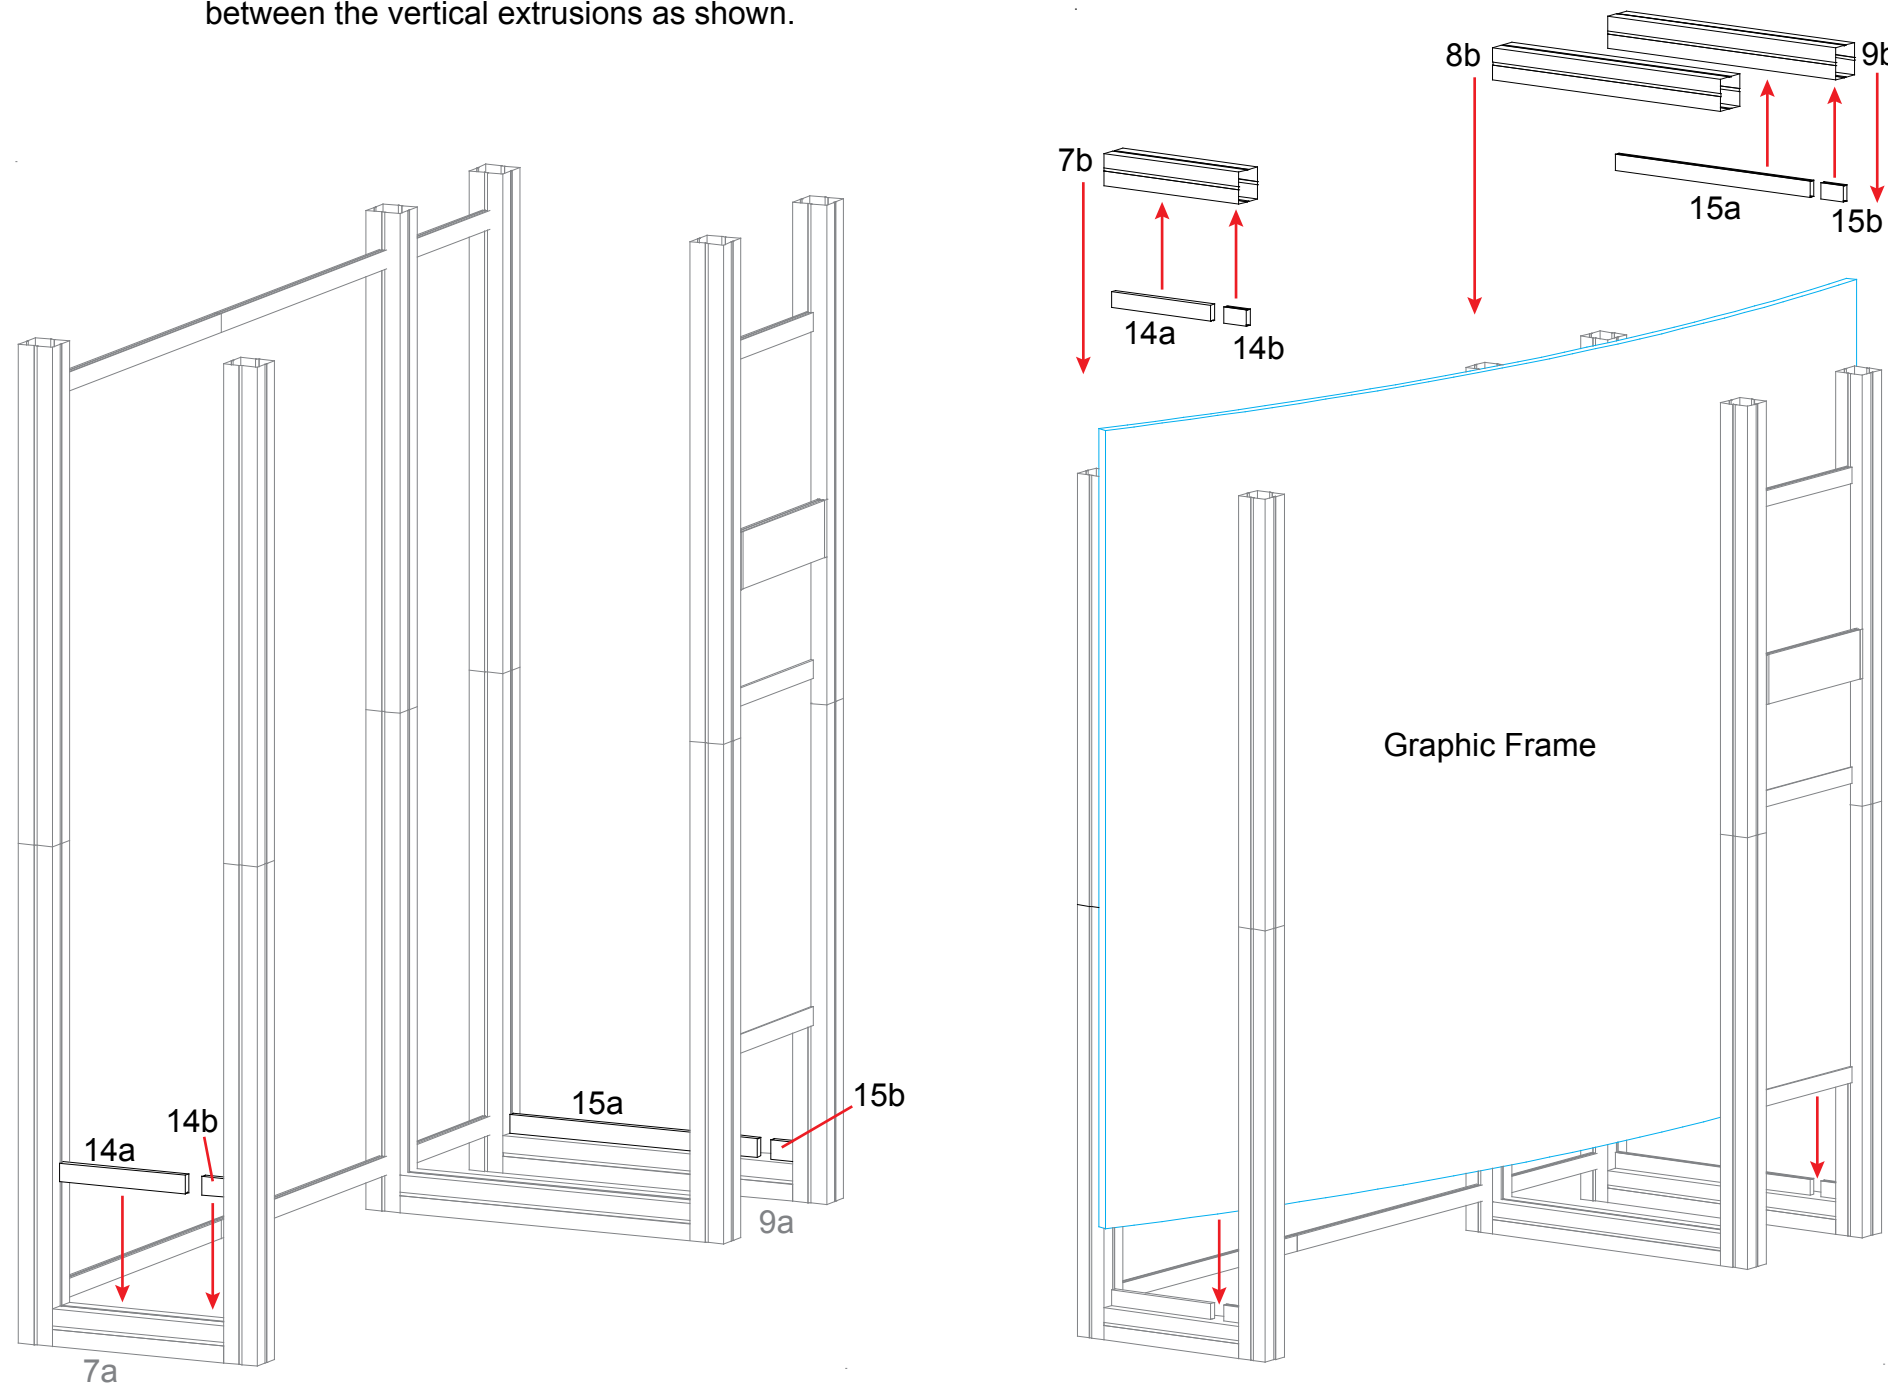

Profile View



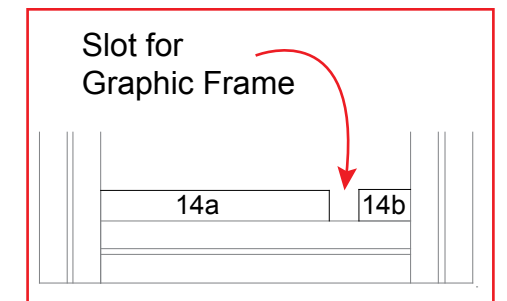


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100


Steps:

- 1) Attach monitor mount to screws on horizontal [13] as shown.
- 2) Lock shelf to verticals.
- 3) Attach literature racks to vertical as indicated.

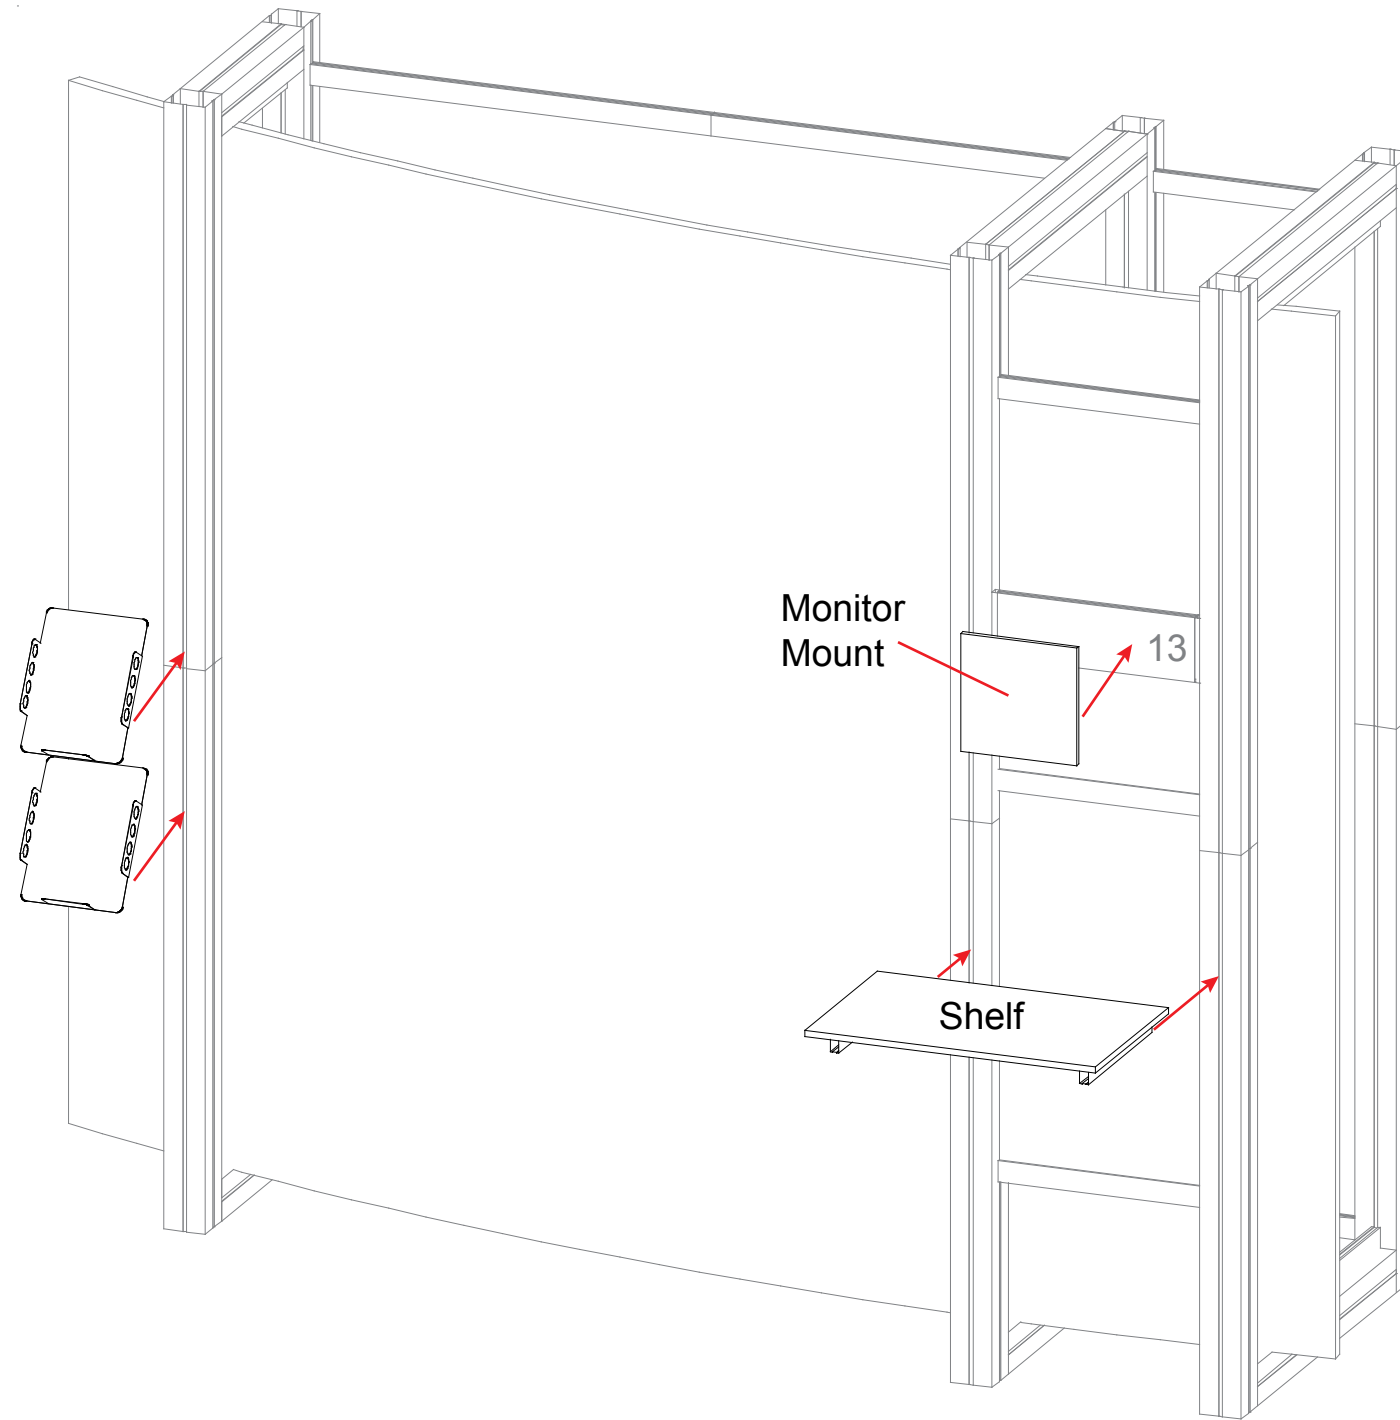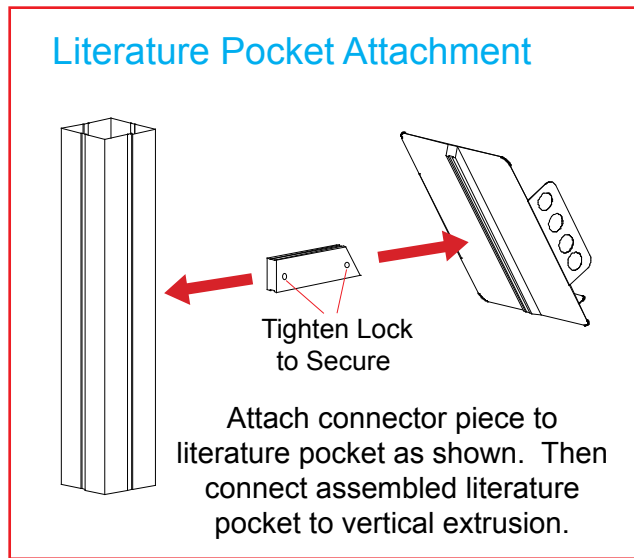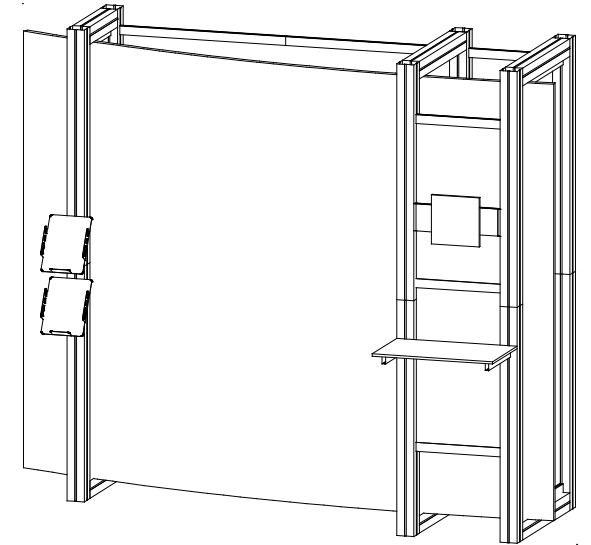


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING



Top View

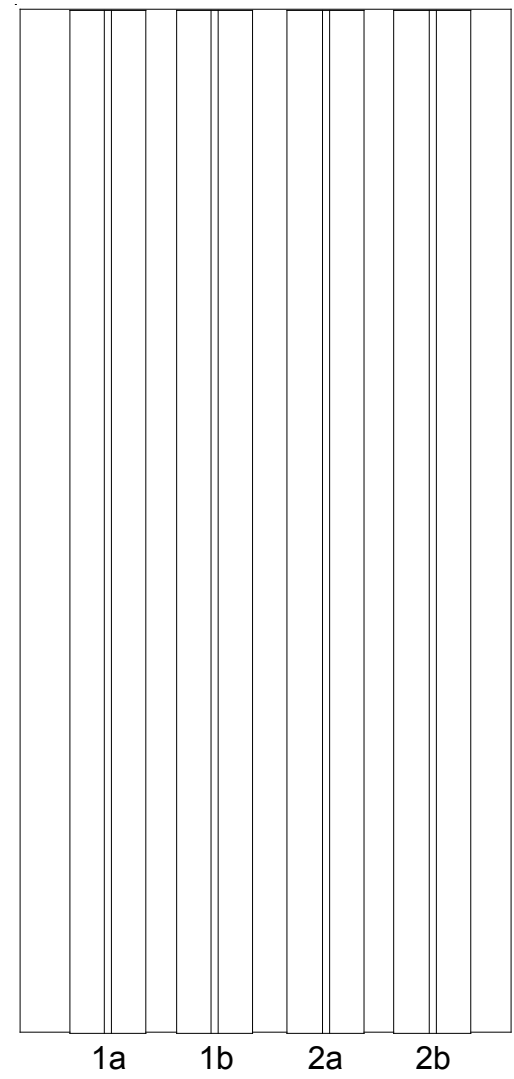

Level 1

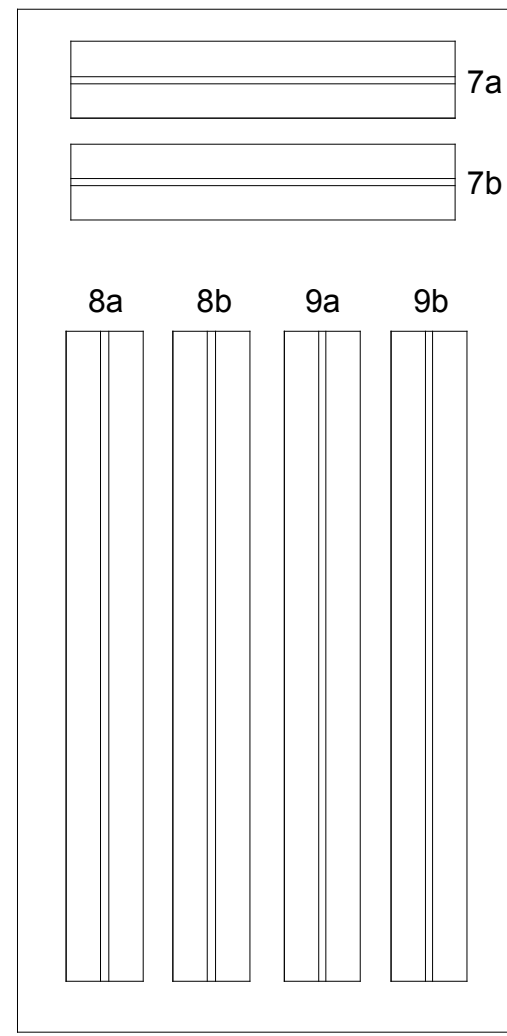


Level 2

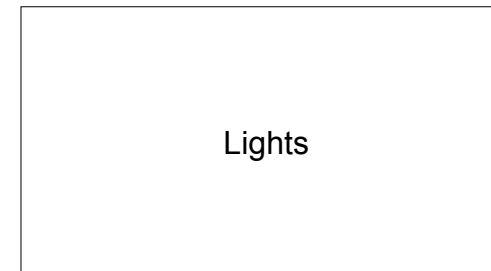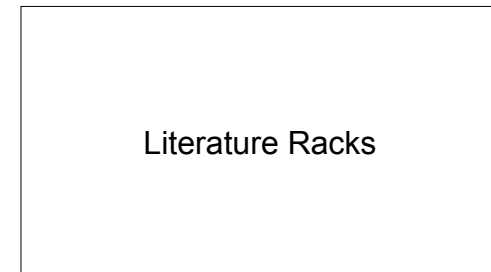


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Top View

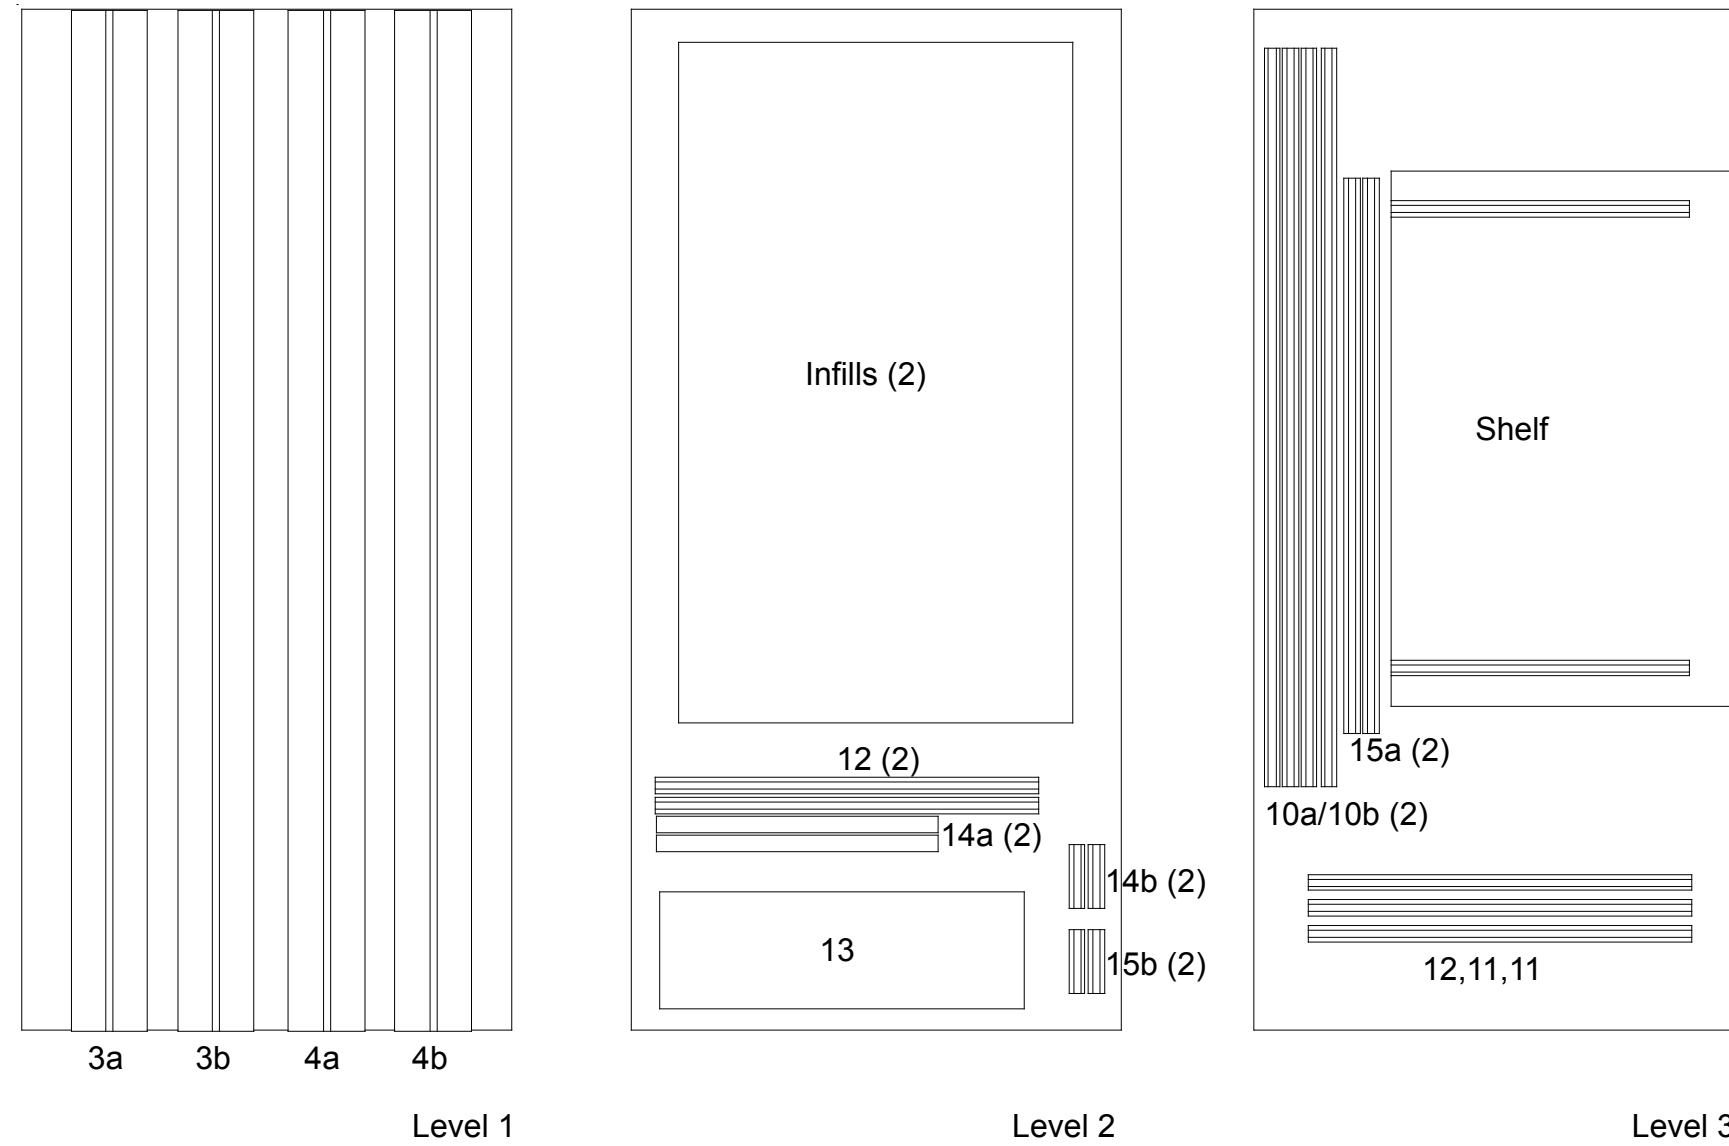


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Top View

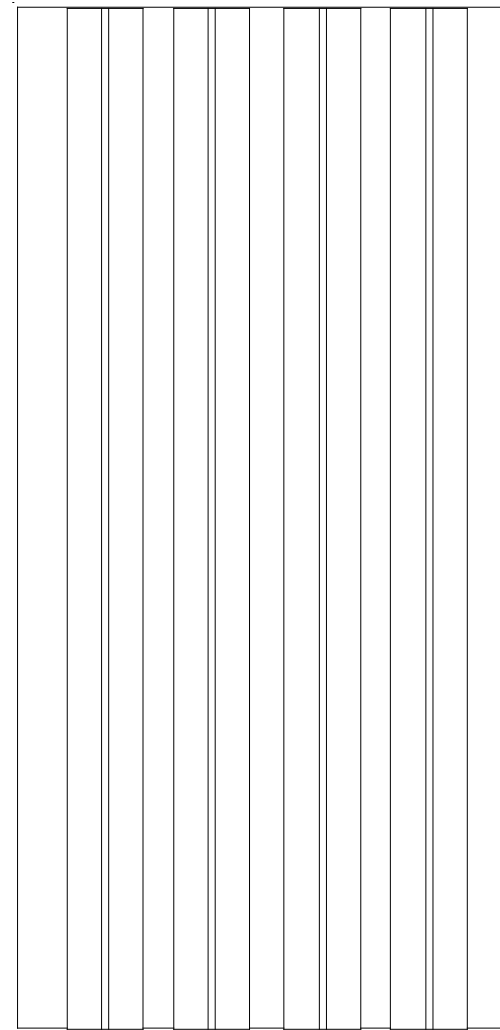

5a 5b 6a 6b

Level 1

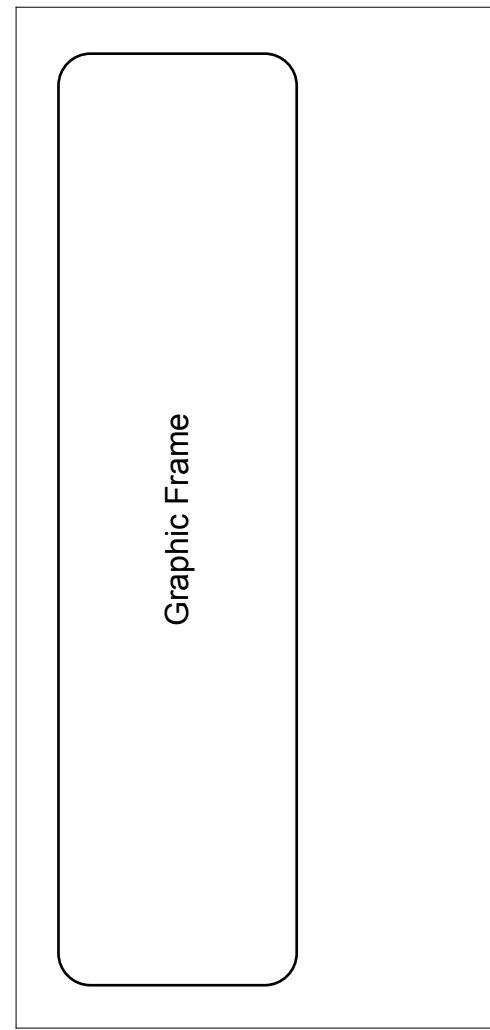

Graphic Frame

Level 2

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING